

**FCC ID : ZNFG900VM**

**Part 0 Power Density Char Report**

**Rev. B (Ver. 1.0)**

**June 17<sup>th</sup>, 2020**

**LG Electronics**

## TABLE OF CONTENTS

|                                                                 |    |
|-----------------------------------------------------------------|----|
| 1. INTRODUCTION                                                 | 2  |
| 2. DEVICE UNDER TEST                                            | 2  |
| 2.1. Time-Averaging for Power Density                           | 2  |
| 2.2. Nomenclature for Part 0 Report                             | 2  |
| 3. POWER DENSITY CHARACTERIZATION                               | 3  |
| 3.1. Exposure Scenarios in Power Density Evaluation             | 3  |
| 3.2. Power Density Characterization Method                      | 4  |
| 3.3. Codebook for all supported beams                           | 5  |
| 3.4. Simulation and modeling validation                         | 11 |
| 3.5. <i>PD_design_target</i>                                    | 12 |
| 3.6. Worst-case Housing Influence Determination: $\Delta_{min}$ | 12 |
| 3.7. PD Char                                                    | 21 |
| 3.7.1. Scaling Factor for Single Beams                          | 21 |
| 3.7.2. Scaling Factor for Beam Pairs                            | 21 |
| 3.7.3. <i>Input.Power.Limit</i> Calculations                    | 21 |

## 1. INTRODUCTION

Qualcomm Smart Transmit cannot operate without PD characterization at the device level, beforehand. The parameters obtained from PD characterization (referred to as PD char, respectively) will be used as input for Smart Transmit. PD char will be entered via the Embedded File System (EFS) to enable the Smart Transmit feature.

## 2. DEVICE UNDER TEST

### 2.1. Time-Averaging for Power Density

This device is enabled with Qualcomm® Smart Transmit algorithm to control and manage transmitting power in real time and to ensure that the time-averaged RF exposure from 5G NR mmW WWAN is in compliance with FCC requirements. This Part 0 report shows Power Density characterization of WWAN radios for 5G NR mmW. Characterization is achieved by determining input.power.limit for 5G NR mmW that correspond to the exposure design targets after accounting for all device design related uncertainties, i.e., PD\_design\_target (< FCC PD limit) for mmW radio. The PD characterization are denoted as PD Char in this report. Section 2.2 includes a nomenclature of the specific terms used in this report.

The compliance test under the static transmission scenario and simultaneous transmission analysis are reported in Part 1 report. The validation of the time-averaging algorithm and compliance under the dynamic (time- varying) transmission scenario for WWAN technologies are reported in Part 2 report

### 2.2 Nomenclature for Part 0 Report

| Technology | Term              | Description                                                                                                 |
|------------|-------------------|-------------------------------------------------------------------------------------------------------------|
| 5G NR mmW  | input.power.limit | Power level at antenna element for each beam corresponding to the exposure design target (PD_design_target) |
|            | PD_design_target  | Target PD level < FCC SAR limit after accounting for all device design related uncertainties                |
|            | $\Delta_{min}$    | Housing material influence                                                                                  |
|            | PD Char           | Table containing input.power.limit for all beams and bands                                                  |

### 3. POWER DENSITY CHARACTERIZATION


#### 3.1. Exposure Scenarios in Power Density Evaluation

For a portable handset at frequencies > 6 GHz, the power density (PD) is required to be assessed for all antenna configurations (beams) from all mmW antenna modules installed inside the device. This device has 3 patch antenna arrays (QTM#0, QTM#1, QTM#2). Per each supported band, there are a total of 135 beams: 90 SISO beams and 45 MIMO beam pairs.

As showed in Figure 3-1, the surfaces near-by each mmW antenna module for PD characterization are identified and listed in Table 3-1.

**Table 3-1 Evaluation Surfaces for PD Characterization**

| Band & Mode             | Antenna | Back<br>S2 | Front<br>S1 | Top<br>S5 | Bottom<br>S6 | Right<br>S4 | Left<br>S3 |
|-------------------------|---------|------------|-------------|-----------|--------------|-------------|------------|
| 5G NR Band<br>n261/n260 | QTM#0   | Yes        | Yes         | No        | No           | No          | Yes        |
|                         | QTM#1   | Yes        | Yes         | No        | No           | Yes         | No         |
|                         | QTM#2   | Yes        | No          | No        | No           | Yes         | No         |

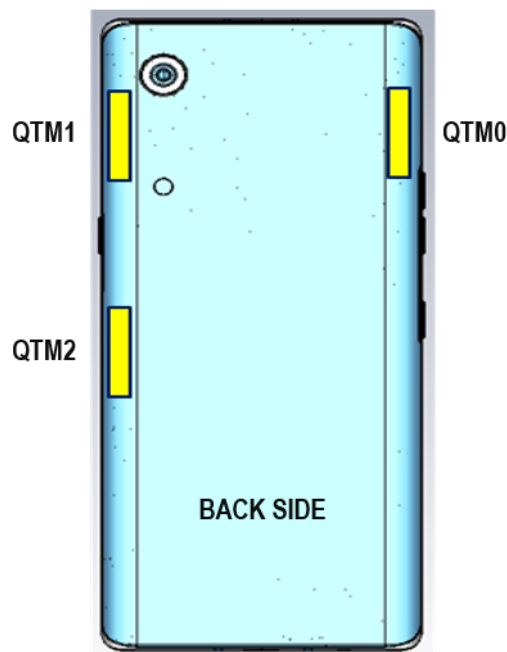

**Figure 3-1: Location of mmW antenna modules looking from back of the DUT**

### 3.2. Power Density Characterization Method

An overview of power density characterization method could be found in Figure 3-2 below.

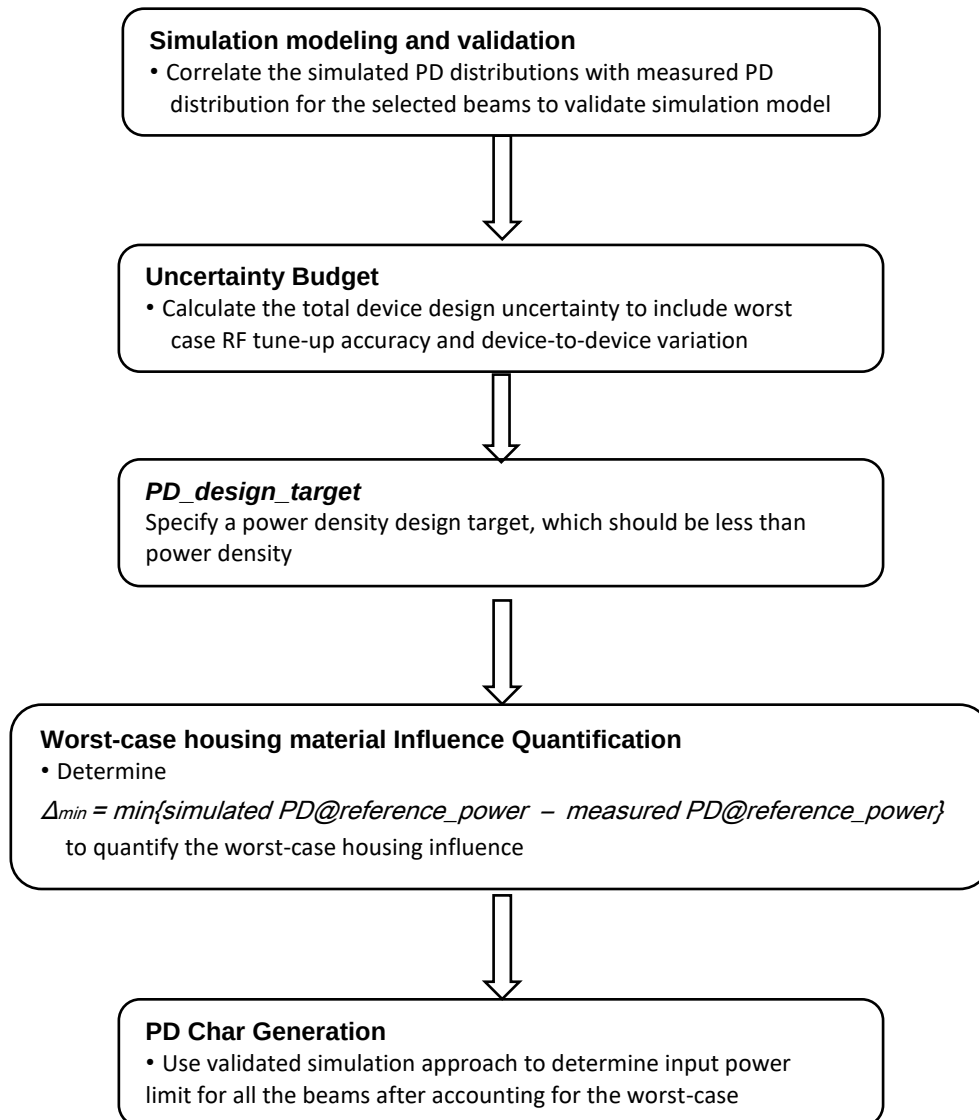


Figure 3-2 High level flow Chart for Power Density Characterization

### 3.3. Codebook for all supported beams

All the beams that the DUT supports are specified in the pre-defined codebook. The codebook for this device is specified as below.

**Table 3-2 5G mmW NR Band n261 QTM#0 Codebook**

| <b>Band</b> | <b>Beam ID</b> | <b>Ant Module ID</b> | <b>Ant Type</b> | <b>Paired With</b> | <b># of Ant Feed</b> |
|-------------|----------------|----------------------|-----------------|--------------------|----------------------|
| 261         | 1              | 0                    | PATCH           | 129                | 1                    |
| 261         | 6              | 0                    | PATCH           | 134                | 2                    |
| 261         | 7              | 0                    | PATCH           | 135                | 2                    |
| 261         | 8              | 0                    | PATCH           | 136                | 2                    |
| 261         | 14             | 0                    | PATCH           | 142                | 2                    |
| 261         | 15             | 0                    | PATCH           | 143                | 2                    |
| 261         | 23             | 0                    | PATCH           | 151                | 4                    |
| 261         | 24             | 0                    | PATCH           | 152                | 4                    |
| 261         | 25             | 0                    | PATCH           | 153                | 4                    |
| 261         | 26             | 0                    | PATCH           | 154                | 4                    |
| 261         | 27             | 0                    | PATCH           | 155                | 4                    |
| 261         | 37             | 0                    | PATCH           | 165                | 4                    |
| 261         | 38             | 0                    | PATCH           | 166                | 4                    |
| 261         | 39             | 0                    | PATCH           | 167                | 4                    |
| 261         | 40             | 0                    | PATCH           | 168                | 4                    |
| 261         | 129            | 0                    | PATCH           | 1                  | 1                    |
| 261         | 134            | 0                    | PATCH           | 6                  | 2                    |
| 261         | 135            | 0                    | PATCH           | 7                  | 2                    |
| 261         | 136            | 0                    | PATCH           | 8                  | 2                    |
| 261         | 142            | 0                    | PATCH           | 14                 | 2                    |
| 261         | 143            | 0                    | PATCH           | 15                 | 2                    |
| 261         | 151            | 0                    | PATCH           | 23                 | 4                    |
| 261         | 152            | 0                    | PATCH           | 24                 | 4                    |
| 261         | 153            | 0                    | PATCH           | 25                 | 4                    |
| 261         | 154            | 0                    | PATCH           | 26                 | 4                    |
| 261         | 155            | 0                    | PATCH           | 27                 | 4                    |
| 261         | 165            | 0                    | PATCH           | 37                 | 4                    |
| 261         | 166            | 0                    | PATCH           | 38                 | 4                    |
| 261         | 167            | 0                    | PATCH           | 39                 | 4                    |
| 261         | 168            | 0                    | PATCH           | 40                 | 4                    |

**Table 3-3 5G mmW NR Band n261 QTM#1 Codebook**

| <b>Band</b> | <b>Beam ID</b> | <b>Ant Module ID</b> | <b>Ant Type</b> | <b>Paired With</b> | <b># of Ant Feed</b> |
|-------------|----------------|----------------------|-----------------|--------------------|----------------------|
| 261         | 0              | 1                    | PATCH           | 128                | 1                    |
| 261         | 3              | 1                    | PATCH           | 131                | 2                    |
| 261         | 4              | 1                    | PATCH           | 132                | 2                    |
| 261         | 5              | 1                    | PATCH           | 133                | 2                    |
| 261         | 12             | 1                    | PATCH           | 140                | 2                    |
| 261         | 13             | 1                    | PATCH           | 141                | 2                    |
| 261         | 18             | 1                    | PATCH           | 146                | 4                    |
| 261         | 19             | 1                    | PATCH           | 147                | 4                    |
| 261         | 20             | 1                    | PATCH           | 148                | 4                    |
| 261         | 21             | 1                    | PATCH           | 149                | 4                    |
| 261         | 22             | 1                    | PATCH           | 150                | 4                    |
| 261         | 33             | 1                    | PATCH           | 161                | 4                    |
| 261         | 34             | 1                    | PATCH           | 162                | 4                    |
| 261         | 35             | 1                    | PATCH           | 163                | 4                    |
| 261         | 36             | 1                    | PATCH           | 164                | 4                    |
| 261         | 128            | 1                    | PATCH           | 0                  | 1                    |
| 261         | 131            | 1                    | PATCH           | 3                  | 2                    |
| 261         | 132            | 1                    | PATCH           | 4                  | 2                    |
| 261         | 133            | 1                    | PATCH           | 5                  | 2                    |
| 261         | 140            | 1                    | PATCH           | 12                 | 2                    |
| 261         | 141            | 1                    | PATCH           | 13                 | 2                    |
| 261         | 146            | 1                    | PATCH           | 18                 | 4                    |
| 261         | 147            | 1                    | PATCH           | 19                 | 4                    |
| 261         | 148            | 1                    | PATCH           | 20                 | 4                    |
| 261         | 149            | 1                    | PATCH           | 21                 | 4                    |
| 261         | 150            | 1                    | PATCH           | 22                 | 4                    |
| 261         | 161            | 1                    | PATCH           | 33                 | 4                    |
| 261         | 162            | 1                    | PATCH           | 34                 | 4                    |
| 261         | 163            | 1                    | PATCH           | 35                 | 4                    |
| 261         | 164            | 1                    | PATCH           | 36                 | 4                    |

**Table 3-4 5G mmW NR Band n261 QTM#2 Codebook**

| <b>Band</b> | <b>Beam ID</b> | <b>Ant Module ID</b> | <b>Ant Type</b> | <b>Paired With</b> | <b># of Ant Feed</b> |
|-------------|----------------|----------------------|-----------------|--------------------|----------------------|
| 261         | 2              | 2                    | PATCH           | 130                | 1                    |
| 261         | 9              | 2                    | PATCH           | 137                | 2                    |
| 261         | 10             | 2                    | PATCH           | 138                | 2                    |
| 261         | 11             | 2                    | PATCH           | 139                | 2                    |
| 261         | 16             | 2                    | PATCH           | 144                | 2                    |
| 261         | 17             | 2                    | PATCH           | 145                | 2                    |
| 261         | 28             | 2                    | PATCH           | 156                | 4                    |
| 261         | 29             | 2                    | PATCH           | 157                | 4                    |
| 261         | 30             | 2                    | PATCH           | 158                | 4                    |
| 261         | 31             | 2                    | PATCH           | 159                | 4                    |
| 261         | 32             | 2                    | PATCH           | 160                | 4                    |
| 261         | 41             | 2                    | PATCH           | 169                | 4                    |
| 261         | 42             | 2                    | PATCH           | 170                | 4                    |
| 261         | 43             | 2                    | PATCH           | 171                | 4                    |
| 261         | 44             | 2                    | PATCH           | 172                | 4                    |
| 261         | 130            | 2                    | PATCH           | 2                  | 1                    |
| 261         | 137            | 2                    | PATCH           | 9                  | 2                    |
| 261         | 138            | 2                    | PATCH           | 10                 | 2                    |
| 261         | 139            | 2                    | PATCH           | 11                 | 2                    |
| 261         | 144            | 2                    | PATCH           | 16                 | 2                    |
| 261         | 145            | 2                    | PATCH           | 17                 | 2                    |
| 261         | 156            | 2                    | PATCH           | 28                 | 4                    |
| 261         | 157            | 2                    | PATCH           | 29                 | 4                    |
| 261         | 158            | 2                    | PATCH           | 30                 | 4                    |
| 261         | 159            | 2                    | PATCH           | 31                 | 4                    |
| 261         | 160            | 2                    | PATCH           | 32                 | 4                    |
| 261         | 169            | 2                    | PATCH           | 41                 | 4                    |
| 261         | 170            | 2                    | PATCH           | 42                 | 4                    |
| 261         | 171            | 2                    | PATCH           | 43                 | 4                    |
| 261         | 172            | 2                    | PATCH           | 44                 | 4                    |



**Table 3-5 5G mmW NR Band n260 QTM#0 Codebook**

| <b>Band</b> | <b>Beam ID</b> | <b>Ant Module ID</b> | <b>Ant Type</b> | <b>Paired With</b> | <b># of Ant Feed</b> |
|-------------|----------------|----------------------|-----------------|--------------------|----------------------|
| 260         | 1              | 0                    | PATCH           | 129                | 1                    |
| 260         | 6              | 0                    | PATCH           | 134                | 2                    |
| 260         | 7              | 0                    | PATCH           | 135                | 2                    |
| 260         | 8              | 0                    | PATCH           | 136                | 2                    |
| 260         | 14             | 0                    | PATCH           | 142                | 2                    |
| 260         | 15             | 0                    | PATCH           | 143                | 2                    |
| 260         | 23             | 0                    | PATCH           | 151                | 4                    |
| 260         | 24             | 0                    | PATCH           | 152                | 4                    |
| 260         | 25             | 0                    | PATCH           | 153                | 4                    |
| 260         | 26             | 0                    | PATCH           | 154                | 4                    |
| 260         | 27             | 0                    | PATCH           | 155                | 4                    |
| 260         | 37             | 0                    | PATCH           | 165                | 4                    |
| 260         | 38             | 0                    | PATCH           | 166                | 4                    |
| 260         | 39             | 0                    | PATCH           | 167                | 4                    |
| 260         | 40             | 0                    | PATCH           | 168                | 4                    |
| 260         | 129            | 0                    | PATCH           | 1                  | 1                    |
| 260         | 134            | 0                    | PATCH           | 6                  | 2                    |
| 260         | 135            | 0                    | PATCH           | 7                  | 2                    |
| 260         | 136            | 0                    | PATCH           | 8                  | 2                    |
| 260         | 142            | 0                    | PATCH           | 14                 | 2                    |
| 260         | 143            | 0                    | PATCH           | 15                 | 2                    |
| 260         | 151            | 0                    | PATCH           | 23                 | 4                    |
| 260         | 152            | 0                    | PATCH           | 24                 | 4                    |
| 260         | 153            | 0                    | PATCH           | 25                 | 4                    |
| 260         | 154            | 0                    | PATCH           | 26                 | 4                    |
| 260         | 155            | 0                    | PATCH           | 27                 | 4                    |
| 260         | 165            | 0                    | PATCH           | 37                 | 4                    |
| 260         | 166            | 0                    | PATCH           | 38                 | 4                    |
| 260         | 167            | 0                    | PATCH           | 39                 | 4                    |
| 260         | 168            | 0                    | PATCH           | 40                 | 4                    |

**Table 3-6 5G mmW NR Band n260 QTM#1 Codebook**

| <b>Band</b> | <b>Beam ID</b> | <b>Ant Module ID</b> | <b>Ant Type</b> | <b>Paired With</b> | <b># of Ant Feed</b> |
|-------------|----------------|----------------------|-----------------|--------------------|----------------------|
| 260         | 0              | 1                    | PATCH           | 128                | 1                    |
| 260         | 3              | 1                    | PATCH           | 131                | 2                    |
| 260         | 4              | 1                    | PATCH           | 132                | 2                    |
| 260         | 5              | 1                    | PATCH           | 133                | 2                    |
| 260         | 12             | 1                    | PATCH           | 140                | 2                    |
| 260         | 13             | 1                    | PATCH           | 141                | 2                    |
| 260         | 18             | 1                    | PATCH           | 146                | 4                    |
| 260         | 19             | 1                    | PATCH           | 147                | 4                    |
| 260         | 20             | 1                    | PATCH           | 148                | 4                    |
| 260         | 21             | 1                    | PATCH           | 149                | 4                    |
| 260         | 22             | 1                    | PATCH           | 150                | 4                    |
| 260         | 33             | 1                    | PATCH           | 161                | 4                    |
| 260         | 34             | 1                    | PATCH           | 162                | 4                    |
| 260         | 35             | 1                    | PATCH           | 163                | 4                    |
| 260         | 36             | 1                    | PATCH           | 164                | 4                    |
| 260         | 128            | 1                    | PATCH           | 0                  | 1                    |
| 260         | 131            | 1                    | PATCH           | 3                  | 2                    |
| 260         | 132            | 1                    | PATCH           | 4                  | 2                    |
| 260         | 133            | 1                    | PATCH           | 5                  | 2                    |
| 260         | 140            | 1                    | PATCH           | 12                 | 2                    |
| 260         | 141            | 1                    | PATCH           | 13                 | 2                    |
| 260         | 146            | 1                    | PATCH           | 18                 | 4                    |
| 260         | 147            | 1                    | PATCH           | 19                 | 4                    |
| 260         | 148            | 1                    | PATCH           | 20                 | 4                    |
| 260         | 149            | 1                    | PATCH           | 21                 | 4                    |
| 260         | 150            | 1                    | PATCH           | 22                 | 4                    |
| 260         | 161            | 1                    | PATCH           | 33                 | 4                    |
| 260         | 162            | 1                    | PATCH           | 34                 | 4                    |
| 260         | 163            | 1                    | PATCH           | 35                 | 4                    |
| 260         | 164            | 1                    | PATCH           | 36                 | 4                    |

**Table 3-7 5G mmW NR Band n260 QTM#2 Codebook**

| <b>Band</b> | <b>Beam ID</b> | <b>Ant Module ID</b> | <b>Ant Type</b> | <b>Paired With</b> | <b># of Ant Feed</b> |
|-------------|----------------|----------------------|-----------------|--------------------|----------------------|
| 260         | 2              | 2                    | PATCH           | 130                | 1                    |
| 260         | 9              | 2                    | PATCH           | 137                | 2                    |
| 260         | 10             | 2                    | PATCH           | 138                | 2                    |
| 260         | 11             | 2                    | PATCH           | 139                | 2                    |
| 260         | 16             | 2                    | PATCH           | 144                | 2                    |
| 260         | 17             | 2                    | PATCH           | 145                | 2                    |
| 260         | 28             | 2                    | PATCH           | 156                | 4                    |
| 260         | 29             | 2                    | PATCH           | 157                | 4                    |
| 260         | 30             | 2                    | PATCH           | 158                | 4                    |
| 260         | 31             | 2                    | PATCH           | 159                | 4                    |
| 260         | 32             | 2                    | PATCH           | 160                | 4                    |
| 260         | 41             | 2                    | PATCH           | 169                | 4                    |
| 260         | 42             | 2                    | PATCH           | 170                | 4                    |
| 260         | 43             | 2                    | PATCH           | 171                | 4                    |
| 260         | 44             | 2                    | PATCH           | 172                | 4                    |
| 260         | 130            | 2                    | PATCH           | 2                  | 1                    |
| 260         | 137            | 2                    | PATCH           | 9                  | 2                    |
| 260         | 138            | 2                    | PATCH           | 10                 | 2                    |
| 260         | 139            | 2                    | PATCH           | 11                 | 2                    |
| 260         | 144            | 2                    | PATCH           | 16                 | 2                    |
| 260         | 145            | 2                    | PATCH           | 17                 | 2                    |
| 260         | 156            | 2                    | PATCH           | 28                 | 4                    |
| 260         | 157            | 2                    | PATCH           | 29                 | 4                    |
| 260         | 158            | 2                    | PATCH           | 30                 | 4                    |
| 260         | 159            | 2                    | PATCH           | 31                 | 4                    |
| 260         | 160            | 2                    | PATCH           | 32                 | 4                    |
| 260         | 169            | 2                    | PATCH           | 41                 | 4                    |
| 260         | 170            | 2                    | PATCH           | 42                 | 4                    |
| 260         | 171            | 2                    | PATCH           | 43                 | 4                    |
| 260         | 172            | 2                    | PATCH           | 44                 | 4                    |

### 3.4. Simulation and modeling validation

Power density simulations of all beams and surfaces were performed by the manufacturer. Details of these simulations and modeling validation can be found in the Power Density Simulation Report Rev. A. Table 3-8 includes a summary of the validation results to support worst-case housing influence quantification in power density characterization for this model.

With an input power of 6 dBm for both n261 and n260 band, PD measurements are conducted for at least one single beam per antenna type and per antenna module (QTM#0,#1,#2) on worst-surface(s) listed in Section 3.6. PD measurements are performed at mid channel of each mmW band and with CW modulation. All measured PD values are listed in Table 3-8 along with corresponding simulated PD values for the same configuration.

PD value will be used to determine worst-case housing influence for conservative assessment.

**Table 3-8 Measured and Simulated 4cm<sup>2</sup> avg. PD for Selected Beams with 6 dBm Input Power for both n261 and n260**

| 6dBm input measurement / simulation |          |        |                              |         |         |         | 4cm <sup>2</sup> avg. PD(W/m <sup>2</sup> ) |           |            |
|-------------------------------------|----------|--------|------------------------------|---------|---------|---------|---------------------------------------------|-----------|------------|
| Band                                | Ant Type | Module | Ant Group (Ant Polarization) | beam ID | Surface | Channel | Measured                                    | Simulated | Delta [dB] |
| n261                                | Patch    | QTM0   | AG0(V)                       | 39      | Left    | Mid     | 4.02                                        | 7.40      | 2.65       |
|                                     |          |        |                              |         | Back    | Mid     | 4.11                                        | 6.30      | 1.85       |
|                                     |          |        | AG1(H)                       | 166     | Left    | Mid     | 5.35                                        | 8.16      | 1.83       |
|                                     |          |        |                              |         | Back    | Mid     | 3.03                                        | 7.17      | 3.74       |
|                                     |          | QTM1   | AG0(V)                       | 20      | Right   | Mid     | 6.54                                        | 9.41      | 1.58       |
|                                     |          |        |                              |         | Back    | Mid     | 5.58                                        | 8.30      | 1.72       |
|                                     |          |        | AG1(H)                       | 162     | Right   | Mid     | 6.81                                        | 10.09     | 1.71       |
|                                     |          |        |                              |         | Back    | Mid     | 5.68                                        | 8.15      | 1.57       |
|                                     |          | QTM2   | AG0(V)                       | 31      | Back    | Mid     | 7.33                                        | 12.54     | 2.33       |
|                                     |          |        |                              |         | Right   | Mid     | 3.62                                        | 5.28      | 1.64       |
|                                     |          |        | AG1(H)                       | 157     | Back    | Mid     | 7.39                                        | 11.18     | 1.80       |
|                                     |          |        |                              |         | Right   | Mid     | 2.97                                        | 5.06      | 2.31       |
| n260                                | Patch    | QTM0   | AG0(V)                       | 40      | Left    | Mid     | 4.47                                        | 7.07      | 1.99       |
|                                     |          |        |                              |         | Back    | Mid     | 3.13                                        | 5.79      | 2.67       |
|                                     |          |        | AG1(H)                       | 151     | Left    | Mid     | 4.61                                        | 7.01      | 1.82       |
|                                     |          |        |                              |         | Back    | Mid     | 2.15                                        | 6.04      | 4.49       |
|                                     |          | QTM1   | AG0(V)                       | 20      | Right   | Mid     | 6.62                                        | 10.78     | 2.12       |
|                                     |          |        |                              |         | Back    | Mid     | 4.24                                        | 6.88      | 2.10       |
|                                     |          |        | AG1(H)                       | 150     | Right   | Mid     | 5.38                                        | 9.54      | 2.49       |
|                                     |          |        |                              |         | Back    | Mid     | 4.79                                        | 9.09      | 2.78       |
|                                     |          | QTM2   | AG0(V)                       | 28      | Back    | Mid     | 7.84                                        | 12.86     | 2.15       |
|                                     |          |        |                              |         | Right   | Mid     | 5.34                                        | 9.08      | 2.31       |
|                                     |          |        | AG1(H)                       | 156     | Back    | Mid     | 4.65                                        | 11.73     | 4.02       |
|                                     |          |        |                              |         | Right   | Mid     | 4.61                                        | 7.92      | 2.35       |

### 3.5. *PD\_design\_target*

*PD\_design\_target* is determined by ensuring that it is less than FCC PD limit after accounting for total device design uncertainties including TxAGC and device-to-device variation, specified by the manufacturer (see Table 3-9).

**Table 3-9 *PD\_design\_target* Calculations**

| <b><i>PD_design_target</i></b>                                                  |                        |
|---------------------------------------------------------------------------------|------------------------|
| $PD\_design\_target < PD\_regulatory\_limit \times 10^{-Total\ Uncertainty/10}$ |                        |
| <b>PD over 4 cm<sup>2</sup> Averaging Area<br/>(W/m<sup>2</sup>)</b>            |                        |
| <i>Total Uncertainty</i>                                                        | 2.1 dB                 |
| <i>PD_regulatory_limit</i>                                                      | 10 W/m <sup>2</sup>    |
| <i>PD_design_target</i>                                                         | 6.166 W/m <sup>2</sup> |

### 3.6. Worst-case Housing Influence Determination: $\Delta_{min}$

For non-metal material, the material property cannot be accurately characterized at mmW frequencies to date. The estimated material property for the device housing is used in the simulation model, which could influence the accuracy in simulation for PD amplitude quantification. Since the housing influence on PD could vary from surface to surface where the EM field propagates through, the most underestimated surface is used to quantify the worst-case housing influence for conservative assessment.

Since the mmW antenna modules are placed at different location as shown in Figure 3-1, only surrounding material/housing has impact on EM field propagation, and in turn power density. Furthermore, depending on the type of antenna array, i.e., dipole antenna array or patch antenna array, the nature of EM field propagation in the near field is different. Therefore, the worst-case housing influence is determined per antenna module and per antenna type.

For this DUT, the below procedure was used to determine worst-case housing influence,  $\Delta_{min}$ :

1. Based on PD simulation, for each module and antenna type, determine one or more worst-surface(s) that has highest 4cm<sup>2</sup>PD for all the single beams per antenna module and per antenna type in the mid channel of each band.
2. For identified worst surface(s) per antenna module and per antenna type group,
  - a. First determine  $\Delta_{min}$  based on identified worst surface(s), and derive *input.power.limit*
  - b. Then prove all other near-by surface(s), i.e., non-selected surface(s), is not required for housing material loss quantification (in other words, these non-evaluated surfaces have no influence on the determined *input.power.limit*) by:
    - i. re-scale all simulated 4cm<sup>2</sup>PD values to *input.power.limit* to identify the worst-PD beam per each non-evaluated surface.
    - ii. Measure 4cm<sup>2</sup>PD at *input.power.limit* on identified worst-PD beam per each non-evaluated surface
    - iii. Demonstrate all measured 4cm<sup>2</sup>PD values are below *PD\_design\_target*.
3. If any of the above surface(s) in Step (2.b.iii) have measured 4cm<sup>2</sup>PD  $\geq PD\_design\_target$ , then those surfaces must be included in the  $\Delta_{min}$  determination in Step (2.a), and re-evaluate *input.power.limit* with these added surfaces.

Following above procedure, based on Table 2 ~ Table 7 in PD simulation report, the worst-surface(s) having highest 4cm<sup>2</sup>PD for all the single beams per each antenna type and each antenna module

group in the mid channel of n261 and n260 bands are identified as:

- a. for QTM#0: Back (S2) & Front (S1) & Left (S3)
- b. for QTM#1: Back (S2) & Front (S1) & Right (S4)
- c. for QTM#2: Back (S2) & Right (S4)

Thus, when comparing a simulated 4 cm<sup>2</sup>-averaged PD and measured 4 cm<sup>2</sup>-averaged PD for the identified worst surface(s), the worst error introduced for each antenna type and each antenna module group when using the estimated material property in the simulation is highlighted in bold numbers in Table 3-8. Thus, the worst-case housing influence, denoted as  $\Delta_{min} = \text{Sim. PD} - \text{Meas. PD}$ , is determined as

**Table 3-10  $\Delta_{min}$  for QTM#0, QTM#1 and QTM#2**

| Band | Ant Module         | $\Delta_{min}$ (dB) |
|------|--------------------|---------------------|
| n261 | QTM#0 (Patch Beam) | 1.83                |
|      | QTM#1 (Patch Beam) | 1.57                |
|      | QTM#2 (Patch Beam) | 1.64                |
| n260 | QTM#0 (Patch Beam) | 1.82                |
|      | QTM#1 (Patch Beam) | 2.10                |
|      | QTM#2 (Patch Beam) | 2.15                |

$\Delta_{min}$  represents the worst case where RF exposure is underestimated the most in simulation when using the estimated material property of the housing. For conservative assessment, the  $\Delta_{min}$  is used as the worst-case factor and applied to all the beams in the corresponding antenna type and antenna module group to determine input power limits in PD char for compliance.

The detail *input.power.limit* derivation is described in Section 3.7.

Simulated 4cm<sup>2</sup>PD values in Table 2 ~ Table 7 in Power Density Simulation Report are scaled to *input.power.limit* and are listed in Tables 3-11 – 3-16 for all single beams for all identified surfaces (shown in Table 3-1), when assuming the simulation is performed with correct housing influence.

Determine the worst beam for each of non-selected surface(s), i.e.,

- a. for QTM#0: Front (S1), Right (S4), Top (S5)
- b. for QTM#1: Front (S1), Left (S3), Top (S5)
- c. for QTM#2: Front (S1), Left (S3)

Then perform PD measurement for all determined worst-case beams, highlighted in red in Tables 3-11 – 3-16, on the corresponding surface. Measurement is performed in the mid channel of each band with CW modulation. The evaluation distance is at 2 mm.

The test results in Table 3-17 shows that the all measured 4 cm<sup>2</sup>PD values are less than *PD\_design\_target* of 6.166 W/m<sup>2</sup>, thus, the non-selected surfaces have no influence on the determined  $\Delta_{min}$  and *input.power.limit* in Section 3.7.

**Table 3-11: n261/mid channel, QTM#0 simulated 4cm<sup>2</sup> avg.PD (W/m<sup>2</sup>) at PD\_Design\_Target (if simulation performed with correct housing material properties) ( $\Delta_{min}$ )**

| Band | Beam_ID | Module | Ant_Type | Front (S1) | Right (S4) | Left (S3) | Top (S5) |
|------|---------|--------|----------|------------|------------|-----------|----------|
| n261 | 1       | QTM0   | PATCH    | 0.78       | 0.04       | 5.50      | 0.30     |
|      | 6       | QTM0   | PATCH    | 1.90       | 0.04       | 6.05      | 0.28     |
|      | 7       | QTM0   | PATCH    | 1.27       | 0.01       | 6.17      | 0.09     |
|      | 8       | QTM0   | PATCH    | 0.39       | 0.02       | 6.00      | 0.27     |
|      | 14      | QTM0   | PATCH    | 0.69       | 0.02       | 5.20      | 0.41     |
|      | 15      | QTM0   | PATCH    | 0.57       | 0.02       | 6.17      | 0.28     |
|      | 23      | QTM0   | PATCH    | 0.57       | 0.04       | 5.14      | 0.73     |
|      | 24      | QTM0   | PATCH    | 1.61       | 0.05       | 6.17      | 0.10     |
|      | 25      | QTM0   | PATCH    | 1.09       | 0.03       | 5.89      | 0.34     |
|      | 26      | QTM0   | PATCH    | 0.76       | 0.02       | 6.17      | 0.13     |
|      | 27      | QTM0   | PATCH    | 0.82       | 0.03       | 5.24      | 0.75     |
|      | 37      | QTM0   | PATCH    | 1.22       | 0.04       | 5.89      | 0.54     |
|      | 38      | QTM0   | PATCH    | 1.10       | 0.04       | 5.89      | 0.18     |
|      | 39      | QTM0   | PATCH    | 0.72       | 0.04       | 6.02      | 0.16     |
|      | 40      | QTM0   | PATCH    | 1.13       | 0.03       | 5.93      | 0.61     |
|      | 129     | QTM0   | PATCH    | 0.70       | 0.03       | 6.17      | 0.17     |
|      | 134     | QTM0   | PATCH    | 0.60       | 0.03       | 6.17      | 0.43     |
|      | 135     | QTM0   | PATCH    | 0.83       | 0.06       | 5.19      | 0.09     |
|      | 136     | QTM0   | PATCH    | 0.78       | 0.07       | 5.08      | 0.07     |
|      | 142     | QTM0   | PATCH    | 0.61       | 0.08       | 4.62      | 0.04     |
|      | 143     | QTM0   | PATCH    | 1.00       | 0.08       | 5.14      | 0.19     |
|      | 151     | QTM0   | PATCH    | 0.74       | 0.07       | 6.03      | 0.39     |
|      | 152     | QTM0   | PATCH    | 0.38       | 0.08       | 6.17      | 0.07     |
|      | 153     | QTM0   | PATCH    | 0.76       | 0.06       | 6.09      | 0.06     |
|      | 154     | QTM0   | PATCH    | 1.47       | 0.07       | 6.17      | 0.29     |
|      | 155     | QTM0   | PATCH    | 0.76       | 0.06       | 6.17      | 0.38     |
|      | 165     | QTM0   | PATCH    | 0.54       | 0.08       | 6.10      | 0.32     |
|      | 166     | QTM0   | PATCH    | 0.75       | 0.04       | 6.17      | 0.10     |
|      | 167     | QTM0   | PATCH    | 0.91       | 0.04       | 6.17      | 0.08     |
|      | 168     | QTM0   | PATCH    | 0.82       | 0.08       | 4.38      | 0.32     |

Please note the above scaled simulation values correspond to PD\_design\_target if the simulation was performed with correct housing material properties.

**Table 3-12: n261/mid channel QTM#1 simulated 4cm<sup>2</sup> avg.PD (W/m<sup>2</sup>) at PD\_Design\_Target (if simulation performed with correct housing material properties) ( $\Delta_{min}$ )**

| Band | Beam_ID | Module | Ant_Type | Front (S1) | Right (S4) | Left (S3) | Top (S5) |
|------|---------|--------|----------|------------|------------|-----------|----------|
| n261 | 0       | QTM1   | PATCH    | 0.29       | 5.44       | 0.02      | 0.32     |
|      | 3       | QTM1   | PATCH    | 0.23       | 6.04       | 0.06      | 0.41     |
|      | 4       | QTM1   | PATCH    | 0.18       | 6.17       | 0.01      | 0.07     |
|      | 5       | QTM1   | PATCH    | 0.33       | 5.79       | 0.02      | 0.52     |
|      | 12      | QTM1   | PATCH    | 0.52       | 5.80       | 0.09      | 0.03     |
|      | 13      | QTM1   | PATCH    | 0.24       | 6.01       | 0.02      | 0.14     |
|      | 18      | QTM1   | PATCH    | 0.30       | 6.05       | 0.09      | 0.55     |
|      | 19      | QTM1   | PATCH    | 0.44       | 6.15       | 0.07      | 0.18     |
|      | 20      | QTM1   | PATCH    | 0.45       | 6.04       | 0.07      | 0.04     |
|      | 21      | QTM1   | PATCH    | 0.62       | 5.81       | 0.04      | 0.11     |
|      | 22      | QTM1   | PATCH    | 0.57       | 5.81       | 0.03      | 0.38     |
|      | 33      | QTM1   | PATCH    | 0.43       | 6.13       | 0.08      | 0.43     |
|      | 34      | QTM1   | PATCH    | 0.44       | 6.02       | 0.08      | 0.07     |
|      | 35      | QTM1   | PATCH    | 0.47       | 5.95       | 0.05      | 0.03     |
|      | 36      | QTM1   | PATCH    | 0.63       | 5.79       | 0.04      | 0.31     |
|      | 128     | QTM1   | PATCH    | 0.71       | 6.17       | 0.08      | 0.25     |
|      | 131     | QTM1   | PATCH    | 0.40       | 6.17       | 0.03      | 0.13     |
|      | 132     | QTM1   | PATCH    | 0.70       | 6.17       | 0.08      | 0.06     |
|      | 133     | QTM1   | PATCH    | 0.22       | 6.03       | 0.07      | 0.38     |
|      | 140     | QTM1   | PATCH    | 0.89       | 6.17       | 0.10      | 0.21     |
|      | 141     | QTM1   | PATCH    | 0.17       | 6.17       | 0.04      | 0.17     |
|      | 146     | QTM1   | PATCH    | 0.81       | 6.17       | 0.06      | 0.44     |
|      | 147     | QTM1   | PATCH    | 0.44       | 6.17       | 0.05      | 0.09     |
|      | 148     | QTM1   | PATCH    | 0.46       | 6.17       | 0.06      | 0.02     |
|      | 149     | QTM1   | PATCH    | 0.44       | 6.17       | 0.06      | 0.12     |
|      | 150     | QTM1   | PATCH    | 0.38       | 6.13       | 0.09      | 0.10     |
|      | 161     | QTM1   | PATCH    | 0.69       | 6.17       | 0.04      | 0.21     |
|      | 162     | QTM1   | PATCH    | 0.32       | 6.17       | 0.06      | 0.04     |
|      | 163     | QTM1   | PATCH    | 0.49       | 6.17       | 0.07      | 0.02     |
|      | 164     | QTM1   | PATCH    | 0.49       | 6.17       | 0.06      | 0.09     |

Please note the above scaled simulation values correspond to PD\_design\_target if the simulation was performed with correct housing material properties.



**Table 3-13: n261/mid channel, QTM#2 simulated 4cm<sup>2</sup> avg.PD (W/m<sup>2</sup>) at PD\_Design\_Target (if simulation performed with correct housing material properties) ( $\Delta_{min}$ )**

| Band | Beam_ID | Module | Ant_Type | Front (S1) | Back (S2) | Left (S3) |
|------|---------|--------|----------|------------|-----------|-----------|
| n261 | 2       | QTM2   | PATCH    | 0.11       | 6.17      | 0.03      |
|      | 9       | QTM2   | PATCH    | 0.14       | 6.17      | 0.02      |
|      | 10      | QTM2   | PATCH    | 0.16       | 6.17      | 0.07      |
|      | 11      | QTM2   | PATCH    | 0.11       | 6.10      | 0.06      |
|      | 16      | QTM2   | PATCH    | 0.14       | 6.17      | 0.03      |
|      | 17      | QTM2   | PATCH    | 0.14       | 6.12      | 0.07      |
|      | 28      | QTM2   | PATCH    | 0.33       | 5.12      | 0.05      |
|      | 29      | QTM2   | PATCH    | 0.37       | 6.04      | 0.09      |
|      | 30      | QTM2   | PATCH    | 0.14       | 6.07      | 0.13      |
|      | 31      | QTM2   | PATCH    | 0.17       | 5.90      | 0.09      |
|      | 32      | QTM2   | PATCH    | 0.24       | 5.54      | 0.14      |
|      | 41      | QTM2   | PATCH    | 0.35       | 5.01      | 0.07      |
|      | 42      | QTM2   | PATCH    | 0.19       | 5.87      | 0.09      |
|      | 43      | QTM2   | PATCH    | 0.14       | 6.17      | 0.17      |
|      | 44      | QTM2   | PATCH    | 0.21       | 5.63      | 0.14      |
|      | 130     | QTM2   | PATCH    | 0.09       | 5.74      | 0.10      |
|      | 137     | QTM2   | PATCH    | 0.13       | 5.78      | 0.11      |
|      | 138     | QTM2   | PATCH    | 0.10       | 6.17      | 0.14      |
|      | 139     | QTM2   | PATCH    | 0.14       | 5.39      | 0.03      |
|      | 144     | QTM2   | PATCH    | 0.13       | 5.83      | 0.05      |
|      | 145     | QTM2   | PATCH    | 0.25       | 6.17      | 0.03      |
|      | 156     | QTM2   | PATCH    | 0.23       | 6.17      | 0.03      |
|      | 157     | QTM2   | PATCH    | 0.09       | 6.10      | 0.18      |
|      | 158     | QTM2   | PATCH    | 0.19       | 6.17      | 0.16      |
|      | 159     | QTM2   | PATCH    | 0.31       | 5.83      | 0.05      |
|      | 160     | QTM2   | PATCH    | 0.16       | 5.67      | 0.04      |
|      | 169     | QTM2   | PATCH    | 0.13       | 5.89      | 0.06      |
|      | 170     | QTM2   | PATCH    | 0.16       | 6.10      | 0.18      |
|      | 171     | QTM2   | PATCH    | 0.19       | 5.72      | 0.13      |
|      | 172     | QTM2   | PATCH    | 0.26       | 5.91      | 0.05      |

Please note the above scaled simulation values correspond to PD\_design\_target if the simulation was performed with correct housing material properties.

**Table 3-14: n260/mid channel, QTM#0 simulated 4cm<sup>2</sup> avg.PD (W/m<sup>2</sup>) at PD\_Design\_Target (if simulation performed with correct housing material properties) ( $\Delta_{min}$ )**

| Band | Beam_ID | Module | Ant_Type | Front (S1) | Right (S4) | Left (S3) | Top (S5) |
|------|---------|--------|----------|------------|------------|-----------|----------|
| n260 | 1       | QTM0   | PATCH    | 0.64       | 0.04       | 5.73      | 0.21     |
|      | 6       | QTM0   | PATCH    | 1.03       | 0.06       | 6.17      | 0.24     |
|      | 7       | QTM0   | PATCH    | 1.17       | 0.04       | 6.17      | 0.21     |
|      | 8       | QTM0   | PATCH    | 0.71       | 0.05       | 6.17      | 0.13     |
|      | 14      | QTM0   | PATCH    | 0.54       | 0.05       | 5.94      | 0.15     |
|      | 15      | QTM0   | PATCH    | 0.91       | 0.04       | 6.17      | 0.20     |
|      | 23      | QTM0   | PATCH    | 1.83       | 0.08       | 6.17      | 0.12     |
|      | 24      | QTM0   | PATCH    | 0.62       | 0.04       | 5.17      | 0.34     |
|      | 25      | QTM0   | PATCH    | 0.69       | 0.04       | 6.06      | 0.44     |
|      | 26      | QTM0   | PATCH    | 0.92       | 0.05       | 5.73      | 0.27     |
|      | 27      | QTM0   | PATCH    | 1.23       | 0.06       | 6.04      | 0.26     |
|      | 37      | QTM0   | PATCH    | 1.51       | 0.10       | 6.17      | 0.04     |
|      | 38      | QTM0   | PATCH    | 0.65       | 0.05       | 5.83      | 0.39     |
|      | 39      | QTM0   | PATCH    | 0.81       | 0.03       | 5.90      | 0.23     |
|      | 40      | QTM0   | PATCH    | 0.71       | 0.05       | 5.61      | 0.29     |
|      | 129     | QTM0   | PATCH    | 1.06       | 0.01       | 5.67      | 0.19     |
|      | 134     | QTM0   | PATCH    | 0.56       | 0.07       | 5.09      | 0.07     |
|      | 135     | QTM0   | PATCH    | 0.34       | 0.02       | 5.47      | 0.11     |
|      | 136     | QTM0   | PATCH    | 0.81       | 0.10       | 5.68      | 0.13     |
|      | 142     | QTM0   | PATCH    | 1.63       | 0.04       | 5.68      | 0.09     |
|      | 143     | QTM0   | PATCH    | 1.03       | 0.10       | 5.68      | 0.22     |
|      | 151     | QTM0   | PATCH    | 1.31       | 0.09       | 5.83      | 0.11     |
|      | 152     | QTM0   | PATCH    | 0.97       | 0.04       | 5.94      | 0.18     |
|      | 153     | QTM0   | PATCH    | 1.25       | 0.06       | 4.71      | 0.18     |
|      | 154     | QTM0   | PATCH    | 0.73       | 0.06       | 5.89      | 0.20     |
|      | 155     | QTM0   | PATCH    | 1.68       | 0.06       | 5.58      | 0.14     |
|      | 165     | QTM0   | PATCH    | 1.20       | 0.03       | 5.64      | 0.12     |
|      | 166     | QTM0   | PATCH    | 0.94       | 0.07       | 5.70      | 0.17     |
|      | 167     | QTM0   | PATCH    | 0.87       | 0.05       | 5.85      | 0.18     |
|      | 168     | QTM0   | PATCH    | 1.09       | 0.05       | 4.36      | 0.15     |

Please note the above scaled simulation values correspond to PD\_design\_target if the simulation was performed with correct housing material properties.

**Table 3-15: n260/mid channel, QTM#1 simulated 4cm<sup>2</sup> avg.PD (W/m<sup>2</sup>) at PD\_Design\_Target (if simulation performed with correct housing material properties) ( $\Delta_{min}$ )**

| Band | Beam_ID | Module | Ant_Type | Front (S1) | Right (S4) | Left (S3) | Top (S5) |
|------|---------|--------|----------|------------|------------|-----------|----------|
| n260 | 0       | QTM1   | PATCH    | 1.20       | 6.16       | 0.05      | 0.18     |
|      | 3       | QTM1   | PATCH    | 1.12       | 5.80       | 0.08      | 0.26     |
|      | 4       | QTM1   | PATCH    | 0.77       | 4.97       | 0.01      | 0.10     |
|      | 5       | QTM1   | PATCH    | 0.56       | 5.10       | 0.01      | 0.16     |
|      | 12      | QTM1   | PATCH    | 1.32       | 6.17       | 0.07      | 0.26     |
|      | 13      | QTM1   | PATCH    | 0.74       | 4.99       | 0.01      | 0.15     |
|      | 18      | QTM1   | PATCH    | 0.53       | 5.54       | 0.04      | 0.10     |
|      | 19      | QTM1   | PATCH    | 0.78       | 6.17       | 0.04      | 0.18     |
|      | 20      | QTM1   | PATCH    | 0.66       | 6.17       | 0.04      | 0.08     |
|      | 21      | QTM1   | PATCH    | 1.12       | 5.66       | 0.05      | 0.16     |
|      | 22      | QTM1   | PATCH    | 0.92       | 5.34       | 0.03      | 0.35     |
|      | 33      | QTM1   | PATCH    | 0.72       | 6.17       | 0.03      | 0.18     |
|      | 34      | QTM1   | PATCH    | 0.79       | 5.80       | 0.06      | 0.17     |
|      | 35      | QTM1   | PATCH    | 0.66       | 5.94       | 0.04      | 0.12     |
|      | 36      | QTM1   | PATCH    | 0.92       | 5.42       | 0.03      | 0.26     |
|      | 128     | QTM1   | PATCH    | 0.53       | 5.06       | 0.03      | 0.12     |
|      | 131     | QTM1   | PATCH    | 0.91       | 5.73       | 0.03      | 0.27     |
|      | 132     | QTM1   | PATCH    | 0.96       | 5.58       | 0.04      | 0.16     |
|      | 133     | QTM1   | PATCH    | 1.04       | 6.17       | 0.03      | 0.17     |
|      | 140     | QTM1   | PATCH    | 0.85       | 5.78       | 0.05      | 0.13     |
|      | 141     | QTM1   | PATCH    | 0.74       | 6.17       | 0.03      | 0.14     |
|      | 146     | QTM1   | PATCH    | 1.03       | 6.01       | 0.04      | 0.12     |
|      | 147     | QTM1   | PATCH    | 0.80       | 6.17       | 0.03      | 0.23     |
|      | 148     | QTM1   | PATCH    | 0.70       | 6.17       | 0.04      | 0.11     |
|      | 149     | QTM1   | PATCH    | 0.66       | 5.25       | 0.02      | 0.17     |
|      | 150     | QTM1   | PATCH    | 0.62       | 5.90       | 0.03      | 0.23     |
|      | 161     | QTM1   | PATCH    | 0.95       | 6.17       | 0.03      | 0.24     |
|      | 162     | QTM1   | PATCH    | 0.77       | 5.66       | 0.02      | 0.16     |
|      | 163     | QTM1   | PATCH    | 0.41       | 5.70       | 0.03      | 0.12     |
|      | 164     | QTM1   | PATCH    | 0.58       | 5.75       | 0.02      | 0.21     |

Please note the above scaled simulation values correspond to PD\_design\_target if the simulation was performed with correct housing material properties.

**Table 3-16: n260/mid channel, QTM#2 simulated 4cm<sup>2</sup> avg.PD (W/m<sup>2</sup>) at PD\_Design\_Target (if simulation performed with correct housing material properties) ( $\Delta_{min}$ )**

| Band | Beam_ID | Module | Ant_Type | Front (S1) | Back (S2) | Left (S3) |
|------|---------|--------|----------|------------|-----------|-----------|
| n260 | 2       | QTM2   | PATCH    | 0.06       | 5.98      | 0.07      |
|      | 9       | QTM2   | PATCH    | 0.12       | 6.17      | 0.03      |
|      | 10      | QTM2   | PATCH    | 0.14       | 6.17      | 0.07      |
|      | 11      | QTM2   | PATCH    | 0.24       | 6.17      | 0.04      |
|      | 16      | QTM2   | PATCH    | 0.11       | 6.03      | 0.06      |
|      | 17      | QTM2   | PATCH    | 0.09       | 6.17      | 0.06      |
|      | 28      | QTM2   | PATCH    | 0.09       | 6.17      | 0.07      |
|      | 29      | QTM2   | PATCH    | 0.11       | 6.17      | 0.07      |
|      | 30      | QTM2   | PATCH    | 0.12       | 5.87      | 0.15      |
|      | 31      | QTM2   | PATCH    | 0.09       | 6.17      | 0.05      |
|      | 32      | QTM2   | PATCH    | 0.21       | 6.17      | 0.04      |
|      | 41      | QTM2   | PATCH    | 0.14       | 6.17      | 0.10      |
|      | 42      | QTM2   | PATCH    | 0.11       | 5.03      | 0.06      |
|      | 43      | QTM2   | PATCH    | 0.10       | 6.17      | 0.15      |
|      | 44      | QTM2   | PATCH    | 0.13       | 6.17      | 0.03      |
|      | 130     | QTM2   | PATCH    | 0.11       | 6.17      | 0.13      |
|      | 137     | QTM2   | PATCH    | 0.13       | 6.08      | 0.10      |
|      | 138     | QTM2   | PATCH    | 0.14       | 6.09      | 0.06      |
|      | 139     | QTM2   | PATCH    | 0.16       | 6.17      | 0.16      |
|      | 144     | QTM2   | PATCH    | 0.11       | 6.17      | 0.25      |
|      | 145     | QTM2   | PATCH    | 0.16       | 5.89      | 0.04      |
|      | 156     | QTM2   | PATCH    | 0.21       | 6.17      | 0.07      |
|      | 157     | QTM2   | PATCH    | 0.31       | 6.17      | 0.16      |
|      | 158     | QTM2   | PATCH    | 0.41       | 5.10      | 0.18      |
|      | 159     | QTM2   | PATCH    | 0.27       | 6.17      | 0.19      |
|      | 160     | QTM2   | PATCH    | 0.11       | 6.12      | 0.09      |
|      | 169     | QTM2   | PATCH    | 0.19       | 6.05      | 0.06      |
|      | 170     | QTM2   | PATCH    | 0.40       | 5.19      | 0.28      |
|      | 171     | QTM2   | PATCH    | 0.31       | 5.98      | 0.13      |
|      | 172     | QTM2   | PATCH    | 0.33       | 6.03      | 0.09      |

Please note the above scaled simulation values correspond to PD\_design\_target if the simulation was performed with correct housing material properties.

**Table 3-17: 4cm<sup>2</sup> avg.PD of the selected beams measured on the corresponding surfaces that are not selected for  $\Delta$ min determination**

| Band | Antenna | Beam ID | Surface    | input.power.limit (dBm) | Meas. 4cm <sup>2</sup> PD (W/m <sup>2</sup> ) |
|------|---------|---------|------------|-------------------------|-----------------------------------------------|
| n261 | QTM#0   | 6       | Front (S1) | 10.14                   | 2.66                                          |
|      |         | 165     | Right (S4) | 8.31                    | 0.503                                         |
|      |         | 27      | Top (S5))  | 7.61                    | 0.475                                         |
|      | QTM#1   | 140     | Front (S1) | 9.66                    | 2.28                                          |
|      |         | 140     | Left (S3)  | 9.66                    | 0.859                                         |
|      |         | 18      | Top (S5)   | 7.07                    | 0.291                                         |
|      | QTM#2   | 29      | Front (S1) | 4.60                    | 0.767                                         |
|      |         | 170     | Left (S3)  | 4.62                    | 0.805                                         |
| n260 | QTM#0   | 23      | Front (S1) | 6.91                    | 0.645                                         |
|      |         | 143     | Right (S4) | 11.09                   | 0.824                                         |
|      |         | 25      | Top (S5))  | 6.88                    | 0.845                                         |
|      | QTM#1   | 12      | Front (S1) | 9.14                    | 2.48                                          |
|      |         | 3       | Left (S3)  | 9.49                    | 0.673                                         |
|      |         | 22      | Top (S5)   | 5.84                    | 0.421                                         |
|      | QTM#2   | 158     | Front (S1) | 6.00                    | 0.661                                         |
|      |         | 170     | Left (S3)  | 5.65                    | 0.577                                         |

### 3.7. PD Char

#### 3.7.1. Scaling Factor for Single Beams

To determine the input power limit at each antenna port, simulation was performed at low, mid and high channel for each mmW band supported, with 6dBm input power per active port for n261 band and 6dBm input power per active port for n260 band:

1. Obtained  $PD_{surface}$  value (the worst PD among all identified surfaces of the DUT) at all three channels for all single beams specified in the codebook of Table 3-1.
2. Derived a scaling factor at low, mid and high channel,  $s(i)_{low\_or\_mid\_or\_high}$ , by:

$$s(i)_{low\_or\_mid\_or\_high} = \frac{PD\ design\ target}{sim.PD_{surface}(i)}, \quad i \in \text{single beams} \quad (1)$$

3. Determined the worst-case scaling factor,  $(i)$ , among low, mid and high channels:

$$s(i) = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, \quad i \in \text{single beams} \quad (2)$$

and this scaling factor applies to the input power at each antenna port.

#### 3.7.2. Scaling Factor for Beam Pairs

Per the manufacturer, the relative phase between beam pair is not controlled in the chipset design and could vary from run to run. Therefore, for each beam pair, based on the simulation results, the worst-case scaling factor was determined mathematically to ensure the compliance. The worst-case PD for MIMO operations was found by sweeping the relative phase for all possible angles to ensure a conservative assessment. The power density simulation report contains the worst-case power density for each surface after sweeping through all relative phases between beams.

Once the power density was determined for the worst-case  $\emptyset$ , the scaling factor was obtained by the below equation for low, mid and high channels:

$$s(i)_{low\_or\_mid\_or\_high} = \frac{PD\ design\ target}{total\ PD(\emptyset(i)_{worstcase})}, \quad i \in \text{single beams} \quad (3)$$

The  $total\ PD(\emptyset_{worstcase})$  varies with channel and beam pair, the lowest scaling factor among all three channels,  $s(i)$ , is determined for the beam pair  $i$ :

$$s(i) = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, \quad i \in \text{single beams} \quad (4)$$

#### 3.7.3. Input.Power.Limit Calculations

The PD Char specifies the limit of input power at antenna port that corresponds to  $PD\_design\_target$  for all the beams.

Ideally, if there is no uncertainty associated with hardware design, the input power limit, denoted as  $input.power.limit(i)$ , for beam  $i$  can be obtained after accounting for the housing influence ( $\Delta_{min}$ ) determined in Table 3-10, given by:

- For n261

$$input.power.limit(i) = 6\ dBm + 10 * \log(s(i)) + \Delta_{min}, \quad i \in \text{all beams} \quad (5a)$$

- For n260

$$input.power.limit(i) = 6\ dBm + 10 * \log(s(i)) + \Delta_{min}, \quad i \in \text{all beams} \quad (5b)$$

where 6 dBm is the input powers used in simulation for n261 and n260 ;  $s(i)$  is the scaling factor obtained from Eq. (2) or Eq. (4) for beam  $i$ ;  $\Delta_{min}$  is the worst-case housing influence factor (determined

in Table 3-10) for beam  $i$ .

If simulation overestimates the housing influence, then  $\Delta_{min}$  (= simulated PD – measured PD) is negative, which means that the measured PD would be higher than the simulated PD. The input power to antenna elements determined via simulation must be decreased for compliance.

Similarly, if simulation underestimates the loss, then  $\Delta_{min}$  is positive (measured PD would be lower than the simulated value). Input power to antenna elements determined via simulation can be increased and still be PD compliant.

In reality the hardware design has uncertainty which must be properly considered. The device design related uncertainty is embedded in the process of  $\Delta_{min}$  determination. Since the device uncertainty is already accounted for in *PD\_design\_target*, it needs to be removed to avoid double counting this uncertainty. Thus, Equation 5a and 5b is modified to:

**If** -TxAGC uncertainty <  $\Delta_{min}$  < TxAGC uncertainty,

$$\text{input.power.limit}(i) = 6 \text{ dBm} + 10 * \log(s(i)), i \in \text{all beams, for n261} \quad (6a)$$

$$\text{input.power.limit}(i) = 6 \text{ dBm} + 10 * \log(s(i)), i \in \text{all beams, for n260} \quad (6b)$$

**else if**  $\Delta_{min}$  < -TxAGC uncertainty,

$$\begin{aligned} \text{input.power.limit}(i) &= 6 \text{ dBm} + 10 * \log(s(i)) + (\Delta_{min} + \text{TxAGC uncertainty}), \\ i &\in \text{all beams, for n261} \end{aligned} \quad (7a)$$

$$\begin{aligned} \text{input.power.limit}(i) &= 6 \text{ dBm} + 10 * \log(s(i)) + (\Delta_{min} + \text{TxAGC uncertainty}), \\ i &\in \text{all beams, for n260} \end{aligned} \quad (7b)$$

**else if**  $\Delta_{min}$  > TxAGC uncertainty,

$$\begin{aligned} \text{input.power.limit}(i) &= 6 \text{ dBm} + 10 * \log(s(i)) + (\Delta_{min} - \text{TxAGC uncertainty}), \\ i &\in \text{all beams, for n261} \end{aligned} \quad (8a)$$

$$\begin{aligned} \text{input.power.limit}(i) &= 6 \text{ dBm} + 10 * \log(s(i)) + (\Delta_{min} - \text{TxAGC uncertainty}), \\ i &\in \text{all beams, for n260} \end{aligned} \quad (8b)$$

Following above logic, the *input.power.limit* for this DUT can be calculated using Equations (6a), (6b), (7a), (7b) and (8a) and (8b), i.e.,

**Table 3-18 *input.power.limit* Calculation**

| Band | Ant Module         | $\Delta_{min}$ (dB) | TxAGC Uncertainty (dB) | <i>input.power.limit</i> (dBm)= | Notes        |
|------|--------------------|---------------------|------------------------|---------------------------------|--------------|
| n261 | QTM#0 (Patch Beam) | 1.83                | 0.5                    | 6 dBm + 10 * log(s(i)) + 1.33   | Using Eq. 8a |
|      | QTM#1 (Patch Beam) | 1.57                | 0.5                    | 6 dBm + 10 * log(s(i)) + 1.07   | Using Eq. 8a |
|      | QTM#2 (Patch Beam) | 1.64                | 0.5                    | 6 dBm + 10 * log(s(i)) + 1.14   | Using Eq. 8a |
| n260 | QTM#0 (Patch Beam) | 1.82                | 0.5                    | 6 dBm + 10 * log(s(i)) + 1.32   | Using Eq. 8b |
|      | QTM#1 (Patch Beam) | 2.10                | 0.5                    | 6 dBm + 10 * log(s(i)) + 1.60   | Using Eq. 8b |
|      | QTM#2 (Patch Beam) | 2.15                | 0.5                    | 6 dBm + 10 * log(s(i)) + 1.65   | Using Eq. 8b |

Thus, the DUT PD Char for n261 and n260 bands is as shown in the tables 3-19 – 3-24 below. The *input.power.limit* for a single beam does not apply to guarantee PD margin, only the calculation of the MIMO beam *input.power.limit*. The full simulation results used to support this calculation can be found in the Power Density Simulation Report.

**Table 3-19 5G NR n261 QTM#0 *input.power.limit***

| Band | Beam_ID | Paired with Beam_ID | Input.Power.Limit |
|------|---------|---------------------|-------------------|
| n261 | 1       |                     | 12.58             |
|      | 6       |                     | 10.14             |
|      | 7       |                     | 8.51              |
|      | 8       |                     | 9.42              |
|      | 14      |                     | 8.61              |
|      | 15      |                     | 9.78              |
|      | 23      |                     | 7.71              |
|      | 24      |                     | 6.94              |
|      | 25      |                     | 7.42              |
|      | 26      |                     | 7.02              |
|      | 27      |                     | 7.61              |
|      | 37      |                     | 7.87              |
|      | 38      |                     | 7.09              |
|      | 39      |                     | 6.43              |
|      | 40      |                     | 8.46              |
|      | 129     |                     | 11.92             |
|      | 134     |                     | 9.07              |
|      | 135     |                     | 9.73              |
|      | 136     |                     | 9.63              |
|      | 142     |                     | 9.49              |
|      | 143     |                     | 11.93             |
|      | 151     |                     | 7.58              |
|      | 152     |                     | 6.76              |
|      | 153     |                     | 6.50              |
|      | 154     |                     | 8.05              |
|      | 155     |                     | 6.93              |
|      | 165     |                     | 8.31              |
|      | 166     |                     | 6.12              |
|      | 167     |                     | 7.16              |
|      | 168     |                     | 7.35              |
|      | 1       | 129                 | 10.35             |
|      | 6       | 134                 | 6.71              |
|      | 7       | 135                 | 8.05              |
|      | 8       | 136                 | 6.51              |
|      | 14      | 142                 | 6.92              |
|      | 15      | 143                 | 8.15              |
|      | 23      | 151                 | 5.74              |
|      | 24      | 152                 | 4.62              |
|      | 25      | 153                 | 4.29              |
|      | 26      | 154                 | 4.77              |
|      | 27      | 155                 | 4.82              |
|      | 37      | 165                 | 5.20              |
|      | 38      | 166                 | 4.67              |
|      | 39      | 167                 | 4.07              |
|      | 40      | 168                 | 5.25              |



**Table 3-20 5G NR n261 QTM#1 *input.power.limit***

| Band | Beam_ID | Paired with Beam_ID | Input.Power.Limit |
|------|---------|---------------------|-------------------|
| n261 | 0       |                     | 12.20             |
|      | 3       |                     | 8.37              |
|      | 4       |                     | 7.58              |
|      | 5       |                     | 8.85              |
|      | 12      |                     | 8.63              |
|      | 13      |                     | 8.03              |
|      | 18      |                     | 7.07              |
|      | 19      |                     | 5.32              |
|      | 20      |                     | 5.14              |
|      | 21      |                     | 5.32              |
|      | 22      |                     | 6.55              |
|      | 33      |                     | 5.83              |
|      | 34      |                     | 5.20              |
|      | 35      |                     | 5.09              |
|      | 36      |                     | 6.01              |
|      | 128     |                     | 12.22             |
|      | 131     |                     | 7.74              |
|      | 132     |                     | 9.18              |
|      | 133     |                     | 10.47             |
|      | 140     |                     | 9.66              |
|      | 141     |                     | 8.04              |
|      | 146     |                     | 6.36              |
|      | 147     |                     | 5.05              |
|      | 148     |                     | 4.98              |
|      | 149     |                     | 5.24              |
|      | 150     |                     | 7.31              |
|      | 161     |                     | 5.22              |
|      | 162     |                     | 4.93              |
|      | 163     |                     | 5.20              |
|      | 164     |                     | 6.28              |
|      | 0       | 128                 | 11.20             |
|      | 3       | 131                 | 6.41              |
|      | 4       | 132                 | 6.55              |
|      | 5       | 133                 | 7.49              |
|      | 12      | 140                 | 7.59              |
|      | 13      | 141                 | 6.52              |
|      | 18      | 146                 | 4.86              |
|      | 19      | 147                 | 3.13              |
|      | 20      | 148                 | 3.13              |
|      | 21      | 149                 | 3.38              |
|      | 22      | 150                 | 5.08              |
|      | 33      | 161                 | 3.50              |
|      | 34      | 162                 | 3.05              |
|      | 35      | 163                 | 3.16              |
|      | 36      | 164                 | 4.17              |

**Table 3-21 5G NR n261 QTM#2 *input.power.limit***

| Band | Beam_ID | Paired with Beam_ID | Input.Power.Limit |
|------|---------|---------------------|-------------------|
| n261 | 2       |                     | 8.85              |
|      | 9       |                     | 6.50              |
|      | 10      |                     | 6.40              |
|      | 11      |                     | 7.04              |
|      | 16      |                     | 6.36              |
|      | 17      |                     | 6.74              |
|      | 28      |                     | 4.31              |
|      | 29      |                     | 4.60              |
|      | 30      |                     | 4.33              |
|      | 31      |                     | 3.87              |
|      | 32      |                     | 5.17              |
|      | 41      |                     | 3.98              |
|      | 42      |                     | 4.27              |
|      | 43      |                     | 4.45              |
|      | 44      |                     | 4.87              |
|      | 130     |                     | 9.34              |
|      | 137     |                     | 7.51              |
|      | 138     |                     | 6.22              |
|      | 139     |                     | 7.19              |
|      | 144     |                     | 7.24              |
|      | 145     |                     | 7.02              |
|      | 156     |                     | 6.11              |
|      | 157     |                     | 4.51              |
|      | 158     |                     | 4.86              |
|      | 159     |                     | 4.97              |
|      | 160     |                     | 4.62              |
|      | 169     |                     | 5.50              |
|      | 170     |                     | 4.62              |
|      | 171     |                     | 4.93              |
|      | 172     |                     | 4.51              |
|      | 2       | 130                 | 8.09              |
|      | 9       | 137                 | 6.65              |
|      | 10      | 138                 | 5.62              |
|      | 11      | 139                 | 6.27              |
|      | 16      | 144                 | 5.49              |
|      | 17      | 145                 | 5.37              |
|      | 28      | 156                 | 3.63              |
|      | 29      | 157                 | 2.49              |
|      | 30      | 158                 | 2.54              |
|      | 31      | 159                 | 2.50              |
|      | 32      | 160                 | 3.41              |
|      | 41      | 169                 | 3.15              |
|      | 42      | 170                 | 2.36              |
|      | 43      | 171                 | 2.60              |
|      | 44      | 172                 | 3.21              |

**Table 3-22 5G NR n260 QTM#0 *input.power.limit***

| Band | Beam_ID | Paired with Beam_ID | Input.Power.Limit |
|------|---------|---------------------|-------------------|
| n260 | 1       |                     | 11.71             |
|      | 6       |                     | 9.16              |
|      | 7       |                     | 9.36              |
|      | 8       |                     | 9.52              |
|      | 14      |                     | 9.78              |
|      | 15      |                     | 9.21              |
|      | 23      |                     | 6.91              |
|      | 24      |                     | 6.29              |
|      | 25      |                     | 6.88              |
|      | 26      |                     | 6.42              |
|      | 27      |                     | 6.87              |
|      | 37      |                     | 7.35              |
|      | 38      |                     | 6.70              |
|      | 39      |                     | 6.57              |
|      | 40      |                     | 6.32              |
|      | 129     |                     | 10.94             |
|      | 134     |                     | 9.73              |
|      | 135     |                     | 8.37              |
|      | 136     |                     | 10.99             |
|      | 142     |                     | 8.95              |
|      | 143     |                     | 11.09             |
|      | 151     |                     | 6.52              |
|      | 152     |                     | 6.95              |
|      | 153     |                     | 6.99              |
|      | 154     |                     | 6.77              |
|      | 155     |                     | 7.73              |
|      | 165     |                     | 6.87              |
|      | 166     |                     | 6.86              |
|      | 167     |                     | 6.72              |
|      | 168     |                     | 6.80              |
|      | 1       | 129                 | 9.27              |
|      | 6       | 134                 | 8.38              |
|      | 7       | 135                 | 6.75              |
|      | 8       | 136                 | 7.90              |
|      | 14      | 142                 | 7.67              |
|      | 15      | 143                 | 7.70              |
|      | 23      | 151                 | 4.35              |
|      | 24      | 152                 | 4.57              |
|      | 25      | 153                 | 3.76              |
|      | 26      | 154                 | 3.97              |
|      | 27      | 155                 | 4.53              |
|      | 37      | 165                 | 4.77              |
|      | 38      | 166                 | 4.32              |
|      | 39      | 167                 | 4.03              |
|      | 40      | 168                 | 3.87              |

**Table 3-23 5G NR n260 QTM#1 *input.power.limit***

| Band | Beam_ID | Paired with Beam_ID | Input.Power.Limit |
|------|---------|---------------------|-------------------|
| n260 | 0       |                     | 11.08             |
|      | 3       |                     | 9.49              |
|      | 4       |                     | 8.31              |
|      | 5       |                     | 7.61              |
|      | 12      |                     | 9.14              |
|      | 13      |                     | 8.48              |
|      | 18      |                     | 5.11              |
|      | 19      |                     | 5.52              |
|      | 20      |                     | 5.17              |
|      | 21      |                     | 5.89              |
|      | 22      |                     | 5.84              |
|      | 33      |                     | 5.58              |
|      | 34      |                     | 6.11              |
|      | 35      |                     | 5.46              |
|      | 36      |                     | 5.50              |
|      | 128     |                     | 10.63             |
|      | 131     |                     | 9.04              |
|      | 132     |                     | 10.43             |
|      | 133     |                     | 8.76              |
|      | 140     |                     | 9.18              |
|      | 141     |                     | 9.00              |
|      | 146     |                     | 5.84              |
|      | 147     |                     | 5.75              |
|      | 148     |                     | 5.95              |
|      | 149     |                     | 5.48              |
|      | 150     |                     | 5.52              |
|      | 161     |                     | 5.73              |
|      | 162     |                     | 5.61              |
|      | 163     |                     | 5.62              |
|      | 164     |                     | 5.59              |
|      | 0       | 128                 | 9.05              |
|      | 3       | 131                 | 6.60              |
|      | 4       | 132                 | 7.41              |
|      | 5       | 133                 | 6.23              |
|      | 12      | 140                 | 8.16              |
|      | 13      | 141                 | 6.70              |
|      | 18      | 146                 | 3.32              |
|      | 19      | 147                 | 3.62              |
|      | 20      | 148                 | 3.78              |
|      | 21      | 149                 | 3.65              |
|      | 22      | 150                 | 4.06              |
|      | 33      | 161                 | 3.62              |
|      | 34      | 162                 | 3.80              |
|      | 35      | 163                 | 3.38              |
|      | 36      | 164                 | 3.81              |

**Table 3-24 5G NR n260 QTM#2 *input.power.limit***

| Band | Beam_ID | Paired with Beam_ID | Input.Power.Limit |
|------|---------|---------------------|-------------------|
| n260 | 2       |                     | 10.94             |
|      | 9       |                     | 7.04              |
|      | 10      |                     | 7.92              |
|      | 11      |                     | 6.83              |
|      | 16      |                     | 7.06              |
|      | 17      |                     | 7.25              |
|      | 28      |                     | 4.46              |
|      | 29      |                     | 5.27              |
|      | 30      |                     | 5.51              |
|      | 31      |                     | 4.53              |
|      | 32      |                     | 4.92              |
|      | 41      |                     | 5.01              |
|      | 42      |                     | 5.71              |
|      | 43      |                     | 4.72              |
|      | 44      |                     | 4.59              |
|      | 130     |                     | 11.24             |
|      | 137     |                     | 7.46              |
|      | 138     |                     | 7.60              |
|      | 139     |                     | 8.00              |
|      | 144     |                     | 8.08              |
|      | 145     |                     | 7.58              |
|      | 156     |                     | 4.86              |
|      | 157     |                     | 5.15              |
|      | 158     |                     | 6.00              |
|      | 159     |                     | 5.35              |
|      | 160     |                     | 4.99              |
|      | 169     |                     | 4.93              |
|      | 170     |                     | 5.65              |
|      | 171     |                     | 5.76              |
|      | 172     |                     | 5.32              |
|      | 2       | 130                 | 10.81             |
|      | 9       | 137                 | 4.89              |
|      | 10      | 138                 | 4.99              |
|      | 11      | 139                 | 5.25              |
|      | 16      | 144                 | 5.68              |
|      | 17      | 145                 | 5.30              |
|      | 28      | 156                 | 2.49              |
|      | 29      | 157                 | 2.37              |
|      | 30      | 158                 | 3.23              |
|      | 31      | 159                 | 1.93              |
|      | 32      | 160                 | 2.51              |
|      | 41      | 169                 | 2.62              |
|      | 42      | 170                 | 2.79              |
|      | 43      | 171                 | 2.09              |
|      | 44      | 172                 | 2.36              |