

FCC TEST REPORT

FCC ID: 2A22E-WWYLT26

Report Number..... : ZKT-211029L5839-02

Date of Test..... Sep. 22, 2021 – Nov. 10, 2021

Date of issue : Nov. 10, 2021

Total number of pages 137

Test Result : PASS

Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Micronet Union Technology(Chengdu) Co., Ltd

Address : Room 502, Building 5, N.O. 528, Yuefei Road, Shibantan Street, Xindu District, Chengdu, Sichuan, China

Manufacturer's name : Micronet Union Technology(Chengdu) Co., Ltd

Address : Room 502, Building 5, N.O. 528, Yuefei Road, Shibantan Street, Xindu District, Chengdu, Sichuan, China

Test specification:

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
KDB 789033 D02 V01r02

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No. : TRF-EL-110_V0

Test Report Form(s) Originator : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : AX1500 Wi-Fi 6 Router

Trademark : /

Model/Type reference : T26-BXX, T26-PQX, T26-GDX, T26-21X (the last X=A-Z or a-z, which indicates for different appearance, dimension and color.)

Ratings..... : DC12V 1A from adapter


Testing procedure and testing location:**Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.****Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China**
-----**Tested by (name + signature).....: Alen He**
-----**Reviewer (name + signature).....: Joe Liu**
-----**Approved (name + signature).....: Lake Xie**
-----

Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULT	14
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 TEST RESULTS	19
5.POWER SPECTRAL DENSITY TEST	78
5.1 APPLIED PROCEDURES / LIMIT	78
5.2 TEST PROCEDURE	78
5.3 DEVIATION FROM STANDARD	78
5.4 TEST SETUP	78
5.5 EUT OPERATION CONDITIONS	79
5.6 TEST RESULT	79
6. -26 DB & 6DBM EMISSION BANDWIDTH	95
6.1 APPLIED PROCEDURES / LIMIT	95
6.2 TEST PROCEDURE	95
6.3 DEVIATION FROM STANDARD	95
6.4 TEST SETUP	95
6.5 EUT OPERATION CONDITIONS	95

6.6 TEST RESULT	95
7. OUTPUT POWER TEST	111
7.1 APPLIED PROCEDURES/LIMIT	111
7.2 DEVIATION FROM STANDARD	111
7.3 TEST SETUP	111
7.4 EUT OPERATION CONDITIONS	111
7.5 TEST RESULT	112
8. OUT OF BAND EDGE EMISSION	114
8.1 TEST PROCEDURE	114
8.2 DEVIATION FROM STANDARD	114
8.3 TEST SETUP	114
8.4 EUT OPERATION CONDITIONS	114
8.5 TEST RESULTS	114
9. FREQUENCY STABILITY MEASUREMENT	127
9.4 TEST RESULT	127
10.ANTENNA REQUIREMENT	134
10. TEST SETUP PHOTO	135
11. EUT CONSTRUCTIONAL DETAILS	137

1. VERSION

Report No.	Version	Description	Approved
ZKT-211029L5839-02	Rev.01	Initial issue of report	Nov. 10, 2021

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.407 (a) (b)	Spurious Radiated Emissions and Band Edge	PASS	
15.407 (e) /15.403(i)	6 dB bandwidth, 26dB Emission Bandwidth& 99% Occupied Bandwidth	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407 (a)(1)(2)(3)	Maximum conducted output power	PASS	
15.407 (g)	Frequency Stability	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	tem	ncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59℃
9	Radiated disturbance(30MHz-1000MHz)	U=4.8dB
10	Radiated disturbance(1GHz-6GHz)	U=4.9dB
11	Radiated disturbance(1GHz-18GHz)	U=5.0dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	AX1500 Wi-Fi 6 Router		
Model No.:	T26-BXX (the last X=A-Z or a-z, which indicates for different appearance, dimension and color.)		
Model Different.:	The antenna of each series model is different,the antenna structure is different, and the color, shape, size of each series model are different		
Serial No.:	T26-PQX, T26-GDX, T26-21X (the last X=A-Z or a-z, which indicates for different appearance, dimension and color.)		
Sample(s) Status:	Engineer sample		
	IEEE802.11 WLAN mode supported		802.11a/n/ac/ax(20MHz bandwidth) 802.11n/ac/ax (40MHz bandwidth) 802.11ac/ax (80MHz bandwidth)
	Data rate		802.11a: 54Mbps 802.11n: MCS0-MCS7 802.11ac:MCS0-MCS9 802.11ax:MCS0-MCS11
	Modulation		OFDM
	Band 1	Frequency Range	IEEE802.11 a : 5180-5240MHz IEEE802.11 n (HT20) : 5180-5240MHz IEEE802.11 n (HT40) : 5190-5230MHz IEEE802.11 ac (VHT20): 5180-5240MHz IEEE802.11 ac (VHT40): 5190-5230MHz IEEE802.11 ac (VHT80): 5210MHz IEEE802.11 ax (HE20): 5180-5240MHz IEEE802.11 ax (HE40): 5190-5230MHz IEEE802.11 ax (HE80): 5210MHz
		Channels	IEEE802.11 a/ac /n/ax: 4 IEEE802.11 ac /n/ax (40MHz): 2 IEEE802.11 ac /ax (80MHz): 1
	BAND 4	Frequency Range	IEEE802.11 a : 5745-5825 MHz IEEE802.11 n (HT20):5745-5825 MHz IEEE802.11 n (HT40):5755-5795 MHz IEEE802.11 ac (VHT20):5745-5825 MHz IEEE802.11 ac (VHT40):5755-5795 MHz IEEE802.11 ac (VHT80):5775MHz IEEE802.11 ax (HE20):5745-5825MHz IEEE802.11 ax (HE40):5755-5795MHz IEEE802.11 ax (HE80):5775MHz
		Channels	IEEE802.11 a/ac /n/ax: 5 IEEE802.11 ac /n/ax (40MHz): 2 IEEE802.11 ac /ax (80MHz): 1
Antenna Type:	FPC antenna		
Antenna gain:	ANT1: 5dBi; ANT2: 5dBi MIMO: 8.01dBi		
Power supply:	AC 120V 50/60Hz		

Band 1		Band 4	
CH.	Frequency (MHz)	CH.	Frequency (MHz)
36	5180	149	5745
40	5200	...	...

44	5220	157	5785
48	5240	...	...
		165	5825

802.11a/n/ac (20MHz) Frequency / Channel Operations

Band 1		Band 4	
CH.	Frequency (MHz)	CH.	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795

802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

Band 1		Band 4	
CH.	Frequency (MHz)	CH.	Frequency (MHz)
42	5210	155	2775

802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

3.2 DESCRIPTION OF TEST MODES

Worst Case Configuration: transmitting both 2.4GHz mode and 5GHz mode

Description	5 GHz Emission
Antenna	MIMO
Channel	38
Operating Frequency (MHz)	802.11a
Data Rate (Mbps)	OFDM/13.5Mbps
Mode	Band I -A20

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support

units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	adapter	/	INPUT:100-240V 50/60Hz 0.35A OUTPUT: 12V 1A	MODEL NO.: MAUS-1201001202	Provide by client

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY45109572	Sep. 21, 2021	Sep. 22, 2022
2	Spectrum Analyzer (1GHz-40GHz)	Agilent	E4446A	100363	Sep. 21, 2021	Sep. 22, 2022
3	Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Sep. 21, 2021	Sep. 22, 2022
4	Bilog Antenna (30MHz-1400MHz)	Schwarzbeck	VULB9168	00877	Sep. 21, 2021	Sep. 22, 2022
5	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	Sep. 21, 2021	Sep. 22, 2022
6	Horn Antenna (18GHz-40GHz)	A.H. System	SAS-574	588	Sep. 21, 2021	Sep. 22, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	N/A	Sep. 21, 2021	Sep. 22, 2022
8	Amplifier (1GHz-40GHz)	QUANJUDA	DLE-161	097	Sep. 21, 2021	Sep. 22, 2022
9	Loop Antenna (9KHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	Sep. 21, 2021	Sep. 22, 2022
10	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Sep. 21, 2021	Sep. 22, 2022
11	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Sep. 21, 2021	Sep. 22, 2022
12	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Sep. 21, 2021	Sep. 22, 2022
13	CMW500 Test	R&S	CMW500	106504	Sep. 21, 2021	Sep. 22, 2022
14	ESG Signal Generator	Agilent	E4421B	GB40051203	Sep. 21, 2021	Sep. 22, 2022
15	Signal Generator	Agilent	N5182A	MY47420215	Sep. 21, 2021	Sep. 22, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
17	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Sep. 21, 2021	Sep. 22, 2022
2	LISN	CYBERTEK	EM5040A	E1850400149	Sep. 21, 2021	Sep. 22, 2022
3	Test Cable	N/A	C01	N/A	Sep. 21, 2021	Sep. 22, 2022
4	Test Cable	N/A	C02	N/A	Sep. 21, 2021	Sep. 22, 2022
5	EMI Test Receiver	R&S	ESRP3	101946	Sep. 21, 2021	Sep. 22, 2022
6	Absorbing Clamp	DZ	ZN23201	N/A	Sep. 21, 2021	Sep. 22, 2022

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.e.
8. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

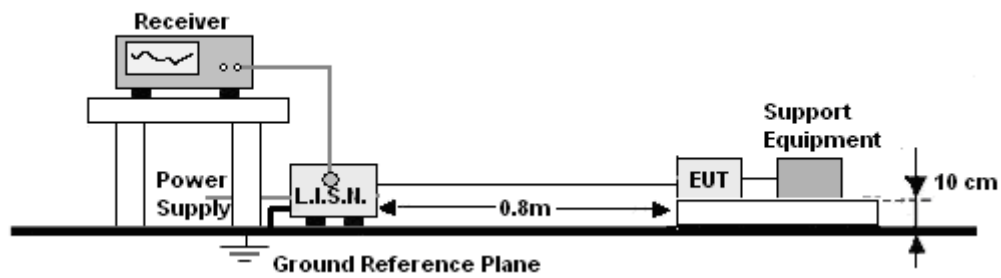


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V , the worst voltage was AC 120V and the data recording in the report.

4.1.6 TEST RESULT

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

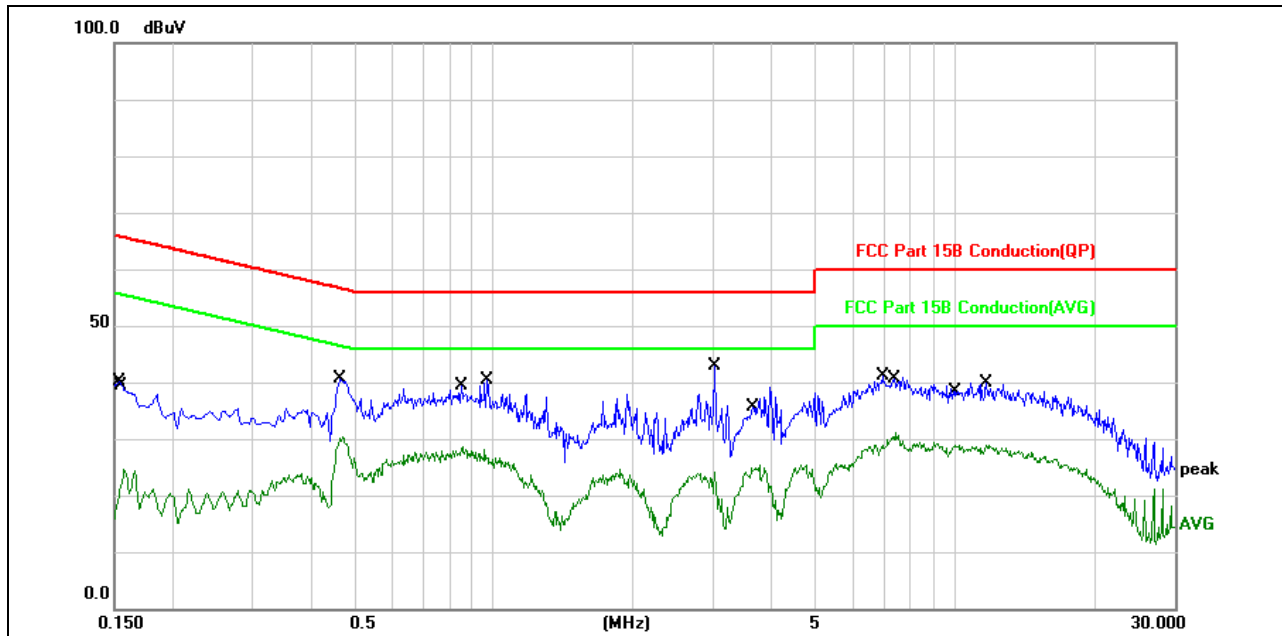


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1539	40.32	-0.13	40.19	65.78	-25.59	QP	
2	0.1580	24.82	-0.13	24.69	55.56	-30.87	AVG	
3	0.4660	40.65	-0.02	40.63	56.58	-15.95	QP	
4	0.4700	30.42	-0.02	30.40	46.51	-16.11	AVG	
5	0.8540	28.61	-0.09	28.52	46.00	-17.48	AVG	
6	0.9660	40.41	-0.11	40.30	56.00	-15.70	QP	
7 *	3.0180	43.15	-0.18	42.97	56.00	-13.03	QP	
8	3.6380	24.96	-0.19	24.77	46.00	-21.23	AVG	
9	6.9700	41.39	-0.28	41.11	60.00	-18.89	QP	
10	7.4380	31.31	-0.28	31.03	50.00	-18.97	AVG	
11	9.9740	29.08	-0.16	28.92	50.00	-21.08	AVG	
12	11.7020	40.04	-0.12	39.92	60.00	-20.08	QP	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

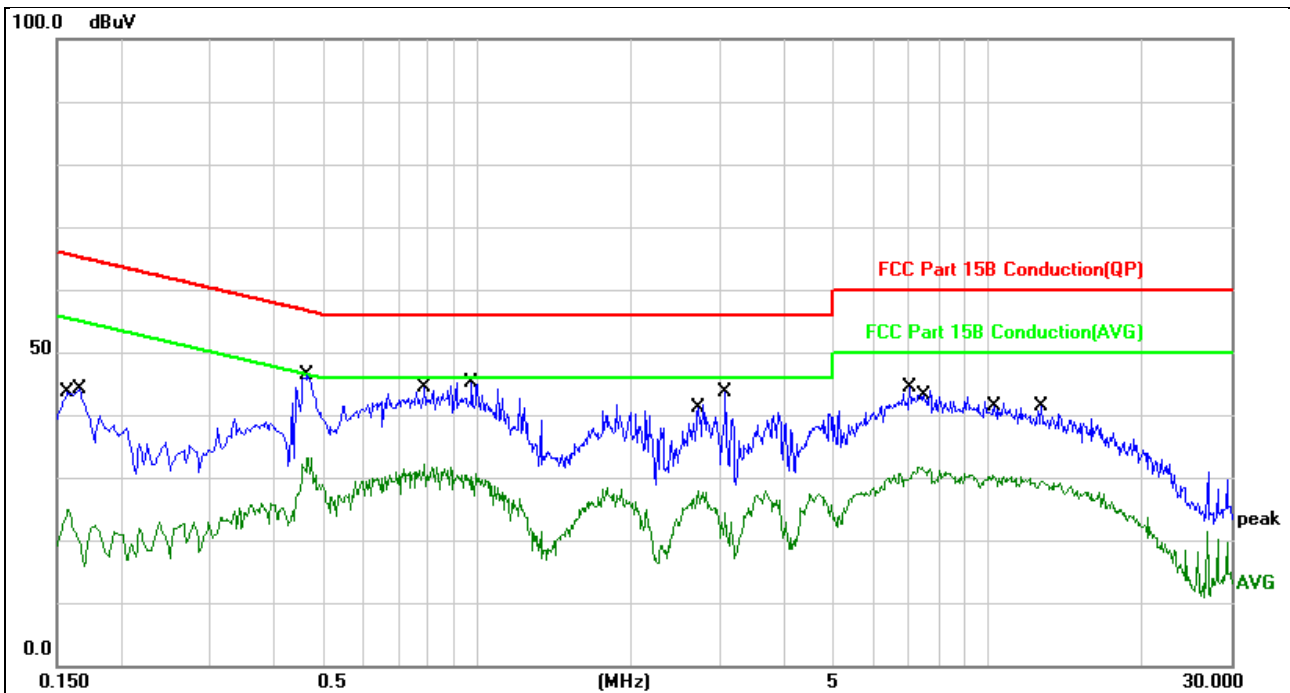

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	25.08	-0.13	24.95	55.56	-30.61	AVG	
2		0.1660	44.21	-0.13	44.08	65.15	-21.07	QP	
3	*	0.4660	46.48	-0.02	46.46	56.58	-10.12	QP	
4		0.4660	33.21	-0.02	33.19	46.58	-13.39	AVG	
5		0.7900	32.27	-0.07	32.20	46.00	-13.80	AVG	
6		0.9740	45.34	-0.11	45.23	56.00	-10.77	QP	
7		2.7180	28.09	-0.17	27.92	46.00	-18.08	AVG	
8		3.0579	43.81	-0.18	43.63	56.00	-12.37	QP	
9		7.0340	44.57	-0.28	44.29	60.00	-15.71	QP	
10		7.4580	31.87	-0.28	31.59	50.00	-18.41	AVG	
11		10.2100	30.38	-0.12	30.26	50.00	-19.74	AVG	
12		12.7420	41.56	-0.14	41.42	60.00	-18.58	QP	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

1. Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013. The EUT was placed above the ground plane, 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz. The interface cable and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.
2. For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz .
3. For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.
4. For transmitters operating in the 5470-5600 MHz and 5650-5725 MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz .
5. KDB789033v02r01G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are out side of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	$2400/F(\text{KHz})$	300
0.490~1.705	$24000/F(\text{KHz})$	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 metre to 1.5 metre (Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

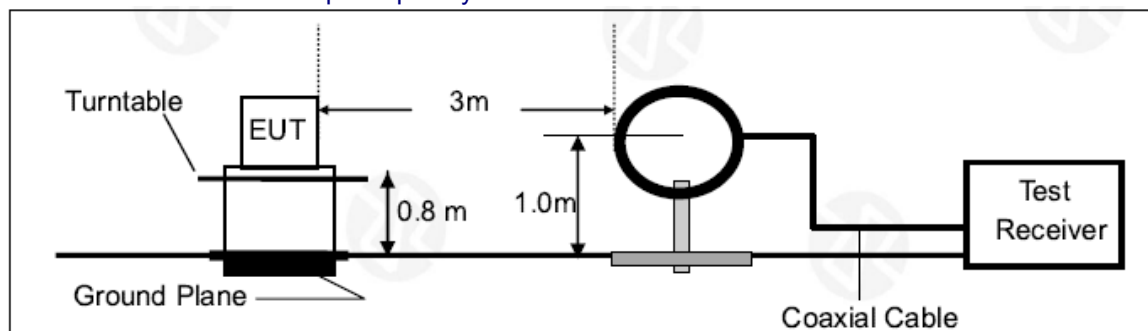

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

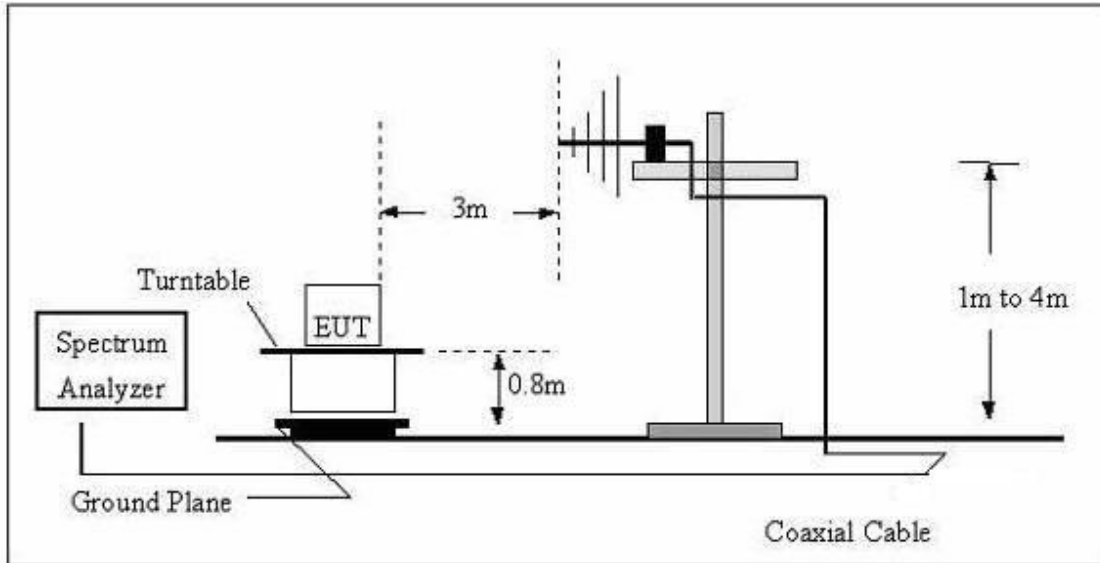

(C) Radiated Emission Test-Up Frequency Above 1GHz

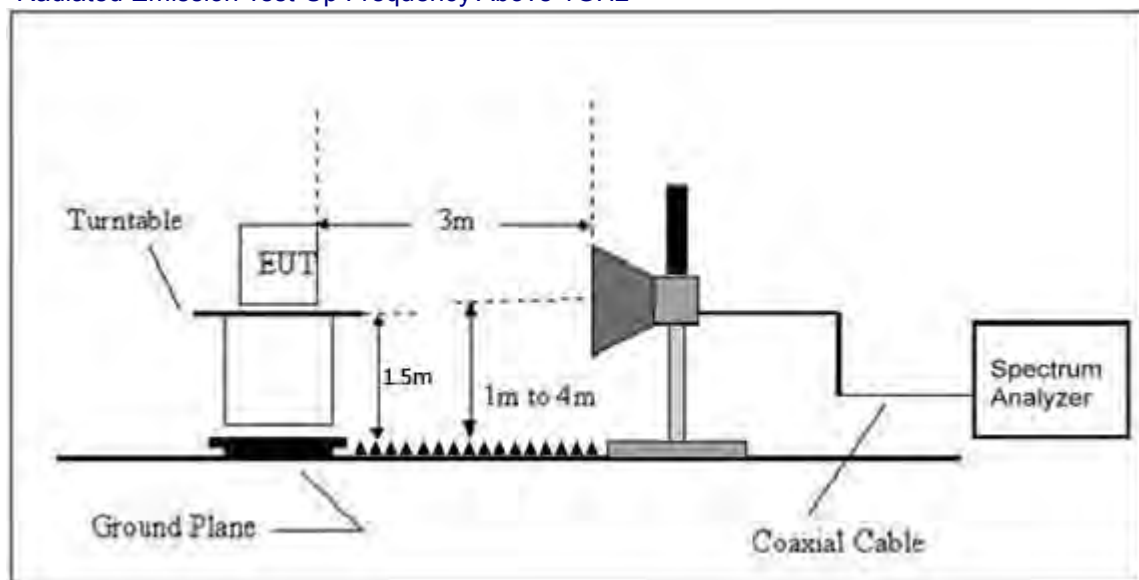

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

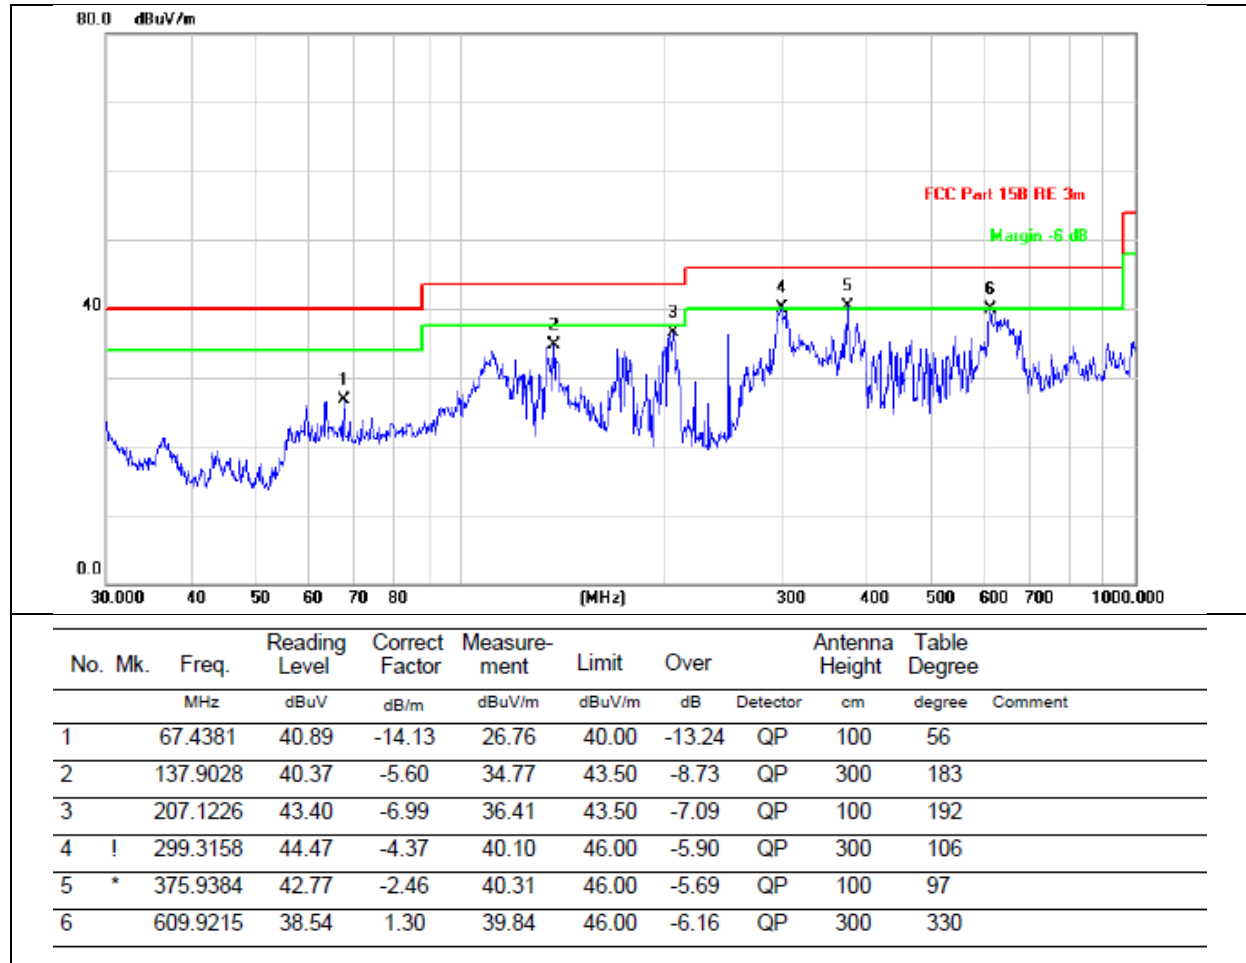

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

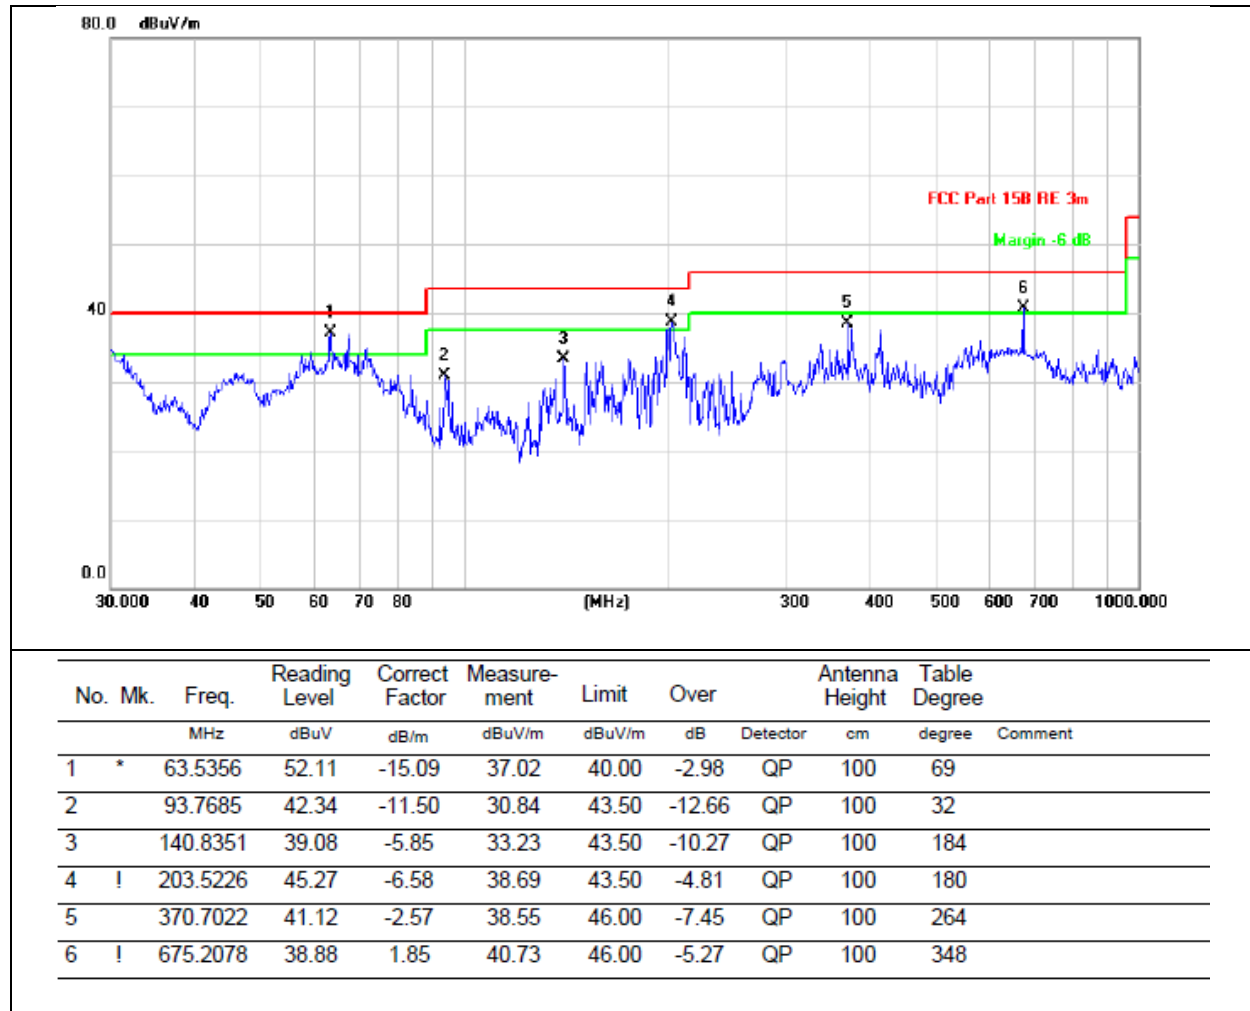

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case MIMO 802.11ax-VHT20-CH36

1GHz~40GHz

ANT1-802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	10360	54.49	30.85	7.45	24.69	55.78	74	-18.22	PK
V	10360	41.12	30.85	7.45	24.69	42.41	54	-11.59	AV
V	15540	54.48	31.38	7.45	24.75	55.30	74	-18.70	PK
V	15540	43.42	31.38	7.45	24.75	44.24	54	-9.76	AV
V	20720	57.09	31.76	7.45	24.86	57.64	74	-16.36	PK
V	20720	41.52	31.76	7.45	24.86	42.07	54	-11.93	AV
H	10360	53.13	30.85	7.45	24.69	54.42	74	-19.58	PK
H	10360	40.29	30.85	7.45	24.69	41.58	54	-12.42	AV
H	15540	55.00	31.38	7.45	24.75	55.82	74	-18.18	PK
H	15540	42.74	31.38	7.45	24.75	43.56	54	-10.44	AV
H	20720	57.76	31.76	7.45	24.86	58.31	74	-15.69	PK
H	20720	39.95	31.76	7.45	24.86	40.50	54	-13.50	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	10400	53.84	30.85	7.45	24.69	55.13	74	-18.87	PK
V	10400	42.69	30.85	7.45	24.69	43.98	54	-10.02	AV
V	15600	54.93	31.38	7.45	24.75	55.75	74	-18.25	PK
V	15600	41.46	31.38	7.45	24.75	42.28	54	-11.72	AV
V	20800	56.65	31.76	7.45	24.86	57.20	74	-16.80	PK
V	20800	41.51	31.76	7.45	24.86	42.06	54	-11.94	AV
H	10400	54.27	30.85	7.45	24.69	55.56	74	-18.44	PK
H	10400	41.58	30.85	7.45	24.69	42.87	54	-11.13	AV
H	15600	55.67	31.38	7.45	24.75	56.49	74	-17.51	PK
H	15600	43.05	31.38	7.45	24.75	43.87	54	-10.13	AV
H	20800	55.47	31.76	7.45	24.86	56.02	74	-17.98	PK
H	20800	39.86	31.76	7.45	24.86	40.41	54	-13.59	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480	52.13	30.85	7.45	24.69	53.42	74	-20.58	PK
V	10480	40.41	30.85	7.45	24.69	41.70	54	-12.30	AV
V	15720	55.21	31.38	7.45	24.75	56.03	74	-17.97	PK
V	15720	42.14	31.38	7.45	24.75	42.96	54	-11.04	AV
V	20960	56.84	31.76	7.45	24.86	57.39	74	-16.61	PK
V	20960	42.66	31.76	7.45	24.86	43.21	54	-10.79	AV
H	10480	52.92	30.85	7.45	24.69	54.21	74	-19.79	PK
H	10480	42.17	30.85	7.45	24.69	43.46	54	-10.54	AV
H	15720	54.44	31.38	7.45	24.75	55.26	74	-18.74	PK
H	15720	41.05	31.38	7.45	24.75	41.87	54	-12.13	AV
H	20960	57.61	31.76	7.45	24.86	58.16	74	-15.84	PK
H	20960	40.07	31.76	7.45	24.86	40.62	54	-13.38	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5745MHz									
V	11490	52.07	30.85	7.45	24.69	53.36	74	-20.64	PK
V	11490	39.82	30.85	7.45	24.69	41.11	54	-12.89	AV
V	17235	55.13	31.38	7.45	24.75	55.95	74	-18.05	PK
V	17235	41.66	31.38	7.45	24.75	42.48	54	-11.52	AV
V	22980	57.09	31.76	7.45	24.86	57.64	74	-16.36	PK
V	22980	40.03	31.76	7.45	24.86	40.58	54	-13.42	AV
H	11490	54.55	30.85	7.45	24.69	55.84	74	-18.16	PK
H	11490	40.11	30.85	7.45	24.69	41.40	54	-12.60	AV
H	17235	54.06	31.38	7.45	24.75	54.88	74	-19.12	PK
H	17235	41.24	31.38	7.45	24.75	42.06	54	-11.94	AV
H	22980	56.96	31.76	7.45	24.86	57.51	74	-16.49	PK
H	22980	41.30	31.76	7.45	24.86	41.85	54	-12.15	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5785MHz									
V	11570	52.92	30.85	7.45	24.69	54.21	74	-19.79	PK
V	11570	40.30	30.85	7.45	24.69	41.59	54	-12.41	AV
V	17355	54.07	31.38	7.45	24.75	54.89	74	-19.11	PK
V	17355	41.46	31.38	7.45	24.75	42.28	54	-11.72	AV
V	23140	57.37	31.76	7.45	24.86	57.92	74	-16.08	PK
V	23140	39.86	31.76	7.45	24.86	40.41	54	-13.59	AV
H	11570	52.89	30.85	7.45	24.69	54.18	74	-19.82	PK
H	11570	42.74	30.85	7.45	24.69	44.03	54	-9.97	AV
H	17355	55.08	31.38	7.45	24.75	55.90	74	-18.10	PK
H	17355	42.84	31.38	7.45	24.75	43.66	54	-10.34	AV
H	23140	57.38	31.76	7.45	24.86	57.93	74	-16.07	PK
H	23140	42.58	31.76	7.45	24.86	43.13	54	-10.87	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5825MHz									
V	11650	52.68	30.85	7.45	24.69	53.97	74	-20.03	PK
V	11650	41.56	30.85	7.45	24.69	42.85	54	-11.15	AV
V	17475	54.72	31.38	7.45	24.75	55.54	74	-18.46	PK
V	17475	41.33	31.38	7.45	24.75	42.15	54	-11.85	AV
V	23300	54.96	31.76	7.45	24.86	55.51	74	-18.49	PK
V	23300	40.87	31.76	7.45	24.86	41.42	54	-12.58	AV
H	11650	52.20	30.85	7.45	24.69	53.49	74	-20.51	PK
H	11650	42.16	30.85	7.45	24.69	43.45	54	-10.55	AV
H	17475	54.41	31.38	7.45	24.75	55.23	74	-18.77	PK
H	17475	42.82	31.38	7.45	24.75	43.64	54	-10.36	AV
H	23300	56.66	31.76	7.45	24.86	57.21	74	-16.79	PK
H	23300	41.73	31.76	7.45	24.86	42.28	54	-11.72	AV

ANT1-802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	10360	53.66	30.85	7.45	24.69	54.95	74	-19.05	PK
V	10360	40.39	30.85	7.45	24.69	41.68	54	-12.32	AV
V	15540	54.93	31.38	7.45	24.75	55.75	74	-18.25	PK
V	15540	42.50	31.38	7.45	24.75	43.32	54	-10.68	AV
V	20720	55.57	31.76	7.45	24.86	56.12	74	-17.88	PK
V	20720	41.21	31.76	7.45	24.86	41.76	54	-12.24	AV
H	10360	52.36	30.85	7.45	24.69	53.65	74	-20.35	PK
H	10360	41.64	30.85	7.45	24.69	42.93	54	-11.07	AV
H	15540	54.26	31.38	7.45	24.75	55.08	74	-18.92	PK
H	15540	43.12	31.38	7.45	24.75	43.94	54	-10.06	AV
H	20720	57.36	31.76	7.45	24.86	57.91	74	-16.09	PK
H	20720	40.01	31.76	7.45	24.86	40.56	54	-13.44	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	10400	51.97	30.85	7.45	24.69	53.26	74	-20.74	PK
V	10400	41.56	30.85	7.45	24.69	42.85	54	-11.15	AV
V	15600	55.52	31.38	7.45	24.75	56.34	74	-17.66	PK
V	15600	43.47	31.38	7.45	24.75	44.29	54	-9.71	AV
V	20800	57.34	31.76	7.45	24.86	57.89	74	-16.11	PK
V	20800	41.58	31.76	7.45	24.86	42.13	54	-11.87	AV
H	10400	51.99	30.85	7.45	24.69	53.28	74	-20.72	PK
H	10400	40.88	30.85	7.45	24.69	42.17	54	-11.83	AV
H	15600	54.52	31.38	7.45	24.75	55.34	74	-18.66	PK
H	15600	41.23	31.38	7.45	24.75	42.05	54	-11.95	AV
H	20800	57.41	31.76	7.45	24.86	57.96	74	-16.04	PK
H	20800	41.79	31.76	7.45	24.86	42.34	54	-11.66	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480	53.27	30.85	7.45	24.69	54.56	74	-19.44	PK
V	10480	42.02	30.85	7.45	24.69	43.31	54	-10.69	AV
V	15720	54.05	31.38	7.45	24.75	54.87	74	-19.13	PK
V	15720	42.21	31.38	7.45	24.75	43.03	54	-10.97	AV
V	20960	57.06	31.76	7.45	24.86	57.61	74	-16.39	PK
V	20960	39.92	31.76	7.45	24.86	40.47	54	-13.53	AV
H	10480	53.23	30.85	7.45	24.69	54.52	74	-19.48	PK
H	10480	41.43	30.85	7.45	24.69	42.72	54	-11.28	AV
H	15720	54.81	31.38	7.45	24.75	55.63	74	-18.37	PK
H	15720	42.27	31.38	7.45	24.75	43.09	54	-10.91	AV
H	20960	55.24	31.76	7.45	24.86	55.79	74	-18.21	PK
H	20960	42.22	31.76	7.45	24.86	42.77	54	-11.23	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5745MHz									
V	11490	51.79	30.85	7.45	24.69	53.08	74	-20.92	PK
V	11490	39.98	30.85	7.45	24.69	41.27	54	-12.73	AV
V	17235	55.64	31.38	7.45	24.75	56.46	74	-17.54	PK
V	17235	43.60	31.38	7.45	24.75	44.42	54	-9.58	AV
V	22980	56.19	31.76	7.45	24.86	56.74	74	-17.26	PK
V	22980	41.28	31.76	7.45	24.86	41.83	54	-12.17	AV
H	11490	52.12	30.85	7.45	24.69	53.41	74	-20.59	PK
H	11490	41.37	30.85	7.45	24.69	42.66	54	-11.34	AV
H	17235	54.47	31.38	7.45	24.75	55.29	74	-18.71	PK
H	17235	42.87	31.38	7.45	24.75	43.69	54	-10.31	AV
H	22980	55.54	31.76	7.45	24.86	56.09	74	-17.91	PK
H	22980	41.08	31.76	7.45	24.86	41.63	54	-12.37	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5785MHz									
V	11570	52.03	30.85	7.45	24.69	53.32	74	-20.68	PK
V	11570	40.09	30.85	7.45	24.69	41.38	54	-12.62	AV
V	17355	55.31	31.38	7.45	24.75	56.13	74	-17.87	PK
V	17355	41.30	31.38	7.45	24.75	42.12	54	-11.88	AV
V	23140	56.62	31.76	7.45	24.86	57.17	74	-16.83	PK
V	23140	42.55	31.76	7.45	24.86	43.10	54	-10.90	AV
H	11570	52.96	30.85	7.45	24.69	54.25	74	-19.75	PK
H	11570	40.35	30.85	7.45	24.69	41.64	54	-12.36	AV
H	17355	54.64	31.38	7.45	24.75	55.46	74	-18.54	PK
H	17355	43.50	31.38	7.45	24.75	44.32	54	-9.68	AV
H	23140	56.09	31.76	7.45	24.86	56.64	74	-17.36	PK
H	23140	39.88	31.76	7.45	24.86	40.43	54	-13.57	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5825MHz									
V	11650	52.79	30.85	7.45	24.69	54.08	74	-19.92	PK
V	11650	42.56	30.85	7.45	24.69	43.85	54	-10.15	AV
V	17475	54.85	31.38	7.45	24.75	55.67	74	-18.33	PK
V	17475	43.36	31.38	7.45	24.75	44.18	54	-9.82	AV
V	23300	56.44	31.76	7.45	24.86	56.99	74	-17.01	PK
V	23300	41.31	31.76	7.45	24.86	41.86	54	-12.14	AV
H	11650	54.07	30.85	7.45	24.69	55.36	74	-18.64	PK
H	11650	40.79	30.85	7.45	24.69	42.08	54	-11.92	AV
H	17475	55.68	31.38	7.45	24.75	56.50	74	-17.50	PK
H	17475	41.06	31.38	7.45	24.75	41.88	54	-12.12	AV
H	23300	57.60	31.76	7.45	24.86	58.15	74	-15.85	PK
H	23300	40.63	31.76	7.45	24.86	41.18	54	-12.82	AV

ANT1-802.11n40

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5190MHz									
V	10380	52.28	30.85	7.45	24.69	53.57	74	-20.43	PK
V	10380	39.98	30.85	7.45	24.69	41.27	54	-12.73	AV
V	15570	54.30	31.38	7.45	24.75	55.12	74	-18.88	PK
V	15570	43.46	31.38	7.45	24.75	44.28	54	-9.72	AV
V	20760	56.91	31.76	7.45	24.86	57.46	74	-16.54	PK
V	20760	40.19	31.76	7.45	24.86	40.74	54	-13.26	AV
H	10380	53.22	30.85	7.45	24.69	54.51	74	-19.49	PK
H	10380	41.39	30.85	7.45	24.69	42.68	54	-11.32	AV
H	15570	55.76	31.38	7.45	24.75	56.58	74	-17.42	PK
H	15570	43.58	31.38	7.45	24.75	44.40	54	-9.60	AV
H	20760	55.75	31.76	7.45	24.86	56.30	74	-17.70	PK
H	20760	41.94	31.76	7.45	24.86	42.49	54	-11.51	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5230MHz									
V	10460	53.56	30.85	7.45	24.69	54.85	74	-19.15	PK
V	10460	41.37	30.85	7.45	24.69	42.66	54	-11.34	AV
V	15690	53.78	31.38	7.45	24.75	54.60	74	-19.40	PK
V	15690	43.25	31.38	7.45	24.75	44.07	54	-9.93	AV
V	20920	56.40	31.76	7.45	24.86	56.95	74	-17.05	PK
V	20920	42.47	31.76	7.45	24.86	43.02	54	-10.98	AV
H	10460	53.16	30.85	7.45	24.69	54.45	74	-19.55	PK
H	10460	42.42	30.85	7.45	24.69	43.71	54	-10.29	AV
H	15690	55.34	31.38	7.45	24.75	56.16	74	-17.84	PK
H	15690	41.10	31.38	7.45	24.75	41.92	54	-12.08	AV
H	20920	57.62	31.76	7.45	24.86	58.17	74	-15.83	PK
H	20920	40.80	31.76	7.45	24.86	41.35	54	-12.65	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5755MHz									
V	11510	52.41	30.85	7.45	24.69	53.70	74	-20.30	PK
V	11510	40.43	30.85	7.45	24.69	41.72	54	-12.28	AV
V	17265	54.65	31.38	7.45	24.75	55.47	74	-18.53	PK
V	17265	43.61	31.38	7.45	24.75	44.43	54	-9.57	AV
V	23020	56.53	31.76	7.45	24.86	57.08	74	-16.92	PK
V	23020	39.93	31.76	7.45	24.86	40.48	54	-13.52	AV
H	11510	54.72	30.85	7.45	24.69	56.01	74	-17.99	PK
H	11510	40.78	30.85	7.45	24.69	42.07	54	-11.93	AV
H	17265	55.73	31.38	7.45	24.75	56.55	74	-17.45	PK
H	17265	40.98	31.38	7.45	24.75	41.80	54	-12.20	AV
H	23020	56.39	31.76	7.45	24.86	56.94	74	-17.06	PK
H	23020	42.08	31.76	7.45	24.86	42.63	54	-11.37	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5795MHz									
V	11590	53.98	30.85	7.45	24.69	55.27	74	-18.73	PK
V	11590	42.30	30.85	7.45	24.69	43.59	54	-10.41	AV
V	17385	54.12	31.38	7.45	24.75	54.94	74	-19.06	PK
V	17385	43.58	31.38	7.45	24.75	44.40	54	-9.60	AV
V	23180	55.40	31.76	7.45	24.86	55.95	74	-18.05	PK
V	23180	42.32	31.76	7.45	24.86	42.87	54	-11.13	AV
H	11590	53.99	30.85	7.45	24.69	55.28	74	-18.72	PK
H	11590	40.28	30.85	7.45	24.69	41.57	54	-12.43	AV
H	17385	54.00	31.38	7.45	24.75	54.82	74	-19.18	PK
H	17385	42.80	31.38	7.45	24.75	43.62	54	-10.38	AV
H	23180	54.88	31.76	7.45	24.86	55.43	74	-18.57	PK
H	23180	40.22	31.76	7.45	24.86	40.77	54	-13.23	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

ANT1--802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	10360	52.82	30.85	7.45	24.69	54.11	74	-19.89	PK
V	10360	42.32	30.85	7.45	24.69	43.61	54	-10.39	AV
V	15540	54.90	31.38	7.45	24.75	55.72	74	-18.28	PK
V	15540	43.44	31.38	7.45	24.75	44.26	54	-9.74	AV
V	20720	57.01	31.76	7.45	24.86	57.56	74	-16.44	PK
V	20720	42.18	31.76	7.45	24.86	42.73	54	-11.27	AV
H	10360	53.82	30.85	7.45	24.69	55.11	74	-18.89	PK
H	10360	40.94	30.85	7.45	24.69	42.23	54	-11.77	AV
H	15540	55.30	31.38	7.45	24.75	56.12	74	-17.88	PK
H	15540	43.51	31.38	7.45	24.75	44.33	54	-9.67	AV
H	20720	57.49	31.76	7.45	24.86	58.04	74	-15.96	PK
H	20720	39.95	31.76	7.45	24.86	40.50	54	-13.50	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	10400	52.27	30.85	7.45	24.69	53.56	74	-20.44	PK
V	10400	42.09	30.85	7.45	24.69	43.38	54	-10.62	AV
V	15600	54.31	31.38	7.45	24.75	55.13	74	-18.87	PK
V	15600	42.77	31.38	7.45	24.75	43.59	54	-10.41	AV
V	20800	54.85	31.76	7.45	24.86	55.40	74	-18.60	PK
V	20800	41.53	31.76	7.45	24.86	42.08	54	-11.92	AV
H	10400	52.97	30.85	7.45	24.69	54.26	74	-19.74	PK
H	10400	40.87	30.85	7.45	24.69	42.16	54	-11.84	AV
H	15600	55.36	31.38	7.45	24.75	56.18	74	-17.82	PK
H	15600	41.24	31.38	7.45	24.75	42.06	54	-11.94	AV
H	20800	55.98	31.76	7.45	24.86	56.53	74	-17.47	PK
H	20800	41.43	31.76	7.45	24.86	41.98	54	-12.02	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480	52.52	30.85	7.45	24.69	53.81	74	-20.19	PK
V	10480	40.52	30.85	7.45	24.69	41.81	54	-12.19	AV
V	15720	54.78	31.38	7.45	24.75	55.60	74	-18.40	PK
V	15720	40.79	31.38	7.45	24.75	41.61	54	-12.39	AV
V	20960	56.94	31.76	7.45	24.86	57.49	74	-16.51	PK
V	20960	40.80	31.76	7.45	24.86	41.35	54	-12.65	AV
H	10480	54.21	30.85	7.45	24.69	55.50	74	-18.50	PK
H	10480	42.07	30.85	7.45	24.69	43.36	54	-10.64	AV
H	15720	54.22	31.38	7.45	24.75	55.04	74	-18.96	PK
H	15720	42.81	31.38	7.45	24.75	43.63	54	-10.37	AV
H	20960	56.39	31.76	7.45	24.86	56.94	74	-17.06	PK
H	20960	42.44	31.76	7.45	24.86	42.99	54	-11.01	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5745MHz									
V	11490	53.53	30.85	7.45	24.69	54.82	74	-19.18	PK
V	11490	42.66	30.85	7.45	24.69	43.95	54	-10.05	AV
V	17235	55.50	31.38	7.45	24.75	56.32	74	-17.68	PK
V	17235	41.17	31.38	7.45	24.75	41.99	54	-12.01	AV
V	22980	56.48	31.76	7.45	24.86	57.03	74	-16.97	PK
V	22980	42.57	31.76	7.45	24.86	43.12	54	-10.88	AV
H	11490	53.78	30.85	7.45	24.69	55.07	74	-18.93	PK
H	11490	41.79	30.85	7.45	24.69	43.08	54	-10.92	AV
H	17235	55.14	31.38	7.45	24.75	55.96	74	-18.04	PK
H	17235	41.33	31.38	7.45	24.75	42.15	54	-11.85	AV
H	22980	57.56	31.76	7.45	24.86	58.11	74	-15.89	PK
H	22980	40.67	31.76	7.45	24.86	41.22	54	-12.78	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5785MHz									
V	11570	52.15	30.85	7.45	24.69	53.44	74	-20.56	PK
V	11570	41.96	30.85	7.45	24.69	43.25	54	-10.75	AV
V	17355	55.19	31.38	7.45	24.75	56.01	74	-17.99	PK
V	17355	41.18	31.38	7.45	24.75	42.00	54	-12.00	AV
V	23140	56.43	31.76	7.45	24.86	56.98	74	-17.02	PK
V	23140	42.30	31.76	7.45	24.86	42.85	54	-11.15	AV
H	11570	54.03	30.85	7.45	24.69	55.32	74	-18.68	PK
H	11570	41.82	30.85	7.45	24.69	43.11	54	-10.89	AV
H	17355	54.24	31.38	7.45	24.75	55.06	74	-18.94	PK
H	17355	41.91	31.38	7.45	24.75	42.73	54	-11.27	AV
H	23140	56.74	31.76	7.45	24.86	57.29	74	-16.71	PK
H	23140	40.05	31.76	7.45	24.86	40.60	54	-13.40	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5795MHz									
V	11590	52.32	30.85	7.45	24.69	53.61	74	-20.39	PK
V	11590	40.27	30.85	7.45	24.69	41.56	54	-12.44	AV
V	17385	54.53	31.38	7.45	24.75	55.35	74	-18.65	PK
V	17385	41.86	31.38	7.45	24.75	42.68	54	-11.32	AV
V	23180	55.07	31.76	7.45	24.86	55.62	74	-18.38	PK
V	23180	42.21	31.76	7.45	24.86	42.76	54	-11.24	AV
H	11590	52.81	30.85	7.45	24.69	54.10	74	-19.90	PK
H	11590	40.29	30.85	7.45	24.69	41.58	54	-12.42	AV
H	17385	54.39	31.38	7.45	24.75	55.21	74	-18.79	PK
H	17385	40.76	31.38	7.45	24.75	41.58	54	-12.42	AV
H	23180	57.25	31.76	7.45	24.86	57.80	74	-16.20	PK
H	23180	41.56	31.76	7.45	24.86	42.11	54	-11.89	AV

ANT1-802.11ac40

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5190MHz									
V	10380	53.05	30.85	7.45	24.69	54.34	74	-19.66	PK
V	10380	41.50	30.85	7.45	24.69	42.79	54	-11.21	AV
V	15570	54.53	31.38	7.45	24.75	55.35	74	-18.65	PK
V	15570	42.97	31.38	7.45	24.75	43.79	54	-10.21	AV
V	20760	56.77	31.76	7.45	24.86	57.32	74	-16.68	PK
V	20760	40.06	31.76	7.45	24.86	40.61	54	-13.39	AV
H	10380	51.80	30.85	7.45	24.69	53.09	74	-20.91	PK
H	10380	41.14	30.85	7.45	24.69	42.43	54	-11.57	AV
H	15570	54.11	31.38	7.45	24.75	54.93	74	-19.07	PK
H	15570	42.00	31.38	7.45	24.75	42.82	54	-11.18	AV
H	20760	57.23	31.76	7.45	24.86	57.78	74	-16.22	PK
H	20760	40.97	31.76	7.45	24.86	41.52	54	-12.48	AV

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5230MHz									
V	10460	52.19	30.85	7.45	24.69	53.48	74	-20.52	PK
V	10460	41.97	30.85	7.45	24.69	43.26	54	-10.74	AV
V	15690	55.18	31.38	7.45	24.75	56.00	74	-18.00	PK
V	15690	43.09	31.38	7.45	24.75	43.91	54	-10.09	AV
V	20920	55.94	31.76	7.45	24.86	56.49	74	-17.51	PK
V	20920	40.52	31.76	7.45	24.86	41.07	54	-12.93	AV
H	10460	53.55	30.85	7.45	24.69	54.84	74	-19.16	PK
H	10460	40.66	30.85	7.45	24.69	41.95	54	-12.05	AV
H	15690	53.83	31.38	7.45	24.75	54.65	74	-19.35	PK
H	15690	41.35	31.38	7.45	24.75	42.17	54	-11.83	AV
H	20920	57.68	31.76	7.45	24.86	58.23	74	-15.77	PK
H	20920	42.38	31.76	7.45	24.86	42.93	54	-11.07	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5755MHz									
V	11510	54.10	30.85	7.45	24.69	55.39	74	-18.61	PK
V	11510	39.79	30.85	7.45	24.69	41.08	54	-12.92	AV
V	17265	54.93	31.38	7.45	24.75	55.75	74	-18.25	PK
V	17265	41.18	31.38	7.45	24.75	42.00	54	-12.00	AV
V	23020	57.74	31.76	7.45	24.86	58.29	74	-15.71	PK
V	23020	40.87	31.76	7.45	24.86	41.42	54	-12.58	AV
H	11510	53.08	30.85	7.45	24.69	54.37	74	-19.63	PK
H	11510	40.80	30.85	7.45	24.69	42.09	54	-11.91	AV
H	17265	54.52	31.38	7.45	24.75	55.34	74	-18.66	PK
H	17265	43.64	31.38	7.45	24.75	44.46	54	-9.54	AV
H	23020	54.87	31.76	7.45	24.86	55.42	74	-18.58	PK
H	23020	40.16	31.76	7.45	24.86	40.71	54	-13.29	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5795MHz									
V	11590	52.14	30.85	7.45	24.69	53.43	74	-20.57	PK
V	11590	40.91	30.85	7.45	24.69	42.20	54	-11.80	AV
V	17385	55.43	31.38	7.45	24.75	56.25	74	-17.75	PK
V	17385	43.46	31.38	7.45	24.75	44.28	54	-9.72	AV
V	23180	55.85	31.76	7.45	24.86	56.40	74	-17.60	PK
V	23180	39.85	31.76	7.45	24.86	40.40	54	-13.60	AV
H	11590	52.41	30.85	7.45	24.69	53.70	74	-20.30	PK
H	11590	41.61	30.85	7.45	24.69	42.90	54	-11.10	AV
H	17385	55.39	31.38	7.45	24.75	56.21	74	-17.79	PK
H	17385	42.51	31.38	7.45	24.75	43.33	54	-10.67	AV
H	23180	55.04	31.76	7.45	24.86	55.59	74	-18.41	PK
H	23180	40.94	31.76	7.45	24.86	41.49	54	-12.51	AV

ANT1-802.11ac80

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
5210MHz									
V	10420	52.64	30.85	7.45	24.69	53.93	74	-20.07	PK
V	10420	42.36	30.85	7.45	24.69	43.65	54	-10.35	AV
V	15630	54.41	31.38	7.45	24.75	55.23	74	-18.77	PK
V	15630	43.32	31.38	7.45	24.75	44.14	54	-9.86	AV
V	20840	55.70	31.76	7.45	24.86	56.25	74	-17.75	PK
V	20840	40.94	31.76	7.45	24.86	41.49	54	-12.51	AV
H	10420	53.89	30.85	7.45	24.69	55.18	74	-18.82	PK
H	10420	42.52	30.85	7.45	24.69	43.81	54	-10.19	AV
H	15630	55.30	31.38	7.45	24.75	56.12	74	-17.88	PK
H	15630	41.20	31.38	7.45	24.75	42.02	54	-11.98	AV
H	20840	56.21	31.76	7.45	24.86	56.76	74	-17.24	PK
H	20840	40.30	31.76	7.45	24.86	40.85	54	-13.15	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5775MHz									
V	11550	52.94	30.85	7.45	24.69	54.23	74	-19.77	PK
V	11550	41.21	30.85	7.45	24.69	42.50	54	-11.50	AV
V	17325	54.99	31.38	7.45	24.75	55.81	74	-18.19	PK
V	17325	40.98	31.38	7.45	24.75	41.80	54	-12.20	AV
V	23100	57.40	31.76	7.45	24.86	57.95	74	-16.05	PK
V	23100	42.13	31.76	7.45	24.86	42.68	54	-11.32	AV
H	11550	54.07	30.85	7.45	24.69	55.36	74	-18.64	PK
H	11550	40.66	30.85	7.45	24.69	41.95	54	-12.05	AV
H	17325	53.86	31.38	7.45	24.75	54.68	74	-19.32	PK
H	17325	42.86	31.38	7.45	24.75	43.68	54	-10.32	AV
H	23100	56.37	31.76	7.45	24.86	56.92	74	-17.08	PK
H	23100	40.83	31.76	7.45	24.86	41.38	54	-12.62	AV

ANT1--802.11ax20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	10360	52.01	30.85	7.45	24.69	53.30	74	-20.70	PK
V	10360	41.37	30.85	7.45	24.69	42.66	54	-11.34	AV
V	15540	54.12	31.38	7.45	24.75	54.94	74	-19.06	PK
V	15540	41.53	31.38	7.45	24.75	42.35	54	-11.65	AV
V	20720	54.84	31.76	7.45	24.86	55.39	74	-18.61	PK
V	20720	40.14	31.76	7.45	24.86	40.69	54	-13.31	AV
H	10360	53.88	30.85	7.45	24.69	55.17	74	-18.83	PK
H	10360	41.04	30.85	7.45	24.69	42.33	54	-11.67	AV
H	15540	54.19	31.38	7.45	24.75	55.01	74	-18.99	PK
H	15540	40.81	31.38	7.45	24.75	41.63	54	-12.37	AV
H	20720	56.63	31.76	7.45	24.86	57.18	74	-16.82	PK
H	20720	40.75	31.76	7.45	24.86	41.30	54	-12.70	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	10400	54.54	30.85	7.45	24.69	55.83	74	-18.17	PK
V	10400	40.85	30.85	7.45	24.69	42.14	54	-11.86	AV
V	15600	55.76	31.38	7.45	24.75	56.58	74	-17.42	PK
V	15600	43.29	31.38	7.45	24.75	44.11	54	-9.89	AV
V	20800	56.97	31.76	7.45	24.86	57.52	74	-16.48	PK
V	20800	40.92	31.76	7.45	24.86	41.47	54	-12.53	AV
H	10400	53.22	30.85	7.45	24.69	54.51	74	-19.49	PK
H	10400	42.47	30.85	7.45	24.69	43.76	54	-10.24	AV
H	15600	55.09	31.38	7.45	24.75	55.91	74	-18.09	PK
H	15600	43.29	31.38	7.45	24.75	44.11	54	-9.89	AV
H	20800	56.50	31.76	7.45	24.86	57.05	74	-16.95	PK
H	20800	42.13	31.76	7.45	24.86	42.68	54	-11.32	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480	53.34	30.85	7.45	24.69	54.63	74	-19.37	PK
V	10480	40.31	30.85	7.45	24.69	41.60	54	-12.40	AV
V	15720	53.79	31.38	7.45	24.75	54.61	74	-19.39	PK
V	15720	43.74	31.38	7.45	24.75	44.56	54	-9.44	AV
V	20960	56.97	31.76	7.45	24.86	57.52	74	-16.48	PK
V	20960	41.88	31.76	7.45	24.86	42.43	54	-11.57	AV
H	10480	54.16	30.85	7.45	24.69	55.45	74	-18.55	PK
H	10480	40.86	30.85	7.45	24.69	42.15	54	-11.85	AV
H	15720	55.62	31.38	7.45	24.75	56.44	74	-17.56	PK
H	15720	41.60	31.38	7.45	24.75	42.42	54	-11.58	AV
H	20960	55.39	31.76	7.45	24.86	55.94	74	-18.06	PK
H	20960	42.59	31.76	7.45	24.86	43.14	54	-10.86	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5745MHz									
V	11490	53.76	30.85	7.45	24.69	55.05	74	-18.95	PK
V	11490	39.92	30.85	7.45	24.69	41.21	54	-12.79	AV
V	17235	55.34	31.38	7.45	24.75	56.16	74	-17.84	PK
V	17235	41.22	31.38	7.45	24.75	42.04	54	-11.96	AV
V	22980	56.01	31.76	7.45	24.86	56.56	74	-17.44	PK
V	22980	42.35	31.76	7.45	24.86	42.90	54	-11.10	AV
H	11490	54.63	30.85	7.45	24.69	55.92	74	-18.08	PK
H	11490	41.69	30.85	7.45	24.69	42.98	54	-11.02	AV
H	17235	55.50	31.38	7.45	24.75	56.32	74	-17.68	PK
H	17235	41.28	31.38	7.45	24.75	42.10	54	-11.90	AV
H	22980	57.35	31.76	7.45	24.86	57.90	74	-16.10	PK
H	22980	41.02	31.76	7.45	24.86	41.57	54	-12.43	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5785MHz									
V	11570	52.80	30.85	7.45	24.69	54.09	74	-19.91	PK
V	11570	42.37	30.85	7.45	24.69	43.66	54	-10.34	AV
V	17355	55.07	31.38	7.45	24.75	55.89	74	-18.11	PK
V	17355	41.77	31.38	7.45	24.75	42.59	54	-11.41	AV
V	23140	56.19	31.76	7.45	24.86	56.74	74	-17.26	PK
V	23140	41.00	31.76	7.45	24.86	41.55	54	-12.45	AV
H	11570	54.55	30.85	7.45	24.69	55.84	74	-18.16	PK
H	11570	40.20	30.85	7.45	24.69	41.49	54	-12.51	AV
H	17355	54.09	31.38	7.45	24.75	54.91	74	-19.09	PK
H	17355	42.87	31.38	7.45	24.75	43.69	54	-10.31	AV
H	23140	56.46	31.76	7.45	24.86	57.01	74	-16.99	PK
H	23140	42.15	31.76	7.45	24.86	42.70	54	-11.30	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5795MHz									
V	11590	54.73	30.85	7.45	24.69	56.02	74	-17.98	PK
V	11590	39.86	30.85	7.45	24.69	41.15	54	-12.85	AV
V	17385	54.32	31.38	7.45	24.75	55.14	74	-18.86	PK
V	17385	43.53	31.38	7.45	24.75	44.35	54	-9.65	AV
V	23180	57.20	31.76	7.45	24.86	57.75	74	-16.25	PK
V	23180	40.92	31.76	7.45	24.86	41.47	54	-12.53	AV
H	11590	52.47	30.85	7.45	24.69	53.76	74	-20.24	PK
H	11590	40.50	30.85	7.45	24.69	41.79	54	-12.21	AV
H	17385	54.52	31.38	7.45	24.75	55.34	74	-18.66	PK
H	17385	43.32	31.38	7.45	24.75	44.14	54	-9.86	AV
H	23180	56.88	31.76	7.45	24.86	57.43	74	-16.57	PK
H	23180	40.35	31.76	7.45	24.86	40.90	54	-13.10	AV

ANT1-802.11ax40

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5190MHz									
V	10380	53.94	30.85	7.45	24.69	55.23	74	-18.77	PK
V	10380	40.60	30.85	7.45	24.69	41.89	54	-12.11	AV
V	15570	54.66	31.38	7.45	24.75	55.48	74	-18.52	PK
V	15570	42.17	31.38	7.45	24.75	42.99	54	-11.01	AV
V	20760	55.10	31.76	7.45	24.86	55.65	74	-18.35	PK
V	20760	40.57	31.76	7.45	24.86	41.12	54	-12.88	AV
H	10380	53.94	30.85	7.45	24.69	55.23	74	-18.77	PK
H	10380	42.08	30.85	7.45	24.69	43.37	54	-10.63	AV
H	15570	55.01	31.38	7.45	24.75	55.83	74	-18.17	PK
H	15570	41.68	31.38	7.45	24.75	42.50	54	-11.50	AV
H	20760	55.95	31.76	7.45	24.86	56.50	74	-17.50	PK
H	20760	41.31	31.76	7.45	24.86	41.86	54	-12.14	AV

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5230MHz									
V	10460	52.64	30.85	7.45	24.69	53.93	74	-20.07	PK
V	10460	42.72	30.85	7.45	24.69	44.01	54	-9.99	AV
V	15690	54.58	31.38	7.45	24.75	55.40	74	-18.60	PK
V	15690	41.29	31.38	7.45	24.75	42.11	54	-11.89	AV
V	20920	57.61	31.76	7.45	24.86	58.16	74	-15.84	PK
V	20920	41.66	31.76	7.45	24.86	42.21	54	-11.79	AV
H	10460	53.59	30.85	7.45	24.69	54.88	74	-19.12	PK
H	10460	41.42	30.85	7.45	24.69	42.71	54	-11.29	AV
H	15690	55.21	31.38	7.45	24.75	56.03	74	-17.97	PK
H	15690	41.84	31.38	7.45	24.75	42.66	54	-11.34	AV
H	20920	55.89	31.76	7.45	24.86	56.44	74	-17.56	PK
H	20920	40.84	31.76	7.45	24.86	41.39	54	-12.61	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5755MHz									
V	11510	53.12	30.85	7.45	24.69	54.41	74	-19.59	PK
V	11510	42.27	30.85	7.45	24.69	43.56	54	-10.44	AV
V	17265	54.47	31.38	7.45	24.75	55.29	74	-18.71	PK
V	17265	42.61	31.38	7.45	24.75	43.43	54	-10.57	AV
V	23020	56.15	31.76	7.45	24.86	56.70	74	-17.30	PK
V	23020	41.90	31.76	7.45	24.86	42.45	54	-11.55	AV
H	11510	51.91	30.85	7.45	24.69	53.20	74	-20.80	PK
H	11510	41.98	30.85	7.45	24.69	43.27	54	-10.73	AV
H	17265	53.90	31.38	7.45	24.75	54.72	74	-19.28	PK
H	17265	43.24	31.38	7.45	24.75	44.06	54	-9.94	AV
H	23020	56.14	31.76	7.45	24.86	56.69	74	-17.31	PK
H	23020	40.41	31.76	7.45	24.86	40.96	54	-13.04	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5795MHz									
V	11590	52.80	30.85	7.45	24.69	54.09	74	-19.91	PK
V	11590	40.91	30.85	7.45	24.69	42.20	54	-11.80	AV
V	17385	54.49	31.38	7.45	24.75	55.31	74	-18.69	PK
V	17385	42.52	31.38	7.45	24.75	43.34	54	-10.66	AV
V	23180	56.69	31.76	7.45	24.86	57.24	74	-16.76	PK
V	23180	40.74	31.76	7.45	24.86	41.29	54	-12.71	AV
H	11590	53.49	30.85	7.45	24.69	54.78	74	-19.22	PK
H	11590	40.30	30.85	7.45	24.69	41.59	54	-12.41	AV
H	17385	54.46	31.38	7.45	24.75	55.28	74	-18.72	PK
H	17385	41.65	31.38	7.45	24.75	42.47	54	-11.53	AV
H	23180	57.65	31.76	7.45	24.86	58.20	74	-15.80	PK
H	23180	42.44	31.76	7.45	24.86	42.99	54	-11.01	AV

ANT1-802.11ax80

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
5210MHz									
V	10420	52.73	30.85	7.45	24.69	54.02	74	-19.98	PK
V	10420	41.76	30.85	7.45	24.69	43.05	54	-10.95	AV
V	15630	54.87	31.38	7.45	24.75	55.69	74	-18.31	PK
V	15630	43.14	31.38	7.45	24.75	43.96	54	-10.04	AV
V	20840	55.47	31.76	7.45	24.86	56.02	74	-17.98	PK
V	20840	40.94	31.76	7.45	24.86	41.49	54	-12.51	AV
H	10420	54.75	30.85	7.45	24.69	56.04	74	-17.96	PK
H	10420	40.31	30.85	7.45	24.69	41.60	54	-12.40	AV
H	15630	55.59	31.38	7.45	24.75	56.41	74	-17.59	PK
H	15630	40.96	31.38	7.45	24.75	41.78	54	-12.22	AV
H	20840	56.01	31.76	7.45	24.86	56.56	74	-17.44	PK
H	20840	42.13	31.76	7.45	24.86	42.68	54	-11.32	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5775MHz									
V	11550	52.96	30.85	7.45	24.69	54.25	74	-19.75	PK
V	11550	41.94	30.85	7.45	24.69	43.23	54	-10.77	AV
V	17325	54.96	31.38	7.45	24.75	55.78	74	-18.22	PK
V	17325	41.20	31.38	7.45	24.75	42.02	54	-11.98	AV
V	23100	57.65	31.76	7.45	24.86	58.20	74	-15.80	PK
V	23100	42.19	31.76	7.45	24.86	42.74	54	-11.26	AV
H	11550	54.49	30.85	7.45	24.69	55.78	74	-18.22	PK
H	11550	40.54	30.85	7.45	24.69	41.83	54	-12.17	AV
H	17325	54.31	31.38	7.45	24.75	55.13	74	-18.87	PK
H	17325	41.14	31.38	7.45	24.75	41.96	54	-12.04	AV
H	23100	57.10	31.76	7.45	24.86	57.65	74	-16.35	PK
H	23100	41.61	31.76	7.45	24.86	42.16	54	-11.84	AV

ANT2-802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	10360	52.52	30.85	7.45	24.69	53.81	74	-20.19	PK
V	10360	41.63	30.85	7.45	24.69	42.92	54	-11.08	AV
V	15540	55.75	31.38	7.45	24.75	56.57	74	-17.43	PK
V	15540	42.05	31.38	7.45	24.75	42.87	54	-11.13	AV
V	20720	57.36	31.76	7.45	24.86	57.91	74	-16.09	PK
V	20720	41.86	31.76	7.45	24.86	42.41	54	-11.59	AV
H	10360	54.18	30.85	7.45	24.69	55.47	74	-18.53	PK
H	10360	42.34	30.85	7.45	24.69	43.63	54	-10.37	AV
H	15540	54.98	31.38	7.45	24.75	55.80	74	-18.20	PK
H	15540	41.33	31.38	7.45	24.75	42.15	54	-11.85	AV
H	20720	55.73	31.76	7.45	24.86	56.28	74	-17.72	PK
H	20720	41.58	31.76	7.45	24.86	42.13	54	-11.87	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	10400	53.09	30.85	7.45	24.69	54.38	74	-19.62	PK
V	10400	40.07	30.85	7.45	24.69	41.36	54	-12.64	AV
V	15600	54.80	31.38	7.45	24.75	55.62	74	-18.38	PK
V	15600	41.47	31.38	7.45	24.75	42.29	54	-11.71	AV
V	20800	56.18	31.76	7.45	24.86	56.73	74	-17.27	PK
V	20800	42.26	31.76	7.45	24.86	42.81	54	-11.19	AV
H	10400	52.67	30.85	7.45	24.69	53.96	74	-20.04	PK
H	10400	39.94	30.85	7.45	24.69	41.23	54	-12.77	AV
H	15600	54.31	31.38	7.45	24.75	55.13	74	-18.87	PK
H	15600	42.67	31.38	7.45	24.75	43.49	54	-10.51	AV
H	20800	56.74	31.76	7.45	24.86	57.29	74	-16.71	PK
H	20800	41.94	31.76	7.45	24.86	42.49	54	-11.51	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480	53.28	30.85	7.45	24.69	54.57	74	-19.43	PK
V	10480	41.22	30.85	7.45	24.69	42.51	54	-11.49	AV
V	15720	54.07	31.38	7.45	24.75	54.89	74	-19.11	PK
V	15720	40.94	31.38	7.45	24.75	41.76	54	-12.24	AV
V	20960	57.61	31.76	7.45	24.86	58.16	74	-15.84	PK
V	20960	41.13	31.76	7.45	24.86	41.68	54	-12.32	AV
H	10480	53.67	30.85	7.45	24.69	54.96	74	-19.04	PK
H	10480	40.22	30.85	7.45	24.69	41.51	54	-12.49	AV
H	15720	54.53	31.38	7.45	24.75	55.35	74	-18.65	PK
H	15720	41.57	31.38	7.45	24.75	42.39	54	-11.61	AV
H	20960	54.94	31.76	7.45	24.86	55.49	74	-18.51	PK
H	20960	40.02	31.76	7.45	24.86	40.57	54	-13.43	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5745MHz									
V	11490	53.52	30.85	7.45	24.69	54.81	74	-19.19	PK
V	11490	40.46	30.85	7.45	24.69	41.75	54	-12.25	AV
V	17235	55.30	31.38	7.45	24.75	56.12	74	-17.88	PK
V	17235	42.82	31.38	7.45	24.75	43.64	54	-10.36	AV
V	22980	57.38	31.76	7.45	24.86	57.93	74	-16.07	PK
V	22980	39.95	31.76	7.45	24.86	40.50	54	-13.50	AV
H	11490	52.45	30.85	7.45	24.69	53.74	74	-20.26	PK
H	11490	40.90	30.85	7.45	24.69	42.19	54	-11.81	AV
H	17235	54.85	31.38	7.45	24.75	55.67	74	-18.33	PK
H	17235	42.20	31.38	7.45	24.75	43.02	54	-10.98	AV
H	22980	57.60	31.76	7.45	24.86	58.15	74	-15.85	PK
H	22980	41.29	31.76	7.45	24.86	41.84	54	-12.16	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5785MHz									
V	11570	52.95	30.85	7.45	24.69	54.24	74	-19.76	PK
V	11570	42.55	30.85	7.45	24.69	43.84	54	-10.16	AV
V	17355	54.46	31.38	7.45	24.75	55.28	74	-18.72	PK
V	17355	41.25	31.38	7.45	24.75	42.07	54	-11.93	AV
V	23140	56.73	31.76	7.45	24.86	57.28	74	-16.72	PK
V	23140	40.92	31.76	7.45	24.86	41.47	54	-12.53	AV
H	11570	52.60	30.85	7.45	24.69	53.89	74	-20.11	PK
H	11570	40.72	30.85	7.45	24.69	42.01	54	-11.99	AV
H	17355	55.72	31.38	7.45	24.75	56.54	74	-17.46	PK
H	17355	42.23	31.38	7.45	24.75	43.05	54	-10.95	AV
H	23140	55.88	31.76	7.45	24.86	56.43	74	-17.57	PK
H	23140	42.10	31.76	7.45	24.86	42.65	54	-11.35	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5825MHz									
V	11650	54.27	30.85	7.45	24.69	55.56	74	-18.44	PK
V	11650	41.74	30.85	7.45	24.69	43.03	54	-10.97	AV
V	17475	55.36	31.38	7.45	24.75	56.18	74	-17.82	PK
V	17475	41.68	31.38	7.45	24.75	42.50	54	-11.50	AV
V	23300	55.89	31.76	7.45	24.86	56.44	74	-17.56	PK
V	23300	40.30	31.76	7.45	24.86	40.85	54	-13.15	AV
H	11650	53.27	30.85	7.45	24.69	54.56	74	-19.44	PK
H	11650	40.63	30.85	7.45	24.69	41.92	54	-12.08	AV
H	17475	54.51	31.38	7.45	24.75	55.33	74	-18.67	PK
H	17475	42.63	31.38	7.45	24.75	43.45	54	-10.55	AV
H	23300	55.51	31.76	7.45	24.86	56.06	74	-17.94	PK
H	23300	42.54	31.76	7.45	24.86	43.09	54	-10.91	AV

ANT2-802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	10360	53.09	30.85	7.45	24.69	54.38	74	-19.62	PK
V	10360	41.33	30.85	7.45	24.69	42.62	54	-11.38	AV
V	15540	54.79	31.38	7.45	24.75	55.61	74	-18.39	PK
V	15540	41.65	31.38	7.45	24.75	42.47	54	-11.53	AV
V	20720	56.10	31.76	7.45	24.86	56.65	74	-17.35	PK
V	20720	42.36	31.76	7.45	24.86	42.91	54	-11.09	AV
H	10360	52.19	30.85	7.45	24.69	53.48	74	-20.52	PK
H	10360	41.46	30.85	7.45	24.69	42.75	54	-11.25	AV
H	15540	55.38	31.38	7.45	24.75	56.20	74	-17.80	PK
H	15540	41.26	31.38	7.45	24.75	42.08	54	-11.92	AV
H	20720	56.18	31.76	7.45	24.86	56.73	74	-17.27	PK
H	20720	40.89	31.76	7.45	24.86	41.44	54	-12.56	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	10400	52.55	30.85	7.45	24.69	53.84	74	-20.16	PK
V	10400	41.40	30.85	7.45	24.69	42.69	54	-11.31	AV
V	15600	55.48	31.38	7.45	24.75	56.30	74	-17.70	PK
V	15600	42.97	31.38	7.45	24.75	43.79	54	-10.21	AV
V	20800	57.05	31.76	7.45	24.86	57.60	74	-16.40	PK
V	20800	40.60	31.76	7.45	24.86	41.15	54	-12.85	AV
H	10400	53.26	30.85	7.45	24.69	54.55	74	-19.45	PK
H	10400	41.19	30.85	7.45	24.69	42.48	54	-11.52	AV
H	15600	54.11	31.38	7.45	24.75	54.93	74	-19.07	PK
H	15600	40.80	31.38	7.45	24.75	41.62	54	-12.38	AV
H	20800	54.91	31.76	7.45	24.86	55.46	74	-18.54	PK
H	20800	39.82	31.76	7.45	24.86	40.37	54	-13.63	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480	53.94	30.85	7.45	24.69	55.23	74	-18.77	PK
V	10480	40.64	30.85	7.45	24.69	41.93	54	-12.07	AV
V	15720	53.88	31.38	7.45	24.75	54.70	74	-19.30	PK
V	15720	43.07	31.38	7.45	24.75	43.89	54	-10.11	AV
V	20960	55.11	31.76	7.45	24.86	55.66	74	-18.34	PK
V	20960	41.48	31.76	7.45	24.86	42.03	54	-11.97	AV
H	10480	52.51	30.85	7.45	24.69	53.80	74	-20.20	PK
H	10480	41.15	30.85	7.45	24.69	42.44	54	-11.56	AV
H	15720	54.24	31.38	7.45	24.75	55.06	74	-18.94	PK
H	15720	42.98	31.38	7.45	24.75	43.80	54	-10.20	AV
H	20960	56.01	31.76	7.45	24.86	56.56	74	-17.44	PK
H	20960	40.76	31.76	7.45	24.86	41.31	54	-12.69	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5745MHz									
V	11490	51.99	30.85	7.45	24.69	53.28	74	-20.72	PK
V	11490	40.99	30.85	7.45	24.69	42.28	54	-11.72	AV
V	17235	55.24	31.38	7.45	24.75	56.06	74	-17.94	PK
V	17235	42.44	31.38	7.45	24.75	43.26	54	-10.74	AV
V	22980	56.37	31.76	7.45	24.86	56.92	74	-17.08	PK
V	22980	40.44	31.76	7.45	24.86	40.99	54	-13.01	AV
H	11490	54.62	30.85	7.45	24.69	55.91	74	-18.09	PK
H	11490	40.53	30.85	7.45	24.69	41.82	54	-12.18	AV
H	17235	55.28	31.38	7.45	24.75	56.10	74	-17.90	PK
H	17235	41.04	31.38	7.45	24.75	41.86	54	-12.14	AV
H	22980	56.25	31.76	7.45	24.86	56.80	74	-17.20	PK
H	22980	41.84	31.76	7.45	24.86	42.39	54	-11.61	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5785MHz									
V	11570	53.44	30.85	7.45	24.69	54.73	74	-19.27	PK
V	11570	40.25	30.85	7.45	24.69	41.54	54	-12.46	AV
V	17355	53.97	31.38	7.45	24.75	54.79	74	-19.21	PK
V	17355	43.40	31.38	7.45	24.75	44.22	54	-9.78	AV
V	23140	54.97	31.76	7.45	24.86	55.52	74	-18.48	PK
V	23140	41.14	31.76	7.45	24.86	41.69	54	-12.31	AV
H	11570	52.21	30.85	7.45	24.69	53.50	74	-20.50	PK
H	11570	42.51	30.85	7.45	24.69	43.80	54	-10.20	AV
H	17355	54.75	31.38	7.45	24.75	55.57	74	-18.43	PK
H	17355	43.65	31.38	7.45	24.75	44.47	54	-9.53	AV
H	23140	56.20	31.76	7.45	24.86	56.75	74	-17.25	PK
H	23140	40.15	31.76	7.45	24.86	40.70	54	-13.30	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5825MHz									
V	11650	54.09	30.85	7.45	24.69	55.38	74	-18.62	PK
V	11650	39.95	30.85	7.45	24.69	41.24	54	-12.76	AV
V	17475	54.69	31.38	7.45	24.75	55.51	74	-18.49	PK
V	17475	40.98	31.38	7.45	24.75	41.80	54	-12.20	AV
V	23300	57.44	31.76	7.45	24.86	57.99	74	-16.01	PK
V	23300	41.70	31.76	7.45	24.86	42.25	54	-11.75	AV
H	11650	54.37	30.85	7.45	24.69	55.66	74	-18.34	PK
H	11650	40.45	30.85	7.45	24.69	41.74	54	-12.26	AV
H	17475	55.33	31.38	7.45	24.75	56.15	74	-17.85	PK
H	17475	40.99	31.38	7.45	24.75	41.81	54	-12.19	AV
H	23300	56.36	31.76	7.45	24.86	56.91	74	-17.09	PK
H	23300	41.47	31.76	7.45	24.86	42.02	54	-11.98	AV

ANT2-802.11n40

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5190MHz									
V	10380	53.77	30.85	7.45	24.69	55.06	74	-18.94	PK
V	10380	40.58	30.85	7.45	24.69	41.87	54	-12.13	AV
V	15570	55.63	31.38	7.45	24.75	56.45	74	-17.55	PK
V	15570	42.34	31.38	7.45	24.75	43.16	54	-10.84	AV
V	20760	57.08	31.76	7.45	24.86	57.63	74	-16.37	PK
V	20760	41.15	31.76	7.45	24.86	41.70	54	-12.30	AV
H	10380	52.32	30.85	7.45	24.69	53.61	74	-20.39	PK
H	10380	41.41	30.85	7.45	24.69	42.70	54	-11.30	AV
H	15570	55.09	31.38	7.45	24.75	55.91	74	-18.09	PK
H	15570	42.88	31.38	7.45	24.75	43.70	54	-10.30	AV
H	20760	56.44	31.76	7.45	24.86	56.99	74	-17.01	PK
H	20760	40.01	31.76	7.45	24.86	40.56	54	-13.44	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5230MHz									
V	10460	53.91	30.85	7.45	24.69	55.20	74	-18.80	PK
V	10460	42.45	30.85	7.45	24.69	43.74	54	-10.26	AV
V	15690	55.12	31.38	7.45	24.75	55.94	74	-18.06	PK
V	15690	41.52	31.38	7.45	24.75	42.34	54	-11.66	AV
V	20920	55.30	31.76	7.45	24.86	55.85	74	-18.15	PK
V	20920	41.84	31.76	7.45	24.86	42.39	54	-11.61	AV
H	10460	51.76	30.85	7.45	24.69	53.05	74	-20.95	PK
H	10460	41.54	30.85	7.45	24.69	42.83	54	-11.17	AV
H	15690	55.65	31.38	7.45	24.75	56.47	74	-17.53	PK
H	15690	42.90	31.38	7.45	24.75	43.72	54	-10.28	AV
H	20920	56.14	31.76	7.45	24.86	56.69	74	-17.31	PK
H	20920	42.17	31.76	7.45	24.86	42.72	54	-11.28	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5755MHz									
V	11510	52.32	30.85	7.45	24.69	53.61	74	-20.39	PK
V	11510	41.67	30.85	7.45	24.69	42.96	54	-11.04	AV
V	17265	55.69	31.38	7.45	24.75	56.51	74	-17.49	PK
V	17265	40.94	31.38	7.45	24.75	41.76	54	-12.24	AV
V	23020	55.98	31.76	7.45	24.86	56.53	74	-17.47	PK
V	23020	41.03	31.76	7.45	24.86	41.58	54	-12.42	AV
H	11510	54.38	30.85	7.45	24.69	55.67	74	-18.33	PK
H	11510	42.64	30.85	7.45	24.69	43.93	54	-10.07	AV
H	17265	55.45	31.38	7.45	24.75	56.27	74	-17.73	PK
H	17265	42.87	31.38	7.45	24.75	43.69	54	-10.31	AV
H	23020	56.22	31.76	7.45	24.86	56.77	74	-17.23	PK
H	23020	42.07	31.76	7.45	24.86	42.62	54	-11.38	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5795MHz									
V	11590	54.15	30.85	7.45	24.69	55.44	74	-18.56	PK
V	11590	41.03	30.85	7.45	24.69	42.32	54	-11.68	AV
V	17385	55.49	31.38	7.45	24.75	56.31	74	-17.69	PK
V	17385	43.47	31.38	7.45	24.75	44.29	54	-9.71	AV
V	23180	57.64	31.76	7.45	24.86	58.19	74	-15.81	PK
V	23180	40.93	31.76	7.45	24.86	41.48	54	-12.52	AV
H	11590	53.45	30.85	7.45	24.69	54.74	74	-19.26	PK
H	11590	41.95	30.85	7.45	24.69	43.24	54	-10.76	AV
H	17385	54.74	31.38	7.45	24.75	55.56	74	-18.44	PK
H	17385	43.50	31.38	7.45	24.75	44.32	54	-9.68	AV
H	23180	56.28	31.76	7.45	24.86	56.83	74	-17.17	PK
H	23180	40.57	31.76	7.45	24.86	41.12	54	-12.88	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

ANT2--802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	10360	54.64	30.85	7.45	24.69	55.93	74	-18.07	PK
V	10360	40.08	30.85	7.45	24.69	41.37	54	-12.63	AV
V	15540	55.43	31.38	7.45	24.75	56.25	74	-17.75	PK
V	15540	43.48	31.38	7.45	24.75	44.30	54	-9.70	AV
V	20720	54.95	31.76	7.45	24.86	55.50	74	-18.50	PK
V	20720	41.76	31.76	7.45	24.86	42.31	54	-11.69	AV
H	10360	51.78	30.85	7.45	24.69	53.07	74	-20.93	PK
H	10360	42.59	30.85	7.45	24.69	43.88	54	-10.12	AV
H	15540	55.70	31.38	7.45	24.75	56.52	74	-17.48	PK
H	15540	43.12	31.38	7.45	24.75	43.94	54	-10.06	AV
H	20720	57.63	31.76	7.45	24.86	58.18	74	-15.82	PK
H	20720	39.98	31.76	7.45	24.86	40.53	54	-13.47	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	10400	53.59	30.85	7.45	24.69	54.88	74	-19.12	PK
V	10400	40.37	30.85	7.45	24.69	41.66	54	-12.34	AV
V	15600	55.40	31.38	7.45	24.75	56.22	74	-17.78	PK
V	15600	42.99	31.38	7.45	24.75	43.81	54	-10.19	AV
V	20800	54.93	31.76	7.45	24.86	55.48	74	-18.52	PK
V	20800	40.06	31.76	7.45	24.86	40.61	54	-13.39	AV
H	10400	52.08	30.85	7.45	24.69	53.37	74	-20.63	PK
H	10400	40.32	30.85	7.45	24.69	41.61	54	-12.39	AV
H	15600	54.24	31.38	7.45	24.75	55.06	74	-18.94	PK
H	15600	42.16	31.38	7.45	24.75	42.98	54	-11.02	AV
H	20800	55.99	31.76	7.45	24.86	56.54	74	-17.46	PK
H	20800	42.72	31.76	7.45	24.86	43.27	54	-10.73	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480	53.08	30.85	7.45	24.69	54.37	74	-19.63	PK
V	10480	42.23	30.85	7.45	24.69	43.52	54	-10.48	AV
V	15720	55.68	31.38	7.45	24.75	56.50	74	-17.50	PK
V	15720	42.18	31.38	7.45	24.75	43.00	54	-11.00	AV
V	20960	56.98	31.76	7.45	24.86	57.53	74	-16.47	PK
V	20960	42.30	31.76	7.45	24.86	42.85	54	-11.15	AV
H	10480	53.74	30.85	7.45	24.69	55.03	74	-18.97	PK
H	10480	42.02	30.85	7.45	24.69	43.31	54	-10.69	AV
H	15720	53.80	31.38	7.45	24.75	54.62	74	-19.38	PK
H	15720	42.69	31.38	7.45	24.75	43.51	54	-10.49	AV
H	20960	56.58	31.76	7.45	24.86	57.13	74	-16.87	PK
H	20960	42.30	31.76	7.45	24.86	42.85	54	-11.15	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5745MHz									
V	11490	54.17	30.85	7.45	24.69	55.46	74	-18.54	PK
V	11490	40.38	30.85	7.45	24.69	41.67	54	-12.33	AV
V	17235	55.74	31.38	7.45	24.75	56.56	74	-17.44	PK
V	17235	41.88	31.38	7.45	24.75	42.70	54	-11.30	AV
V	22980	57.02	31.76	7.45	24.86	57.57	74	-16.43	PK
V	22980	40.16	31.76	7.45	24.86	40.71	54	-13.29	AV
H	11490	52.38	30.85	7.45	24.69	53.67	74	-20.33	PK
H	11490	40.13	30.85	7.45	24.69	41.42	54	-12.58	AV
H	17235	53.92	31.38	7.45	24.75	54.74	74	-19.26	PK
H	17235	43.46	31.38	7.45	24.75	44.28	54	-9.72	AV
H	22980	54.86	31.76	7.45	24.86	55.41	74	-18.59	PK
H	22980	42.55	31.76	7.45	24.86	43.10	54	-10.90	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5785MHz									
V	11570	53.51	30.85	7.45	24.69	54.80	74	-19.20	PK
V	11570	41.89	30.85	7.45	24.69	43.18	54	-10.82	AV
V	17355	55.69	31.38	7.45	24.75	56.51	74	-17.49	PK
V	17355	42.99	31.38	7.45	24.75	43.81	54	-10.19	AV
V	23140	56.66	31.76	7.45	24.86	57.21	74	-16.79	PK
V	23140	41.29	31.76	7.45	24.86	41.84	54	-12.16	AV
H	11570	52.68	30.85	7.45	24.69	53.97	74	-20.03	PK
H	11570	42.53	30.85	7.45	24.69	43.82	54	-10.18	AV
H	17355	55.51	31.38	7.45	24.75	56.33	74	-17.67	PK
H	17355	41.26	31.38	7.45	24.75	42.08	54	-11.92	AV
H	23140	55.62	31.76	7.45	24.86	56.17	74	-17.83	PK
H	23140	40.52	31.76	7.45	24.86	41.07	54	-12.93	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5795MHz									
V	11590	53.19	30.85	7.45	24.69	54.48	74	-19.52	PK
V	11590	41.47	30.85	7.45	24.69	42.76	54	-11.24	AV
V	17385	54.98	31.38	7.45	24.75	55.80	74	-18.20	PK
V	17385	41.65	31.38	7.45	24.75	42.47	54	-11.53	AV
V	23180	55.72	31.76	7.45	24.86	56.27	74	-17.73	PK
V	23180	40.39	31.76	7.45	24.86	40.94	54	-13.06	AV
H	11590	52.74	30.85	7.45	24.69	54.03	74	-19.97	PK
H	11590	42.05	30.85	7.45	24.69	43.34	54	-10.66	AV
H	17385	54.95	31.38	7.45	24.75	55.77	74	-18.23	PK
H	17385	42.49	31.38	7.45	24.75	43.31	54	-10.69	AV
H	23180	57.22	31.76	7.45	24.86	57.77	74	-16.23	PK
H	23180	41.24	31.76	7.45	24.86	41.79	54	-12.21	AV

ANT2-802.11ac40

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5190MHz									
V	10380	52.57	30.85	7.45	24.69	53.86	74	-20.14	PK
V	10380	40.77	30.85	7.45	24.69	42.06	54	-11.94	AV
V	15570	54.40	31.38	7.45	24.75	55.22	74	-18.78	PK
V	15570	42.55	31.38	7.45	24.75	43.37	54	-10.63	AV
V	20760	55.98	31.76	7.45	24.86	56.53	74	-17.47	PK
V	20760	41.50	31.76	7.45	24.86	42.05	54	-11.95	AV
H	10380	54.21	30.85	7.45	24.69	55.50	74	-18.50	PK
H	10380	42.69	30.85	7.45	24.69	43.98	54	-10.02	AV
H	15570	53.79	31.38	7.45	24.75	54.61	74	-19.39	PK
H	15570	43.44	31.38	7.45	24.75	44.26	54	-9.74	AV
H	20760	54.99	31.76	7.45	24.86	55.54	74	-18.46	PK
H	20760	41.38	31.76	7.45	24.86	41.93	54	-12.07	AV

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5230MHz									
V	10460	52.85	30.85	7.45	24.69	54.14	74	-19.86	PK
V	10460	40.15	30.85	7.45	24.69	41.44	54	-12.56	AV
V	15690	54.88	31.38	7.45	24.75	55.70	74	-18.30	PK
V	15690	40.95	31.38	7.45	24.75	41.77	54	-12.23	AV
V	20920	56.79	31.76	7.45	24.86	57.34	74	-16.66	PK
V	20920	41.43	31.76	7.45	24.86	41.98	54	-12.02	AV
H	10460	53.66	30.85	7.45	24.69	54.95	74	-19.05	PK
H	10460	41.70	30.85	7.45	24.69	42.99	54	-11.01	AV
H	15690	54.66	31.38	7.45	24.75	55.48	74	-18.52	PK
H	15690	43.11	31.38	7.45	24.75	43.93	54	-10.07	AV
H	20920	57.48	31.76	7.45	24.86	58.03	74	-15.97	PK
H	20920	40.12	31.76	7.45	24.86	40.67	54	-13.33	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5755MHz									
V	11510	54.33	30.85	7.45	24.69	55.62	74	-18.38	PK
V	11510	41.42	30.85	7.45	24.69	42.71	54	-11.29	AV
V	17265	54.10	31.38	7.45	24.75	54.92	74	-19.08	PK
V	17265	41.44	31.38	7.45	24.75	42.26	54	-11.74	AV
V	23020	57.27	31.76	7.45	24.86	57.82	74	-16.18	PK
V	23020	41.96	31.76	7.45	24.86	42.51	54	-11.49	AV
H	11510	52.76	30.85	7.45	24.69	54.05	74	-19.95	PK
H	11510	40.19	30.85	7.45	24.69	41.48	54	-12.52	AV
H	17265	54.99	31.38	7.45	24.75	55.81	74	-18.19	PK
H	17265	42.99	31.38	7.45	24.75	43.81	54	-10.19	AV
H	23020	57.48	31.76	7.45	24.86	58.03	74	-15.97	PK
H	23020	41.45	31.76	7.45	24.86	42.00	54	-12.00	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5795MHz									
V	11590	52.62	30.85	7.45	24.69	53.91	74	-20.09	PK
V	11590	42.12	30.85	7.45	24.69	43.41	54	-10.59	AV
V	17385	54.76	31.38	7.45	24.75	55.58	74	-18.42	PK
V	17385	41.44	31.38	7.45	24.75	42.26	54	-11.74	AV
V	23180	56.07	31.76	7.45	24.86	56.62	74	-17.38	PK
V	23180	41.39	31.76	7.45	24.86	41.94	54	-12.06	AV
H	11590	53.70	30.85	7.45	24.69	54.99	74	-19.01	PK
H	11590	40.88	30.85	7.45	24.69	42.17	54	-11.83	AV
H	17385	55.00	31.38	7.45	24.75	55.82	74	-18.18	PK
H	17385	42.02	31.38	7.45	24.75	42.84	54	-11.16	AV
H	23180	57.50	31.76	7.45	24.86	58.05	74	-15.95	PK
H	23180	39.99	31.76	7.45	24.86	40.54	54	-13.46	AV

ANT1-802.11ac80

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
5210MHz									
V	10420	53.50	30.85	7.45	24.69	54.79	74	-19.21	PK
V	10420	40.75	30.85	7.45	24.69	42.04	54	-11.96	AV
V	15630	54.99	31.38	7.45	24.75	55.81	74	-18.19	PK
V	15630	40.87	31.38	7.45	24.75	41.69	54	-12.31	AV
V	20840	57.18	31.76	7.45	24.86	57.73	74	-16.27	PK
V	20840	41.63	31.76	7.45	24.86	42.18	54	-11.82	AV
H	10420	52.56	30.85	7.45	24.69	53.85	74	-20.15	PK
H	10420	41.50	30.85	7.45	24.69	42.79	54	-11.21	AV
H	15630	54.98	31.38	7.45	24.75	55.80	74	-18.20	PK
H	15630	40.99	31.38	7.45	24.75	41.81	54	-12.19	AV
H	20840	56.20	31.76	7.45	24.86	56.75	74	-17.25	PK
H	20840	41.71	31.76	7.45	24.86	42.26	54	-11.74	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5775MHz									
V	11550	52.31	30.85	7.45	24.69	53.60	74	-20.40	PK
V	11550	41.88	30.85	7.45	24.69	43.17	54	-10.83	AV
V	17325	54.03	31.38	7.45	24.75	54.85	74	-19.15	PK
V	17325	42.62	31.38	7.45	24.75	43.44	54	-10.56	AV
V	23100	55.22	31.76	7.45	24.86	55.77	74	-18.23	PK
V	23100	40.07	31.76	7.45	24.86	40.62	54	-13.38	AV
H	11550	52.87	30.85	7.45	24.69	54.16	74	-19.84	PK
H	11550	41.14	30.85	7.45	24.69	42.43	54	-11.57	AV
H	17325	53.87	31.38	7.45	24.75	54.69	74	-19.31	PK
H	17325	43.40	31.38	7.45	24.75	44.22	54	-9.78	AV
H	23100	57.17	31.76	7.45	24.86	57.72	74	-16.28	PK
H	23100	41.59	31.76	7.45	24.86	42.14	54	-11.86	AV

ANT2--802.11ax20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	10360	52.09	30.85	7.45	24.69	53.38	74	-20.62	PK
V	10360	39.99	30.85	7.45	24.69	41.28	54	-12.72	AV
V	15540	55.71	31.38	7.45	24.75	56.53	74	-17.47	PK
V	15540	41.62	31.38	7.45	24.75	42.44	54	-11.56	AV
V	20720	56.80	31.76	7.45	24.86	57.35	74	-16.65	PK
V	20720	42.53	31.76	7.45	24.86	43.08	54	-10.92	AV
H	10360	54.63	30.85	7.45	24.69	55.92	74	-18.08	PK
H	10360	42.72	30.85	7.45	24.69	44.01	54	-9.99	AV
H	15540	55.00	31.38	7.45	24.75	55.82	74	-18.18	PK
H	15540	40.86	31.38	7.45	24.75	41.68	54	-12.32	AV
H	20720	56.27	31.76	7.45	24.86	56.82	74	-17.18	PK
H	20720	41.25	31.76	7.45	24.86	41.80	54	-12.20	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	10400	53.58	30.85	7.45	24.69	54.87	74	-19.13	PK
V	10400	40.03	30.85	7.45	24.69	41.32	54	-12.68	AV
V	15600	53.83	31.38	7.45	24.75	54.65	74	-19.35	PK
V	15600	43.08	31.38	7.45	24.75	43.90	54	-10.10	AV
V	20800	55.24	31.76	7.45	24.86	55.79	74	-18.21	PK
V	20800	42.74	31.76	7.45	24.86	43.29	54	-10.71	AV
H	10400	53.29	30.85	7.45	24.69	54.58	74	-19.42	PK
H	10400	40.93	30.85	7.45	24.69	42.22	54	-11.78	AV
H	15600	55.57	31.38	7.45	24.75	56.39	74	-17.61	PK
H	15600	43.72	31.38	7.45	24.75	44.54	54	-9.46	AV
H	20800	55.34	31.76	7.45	24.86	55.89	74	-18.11	PK
H	20800	40.47	31.76	7.45	24.86	41.02	54	-12.98	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480	51.80	30.85	7.45	24.69	53.09	74	-20.91	PK
V	10480	40.25	30.85	7.45	24.69	41.54	54	-12.46	AV
V	15720	54.50	31.38	7.45	24.75	55.32	74	-18.68	PK
V	15720	42.30	31.38	7.45	24.75	43.12	54	-10.88	AV
V	20960	55.17	31.76	7.45	24.86	55.72	74	-18.28	PK
V	20960	40.73	31.76	7.45	24.86	41.28	54	-12.72	AV
H	10480	53.20	30.85	7.45	24.69	54.49	74	-19.51	PK
H	10480	40.36	30.85	7.45	24.69	41.65	54	-12.35	AV
H	15720	54.70	31.38	7.45	24.75	55.52	74	-18.48	PK
H	15720	43.44	31.38	7.45	24.75	44.26	54	-9.74	AV
H	20960	54.89	31.76	7.45	24.86	55.44	74	-18.56	PK
H	20960	40.16	31.76	7.45	24.86	40.71	54	-13.29	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5745MHz									
V	11490	53.48	30.85	7.45	24.69	54.77	74	-19.23	PK
V	11490	42.40	30.85	7.45	24.69	43.69	54	-10.31	AV
V	17235	55.03	31.38	7.45	24.75	55.85	74	-18.15	PK
V	17235	43.63	31.38	7.45	24.75	44.45	54	-9.55	AV
V	22980	56.34	31.76	7.45	24.86	56.89	74	-17.11	PK
V	22980	42.39	31.76	7.45	24.86	42.94	54	-11.06	AV
H	11490	53.63	30.85	7.45	24.69	54.92	74	-19.08	PK
H	11490	41.57	30.85	7.45	24.69	42.86	54	-11.14	AV
H	17235	53.78	31.38	7.45	24.75	54.60	74	-19.40	PK
H	17235	41.88	31.38	7.45	24.75	42.70	54	-11.30	AV
H	22980	57.43	31.76	7.45	24.86	57.98	74	-16.02	PK
H	22980	39.84	31.76	7.45	24.86	40.39	54	-13.61	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5785MHz									
V	11570	51.81	30.85	7.45	24.69	53.10	74	-20.90	PK
V	11570	40.42	30.85	7.45	24.69	41.71	54	-12.29	AV
V	17355	54.58	31.38	7.45	24.75	55.40	74	-18.60	PK
V	17355	42.35	31.38	7.45	24.75	43.17	54	-10.83	AV
V	23140	54.95	31.76	7.45	24.86	55.50	74	-18.50	PK
V	23140	41.61	31.76	7.45	24.86	42.16	54	-11.84	AV
H	11570	54.09	30.85	7.45	24.69	55.38	74	-18.62	PK
H	11570	39.96	30.85	7.45	24.69	41.25	54	-12.75	AV
H	17355	54.45	31.38	7.45	24.75	55.27	74	-18.73	PK
H	17355	40.91	31.38	7.45	24.75	41.73	54	-12.27	AV
H	23140	55.44	31.76	7.45	24.86	55.99	74	-18.01	PK
H	23140	42.55	31.76	7.45	24.86	43.10	54	-10.90	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5795MHz									
V	11590	53.19	30.85	7.45	24.69	54.48	74	-19.52	PK
V	11590	42.42	30.85	7.45	24.69	43.71	54	-10.29	AV
V	17385	55.47	31.38	7.45	24.75	56.29	74	-17.71	PK
V	17385	42.39	31.38	7.45	24.75	43.21	54	-10.79	AV
V	23180	55.22	31.76	7.45	24.86	55.77	74	-18.23	PK
V	23180	42.58	31.76	7.45	24.86	43.13	54	-10.87	AV
H	11590	53.57	30.85	7.45	24.69	54.86	74	-19.14	PK
H	11590	40.47	30.85	7.45	24.69	41.76	54	-12.24	AV
H	17385	55.26	31.38	7.45	24.75	56.08	74	-17.92	PK
H	17385	42.72	31.38	7.45	24.75	43.54	54	-10.46	AV
H	23180	55.76	31.76	7.45	24.86	56.31	74	-17.69	PK
H	23180	42.34	31.76	7.45	24.86	42.89	54	-11.11	AV

ANT2-802.11ax40

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5190MHz									
V	10380	52.69	30.85	7.45	24.69	53.98	74	-20.02	PK
V	10380	41.33	30.85	7.45	24.69	42.62	54	-11.38	AV
V	15570	53.94	31.38	7.45	24.75	54.76	74	-19.24	PK
V	15570	41.90	31.38	7.45	24.75	42.72	54	-11.28	AV
V	20760	56.92	31.76	7.45	24.86	57.47	74	-16.53	PK
V	20760	40.88	31.76	7.45	24.86	41.43	54	-12.57	AV
H	10380	52.63	30.85	7.45	24.69	53.92	74	-20.08	PK
H	10380	41.20	30.85	7.45	24.69	42.49	54	-11.51	AV
H	15570	55.39	31.38	7.45	24.75	56.21	74	-17.79	PK
H	15570	42.74	31.38	7.45	24.75	43.56	54	-10.44	AV
H	20760	55.16	31.76	7.45	24.86	55.71	74	-18.29	PK
H	20760	39.94	31.76	7.45	24.86	40.49	54	-13.51	AV

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5230MHz									
V	10460	52.66	30.85	7.45	24.69	53.95	74	-20.05	PK
V	10460	41.88	30.85	7.45	24.69	43.17	54	-10.83	AV
V	15690	55.22	31.38	7.45	24.75	56.04	74	-17.96	PK
V	15690	42.58	31.38	7.45	24.75	43.40	54	-10.60	AV
V	20920	57.28	31.76	7.45	24.86	57.83	74	-16.17	PK
V	20920	40.60	31.76	7.45	24.86	41.15	54	-12.85	AV
H	10460	53.40	30.85	7.45	24.69	54.69	74	-19.31	PK
H	10460	41.35	30.85	7.45	24.69	42.64	54	-11.36	AV
H	15690	54.71	31.38	7.45	24.75	55.53	74	-18.47	PK
H	15690	43.03	31.38	7.45	24.75	43.85	54	-10.15	AV
H	20920	56.43	31.76	7.45	24.86	56.98	74	-17.02	PK
H	20920	40.76	31.76	7.45	24.86	41.31	54	-12.69	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5755MHz									
V	11510	53.12	30.85	7.45	24.69	54.41	74	-19.59	PK
V	11510	41.14	30.85	7.45	24.69	42.43	54	-11.57	AV
V	17265	54.70	31.38	7.45	24.75	55.52	74	-18.48	PK
V	17265	43.06	31.38	7.45	24.75	43.88	54	-10.12	AV
V	23020	57.73	31.76	7.45	24.86	58.28	74	-15.72	PK
V	23020	42.59	31.76	7.45	24.86	43.14	54	-10.86	AV
H	11510	51.90	30.85	7.45	24.69	53.19	74	-20.81	PK
H	11510	41.05	30.85	7.45	24.69	42.34	54	-11.66	AV
H	17265	55.35	31.38	7.45	24.75	56.17	74	-17.83	PK
H	17265	41.81	31.38	7.45	24.75	42.63	54	-11.37	AV
H	23020	56.65	31.76	7.45	24.86	57.20	74	-16.80	PK
H	23020	40.55	31.76	7.45	24.86	41.10	54	-12.90	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5795MHz									
V	11590	54.63	30.85	7.45	24.69	55.92	74	-18.08	PK
V	11590	40.08	30.85	7.45	24.69	41.37	54	-12.63	AV
V	17385	54.13	31.38	7.45	24.75	54.95	74	-19.05	PK
V	17385	40.92	31.38	7.45	24.75	41.74	54	-12.26	AV
V	23180	57.41	31.76	7.45	24.86	57.96	74	-16.04	PK
V	23180	39.87	31.76	7.45	24.86	40.42	54	-13.58	AV
H	11590	54.59	30.85	7.45	24.69	55.88	74	-18.12	PK
H	11590	41.36	30.85	7.45	24.69	42.65	54	-11.35	AV
H	17385	55.35	31.38	7.45	24.75	56.17	74	-17.83	PK
H	17385	43.69	31.38	7.45	24.75	44.51	54	-9.49	AV
H	23180	56.76	31.76	7.45	24.86	57.31	74	-16.69	PK
H	23180	42.68	31.76	7.45	24.86	43.23	54	-10.77	AV

ANT2-802.11ax80

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
5210MHz									
V	10420	52.64	30.85	7.45	24.69	53.93	74	-20.07	PK
V	10420	40.50	30.85	7.45	24.69	41.79	54	-12.21	AV
V	15630	54.34	31.38	7.45	24.75	55.16	74	-18.84	PK
V	15630	42.21	31.38	7.45	24.75	43.03	54	-10.97	AV
V	20840	57.62	31.76	7.45	24.86	58.17	74	-15.83	PK
V	20840	42.32	31.76	7.45	24.86	42.87	54	-11.13	AV
H	10420	54.05	30.85	7.45	24.69	55.34	74	-18.66	PK
H	10420	40.26	30.85	7.45	24.69	41.55	54	-12.45	AV
H	15630	53.77	31.38	7.45	24.75	54.59	74	-19.41	PK
H	15630	43.72	31.38	7.45	24.75	44.54	54	-9.46	AV
H	20840	55.22	31.76	7.45	24.86	55.77	74	-18.23	PK
H	20840	39.85	31.76	7.45	24.86	40.40	54	-13.60	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5775MHz									
V	11550	53.90	30.85	7.45	24.69	55.19	74	-18.81	PK
V	11550	39.95	30.85	7.45	24.69	41.24	54	-12.76	AV
V	17325	55.17	31.38	7.45	24.75	55.99	74	-18.01	PK
V	17325	41.90	31.38	7.45	24.75	42.72	54	-11.28	AV
V	23100	55.66	31.76	7.45	24.86	56.21	74	-17.79	PK
V	23100	40.81	31.76	7.45	24.86	41.36	54	-12.64	AV
H	11550	53.27	30.85	7.45	24.69	54.56	74	-19.44	PK
H	11550	40.70	30.85	7.45	24.69	41.99	54	-12.01	AV
H	17325	55.59	31.38	7.45	24.75	56.41	74	-17.59	PK
H	17325	42.89	31.38	7.45	24.75	43.71	54	-10.29	AV
H	23100	55.33	31.76	7.45	24.86	55.88	74	-18.12	PK
H	23100	40.33	31.76	7.45	24.86	40.88	54	-13.12	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

MIMO-802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360	53.90	30.85	7.45	24.69	55.19	74	-18.81	PK
V	10360	39.85	30.85	7.45	24.69	41.14	54	-12.86	AV
V	15540	54.17	31.38	7.45	24.75	54.99	74	-19.01	PK
V	15540	42.74	31.38	7.45	24.75	43.56	54	-10.44	AV
V	20720	56.86	31.76	7.45	24.86	57.41	74	-16.59	PK
V	20720	42.20	31.76	7.45	24.86	42.75	54	-11.25	AV
H	10360	54.50	30.85	7.45	24.69	55.79	74	-18.21	PK
H	10360	40.83	30.85	7.45	24.69	42.12	54	-11.88	AV
H	15540	55.01	31.38	7.45	24.75	55.83	74	-18.17	PK
H	15540	41.72	31.38	7.45	24.75	42.54	54	-11.46	AV
H	20720	56.73	31.76	7.45	24.86	57.28	74	-16.72	PK
H	20720	42.21	31.76	7.45	24.86	42.76	54	-11.24	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400	53.04	30.85	7.45	24.69	54.33	74	-19.67	PK
V	10400	39.96	30.85	7.45	24.69	41.25	54	-12.75	AV
V	15600	54.06	31.38	7.45	24.75	54.88	74	-19.12	PK
V	15600	43.70	31.38	7.45	24.75	44.52	54	-9.48	AV
V	20800	56.73	31.76	7.45	24.86	57.28	74	-16.72	PK
V	20800	41.99	31.76	7.45	24.86	42.54	54	-11.46	AV
H	10400	53.53	30.85	7.45	24.69	54.82	74	-19.18	PK
H	10400	41.01	30.85	7.45	24.69	42.30	54	-11.70	AV
H	15600	54.54	31.38	7.45	24.75	55.36	74	-18.64	PK
H	15600	42.39	31.38	7.45	24.75	43.21	54	-10.79	AV
H	20800	57.42	31.76	7.45	24.86	57.97	74	-16.03	PK
H	20800	39.95	31.76	7.45	24.86	40.50	54	-13.50	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480	54.13	30.85	7.45	24.69	55.42	74	-18.58	PK
V	10480	41.37	30.85	7.45	24.69	42.66	54	-11.34	AV

V	15720	55.60	31.38	7.45	24.75	56.42	74	-17.58	PK
V	15720	42.02	31.38	7.45	24.75	42.84	54	-11.16	AV
V	20960	56.91	31.76	7.45	24.86	57.46	74	-16.54	PK
V	20960	40.38	31.76	7.45	24.86	40.93	54	-13.07	AV
H	10480	54.40	30.85	7.45	24.69	55.69	74	-18.31	PK
H	10480	40.17	30.85	7.45	24.69	41.46	54	-12.54	AV
H	15720	55.60	31.38	7.45	24.75	56.42	74	-17.58	PK
H	15720	43.65	31.38	7.45	24.75	44.47	54	-9.53	AV
H	20960	55.67	31.76	7.45	24.86	56.22	74	-17.78	PK
H	20960	42.36	31.76	7.45	24.86	42.91	54	-11.09	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:5745MHz									
V	11490	53.68	30.85	7.45	24.69	54.97	74	-19.03	PK
V	11490	42.17	30.85	7.45	24.69	43.46	54	-10.54	AV
V	17235	55.46	31.38	7.45	24.75	56.28	74	-17.72	PK
V	17235	40.93	31.38	7.45	24.75	41.75	54	-12.25	AV
V	22980	55.36	31.76	7.45	24.86	55.91	74	-18.09	PK
V	22980	41.08	31.76	7.45	24.86	41.63	54	-12.37	AV
H	11490	53.85	30.85	7.45	24.69	55.14	74	-18.86	PK
H	11490	41.37	30.85	7.45	24.69	42.66	54	-11.34	AV
H	17235	55.37	31.38	7.45	24.75	56.19	74	-17.81	PK
H	17235	43.42	31.38	7.45	24.75	44.24	54	-9.76	AV
H	22980	55.73	31.76	7.45	24.86	56.28	74	-17.72	PK
H	22980	42.43	31.76	7.45	24.86	42.98	54	-11.02	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:5785MHz									
V	11570	53.40	30.85	7.45	24.69	54.69	74	-19.31	PK
V	11570	41.92	30.85	7.45	24.69	43.21	54	-10.79	AV
V	17355	55.52	31.38	7.45	24.75	56.34	74	-17.66	PK
V	17355	43.08	31.38	7.45	24.75	43.90	54	-10.10	AV
V	23140	56.33	31.76	7.45	24.86	56.88	74	-17.12	PK
V	23140	41.35	31.76	7.45	24.86	41.90	54	-12.10	AV
H	11570	54.13	30.85	7.45	24.69	55.42	74	-18.58	PK
H	11570	42.36	30.85	7.45	24.69	43.65	54	-10.35	AV
H	17355	55.36	31.38	7.45	24.75	56.18	74	-17.82	PK
H	17355	42.98	31.38	7.45	24.75	43.80	54	-10.20	AV
H	23140	57.66	31.76	7.45	24.86	58.21	74	-15.79	PK
H	23140	41.36	31.76	7.45	24.86	41.91	54	-12.09	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:5825MHz									
V	11650	52.97	30.85	7.45	24.69	54.26	74	-19.74	PK
V	11650	41.42	30.85	7.45	24.69	42.71	54	-11.29	AV
V	17475	54.67	31.38	7.45	24.75	55.49	74	-18.51	PK

V	17475	43.27	31.38	7.45	24.75	44.09	54	-9.91	AV
V	23300	57.13	31.76	7.45	24.86	57.68	74	-16.32	PK
V	23300	42.56	31.76	7.45	24.86	43.11	54	-10.89	AV
H	11650	54.00	30.85	7.45	24.69	55.29	74	-18.71	PK
H	11650	41.06	30.85	7.45	24.69	42.35	54	-11.65	AV
H	17475	55.17	31.38	7.45	24.75	55.99	74	-18.01	PK
H	17475	41.57	31.38	7.45	24.75	42.39	54	-11.61	AV
H	23300	54.79	31.76	7.45	24.86	55.34	74	-18.66	PK
H	23300	41.16	31.76	7.45	24.86	41.71	54	-12.29	AV

MIMO-802.11n40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:5190MHz									
V	10380	53.47	30.85	7.45	24.69	54.76	74	-19.24	PK
V	10380	42.46	30.85	7.45	24.69	43.75	54	-10.25	AV
V	15570	53.82	31.38	7.45	24.75	54.64	74	-19.36	PK
V	15570	42.45	31.38	7.45	24.75	43.27	54	-10.73	AV
V	20760	56.03	31.76	7.45	24.86	56.58	74	-17.42	PK
V	20760	42.65	31.76	7.45	24.86	43.20	54	-10.80	AV
H	10380	54.11	30.85	7.45	24.69	55.40	74	-18.60	PK
H	10380	42.19	30.85	7.45	24.69	43.48	54	-10.52	AV
H	15570	55.02	31.38	7.45	24.75	55.84	74	-18.16	PK
H	15570	40.87	31.38	7.45	24.75	41.69	54	-12.31	AV
H	20760	55.46	31.76	7.45	24.86	56.01	74	-17.99	PK
H	20760	42.04	31.76	7.45	24.86	42.59	54	-11.41	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:5230MHz									
V	10460	53.24	30.85	7.45	24.69	54.53	74	-19.47	PK
V	10460	40.64	30.85	7.45	24.69	41.93	54	-12.07	AV
V	15690	55.59	31.38	7.45	24.75	56.41	74	-17.59	PK
V	15690	43.17	31.38	7.45	24.75	43.99	54	-10.01	AV
V	20920	56.08	31.76	7.45	24.86	56.63	74	-17.37	PK
V	20920	40.34	31.76	7.45	24.86	40.89	54	-13.11	AV
H	10460	54.29	30.85	7.45	24.69	55.58	74	-18.42	PK
H	10460	39.83	30.85	7.45	24.69	41.12	54	-12.88	AV
H	15690	54.09	31.38	7.45	24.75	54.91	74	-19.09	PK
H	15690	42.25	31.38	7.45	24.75	43.07	54	-10.93	AV
H	20920	55.82	31.76	7.45	24.86	56.37	74	-17.63	PK
H	20920	41.52	31.76	7.45	24.86	42.07	54	-11.93	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:5755MHz									
V	11510	54.44	30.85	7.45	24.69	55.73	74	-18.27	PK
V	11510	42.08	30.85	7.45	24.69	43.37	54	-10.63	AV
V	17265	54.22	31.38	7.45	24.75	55.04	74	-18.96	PK

V	17265	41.46	31.38	7.45	24.75	42.28	54	-11.72	AV
V	23020	57.32	31.76	7.45	24.86	57.87	74	-16.13	PK
V	23020	41.78	31.76	7.45	24.86	42.33	54	-11.67	AV
H	11510	54.34	30.85	7.45	24.69	55.63	74	-18.37	PK
H	11510	41.23	30.85	7.45	24.69	42.52	54	-11.48	AV
H	17265	55.19	31.38	7.45	24.75	56.01	74	-17.99	PK
H	17265	41.72	31.38	7.45	24.75	42.54	54	-11.46	AV
H	23020	56.25	31.76	7.45	24.86	56.80	74	-17.20	PK
H	23020	40.98	31.76	7.45	24.86	41.53	54	-12.47	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5795MHz									
V	11590	53.17	30.85	7.45	24.69	54.46	74	-19.54	PK
V	11590	42.06	30.85	7.45	24.69	43.35	54	-10.65	AV
V	17385	55.27	31.38	7.45	24.75	56.09	74	-17.91	PK
V	17385	42.88	31.38	7.45	24.75	43.70	54	-10.30	AV
V	23180	55.01	31.76	7.45	24.86	55.56	74	-18.44	PK
V	23180	41.71	31.76	7.45	24.86	42.26	54	-11.74	AV
H	11590	52.59	30.85	7.45	24.69	53.88	74	-20.12	PK
H	11590	41.91	30.85	7.45	24.69	43.20	54	-10.80	AV
H	17385	54.03	31.38	7.45	24.75	54.85	74	-19.15	PK
H	17385	40.99	31.38	7.45	24.75	41.81	54	-12.19	AV
H	23180	54.89	31.76	7.45	24.86	55.44	74	-18.56	PK
H	23180	42.19	31.76	7.45	24.86	42.74	54	-11.26	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

MIMO--802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	10360	52.28	30.85	7.45	24.69	53.57	74	-20.43	PK
V	10360	42.11	30.85	7.45	24.69	43.40	54	-10.60	AV
V	15540	55.38	31.38	7.45	24.75	56.20	74	-17.80	PK
V	15540	40.89	31.38	7.45	24.75	41.71	54	-12.29	AV
V	20720	55.05	31.76	7.45	24.86	55.60	74	-18.40	PK
V	20720	42.45	31.76	7.45	24.86	43.00	54	-11.00	AV
H	10360	52.65	30.85	7.45	24.69	53.94	74	-20.06	PK
H	10360	40.31	30.85	7.45	24.69	41.60	54	-12.40	AV
H	15540	55.43	31.38	7.45	24.75	56.25	74	-17.75	PK
H	15540	41.69	31.38	7.45	24.75	42.51	54	-11.49	AV
H	20720	57.19	31.76	7.45	24.86	57.74	74	-16.26	PK
H	20720	40.00	31.76	7.45	24.86	40.55	54	-13.45	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	10400	52.85	30.85	7.45	24.69	54.14	74	-19.86	PK
V	10400	40.28	30.85	7.45	24.69	41.57	54	-12.43	AV
V	15600	54.08	31.38	7.45	24.75	54.90	74	-19.10	PK
V	15600	43.61	31.38	7.45	24.75	44.43	54	-9.57	AV
V	20800	56.45	31.76	7.45	24.86	57.00	74	-17.00	PK
V	20800	40.80	31.76	7.45	24.86	41.35	54	-12.65	AV
H	10400	52.92	30.85	7.45	24.69	54.21	74	-19.79	PK
H	10400	41.24	30.85	7.45	24.69	42.53	54	-11.47	AV
H	15600	53.94	31.38	7.45	24.75	54.76	74	-19.24	PK
H	15600	43.11	31.38	7.45	24.75	43.93	54	-10.07	AV
H	20800	55.36	31.76	7.45	24.86	55.91	74	-18.09	PK
H	20800	41.15	31.76	7.45	24.86	41.70	54	-12.30	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480	53.01	30.85	7.45	24.69	54.30	74	-19.70	PK
V	10480	40.56	30.85	7.45	24.69	41.85	54	-12.15	AV
V	15720	55.68	31.38	7.45	24.75	56.50	74	-17.50	PK
V	15720	43.52	31.38	7.45	24.75	44.34	54	-9.66	AV
V	20960	56.35	31.76	7.45	24.86	56.90	74	-17.10	PK
V	20960	42.24	31.76	7.45	24.86	42.79	54	-11.21	AV
H	10480	53.46	30.85	7.45	24.69	54.75	74	-19.25	PK
H	10480	42.46	30.85	7.45	24.69	43.75	54	-10.25	AV
H	15720	54.93	31.38	7.45	24.75	55.75	74	-18.25	PK
H	15720	43.47	31.38	7.45	24.75	44.29	54	-9.71	AV
H	20960	57.57	31.76	7.45	24.86	58.12	74	-15.88	PK
H	20960	40.56	31.76	7.45	24.86	41.11	54	-12.89	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5745MHz									
V	11490	52.07	30.85	7.45	24.69	53.36	74	-20.64	PK
V	11490	40.64	30.85	7.45	24.69	41.93	54	-12.07	AV
V	17235	54.31	31.38	7.45	24.75	55.13	74	-18.87	PK
V	17235	43.64	31.38	7.45	24.75	44.46	54	-9.54	AV
V	22980	57.21	31.76	7.45	24.86	57.76	74	-16.24	PK
V	22980	41.37	31.76	7.45	24.86	41.92	54	-12.08	AV
H	11490	54.18	30.85	7.45	24.69	55.47	74	-18.53	PK
H	11490	41.98	30.85	7.45	24.69	43.27	54	-10.73	AV
H	17235	55.63	31.38	7.45	24.75	56.45	74	-17.55	PK
H	17235	42.85	31.38	7.45	24.75	43.67	54	-10.33	AV
H	22980	55.77	31.76	7.45	24.86	56.32	74	-17.68	PK
H	22980	42.52	31.76	7.45	24.86	43.07	54	-10.93	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5785MHz									
V	11570	52.84	30.85	7.45	24.69	54.13	74	-19.87	PK
V	11570	41.41	30.85	7.45	24.69	42.70	54	-11.30	AV
V	17355	54.43	31.38	7.45	24.75	55.25	74	-18.75	PK
V	17355	42.89	31.38	7.45	24.75	43.71	54	-10.29	AV
V	23140	55.20	31.76	7.45	24.86	55.75	74	-18.25	PK
V	23140	42.43	31.76	7.45	24.86	42.98	54	-11.02	AV
H	11570	53.23	30.85	7.45	24.69	54.52	74	-19.48	PK
H	11570	40.50	30.85	7.45	24.69	41.79	54	-12.21	AV
H	17355	54.97	31.38	7.45	24.75	55.79	74	-18.21	PK
H	17355	43.51	31.38	7.45	24.75	44.33	54	-9.67	AV
H	23140	56.03	31.76	7.45	24.86	56.58	74	-17.42	PK
H	23140	40.34	31.76	7.45	24.86	40.89	54	-13.11	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5795MHz									
V	11590	53.37	30.85	7.45	24.69	54.66	74	-19.34	PK
V	11590	40.31	30.85	7.45	24.69	41.60	54	-12.40	AV
V	17385	53.89	31.38	7.45	24.75	54.71	74	-19.29	PK
V	17385	41.46	31.38	7.45	24.75	42.28	54	-11.72	AV
V	23180	57.14	31.76	7.45	24.86	57.69	74	-16.31	PK
V	23180	42.11	31.76	7.45	24.86	42.66	54	-11.34	AV
H	11590	52.37	30.85	7.45	24.69	53.66	74	-20.34	PK
H	11590	41.12	30.85	7.45	24.69	42.41	54	-11.59	AV
H	17385	53.82	31.38	7.45	24.75	54.64	74	-19.36	PK
H	17385	41.54	31.38	7.45	24.75	42.36	54	-11.64	AV
H	23180	57.32	31.76	7.45	24.86	57.87	74	-16.13	PK
H	23180	42.24	31.76	7.45	24.86	42.79	54	-11.21	AV

MIMO-802.11ac40

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5190MHz									
V	10380	54.00	30.85	7.45	24.69	55.29	74	-18.71	PK
V	10380	41.93	30.85	7.45	24.69	43.22	54	-10.78	AV
V	15570	55.41	31.38	7.45	24.75	56.23	74	-17.77	PK
V	15570	42.44	31.38	7.45	24.75	43.26	54	-10.74	AV
V	20760	57.20	31.76	7.45	24.86	57.75	74	-16.25	PK
V	20760	40.95	31.76	7.45	24.86	41.50	54	-12.50	AV
H	10380	53.91	30.85	7.45	24.69	55.20	74	-18.80	PK
H	10380	41.55	30.85	7.45	24.69	42.84	54	-11.16	AV
H	15570	53.97	31.38	7.45	24.75	54.79	74	-19.21	PK
H	15570	43.51	31.38	7.45	24.75	44.33	54	-9.67	AV
H	20760	55.25	31.76	7.45	24.86	55.80	74	-18.20	PK
H	20760	42.25	31.76	7.45	24.86	42.80	54	-11.20	AV

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5230MHz									
V	10460	51.95	30.85	7.45	24.69	53.24	74	-20.76	PK
V	10460	42.22	30.85	7.45	24.69	43.51	54	-10.49	AV
V	15690	54.33	31.38	7.45	24.75	55.15	74	-18.85	PK
V	15690	41.38	31.38	7.45	24.75	42.20	54	-11.80	AV
V	20920	55.63	31.76	7.45	24.86	56.18	74	-17.82	PK
V	20920	42.63	31.76	7.45	24.86	43.18	54	-10.82	AV
H	10460	53.97	30.85	7.45	24.69	55.26	74	-18.74	PK
H	10460	40.20	30.85	7.45	24.69	41.49	54	-12.51	AV
H	15690	55.50	31.38	7.45	24.75	56.32	74	-17.68	PK
H	15690	41.23	31.38	7.45	24.75	42.05	54	-11.95	AV
H	20920	54.96	31.76	7.45	24.86	55.51	74	-18.49	PK
H	20920	39.99	31.76	7.45	24.86	40.54	54	-13.46	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5755MHz									
V	11510	52.07	30.85	7.45	24.69	53.36	74	-20.64	PK
V	11510	41.87	30.85	7.45	24.69	43.16	54	-10.84	AV
V	17265	54.68	31.38	7.45	24.75	55.50	74	-18.50	PK
V	17265	41.59	31.38	7.45	24.75	42.41	54	-11.59	AV
V	23020	55.27	31.76	7.45	24.86	55.82	74	-18.18	PK
V	23020	40.93	31.76	7.45	24.86	41.48	54	-12.52	AV
H	11510	54.21	30.85	7.45	24.69	55.50	74	-18.50	PK
H	11510	40.86	30.85	7.45	24.69	42.15	54	-11.85	AV
H	17265	53.86	31.38	7.45	24.75	54.68	74	-19.32	PK
H	17265	42.15	31.38	7.45	24.75	42.97	54	-11.03	AV
H	23020	57.24	31.76	7.45	24.86	57.79	74	-16.21	PK
H	23020	40.63	31.76	7.45	24.86	41.18	54	-12.82	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5795MHz									
V	11590	54.08	30.85	7.45	24.69	55.37	74	-18.63	PK
V	11590	39.76	30.85	7.45	24.69	41.05	54	-12.95	AV
V	17385	54.77	31.38	7.45	24.75	55.59	74	-18.41	PK
V	17385	41.20	31.38	7.45	24.75	42.02	54	-11.98	AV
V	23180	56.12	31.76	7.45	24.86	56.67	74	-17.33	PK
V	23180	41.51	31.76	7.45	24.86	42.06	54	-11.94	AV
H	11590	52.94	30.85	7.45	24.69	54.23	74	-19.77	PK
H	11590	41.23	30.85	7.45	24.69	42.52	54	-11.48	AV
H	17385	55.69	31.38	7.45	24.75	56.51	74	-17.49	PK
H	17385	42.02	31.38	7.45	24.75	42.84	54	-11.16	AV
H	23180	55.54	31.76	7.45	24.86	56.09	74	-17.91	PK
H	23180	40.89	31.76	7.45	24.86	41.44	54	-12.56	AV

MIMO-802.11ac80

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
5210MHz									
V	10420	52.57	30.85	7.45	24.69	53.86	74	-20.14	PK
V	10420	42.47	30.85	7.45	24.69	43.76	54	-10.24	AV
V	15630	53.89	31.38	7.45	24.75	54.71	74	-19.29	PK
V	15630	43.11	31.38	7.45	24.75	43.93	54	-10.07	AV
V	20840	57.65	31.76	7.45	24.86	58.20	74	-15.80	PK
V	20840	40.82	31.76	7.45	24.86	41.37	54	-12.63	AV
H	10420	53.10	30.85	7.45	24.69	54.39	74	-19.61	PK
H	10420	41.68	30.85	7.45	24.69	42.97	54	-11.03	AV
H	15630	54.51	31.38	7.45	24.75	55.33	74	-18.67	PK
H	15630	41.50	31.38	7.45	24.75	42.32	54	-11.68	AV
H	20840	55.71	31.76	7.45	24.86	56.26	74	-17.74	PK
H	20840	42.11	31.76	7.45	24.86	42.66	54	-11.34	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
5775MHz									
V	11550	52.35	30.85	7.45	24.69	53.64	74	-20.36	PK
V	11550	41.40	30.85	7.45	24.69	42.69	54	-11.31	AV
V	17325	54.27	31.38	7.45	24.75	55.09	74	-18.91	PK
V	17325	43.38	31.38	7.45	24.75	44.20	54	-9.80	AV
V	23100	55.70	31.76	7.45	24.86	56.25	74	-17.75	PK
V	23100	40.71	31.76	7.45	24.86	41.26	54	-12.74	AV
H	11550	54.29	30.85	7.45	24.69	55.58	74	-18.42	PK
H	11550	41.35	30.85	7.45	24.69	42.64	54	-11.36	AV
H	17325	55.36	31.38	7.45	24.75	56.18	74	-17.82	PK
H	17325	41.58	31.38	7.45	24.75	42.40	54	-11.60	AV
H	23100	55.81	31.76	7.45	24.86	56.36	74	-17.64	PK
H	23100	41.41	31.76	7.45	24.86	41.96	54	-12.04	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

MIMO--802.11ax20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	10360	53.04	30.85	7.45	24.69	54.33	74	-19.67	PK
V	10360	42.32	30.85	7.45	24.69	43.61	54	-10.39	AV
V	15540	53.81	31.38	7.45	24.75	54.63	74	-19.37	PK
V	15540	41.93	31.38	7.45	24.75	42.75	54	-11.25	AV

V	20720	55.23	31.76	7.45	24.86	55.78	74	-18.22	PK
V	20720	42.35	31.76	7.45	24.86	42.90	54	-11.10	AV
H	10360	53.09	30.85	7.45	24.69	54.38	74	-19.62	PK
H	10360	40.27	30.85	7.45	24.69	41.56	54	-12.44	AV
H	15540	54.81	31.38	7.45	24.75	55.63	74	-18.37	PK
H	15540	41.69	31.38	7.45	24.75	42.51	54	-11.49	AV
H	20720	56.15	31.76	7.45	24.86	56.70	74	-17.30	PK
H	20720	41.49	31.76	7.45	24.86	42.04	54	-11.96	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5200MHz									
V	10400	53.74	30.85	7.45	24.69	55.03	74	-18.97	PK
V	10400	41.69	30.85	7.45	24.69	42.98	54	-11.02	AV
V	15600	54.93	31.38	7.45	24.75	55.75	74	-18.25	PK
V	15600	41.14	31.38	7.45	24.75	41.96	54	-12.04	AV
V	20800	56.52	31.76	7.45	24.86	57.07	74	-16.93	PK
V	20800	42.48	31.76	7.45	24.86	43.03	54	-10.97	AV
H	10400	52.47	30.85	7.45	24.69	53.76	74	-20.24	PK
H	10400	39.98	30.85	7.45	24.69	41.27	54	-12.73	AV
H	15600	54.62	31.38	7.45	24.75	55.44	74	-18.56	PK
H	15600	42.78	31.38	7.45	24.75	43.60	54	-10.40	AV
H	20800	57.45	31.76	7.45	24.86	58.00	74	-16.00	PK
H	20800	40.49	31.76	7.45	24.86	41.04	54	-12.96	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5240MHz									
V	10480	54.64	30.85	7.45	24.69	55.93	74	-18.07	PK
V	10480	40.97	30.85	7.45	24.69	42.26	54	-11.74	AV
V	15720	54.42	31.38	7.45	24.75	55.24	74	-18.76	PK
V	15720	42.44	31.38	7.45	24.75	43.26	54	-10.74	AV
V	20960	57.35	31.76	7.45	24.86	57.90	74	-16.10	PK
V	20960	40.92	31.76	7.45	24.86	41.47	54	-12.53	AV
H	10480	53.88	30.85	7.45	24.69	55.17	74	-18.83	PK
H	10480	42.33	30.85	7.45	24.69	43.62	54	-10.38	AV
H	15720	54.27	31.38	7.45	24.75	55.09	74	-18.91	PK
H	15720	42.20	31.38	7.45	24.75	43.02	54	-10.98	AV
H	20960	55.01	31.76	7.45	24.86	55.56	74	-18.44	PK
H	20960	40.27	31.76	7.45	24.86	40.82	54	-13.18	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5745MHz									
V	11490	53.39	30.85	7.45	24.69	54.68	74	-19.32	PK
V	11490	40.90	30.85	7.45	24.69	42.19	54	-11.81	AV
V	17235	54.91	31.38	7.45	24.75	55.73	74	-18.27	PK
V	17235	42.12	31.38	7.45	24.75	42.94	54	-11.06	AV
V	22980	57.19	31.76	7.45	24.86	57.74	74	-16.26	PK

V	22980	41.94	31.76	7.45	24.86	42.49	54	-11.51	AV
H	11490	53.16	30.85	7.45	24.69	54.45	74	-19.55	PK
H	11490	40.71	30.85	7.45	24.69	42.00	54	-12.00	AV
H	17235	54.80	31.38	7.45	24.75	55.62	74	-18.38	PK
H	17235	41.01	31.38	7.45	24.75	41.83	54	-12.17	AV
H	22980	56.39	31.76	7.45	24.86	56.94	74	-17.06	PK
H	22980	41.74	31.76	7.45	24.86	42.29	54	-11.71	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5785MHz									
V	11570	54.15	30.85	7.45	24.69	55.44	74	-18.56	PK
V	11570	41.94	30.85	7.45	24.69	43.23	54	-10.77	AV
V	17355	55.52	31.38	7.45	24.75	56.34	74	-17.66	PK
V	17355	41.79	31.38	7.45	24.75	42.61	54	-11.39	AV
V	23140	55.83	31.76	7.45	24.86	56.38	74	-17.62	PK
V	23140	41.75	31.76	7.45	24.86	42.30	54	-11.70	AV
H	11570	52.71	30.85	7.45	24.69	54.00	74	-20.00	PK
H	11570	42.56	30.85	7.45	24.69	43.85	54	-10.15	AV
H	17355	54.82	31.38	7.45	24.75	55.64	74	-18.36	PK
H	17355	42.19	31.38	7.45	24.75	43.01	54	-10.99	AV
H	23140	56.63	31.76	7.45	24.86	57.18	74	-16.82	PK
H	23140	42.69	31.76	7.45	24.86	43.24	54	-10.76	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5795MHz									
V	11590	52.52	30.85	7.45	24.69	53.81	74	-20.19	PK
V	11590	41.95	30.85	7.45	24.69	43.24	54	-10.76	AV
V	17385	54.16	31.38	7.45	24.75	54.98	74	-19.02	PK
V	17385	43.40	31.38	7.45	24.75	44.22	54	-9.78	AV
V	23180	57.32	31.76	7.45	24.86	57.87	74	-16.13	PK
V	23180	42.28	31.76	7.45	24.86	42.83	54	-11.17	AV
H	11590	54.61	30.85	7.45	24.69	55.90	74	-18.10	PK
H	11590	41.20	30.85	7.45	24.69	42.49	54	-11.51	AV
H	17385	55.00	31.38	7.45	24.75	55.82	74	-18.18	PK
H	17385	42.02	31.38	7.45	24.75	42.84	54	-11.16	AV
H	23180	56.35	31.76	7.45	24.86	56.90	74	-17.10	PK
H	23180	42.23	31.76	7.45	24.86	42.78	54	-11.22	AV

MIMO-802.11ax40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5190MHz									
V	10380	53.17	30.85	7.45	24.69	54.46	74	-19.54	PK
V	10380	42.68	30.85	7.45	24.69	43.97	54	-10.03	AV
V	15570	54.87	31.38	7.45	24.75	55.69	74	-18.31	PK
V	15570	42.30	31.38	7.45	24.75	43.12	54	-10.88	AV
V	20760	57.21	31.76	7.45	24.86	57.76	74	-16.24	PK

V	20760	41.26	31.76	7.45	24.86	41.81	54	-12.19	AV
H	10380	53.02	30.85	7.45	24.69	54.31	74	-19.69	PK
H	10380	40.76	30.85	7.45	24.69	42.05	54	-11.95	AV
H	15570	55.67	31.38	7.45	24.75	56.49	74	-17.51	PK
H	15570	42.15	31.38	7.45	24.75	42.97	54	-11.03	AV
H	20760	56.56	31.76	7.45	24.86	57.11	74	-16.89	PK
H	20760	40.64	31.76	7.45	24.86	41.19	54	-12.81	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5230MHz									
V	10460	52.02	30.85	7.45	24.69	53.31	74	-20.69	PK
V	10460	40.24	30.85	7.45	24.69	41.53	54	-12.47	AV
V	15690	55.44	31.38	7.45	24.75	56.26	74	-17.74	PK
V	15690	42.34	31.38	7.45	24.75	43.16	54	-10.84	AV
V	20920	55.21	31.76	7.45	24.86	55.76	74	-18.24	PK
V	20920	41.53	31.76	7.45	24.86	42.08	54	-11.92	AV
H	10460	53.33	30.85	7.45	24.69	54.62	74	-19.38	PK
H	10460	42.20	30.85	7.45	24.69	43.49	54	-10.51	AV
H	15690	55.32	31.38	7.45	24.75	56.14	74	-17.86	PK
H	15690	41.46	31.38	7.45	24.75	42.28	54	-11.72	AV
H	20920	55.71	31.76	7.45	24.86	56.26	74	-17.74	PK
H	20920	40.18	31.76	7.45	24.86	40.73	54	-13.27	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5755MHz									
V	11510	52.74	30.85	7.45	24.69	54.03	74	-19.97	PK
V	11510	41.69	30.85	7.45	24.69	42.98	54	-11.02	AV
V	17265	54.89	31.38	7.45	24.75	55.71	74	-18.29	PK
V	17265	41.57	31.38	7.45	24.75	42.39	54	-11.61	AV
V	23020	56.14	31.76	7.45	24.86	56.69	74	-17.31	PK
V	23020	40.42	31.76	7.45	24.86	40.97	54	-13.03	AV
H	11510	52.94	30.85	7.45	24.69	54.23	74	-19.77	PK
H	11510	41.80	30.85	7.45	24.69	43.09	54	-10.91	AV
H	17265	55.56	31.38	7.45	24.75	56.38	74	-17.62	PK
H	17265	40.87	31.38	7.45	24.75	41.69	54	-12.31	AV
H	23020	56.07	31.76	7.45	24.86	56.62	74	-17.38	PK
H	23020	41.76	31.76	7.45	24.86	42.31	54	-11.69	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5795MHz									
V	11590	54.52	30.85	7.45	24.69	55.81	74	-18.19	PK
V	11590	42.39	30.85	7.45	24.69	43.68	54	-10.32	AV
V	17385	54.56	31.38	7.45	24.75	55.38	74	-18.62	PK
V	17385	42.19	31.38	7.45	24.75	43.01	54	-10.99	AV
V	23180	56.98	31.76	7.45	24.86	57.53	74	-16.47	PK
V	23180	41.67	31.76	7.45	24.86	42.22	54	-11.78	AV
H	11590	52.60	30.85	7.45	24.69	53.89	74	-20.11	PK

H	11590	42.06	30.85	7.45	24.69	43.35	54	-10.65	AV
H	17385	55.42	31.38	7.45	24.75	56.24	74	-17.76	PK
H	17385	41.97	31.38	7.45	24.75	42.79	54	-11.21	AV
H	23180	56.18	31.76	7.45	24.86	56.73	74	-17.27	PK
H	23180	40.00	31.76	7.45	24.86	40.55	54	-13.45	AV

MIMO-802.11ax80

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
5210MHz									
V	10420	52.33	30.85	7.45	24.69	53.62	74	-20.38	PK
V	10420	40.96	30.85	7.45	24.69	42.25	54	-11.75	AV
V	15630	55.00	31.38	7.45	24.75	55.82	74	-18.18	PK
V	15630	43.07	31.38	7.45	24.75	43.89	54	-10.11	AV
V	20840	56.16	31.76	7.45	24.86	56.71	74	-17.29	PK
V	20840	42.65	31.76	7.45	24.86	43.20	54	-10.80	AV
H	10420	54.09	30.85	7.45	24.69	55.38	74	-18.62	PK
H	10420	41.05	30.85	7.45	24.69	42.34	54	-11.66	AV
H	15630	53.83	31.38	7.45	24.75	54.65	74	-19.35	PK
H	15630	43.59	31.38	7.45	24.75	44.41	54	-9.59	AV
H	20840	57.11	31.76	7.45	24.86	57.66	74	-16.34	PK
H	20840	40.08	31.76	7.45	24.86	40.63	54	-13.37	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
5775MHz									
V	11550	52.15	30.85	7.45	24.69	53.44	74	-20.56	PK
V	11550	41.19	30.85	7.45	24.69	42.48	54	-11.52	AV
V	17325	54.40	31.38	7.45	24.75	55.22	74	-18.78	PK
V	17325	41.45	31.38	7.45	24.75	42.27	54	-11.73	AV
V	23100	57.73	31.76	7.45	24.86	58.28	74	-15.72	PK
V	23100	39.84	31.76	7.45	24.86	40.39	54	-13.61	AV
H	11550	53.33	30.85	7.45	24.69	54.62	74	-19.38	PK
H	11550	41.56	30.85	7.45	24.69	42.85	54	-11.15	AV
H	17325	54.38	31.38	7.45	24.75	55.20	74	-18.80	PK
H	17325	41.35	31.38	7.45	24.75	42.17	54	-11.83	AV
H	23100	55.08	31.76	7.45	24.86	55.63	74	-18.37	PK
H	23100	42.50	31.76	7.45	24.86	43.05	54	-10.95	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Radiated Band Edge Test:

ANT1

Worse case mode:		802.11a		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	58.07	-0.12	57.95	74.00	-16.05	peak	H
	42.35	-0.12	42.23	54.00	-11.77	AV	H
5150	57.35	-0.12	57.23	74.00	-16.77	peak	V
	40.92	-0.12	40.80	54.00	-13.20	AV	V

Worse case mode:		802.11a		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	57.13	-0.12	57.01	74.00	-16.99	peak	H
	43.75	-0.12	43.63	54.00	-10.37	AV	H
5250	57.71	-0.12	57.59	74.00	-16.41	peak	V
	41.24	-0.12	41.12	54.00	-12.88	AV	V

Worse case mode:		802.11a		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	53.56	-0.12	53.44	68.2	-14.76	peak	H
5700	85.45	-0.12	85.33	105.2	-19.87	peak	H
5720	89.05	-0.12	88.93	110.8	-21.87	peak	H
5725	96.36	-0.12	96.24	122.2	-25.96	peak	H
5650	51.17	-0.12	51.05	68.2	-17.15	peak	V
5700	85.59	-0.12	85.47	105.2	-19.73	peak	V
5720	87.84	-0.12	87.72	110.8	-23.08	peak	V
5725	96.56	-0.12	96.44	122.2	-25.76	peak	V

Worse case mode:		802.11a		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	101.23	-0.12	101.11	122.2	-21.09	peak	H
5855	86.82	-0.12	86.70	110.8	-24.10	peak	H
5875	82.92	-0.12	82.80	105.2	-22.40	peak	H
5925	52.82	-0.12	52.70	68.2	-15.50	peak	H
5850	102.10	-0.12	101.98	122.2	-20.22	peak	V
5855	86.03	-0.12	85.91	110.8	-24.89	peak	V
5875	82.62	-0.12	82.50	105.2	-22.70	peak	V
5925	52.76	-0.12	52.64	68.2	-15.56	peak	V

Worse case mode:		802.11n20		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	57.46	-0.12	57.34	74.00	-16.66	peak	H
	43.76	-0.12	43.64	54.00	-10.36	AV	H
5150	59.24	-0.12	59.12	74.00	-14.88	peak	V
	41.80	-0.12	41.68	54.00	-12.32	AV	V

Worse case mode:		802.11n20		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	58.37	-0.12	58.25	74.00	-15.75	peak	H
	41.27	-0.12	41.15	54.00	-12.85	AV	H
5250	56.80	-0.12	56.68	74.00	-17.32	peak	V
	42.98	-0.12	42.86	54.00	-11.14	AV	V

Worse case mode:		802.11n20		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	100.20	-0.12	100.08	122.20	-22.12	peak	H
5700	87.36	-0.12	87.24	110.80	-23.56	peak	H
5720	84.32	-0.12	84.20	105.20	-21.00	peak	H
5725	51.55	-0.12	51.43	68.20	-16.77	peak	H
5650	104.33	-0.12	104.21	122.20	-17.99	peak	V
5700	88.18	-0.12	88.06	110.80	-22.74	peak	V
5720	85.04	-0.12	84.92	105.20	-20.28	peak	V
5725	52.55	-0.12	52.43	68.20	-15.77	peak	V

Worse case mode:		802.11n20		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	104.04	-0.12	103.92	122.20	-18.28	peak	H
5855	90.89	-0.12	90.77	110.80	-20.03	peak	H
5875	87.67	-0.12	87.55	105.20	-17.65	peak	H
5925	51.28	-0.12	51.16	68.20	-17.04	peak	H
5850	102.66	-0.12	102.54	122.20	-19.66	peak	V
5855	89.05	-0.12	88.93	110.80	-21.87	peak	V
5875	87.75	-0.12	87.63	105.20	-17.57	peak	V
5925	51.94	-0.12	51.82	68.20	-16.38	peak	V

Worse case mode:		802.11n40		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	58.78	-0.12	58.66	74.00	-15.34	peak	H

	40.48	-0.12	40.36	54.00	-13.64	AV	H
5150	56.61	-0.12	56.49	74.00	-17.51	peak	V
	40.61	-0.12	40.49	54.00	-13.51	AV	V

Worse case mode:		802.11n40		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	57.96	-0.12	57.84	74.00	-16.16	peak	H
	40.57	-0.12	40.45	54.00	-13.55	AV	H
5250	58.61	-0.12	58.49	74.00	-15.51	peak	V
	43.96	-0.12	43.84	54.00	-10.16	AV	V

Worse case mode:		802.11n40		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	51.00	-0.12	50.88	68.20	-17.32	peak	H
5700	85.74	-0.12	85.62	105.20	-19.58	peak	H
5720	89.59	-0.12	89.47	110.80	-21.33	peak	H
5725	96.74	-0.12	96.62	122.20	-25.58	peak	H
5650	50.98	-0.12	50.86	68.20	-17.34	peak	V
5700	85.47	-0.12	85.35	105.20	-19.85	peak	V
5720	90.21	-0.12	90.09	110.80	-20.71	peak	V
5725	98.63	-0.12	98.51	122.20	-23.69	peak	V

Worse case mode:		802.11n40		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	103.46	-0.12	103.34	122.20	-18.86	peak	H
5855	89.29	-0.12	89.17	110.80	-21.63	peak	H
5875	86.57	-0.12	86.45	105.20	-18.75	peak	H
5925	53.21	-0.12	53.09	68.20	-15.11	peak	H
5850	103.99	-0.12	103.87	122.20	-18.33	peak	V
5855	88.50	-0.12	88.38	110.80	-22.42	peak	V
5875	86.52	-0.12	86.40	105.20	-18.80	peak	V
5925	52.53	-0.12	52.41	68.20	-15.79	peak	V

Worse case mode:		802.11ac20		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	58.70	-0.12	58.58	74.00	-15.42	peak	H
	41.33	-0.12	41.21	54.00	-12.79	AV	H
5150	58.77	-0.12	58.65	74.00	-15.35	peak	V
	41.49	-0.12	41.37	54.00	-12.63	AV	V

Worse case mode:		802.11ac20		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	59.26	-0.12	59.14	74.00	-14.86	peak	H
	43.83	-0.12	43.71	54.00	-10.29	AV	H
5250	57.80	-0.12	57.68	74.00	-16.32	peak	V
	43.52	-0.12	43.40	54.00	-10.60	AV	V

Worse case mode:		802.11ac20		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	53.64	-0.12	53.52	68.20	-14.68	peak	H
5700	86.10	-0.12	85.98	105.20	-19.22	peak	H
5720	89.01	-0.12	88.89	110.80	-21.91	peak	H
5725	99.65	-0.12	99.53	122.20	-22.67	peak	H
5650	53.07	-0.12	52.95	68.20	-15.25	peak	V
5700	86.81	-0.12	86.69	105.20	-18.51	peak	V
5720	87.74	-0.12	87.62	110.80	-23.18	peak	V
5725	99.28	-0.12	99.16	122.20	-23.04	peak	V

Worse case mode:		802.11ac20		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	100.33	-0.12	100.21	122.20	-21.99	peak	H
5855	85.21	-0.12	85.09	110.80	-25.71	peak	H
5875	87.72	-0.12	87.60	105.20	-17.60	peak	H
5925	51.90	-0.12	51.78	68.20	-16.42	peak	H
5850	103.26	-0.12	103.14	122.20	-19.06	peak	V
5855	90.99	-0.12	90.87	110.80	-19.93	peak	V
5875	82.21	-0.12	82.09	105.20	-23.11	peak	V
5925	51.53	-0.12	51.41	68.20	-16.79	peak	V

Worse case mode:		802.11ac40		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	57.95	-0.12	57.83	74.00	-16.17	peak	H
	43.47	-0.12	43.35	54.00	-10.65	AV	H
5150	56.81	-0.12	56.69	74.00	-17.31	peak	V
	42.20	-0.12	42.08	54.00	-11.92	AV	V

Worse case mode:		802.11ac40		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	56.44	-0.12	56.32	74.00	-17.68	peak	H

	41.56	-0.12	41.44	54.00	-12.56	AV	H
5250	56.32	-0.12	56.20	74.00	-17.80	peak	V
	43.17	-0.12	43.05	54.00	-10.95	AV	V

Worse case mode:		802.11ac40		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	53.52	-0.12	53.40	68.20	-14.80	peak	H
5700	85.28	-0.12	85.16	105.20	-20.04	peak	H
5720	89.90	-0.12	89.78	110.80	-21.02	peak	H
5725	98.93	-0.12	98.81	122.20	-23.39	peak	H
5650	52.84	-0.12	52.72	68.20	-15.48	peak	V
5700	85.31	-0.12	85.19	105.20	-20.01	peak	V
5720	88.63	-0.12	88.51	110.80	-22.29	peak	V
5725	97.41	-0.12	97.29	122.20	-24.91	peak	V

Worse case mode:		802.11ac40		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	102.15	-0.12	102.03	122.20	-20.17	peak	H
5855	87.60	-0.12	87.48	110.80	-23.32	peak	H
5875	86.30	-0.12	86.18	105.20	-19.02	peak	H
5925	51.69	-0.12	51.57	68.20	-16.63	peak	H
5850	103.80	-0.12	103.68	122.20	-18.52	peak	V
5855	89.32	-0.12	89.20	110.80	-21.60	peak	V
5875	82.01	-0.12	81.89	105.20	-23.31	peak	V
5925	52.91	-0.12	52.79	68.20	-15.41	peak	V

Worse case mode:		802.11ac80		Test channel:		42	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	58.06	-0.12	57.94	74.00	-16.06	peak	H
	40.16	-0.12	40.04	54.00	-13.96	AV	H
5150	58.25	-0.12	58.13	74.00	-15.87	peak	V
	43.33	-0.12	43.21	54.00	-10.79	AV	V
5250	56.74	-0.12	56.62	74.00	-17.38	peak	H
	42.61	-0.12	42.49	54.00	-11.51	AV	H
5250	57.05	-0.12	56.93	74.00	-17.07	peak	V
	43.46	-0.12	43.34	54.00	-10.66	AV	V

Worse case mode:		802.11ac80		Test channel:		155	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	51.27	-0.12	51.15	68.20	-17.05	peak	H

5700	86.36	-0.12	86.24	105.20	-18.96	peak	H
5720	87.83	-0.12	87.71	110.80	-23.09	peak	H
5725	99.26	-0.12	99.14	122.20	-23.06	peak	H
5650	50.83	-0.12	50.71	68.20	-17.49	peak	V
5700	86.83	-0.12	86.71	105.20	-18.49	peak	V
5720	87.85	-0.12	87.73	110.80	-23.07	peak	V
5725	96.01	-0.12	95.89	122.20	-26.31	peak	V
5850	100.54	-0.12	100.42	122.20	-21.78	peak	H
5855	87.00	-0.12	86.88	110.80	-23.92	peak	H
5875	87.19	-0.12	87.07	105.20	-18.13	peak	H
5925	50.14	-0.12	50.02	68.20	-18.18	peak	H
5850	104.72	-0.12	104.60	122.20	-17.60	peak	V
5855	88.20	-0.12	88.08	110.80	-22.72	peak	V
5875	87.80	-0.12	87.68	105.20	-17.52	peak	V
5925	53.26	-0.12	53.14	68.20	-15.06	peak	V

Worse case mode:		802.11ax20		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	58.04	-0.12	57.92	74.00	-16.08	peak	H
	40.47	-0.12	40.35	54.00	-13.65	AV	H
5150	56.35	-0.12	56.23	74.00	-17.77	peak	V
	41.46	-0.12	41.34	54.00	-12.66	AV	V

Worse case mode:		802.11ax20		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	57.01	-0.12	56.89	74.00	-17.11	peak	H
	40.16	-0.12	40.04	54.00	-13.96	AV	H
5250	57.00	-0.12	56.88	74.00	-17.12	peak	V
	43.29	-0.12	43.17	54.00	-10.83	AV	V

Worse case mode:		802.11ax20		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	53.60	-0.12	53.48	68.20	-14.72	peak	H
5700	86.81	-0.12	86.69	105.20	-18.51	peak	H
5720	88.05	-0.12	87.93	110.80	-22.87	peak	H
5725	99.09	-0.12	98.97	122.20	-23.23	peak	H
5650	53.94	-0.12	53.82	68.20	-14.38	peak	V
5700	87.62	-0.12	87.50	105.20	-17.70	peak	V
5720	90.66	-0.12	90.54	110.80	-20.26	peak	V
5725	99.09	-0.12	98.97	122.20	-23.23	peak	V

Worse case mode:		802.11ax20		Test channel:		165	
------------------	--	------------	--	---------------	--	-----	--

Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	100.04	-0.12	99.92	122.20	-22.28	peak	H
5855	85.27	-0.12	85.15	110.80	-25.65	peak	H
5875	83.91	-0.12	83.79	105.20	-21.41	peak	H
5925	50.14	-0.12	50.02	68.20	-18.18	peak	H
5850	103.69	-0.12	103.57	122.20	-18.63	peak	V
5855	85.74	-0.12	85.62	110.80	-25.18	peak	V
5875	84.98	-0.12	84.86	105.20	-20.34	peak	V
5925	53.42	-0.12	53.30	68.20	-14.90	peak	V

Worse case mode:		802.11ax40		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	56.63	-0.12	56.51	74.00	-17.49	peak	H
	41.74	-0.12	41.62	54.00	-12.38	AV	H
5150	57.31	-0.12	57.19	74.00	-16.81	peak	V
	43.46	-0.12	43.34	54.00	-10.66	AV	V

Worse case mode:		802.11ac40		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	57.91	-0.12	57.79	74.00	-16.21	peak	H
	40.12	-0.12	40.00	54.00	-14.00	AV	H
5250	59.08	-0.12	58.96	74.00	-15.04	peak	V
	42.89	-0.12	42.77	54.00	-11.23	AV	V

Worse case mode:		802.11ax40		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	51.98	-0.12	51.86	68.20	-16.34	peak	H
5700	86.72	-0.12	86.60	105.20	-18.60	peak	H
5720	87.11	-0.12	86.99	110.80	-23.81	peak	H
5725	98.02	-0.12	97.90	122.20	-24.30	peak	H
5650	52.62	-0.12	52.50	68.20	-15.70	peak	V
5700	86.99	-0.12	86.87	105.20	-18.33	peak	V
5720	89.88	-0.12	89.76	110.80	-21.04	peak	V
5725	98.40	-0.12	98.28	122.20	-23.92	peak	V

Worse case mode:		802.11ax40		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	104.74	-0.12	104.62	122.20	-17.58	peak	H
5855	86.70	-0.12	86.58	110.80	-24.22	peak	H

5875	84.96	-0.12	84.84	105.20	-20.36	peak	H
5925	50.63	-0.12	50.51	68.20	-17.69	peak	H
5850	100.96	-0.12	100.84	122.20	-21.36	peak	V
5855	89.35	-0.12	89.23	110.80	-21.57	peak	V
5875	85.02	-0.12	84.90	105.20	-20.30	peak	V
5925	53.37	-0.12	53.25	68.20	-14.95	peak	V

Worse case mode:		802.11ax80		Test channel:		42	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	59.32	-0.12	59.20	74.00	-14.80	peak	H
	43.98	-0.12	43.86	54.00	-10.14	AV	H
5150	58.08	-0.12	57.96	74.00	-16.04	peak	V
	43.75	-0.12	43.63	54.00	-10.37	AV	V
5250	58.83	-0.12	58.71	74.00	-15.29	peak	H
	43.42	-0.12	43.30	54.00	-10.70	AV	H
5250	55.94	-0.12	55.82	74.00	-18.18	peak	V
	40.48	-0.12	40.36	54.00	-13.64	AV	V

Worse case mode:		802.11ax80		Test channel:		155	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	51.90	-0.12	51.78	68.20	-16.42	peak	H
5700	85.04	-0.12	84.92	105.20	-20.28	peak	H
5720	87.57	-0.12	87.45	110.80	-23.35	peak	H
5725	97.74	-0.12	97.62	122.20	-24.58	peak	H
5650	50.57	-0.12	50.45	68.20	-17.75	peak	V
5700	86.05	-0.12	85.93	105.20	-19.27	peak	V
5720	89.41	-0.12	89.29	110.80	-21.51	peak	V
5725	97.73	-0.12	97.61	122.20	-24.59	peak	V
5850	100.46	-0.12	100.34	122.20	-21.86	peak	H
5855	88.83	-0.12	88.71	110.80	-22.09	peak	H
5875	82.76	-0.12	82.64	105.20	-22.56	peak	H
5925	52.78	-0.12	52.66	68.20	-15.54	peak	H
5850	102.31	-0.12	102.19	122.20	-20.01	peak	V
5855	90.06	-0.12	89.94	110.80	-20.86	peak	V
5875	87.02	-0.12	86.90	105.20	-18.30	peak	V
5925	51.27	-0.12	51.15	68.20	-17.05	peak	V

ANT2

Worse case mode:		802.11a		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	56.52	-0.12	56.40	74.00	-17.60	peak	H
	40.70	-0.12	40.58	54.00	-13.42	AV	H
5150	57.74	-0.12	57.62	74.00	-16.38	peak	V
	41.38	-0.12	41.26	54.00	-12.74	AV	V

Worse case mode:		802.11a		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	59.96	-0.12	59.84	74.00	-14.16	peak	H
	42.49	-0.12	42.37	54.00	-11.63	AV	H
5250	58.14	-0.12	58.02	74.00	-15.98	peak	V
	42.84	-0.12	42.72	54.00	-11.28	AV	V

Worse case mode:		802.11a		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	53.16	-0.12	53.04	68.20	-15.16	peak	H
5700	87.20	-0.12	87.08	105.20	-18.12	peak	H
5720	88.42	-0.12	88.30	110.80	-22.50	peak	H
5725	97.09	-0.12	96.97	122.20	-25.23	peak	H
5650	50.35	-0.12	50.23	68.20	-17.97	peak	V
5700	87.86	-0.12	87.74	105.20	-17.46	peak	V
5720	88.97	-0.12	88.85	110.80	-21.95	peak	V
5725	97.11	-0.12	96.99	122.20	-25.21	peak	V

Worse case mode:		802.11a		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	102.89	-0.12	102.77	122.20	-19.43	peak	H
5855	90.55	-0.12	90.43	110.80	-20.37	peak	H
5875	83.68	-0.12	83.56	105.20	-21.64	peak	H
5925	51.44	-0.12	51.32	68.20	-16.88	peak	H
5850	102.63	-0.12	102.51	122.20	-19.69	peak	V
5855	86.12	-0.12	86.00	110.80	-24.80	peak	V
5875	86.13	-0.12	86.01	105.20	-19.19	peak	V
5925	52.24	-0.12	52.12	68.20	-16.08	peak	V

Worse case mode:		802.11n20		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	59.11	-0.12	58.99	74.00	-15.01	peak	H
	41.65	-0.12	41.53	54.00	-12.47	AV	H
5150	56.54	-0.12	56.42	74.00	-17.58	peak	V
	42.31	-0.12	42.19	54.00	-11.81	AV	V

Worse case mode:		802.11n20		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	57.41	-0.12	57.29	74.00	-16.71	peak	H
	42.43	-0.12	42.31	54.00	-11.69	AV	H
5250	55.44	-0.12	55.32	74.00	-18.68	peak	V
	40.47	-0.12	40.35	54.00	-13.65	AV	V

Worse case mode:		802.11n20		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	49.08	-0.12	48.96	68.20	-19.24	peak	H
5700	85.66	-0.12	85.54	105.20	-19.66	peak	H
5720	87.75	-0.12	87.63	110.80	-23.17	peak	H
5725	96.62	-0.12	96.50	122.20	-25.70	peak	H
5650	51.19	-0.12	51.07	68.20	-17.13	peak	V
5700	87.36	-0.12	87.24	105.20	-17.96	peak	V
5720	90.99	-0.12	90.87	110.80	-19.93	peak	V
5725	96.15	-0.12	96.03	122.20	-26.17	peak	V

Worse case mode:		802.11n20		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	101.60	-0.12	101.48	122.20	-20.72	peak	H
5855	86.19	-0.12	86.07	110.80	-24.73	peak	H
5875	83.81	-0.12	83.69	105.20	-21.51	peak	H
5925	53.32	-0.12	53.20	68.20	-15.00	peak	H
5850	101.06	-0.12	100.94	122.20	-21.26	peak	V
5855	89.18	-0.12	89.06	110.80	-21.74	peak	V
5875	86.24	-0.12	86.12	105.20	-19.08	peak	V
5925	51.32	-0.12	51.20	68.20	-17.00	peak	V

Worse case mode:		802.11n40		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	59.84	-0.12	59.72	74.00	-14.28	peak	H

	40.40	-0.12	40.28	54.00	-13.72	AV	H
5150	59.09	-0.12	58.97	74.00	-15.03	peak	V
	42.14	-0.12	42.02	54.00	-11.98	AV	V

Worse case mode:		802.11n40		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	58.74	-0.12	58.62	74.00	-15.38	peak	H
	43.65	-0.12	43.53	54.00	-10.47	AV	H
5250	57.16	-0.12	57.04	74.00	-16.96	peak	V
	43.93	-0.12	43.81	54.00	-10.19	AV	V

Worse case mode:		802.11n40		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	53.26	-0.12	53.14	68.20	-15.06	peak	H
5700	85.90	-0.12	85.78	105.20	-19.42	peak	H
5720	87.83	-0.12	87.71	110.80	-23.09	peak	H
5725	99.83	-0.12	99.71	122.20	-22.49	peak	H
5650	49.46	-0.12	49.34	68.20	-18.86	peak	V
5700	85.81	-0.12	85.69	105.20	-19.51	peak	V
5720	88.86	-0.12	88.74	110.80	-22.06	peak	V
5725	97.86	-0.12	97.74	122.20	-24.46	peak	V

Worse case mode:		802.11n40		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	105.97	-0.12	105.85	122.20	-16.35	peak	H
5855	89.15	-0.12	89.03	110.80	-21.77	peak	H
5875	85.91	-0.12	85.79	105.20	-19.41	peak	H
5925	52.40	-0.12	52.28	68.20	-15.92	peak	H
5850	105.62	-0.12	105.50	122.20	-16.70	peak	V
5855	86.19	-0.12	86.07	110.80	-24.73	peak	V
5875	85.20	-0.12	85.08	105.20	-20.12	peak	V
5925	51.84	-0.12	51.72	68.20	-16.48	peak	V

Worse case mode:		802.11ac20		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	59.59	-0.12	59.47	74.00	-14.53	peak	H
	40.16	-0.12	40.04	54.00	-13.96	AV	H
5150	58.35	-0.12	58.23	74.00	-15.77	peak	V
	40.23	-0.12	40.11	54.00	-13.89	AV	V

Worse case mode:		802.11ac20		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	56.82	-0.12	56.70	74.00	-17.30	peak	H
	40.30	-0.12	40.18	54.00	-13.82	AV	H
5250	57.55	-0.12	57.43	74.00	-16.57	peak	V
	41.59	-0.12	41.47	54.00	-12.53	AV	V

Worse case mode:		802.11ac20		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	51.89	-0.12	51.77	68.20	-16.43	peak	H
5700	87.74	-0.12	87.62	105.20	-17.58	peak	H
5720	87.60	-0.12	87.48	110.80	-23.32	peak	H
5725	97.45	-0.12	97.33	122.20	-24.87	peak	H
5650	50.33	-0.12	50.21	68.20	-17.99	peak	V
5700	85.31	-0.12	85.19	105.20	-20.01	peak	V
5720	88.95	-0.12	88.83	110.80	-21.97	peak	V
5725	96.70	-0.12	96.58	122.20	-25.62	peak	V

Worse case mode:		802.11ac20		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	100.70	-0.12	100.58	122.20	-21.62	peak	H
5855	87.17	-0.12	87.05	110.80	-23.75	peak	H
5875	85.52	-0.12	85.40	105.20	-19.80	peak	H
5925	52.88	-0.12	52.76	68.20	-15.44	peak	H
5850	102.88	-0.12	102.76	122.20	-19.44	peak	V
5855	85.35	-0.12	85.23	110.80	-25.57	peak	V
5875	83.70	-0.12	83.58	105.20	-21.62	peak	V
5925	51.75	-0.12	51.63	68.20	-16.57	peak	V

Worse case mode:		802.11ac40		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	59.26	-0.12	59.14	74.00	-14.86	peak	H
	43.82	-0.12	43.70	54.00	-10.30	AV	H
5150	56.84	-0.12	56.72	74.00	-17.28	peak	V
	43.69	-0.12	43.57	54.00	-10.43	AV	V

Worse case mode:		802.11ac40		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	59.21	-0.12	59.09	74.00	-14.91	peak	H

	42.79	-0.12	42.67	54.00	-11.33	AV	H
5250	58.33	-0.12	58.21	74.00	-15.79	peak	V
	43.06	-0.12	42.94	54.00	-11.06	AV	V

Worse case mode:		802.11 ac40		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	49.48	-0.12	49.36	68.20	-18.84	peak	H
5700	87.73	-0.12	87.61	105.20	-17.59	peak	H
5720	88.89	-0.12	88.77	110.80	-22.03	peak	H
5725	96.26	-0.12	96.14	122.20	-26.06	peak	H
5650	52.29	-0.12	52.17	68.20	-16.03	peak	V
5700	87.89	-0.12	87.77	105.20	-17.43	peak	V
5720	88.08	-0.12	87.96	110.80	-22.84	peak	V
5725	97.68	-0.12	97.56	122.20	-24.64	peak	V

Worse case mode:		802.11n20		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	104.99	-0.12	104.87	122.20	-17.33	peak	H
5855	85.52	-0.12	85.40	110.80	-25.40	peak	H
5875	87.73	-0.12	87.61	105.20	-17.59	peak	H
5925	52.13	-0.12	52.01	68.20	-16.19	peak	H
5850	102.86	-0.12	102.74	122.20	-19.46	peak	V
5855	90.83	-0.12	90.71	110.80	-20.09	peak	V
5875	85.30	-0.12	85.18	105.20	-20.02	peak	V
5925	52.48	-0.12	52.36	68.20	-15.84	peak	V

Worse case mode:		802.11ac80		Test channel:		42	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	58.95	-0.12	58.83	74.00	-15.17	peak	H
	41.10	-0.12	40.98	54.00	-13.02	AV	H
5150	56.17	-0.12	56.05	74.00	-17.95	peak	V
	43.13	-0.12	43.01	54.00	-10.99	AV	V
5250	58.38	-0.12	58.26	74.00	-15.74	peak	H
	40.12	-0.12	40.00	54.00	-14.00	AV	H
5250	58.08	-0.12	57.96	74.00	-16.04	peak	V
	40.74	-0.12	40.62	54.00	-13.38	AV	V

Worse case mode:		802.11ac80		Test channel:		155	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	49.97	-0.12	49.85	68.20	-18.35	peak	H

5700	86.56	-0.12	86.44	105.20	-18.76	peak	H
5720	89.58	-0.12	89.46	110.80	-21.34	peak	H
5725	99.45	-0.12	99.33	122.20	-22.87	peak	H
5650	49.21	-0.12	49.09	68.20	-19.11	peak	V
5700	85.54	-0.12	85.42	105.20	-19.78	peak	V
5720	90.56	-0.12	90.44	110.80	-20.36	peak	V
5725	98.26	-0.12	98.14	122.20	-24.06	peak	V
5850	103.93	-0.12	103.81	122.20	-18.39	peak	H
5855	89.60	-0.12	89.48	110.80	-21.32	peak	H
5875	84.69	-0.12	84.57	105.20	-20.63	peak	H
5925	51.64	-0.12	51.52	68.20	-16.68	peak	H
5850	100.03	-0.12	99.91	122.20	-22.29	peak	V
5855	85.49	-0.12	85.37	110.80	-25.43	peak	V
5875	83.35	-0.12	83.23	105.20	-21.97	peak	V
5925	51.46	-0.12	51.34	68.20	-16.86	peak	V

Worse case mode:		802.11ax20		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	58.56	-0.12	58.44	74.00	-15.56	peak	H
	43.26	-0.12	43.14	54.00	-10.86	AV	H
5150	57.33	-0.12	57.21	74.00	-16.79	peak	V
	41.44	-0.12	41.32	54.00	-12.68	AV	V

Worse case mode:		802.11ax20		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	57.29	-0.12	57.17	74.00	-16.83	peak	H
	43.99	-0.12	43.87	54.00	-10.13	AV	H
5250	58.27	-0.12	58.15	74.00	-15.85	peak	V
	42.03	-0.12	41.91	54.00	-12.09	AV	V

Worse case mode:		802.11ax20		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	50.57	-0.12	50.45	68.20	-17.75	peak	H
5700	86.79	-0.12	86.67	105.20	-18.53	peak	H
5720	89.07	-0.12	88.95	110.80	-21.85	peak	H
5725	97.89	-0.12	97.77	122.20	-24.43	peak	H
5650	53.01	-0.12	52.89	68.20	-15.31	peak	V
5700	85.30	-0.12	85.18	105.20	-20.02	peak	V
5720	87.94	-0.12	87.82	110.80	-22.98	peak	V
5725	98.42	-0.12	98.30	122.20	-23.90	peak	V

Worse case mode:		802.11ax20		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	102.87	-0.12	102.75	122.20	-19.45	peak	H
5855	88.76	-0.12	88.64	110.80	-22.16	peak	H
5875	84.49	-0.12	84.37	105.20	-20.83	peak	H
5925	52.60	-0.12	52.48	68.20	-15.72	peak	H
5850	105.14	-0.12	105.02	122.20	-17.18	peak	V
5855	88.74	-0.12	88.62	110.80	-22.18	peak	V
5875	84.21	-0.12	84.09	105.20	-21.11	peak	V
5925	50.36	-0.12	50.24	68.20	-17.96	peak	V

Worse case mode:		802.11ax40		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	59.81	-0.12	59.69	74.00	-14.31	peak	H
	41.19	-0.12	41.07	54.00	-12.93	AV	H
5150	59.20	-0.12	59.08	74.00	-14.92	peak	V
	42.38	-0.12	42.26	54.00	-11.74	AV	V

Worse case mode:		802.11ac40		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	58.32	-0.12	58.20	74.00	-15.80	peak	H
	40.71	-0.12	40.59	54.00	-13.41	AV	H
5250	55.38	-0.12	55.26	74.00	-18.74	peak	V
	42.56	-0.12	42.44	54.00	-11.56	AV	V

Worse case mode:		802.11ax40		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	53.65	-0.12	53.53	68.20	-14.67	peak	H
5700	86.37	-0.12	86.25	105.20	-18.95	peak	H
5720	89.24	-0.12	89.12	110.80	-21.68	peak	H
5725	98.00	-0.12	97.88	122.20	-24.32	peak	H
5650	50.59	-0.12	50.47	68.20	-17.73	peak	V
5700	87.18	-0.12	87.06	105.20	-18.14	peak	V
5720	90.25	-0.12	90.13	110.80	-20.67	peak	V
5725	97.10	-0.12	96.98	122.20	-25.22	peak	V

Worse case mode:		802.11ax40		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	100.73	-0.12	100.61	122.20	-21.59	peak	H

5855	90.22	-0.12	90.10	110.80	-20.70	peak	H
5875	83.70	-0.12	83.58	105.20	-21.62	peak	H
5925	50.93	-0.12	50.81	68.20	-17.39	peak	H
5850	100.39	-0.12	100.27	122.20	-21.93	peak	V
5855	88.42	-0.12	88.30	110.80	-22.50	peak	V
5875	86.73	-0.12	86.61	105.20	-18.59	peak	V
5925	50.07	-0.12	49.95	68.20	-18.25	peak	V

Worse case mode:		802.11ax80		Test channel:		42	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	57.83	-0.12	57.71	74.00	-16.29	peak	H
	43.16	-0.12	43.04	54.00	-10.96	AV	H
5150	58.52	-0.12	58.40	74.00	-15.60	peak	V
	41.46	-0.12	41.34	54.00	-12.66	AV	V
5250	57.39	-0.12	57.27	74.00	-16.73	peak	H
	43.92	-0.12	43.80	54.00	-10.20	AV	H
5250	56.23	-0.12	56.11	74.00	-17.89	peak	V
	43.87	-0.12	43.75	54.00	-10.25	AV	V

Worse case mode:		802.11ax80		Test channel:		155	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	50.21	-0.12	50.09	68.20	-18.11	peak	H
5700	85.03	-0.12	84.91	105.20	-20.29	peak	H
5720	88.80	-0.12	88.68	110.80	-22.12	peak	H
5725	98.14	-0.12	98.02	122.20	-24.18	peak	H
5650	49.79	-0.12	49.67	68.20	-18.53	peak	V
5700	86.81	-0.12	86.69	105.20	-18.51	peak	V
5720	87.25	-0.12	87.13	110.80	-23.67	peak	V
5725	99.34	-0.12	99.22	122.20	-22.98	peak	V
5850	102.19	-0.12	102.07	122.20	-20.13	peak	H
5855	87.52	-0.12	87.40	110.80	-23.40	peak	H
5875	82.47	-0.12	82.35	105.20	-22.85	peak	H
5925	53.50	-0.12	53.38	68.20	-14.82	peak	H
5850	100.23	-0.12	100.11	122.20	-22.09	peak	V
5855	86.96	-0.12	86.84	110.80	-23.96	peak	V
5875	84.38	-0.12	84.26	105.20	-20.94	peak	V
5925	51.37	-0.12	51.25	68.20	-16.95	peak	V

Factor =Antenna Factor + Cable Loss – Pre-amplifier,

5. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)
Test Method:	KDB 789033 D02 v02r01

5.1 APPLIED PROCEDURES / LIMIT

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


LIMIT:	U-NII-1	17DBM/MHZ
	U-NII-3	30DBM/500KHZ

5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

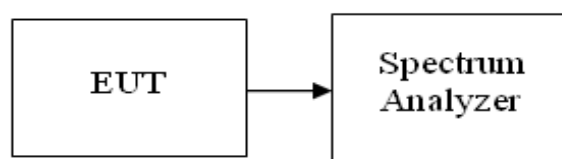5.4 TEST SETUP

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V
Test Mode :	TX frequency band 1&band4		

BAND1

802.11 Mode	Channel No.	Frequency [MHz]	Measured Power Spectral Density [dBm/MHz]		Power Spectral Density Limit [dBm/MHz]	MIMO/CDD Power Density [dBm/MHz]	MIMO/CDD Power Density Limit [dBm/MHz]
			ANT1	ANT2			
a	36	5180	8.63	10.003	17	/	/
	40	5200	8.559	10.139	17	/	/
	48	5240	7.939	9.33	17	/	/
n (20MHz)	36	5180	7.642	9.089	17	11.44	14.99
	40	5200	7.26	8.752	17	11.08	14.99
	48	5240	6.936	8.226	17	10.64	14.99
n (40MHz)	38	5190	3.705	5.213	17	7.53	14.99
	46	5230	3.505	4.491	17	7.04	14.99
ac (20MHz)	36	5180	7.441	8.751	17	11.16	14.99
	40	5200	7.204	8.74	17	11.05	14.99
	48	5240	7.237	8.633	17	11.00	14.99
ac(40MHz)	38	5190	3.433	5.298	17	7.48	14.99
	46	5230	3.181	4.271	17	6.77	14.99
ac(80MHz)	42	5210	0.506	1.648	17	4.12	14.99
ax (20MHz)	36	5180	9.059	7.743	17	11.46	14.99
	40	5200	8.72	7.252	17	11.06	14.99
	48	5240	8.206	6.808	17	10.57	14.99
ax(40MHz)	38	5190	6.758	4.458	17	8.77	14.99
	46	5230	6.036	4.883	17	8.51	14.99
ax(80MHz)	42	5210	3.753	1.683	17	5.85	14.99

BAND 4


802.11 Mode	Channel No.	Frequency [MHz]	Meas PSD [dBm/510kHz]		Meas PSD [dBm/500kHz]		MIMO/CDD Power Density Limit [dBm/500kHz]
			ANT1	ANT2	ANT1	ANT2	
a	149	5745	4.529	6.126	4.443	6.040	30
	157	5785	4.654	6.008	4.568	5.922	30
	165	5825	4.528	4.515	4.442	4.429	30
n (20MHz)	149	5745	4.469	5.077	4.383	4.991	30
	157	5785	4.945	4.897	4.859	4.811	30
	165	5825	3.72	2.835	3.634	2.749	30
n (40MHz)	151	5755	1.586	1.819	1.500	1.733	30
	159	5795	1.084	0.775	0.998	0.689	30
ac (20MHz)	149	5745	4.003	5.167	3.917	5.081	30
	157	5785	4.788	4.247	4.702	4.161	30

	165	5825	3.986	3.992	3.900	3.906	30
ac(40MHz)	151	5755	0.293	1.74	0.207	1.654	30
	159	5795	0.491	0.199	0.405	0.113	30
ac(80MHz)	155	5775	-2.782	-1.975	-2.868	-2.061	30
ax (20MHz)	149	5745	4.648	5.75	4.562	5.664	30
	157	5785	4.813	5.569	4.727	5.483	30
	165	5825	3.004	5.076	2.918	4.990	30
ax(40MHz)	151	5755	1.708	3.284	1.622	3.198	30
	159	5795	1.171	2.674	1.085	2.588	30
ax(80MHz)	155	5775	-0.817	0.293	-0.903	0.207	30


Note: Covert PSD [dBm/510KHz]= PSD[dBm/510KHz]+10*log(500/510)

802.11 Mode	Channel No.	Frequency [MHz]	Meas PSD [dBm/500kHz]		MIMO/CDD Power Density [dBm/500kHz]	MIMO/CDD Power Density Limit [dBm/500kHz]
			ANT1	ANT2		
a	149	5745	4.443	6.040	/	/
	157	5785	4.568	5.922	/	/
	165	5825	4.442	4.429	/	/
n (20MHz)	149	5745	4.383	4.991	7.71	27.99
	157	5785	4.859	4.811	7.85	27.99
	165	5825	3.634	2.749	6.22	27.99
n (40MHz)	151	5755	1.500	1.733	4.63	27.99
	159	5795	0.998	0.689	3.86	27.99
ac (20MHz)	149	5745	3.917	5.081	7.55	27.99
	157	5785	4.702	4.161	7.45	27.99
	165	5825	3.900	3.906	6.91	27.99
ac(40MHz)	151	5755	0.207	1.654	4.00	27.99
	159	5795	0.405	0.113	3.27	27.99
ac(80MHz)	155	5775	-2.868	-2.061	0.56	27.99
ax (20MHz)	149	5745	4.562	5.664	8.158	27.99
	157	5785	4.727	5.483	8.132	27.99
	165	5825	2.918	4.990	7.087	27.99
ax(40MHz)	151	5755	1.622	3.198	5.491	27.99
	159	5795	1.085	2.588	4.911	27.99
ax(80MHz)	155	5775	-0.903	0.207	2.698	27.99


band 1 – 802.11a

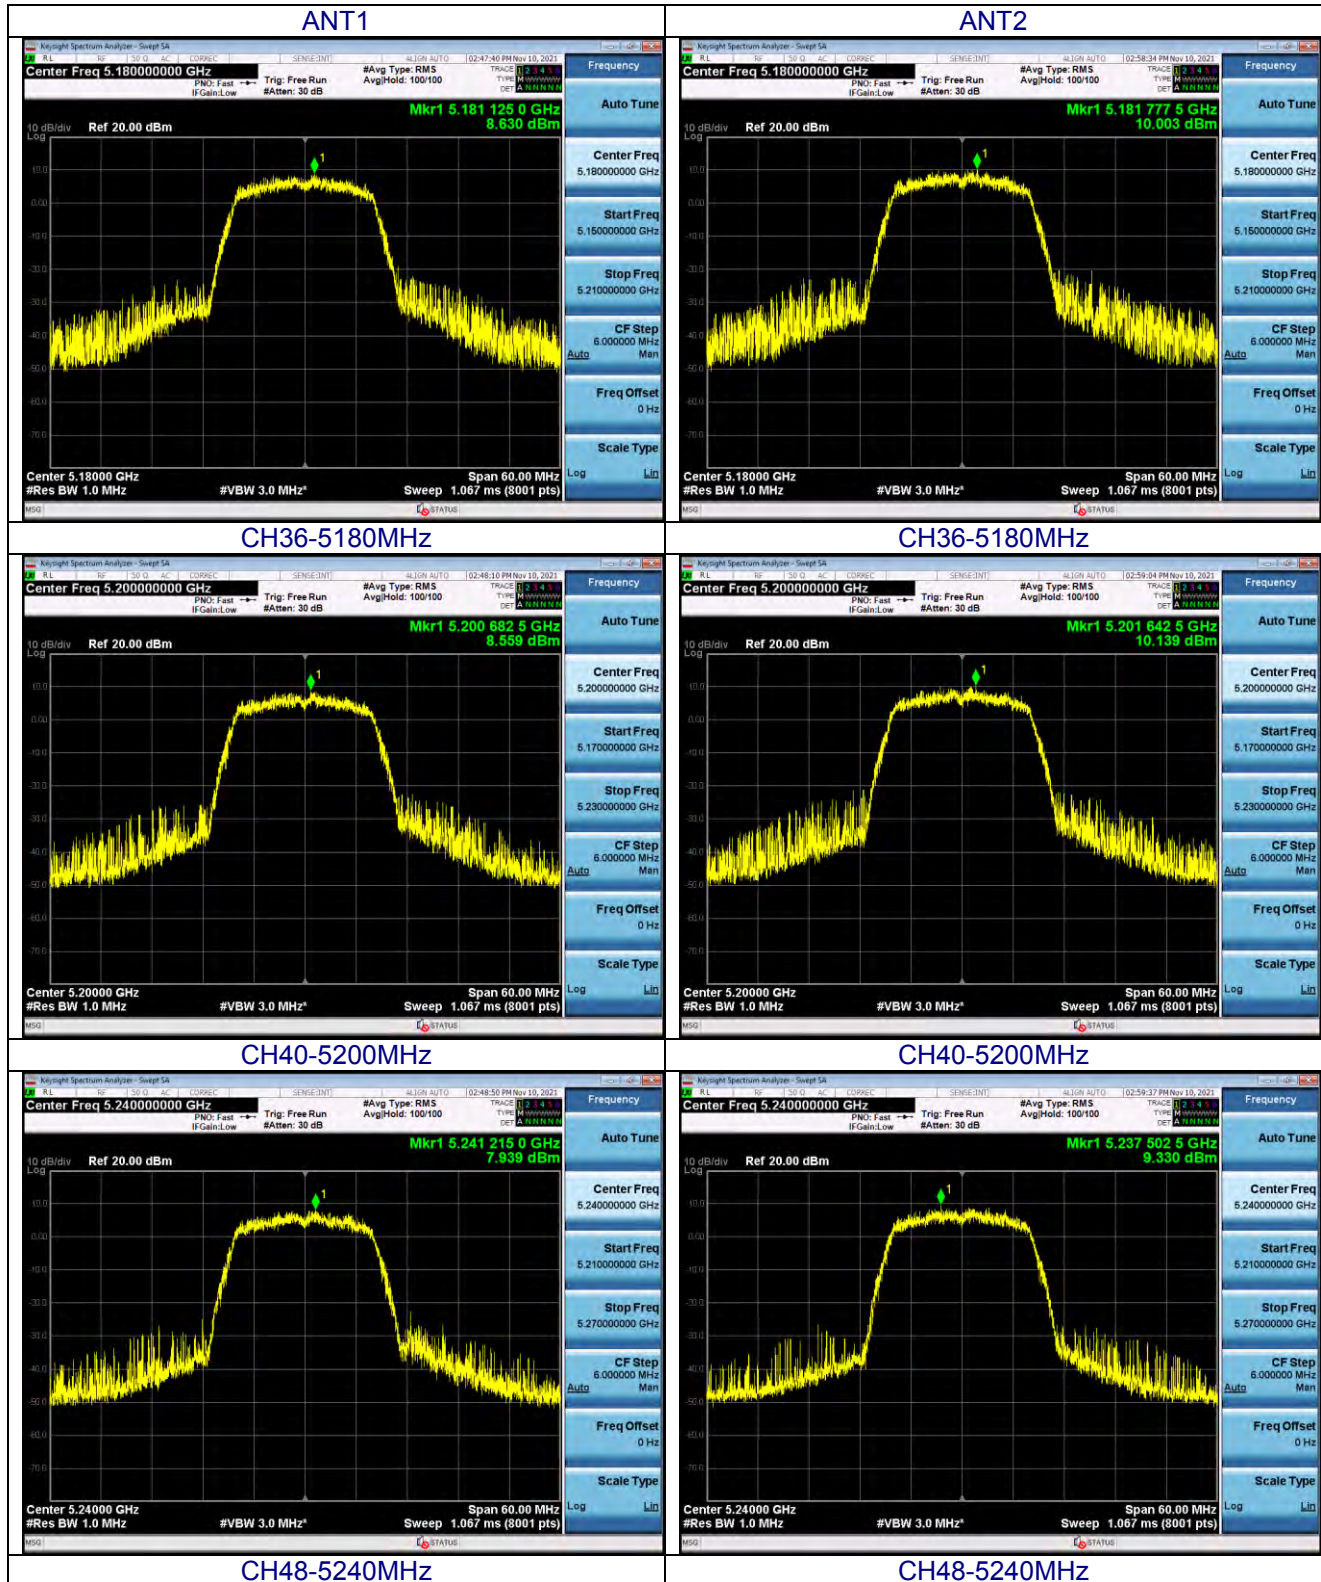


band 1 – 802.11n (20MHz)

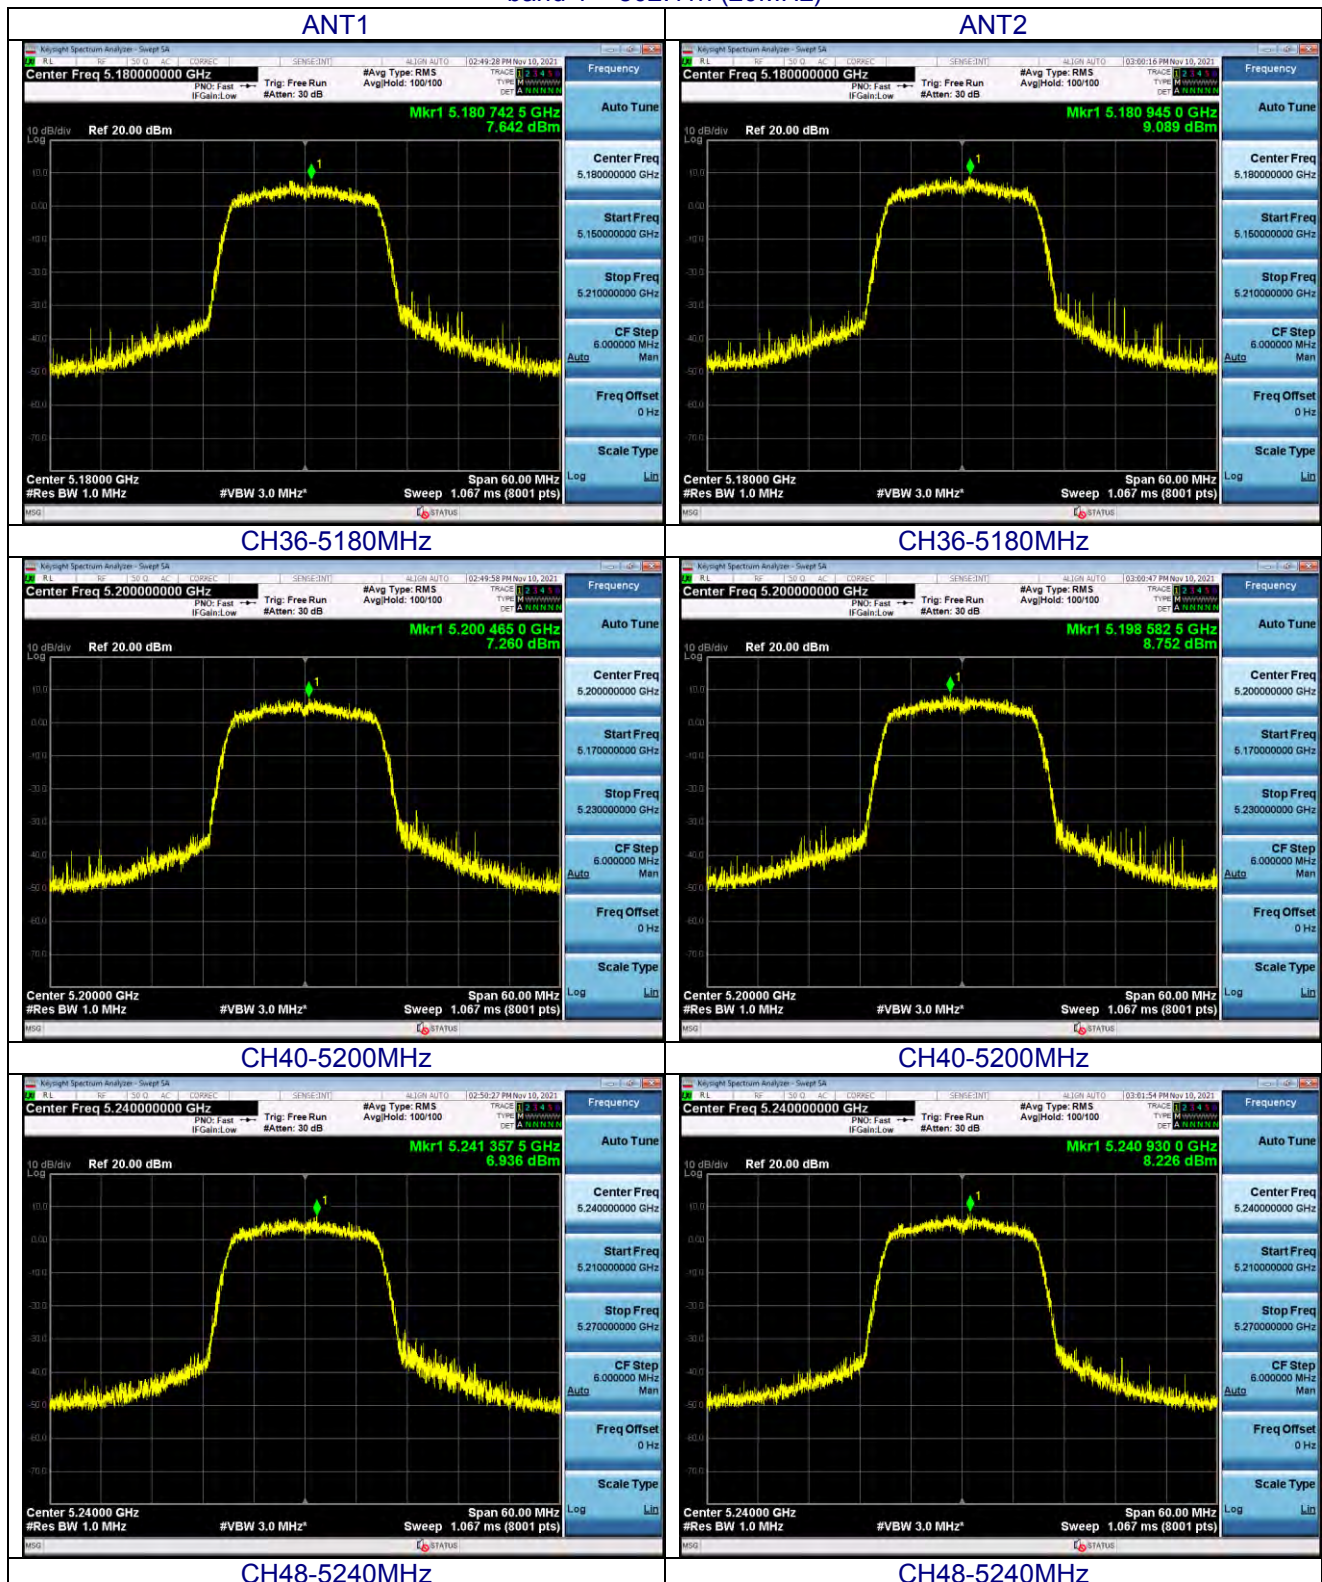


band 1 – 802.11n (40MHz)

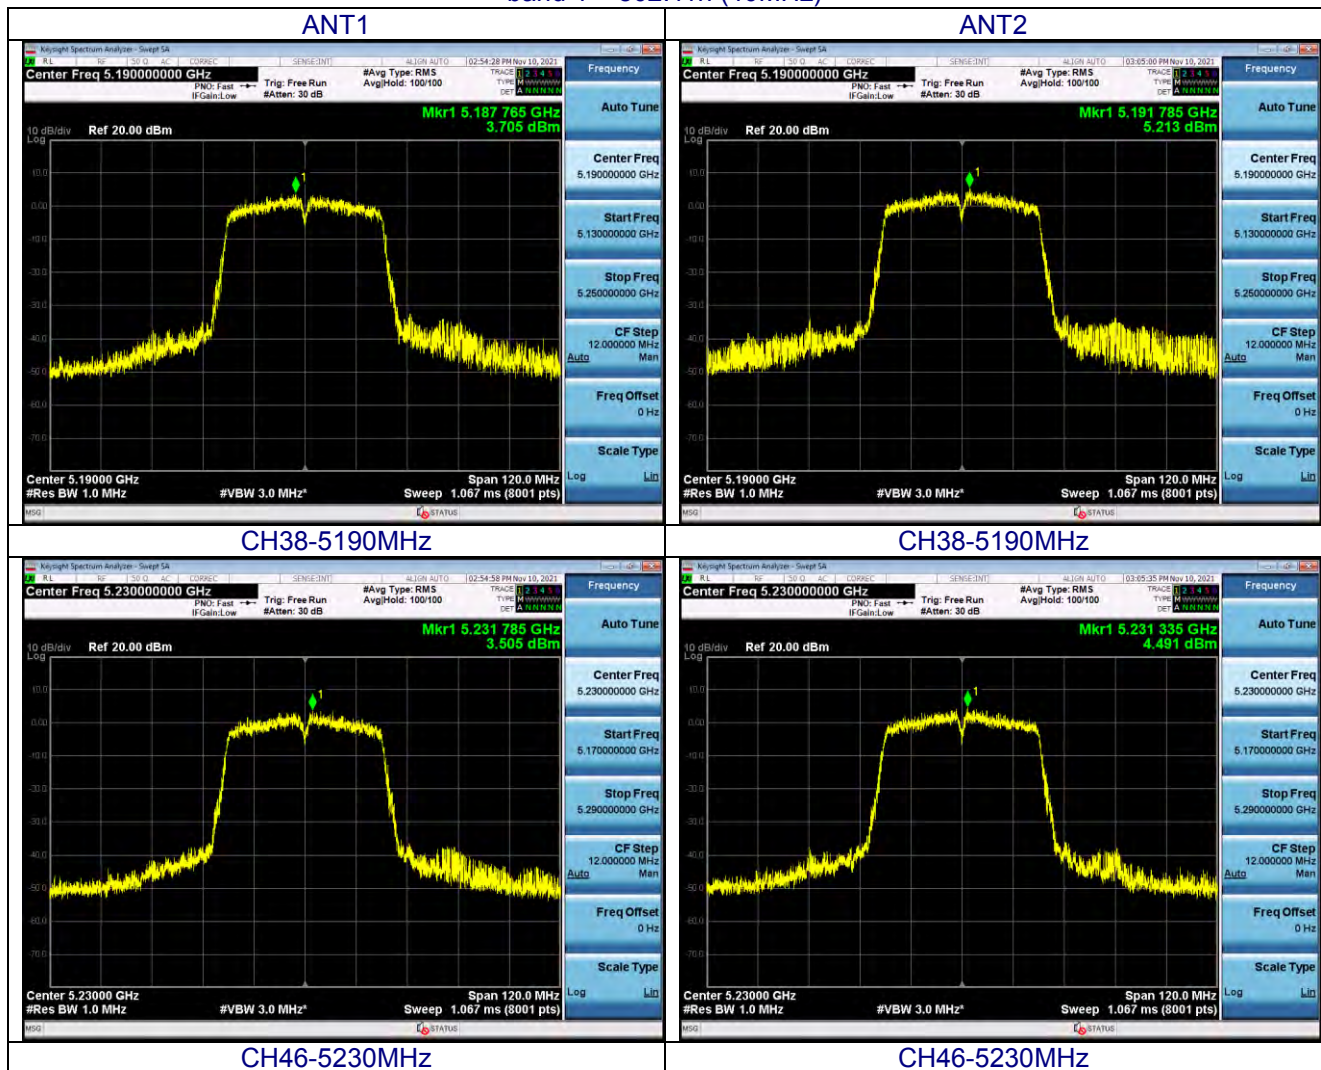


band 1 – 802.11ac (20MHz)

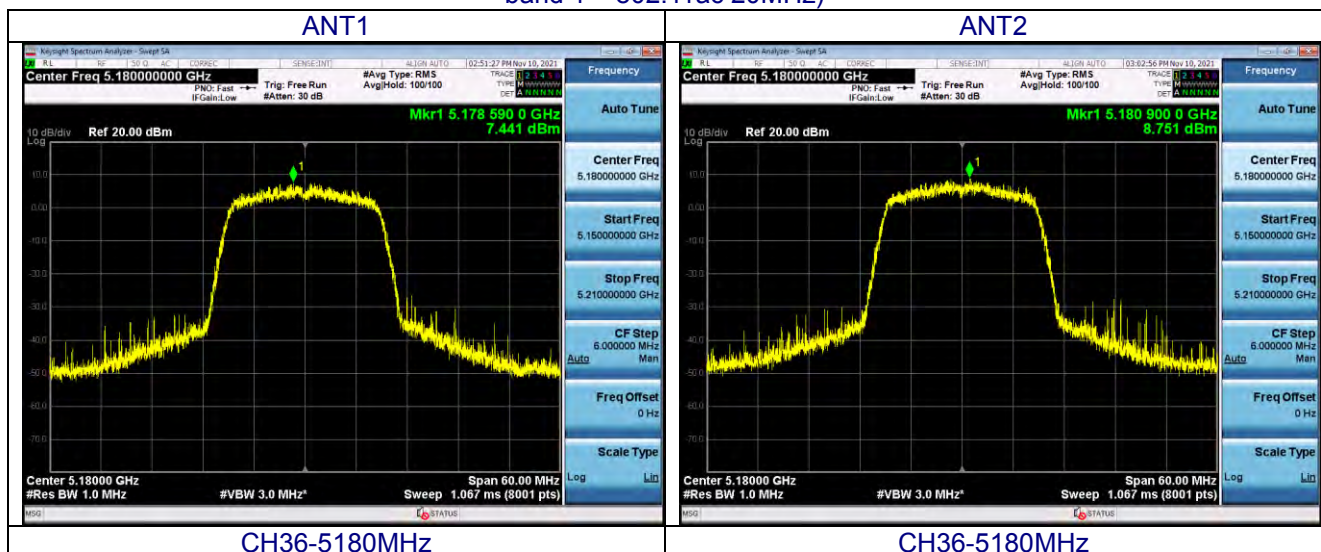

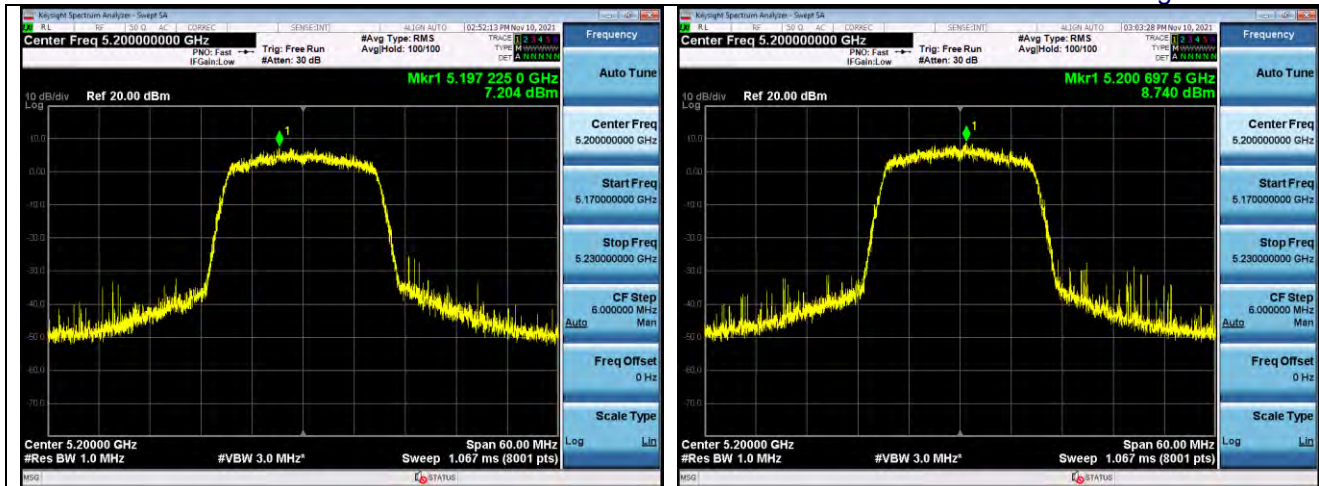

CH40-5200MHz


CH40-5200MHz

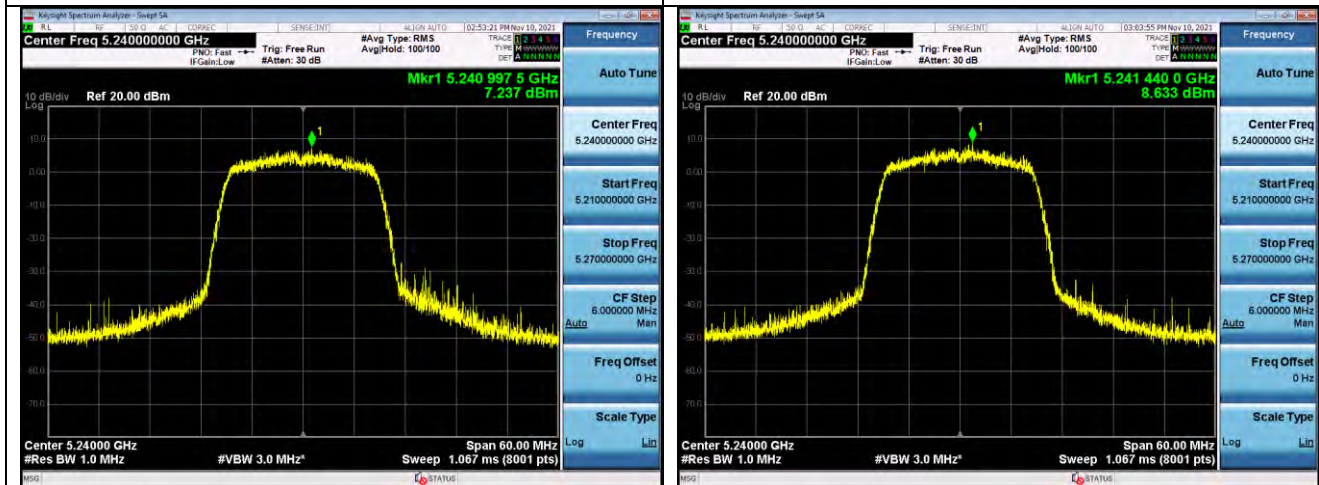

CH48-5240MHz


CH48-5240MHz

band 1 – 802.11ac (40MHz)

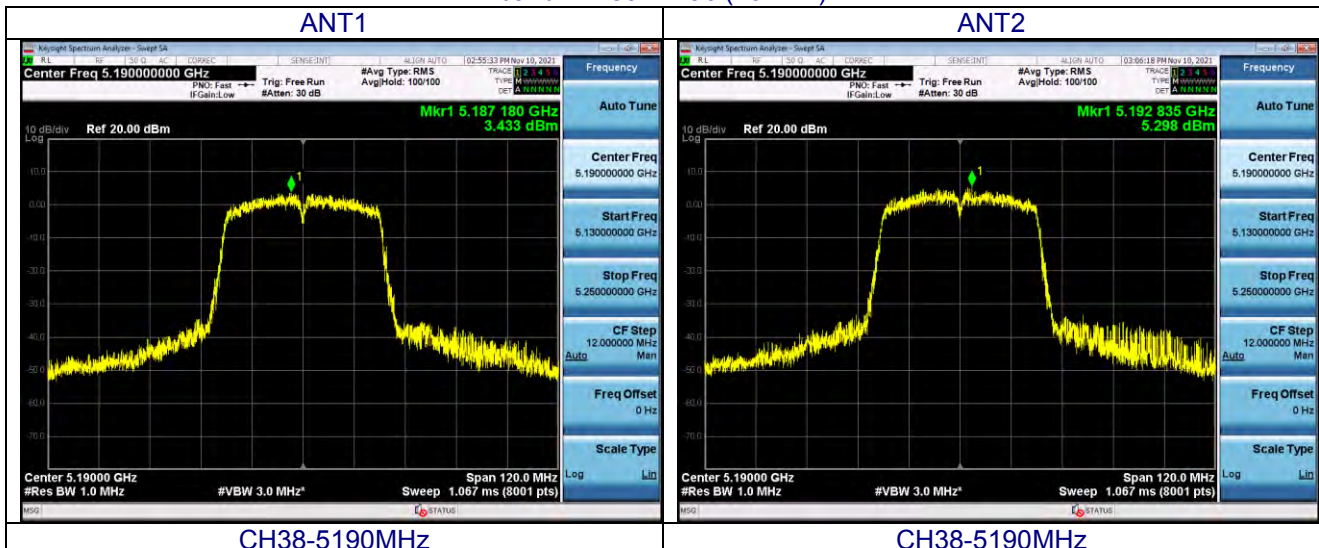

CH38-5190MHz


CH38-5190MHz

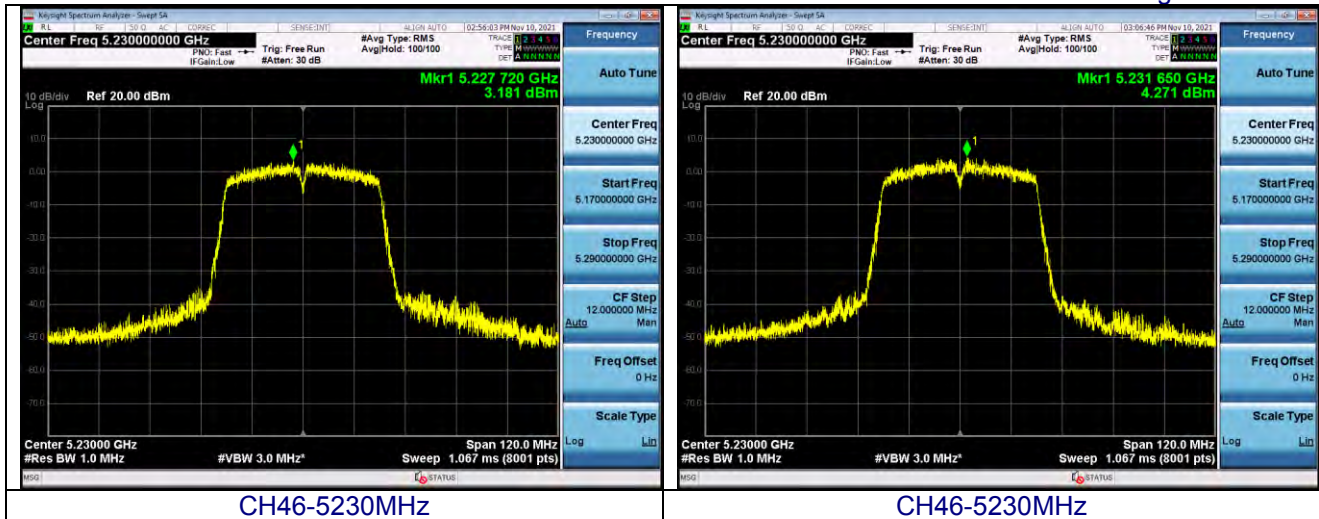

CH46-5230MHz

CH46-5230MHz


band 1 – 802.11ac (80MHz)

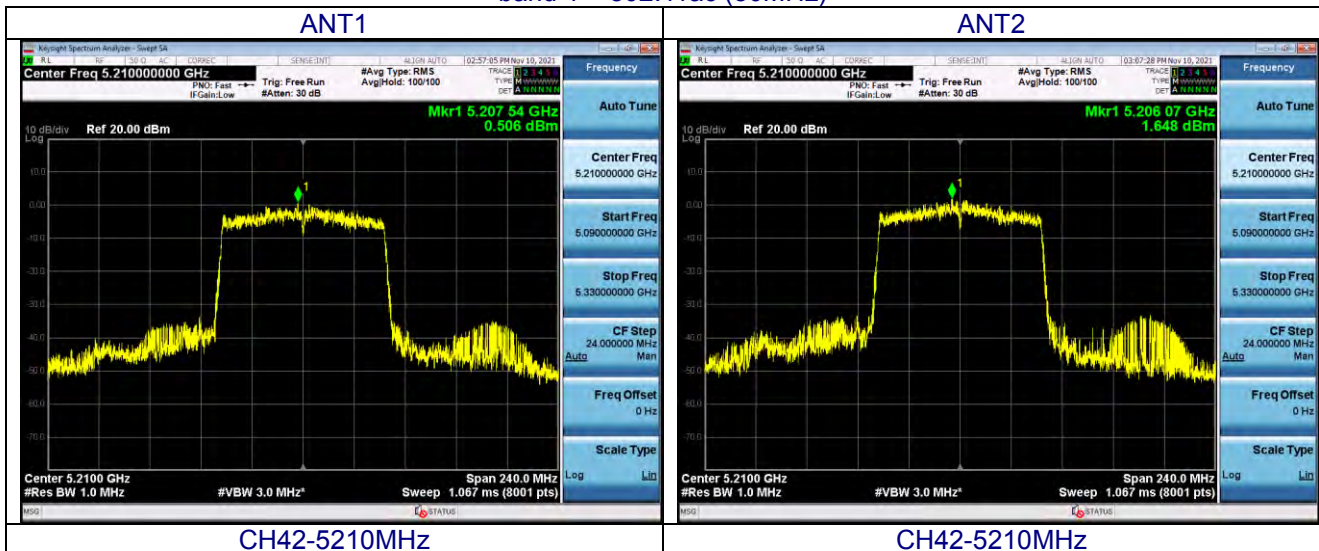

CH42-5210MHz


CH42-5210MHz

band 1 – 802.11ax (20MHz)

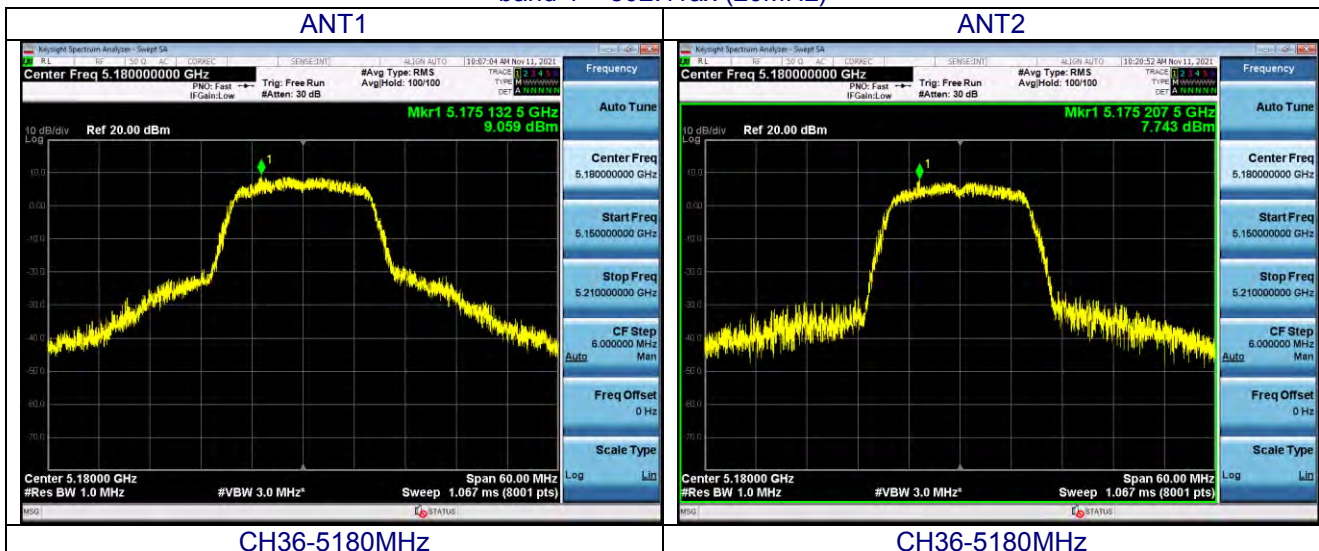


CH36-5180MHz

CH36-5180MHz

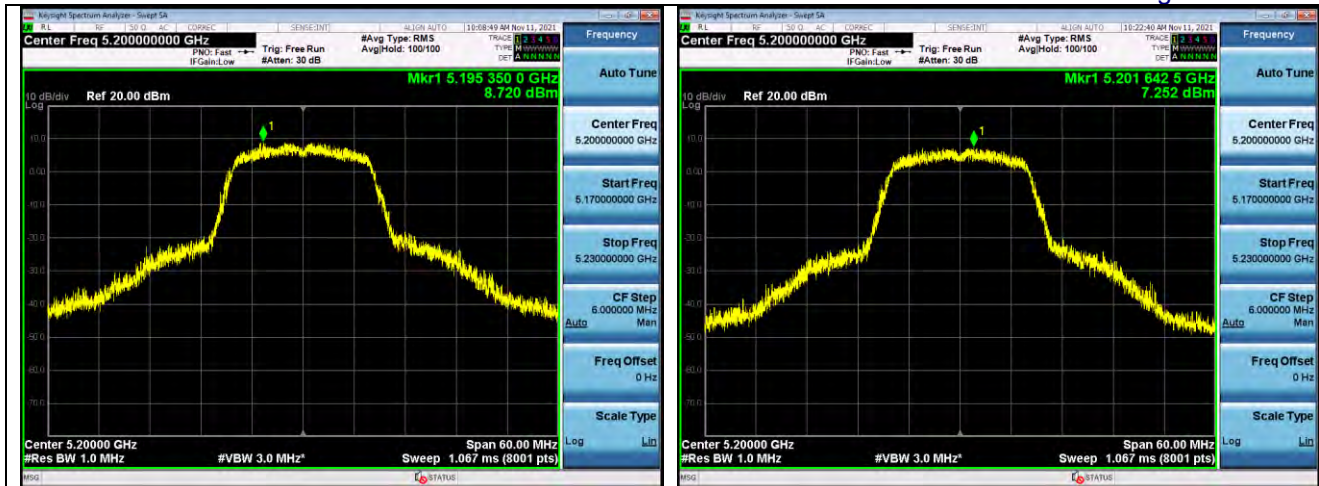

CH40-5200MHz


CH40-5200MHz

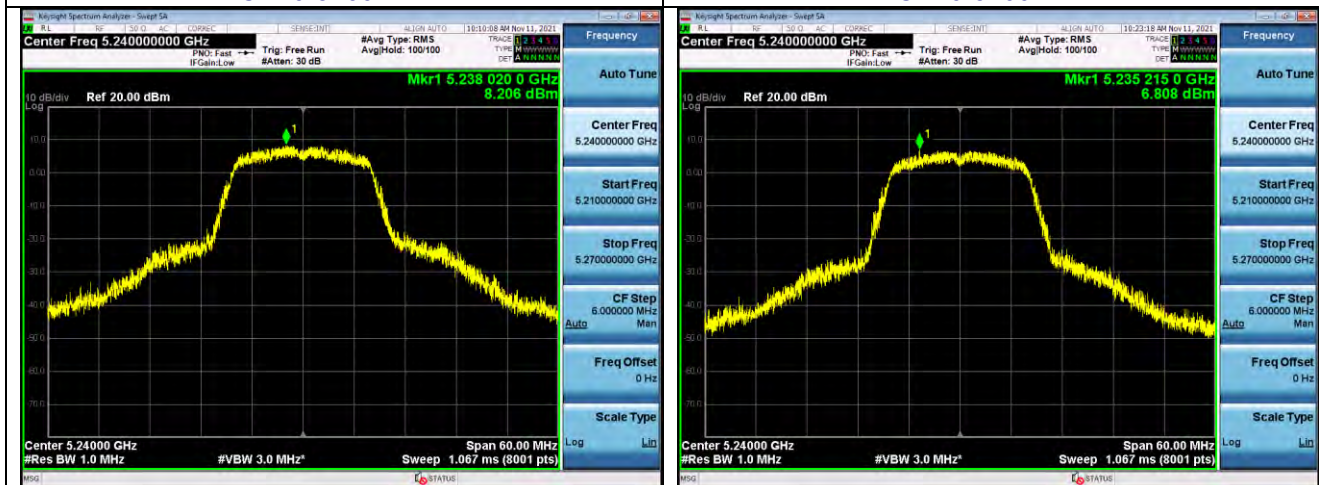

CH48-5240MHz

CH48-5240MHz

band 1 – 802.11 ax (40MHz)

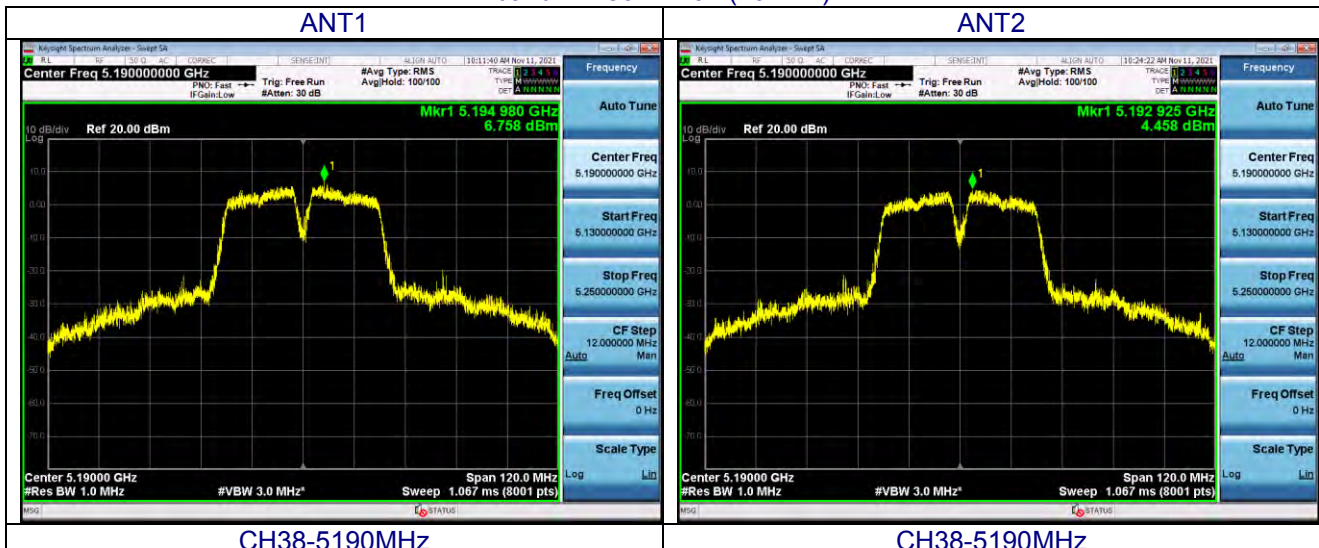


CH38-5190MHz

CH38-5190MHz



band 1 – 802.11 ax (80MHz)

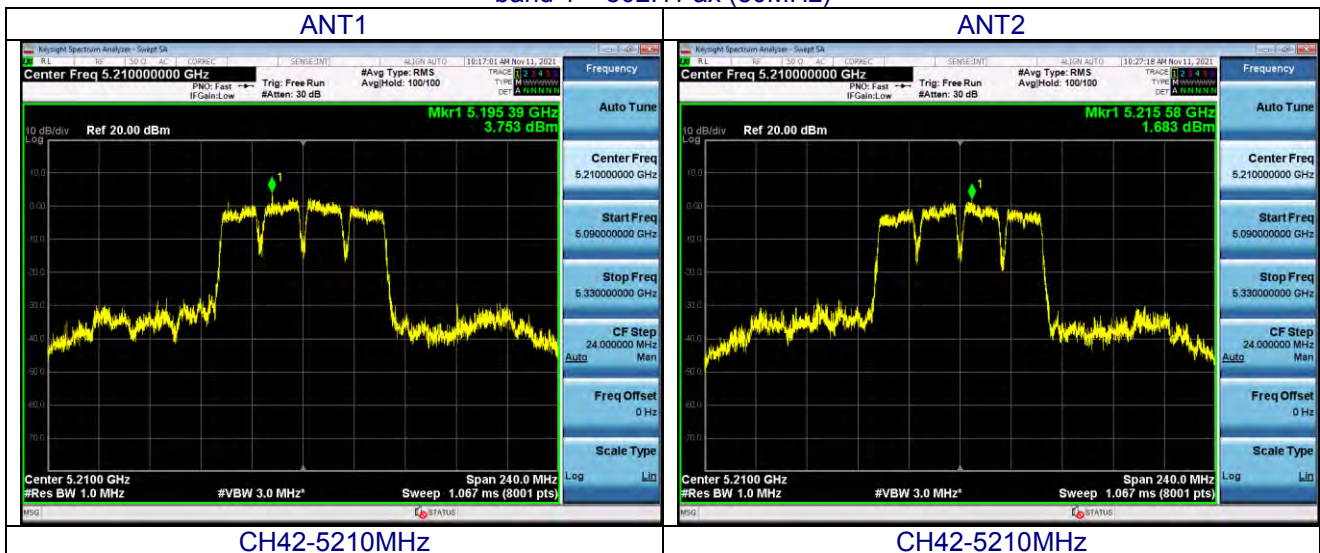


Band 4 -802.11a

ANT1




ANT2

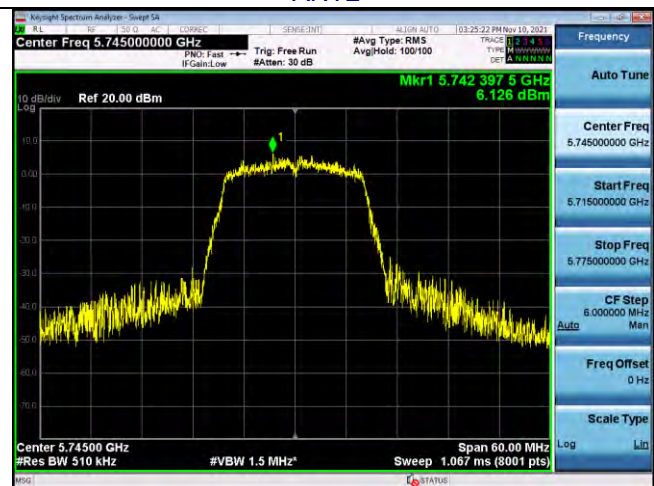

CH149 -5745MHz



CH149 -5745MHz

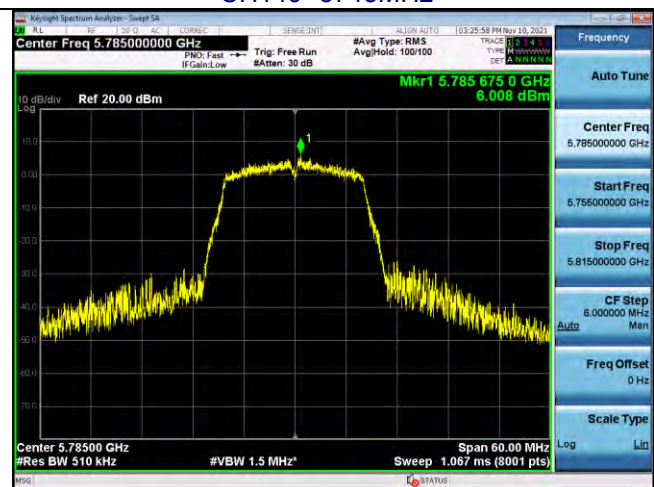

CH157 -5785MHz



CH157 -5785MHz



CH165 -5825MHz




CH165 -5825MHz




Band4 -802.11n (20MHz)

ANT1

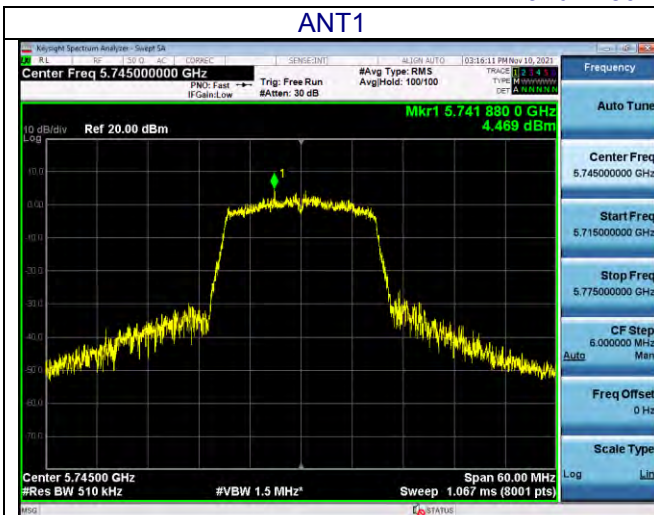


ANT2

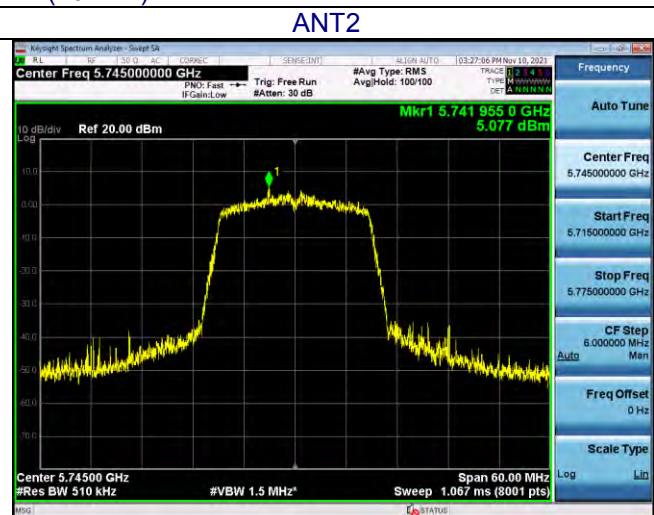

CH149 -5745MHz




CH149 -5745MHz

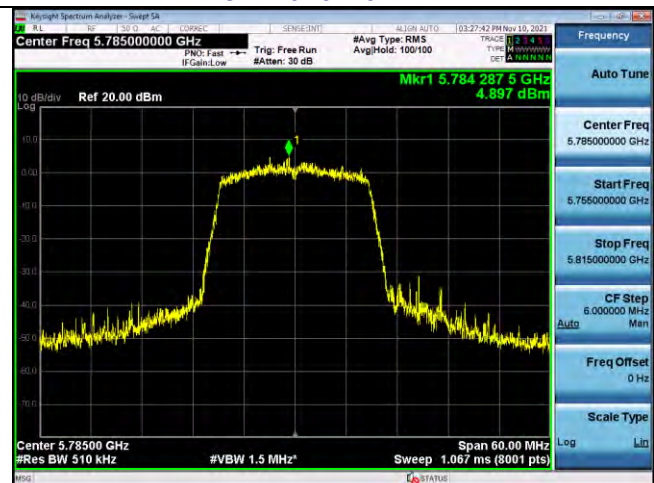

CH157 -5785MHz



CH157 -5785MHz

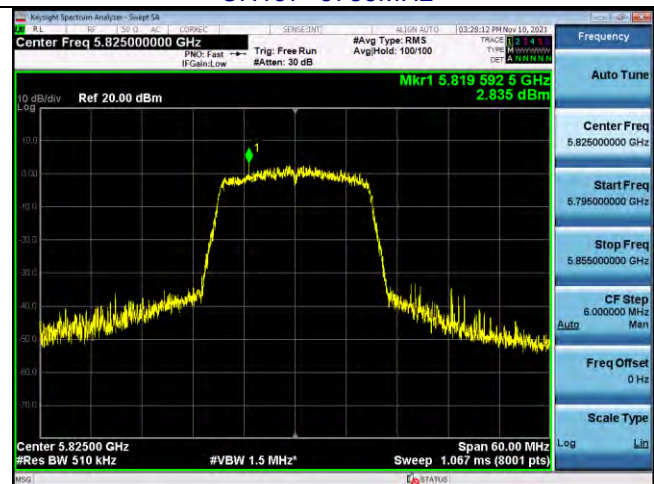


CH165 -5825MHz




CH165 -5825MHz





Band 4 – 802.11n (40MHz)

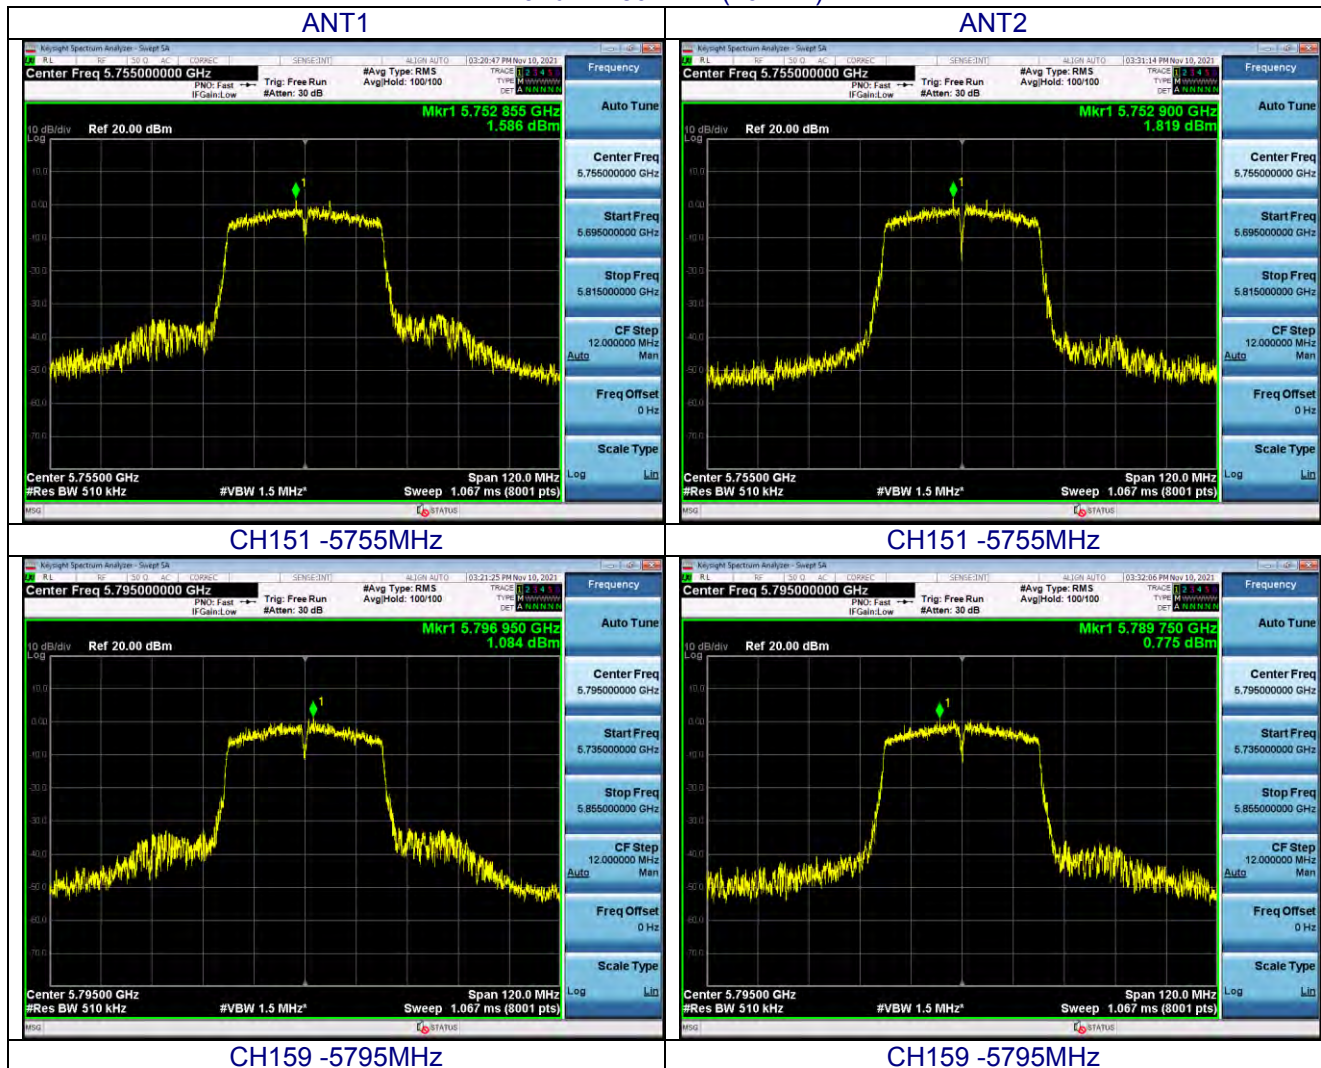



Band4 –802.11ac (20MHz)

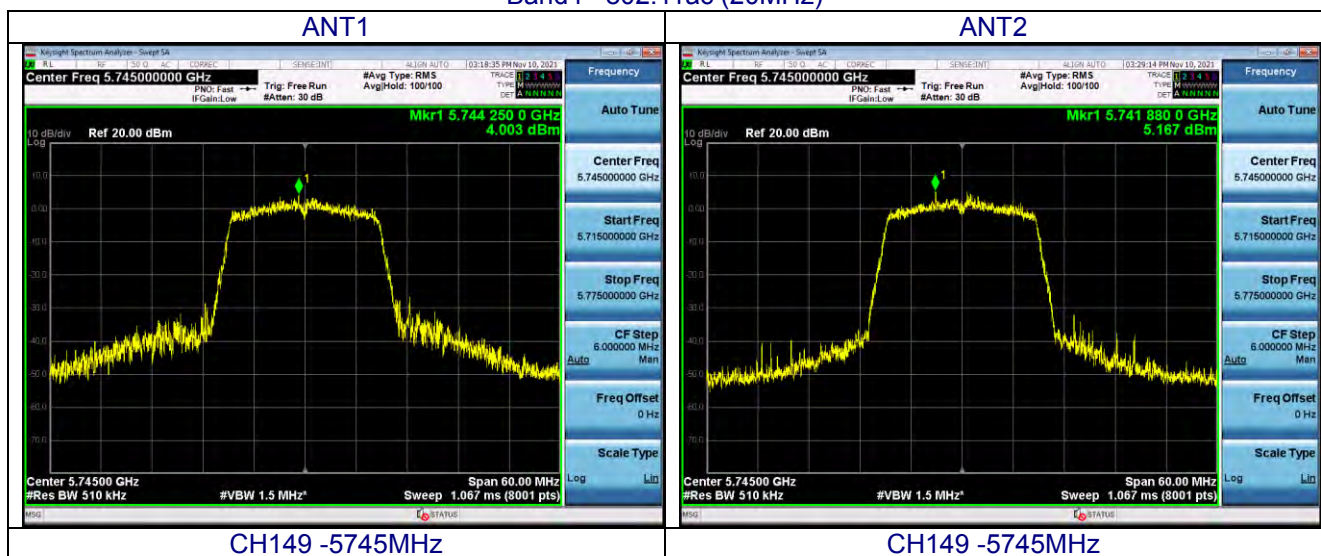

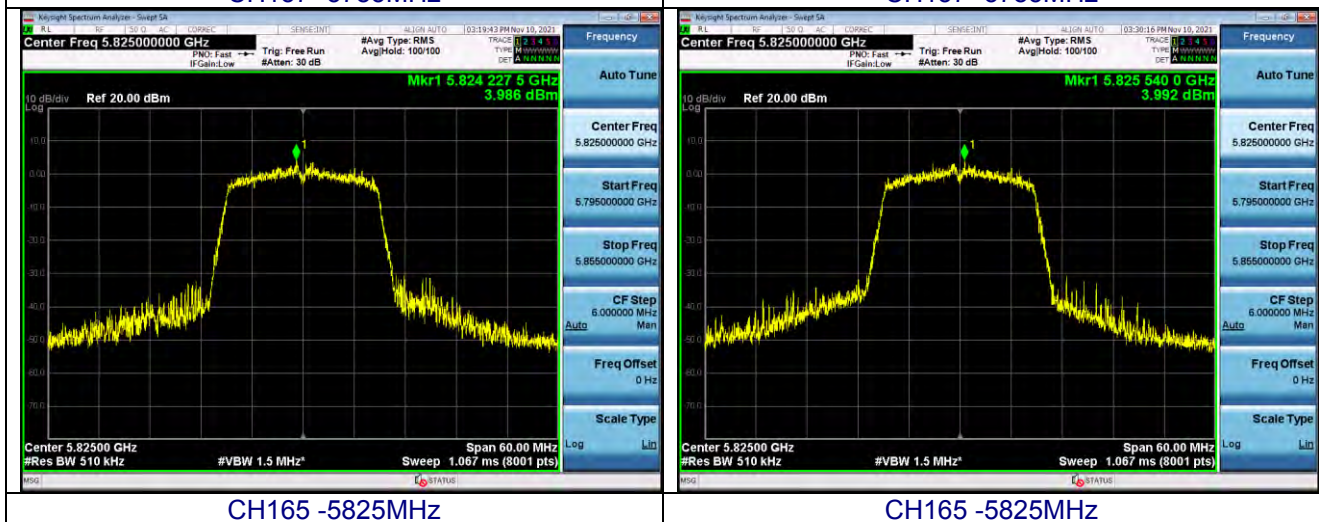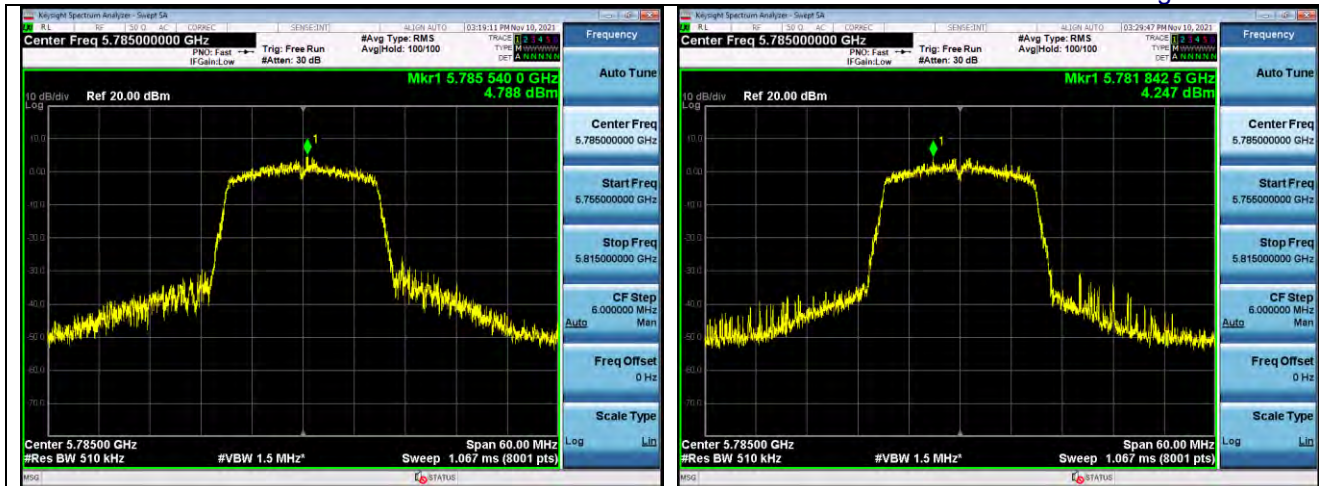


Band4 – 802.11ac (40MHz)

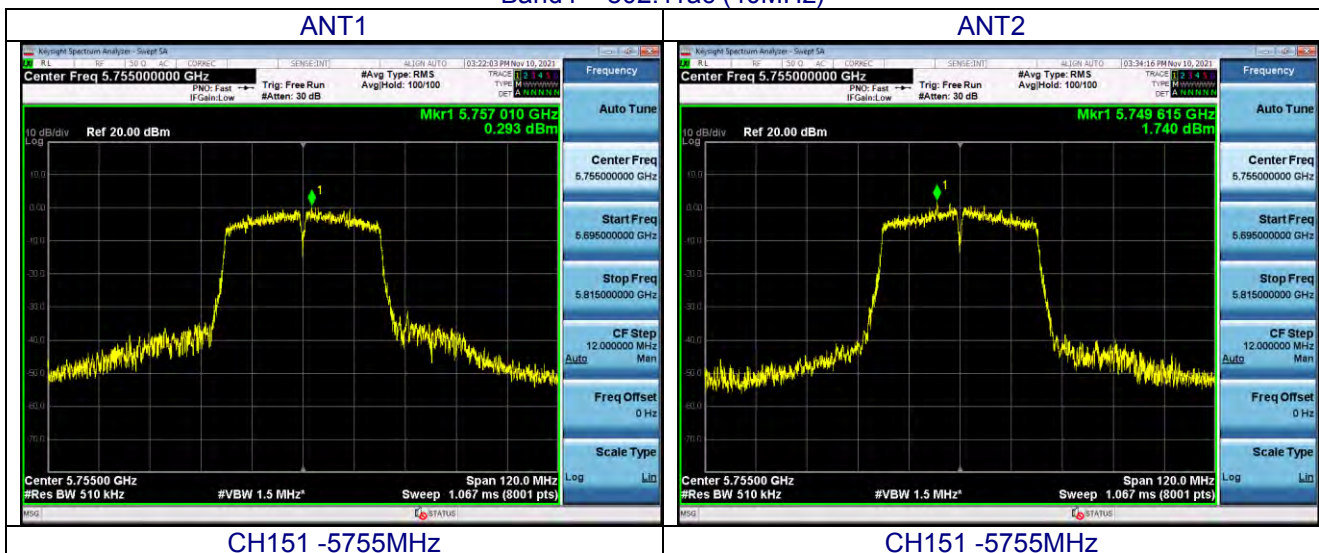

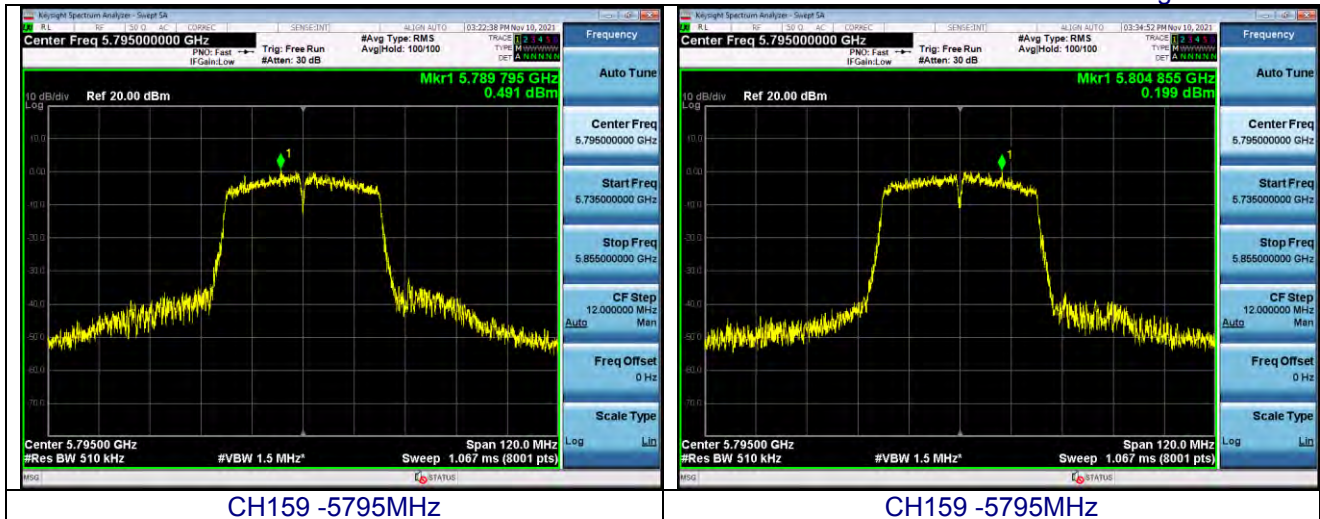


Band4 – 802.11ac (80MHz)

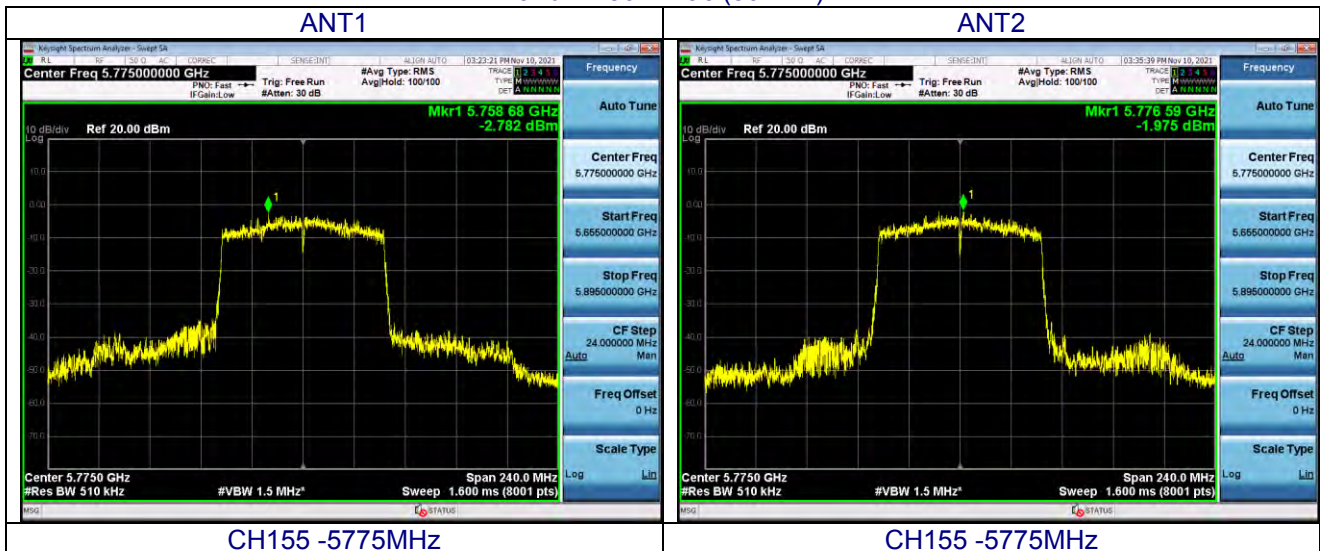


Band4 -802.11ax (20MHz)

ANT1

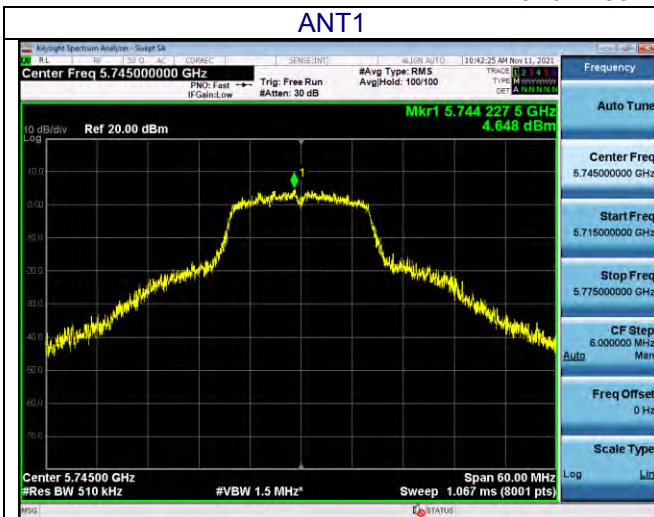

ANT2

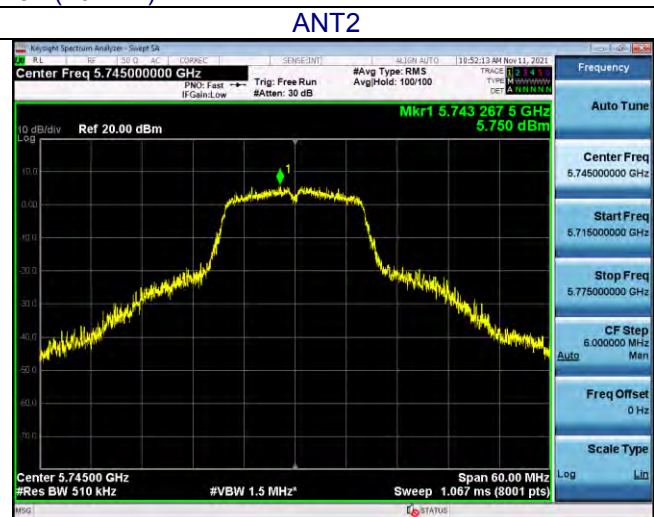

CH149 -5745MHz



CH149 -5745MHz



CH157 -5785MHz




CH157 -5785MHz



CH165 -5825MHz

CH165 -5825MHz

Band4 – 802.11 ax (40MHz)

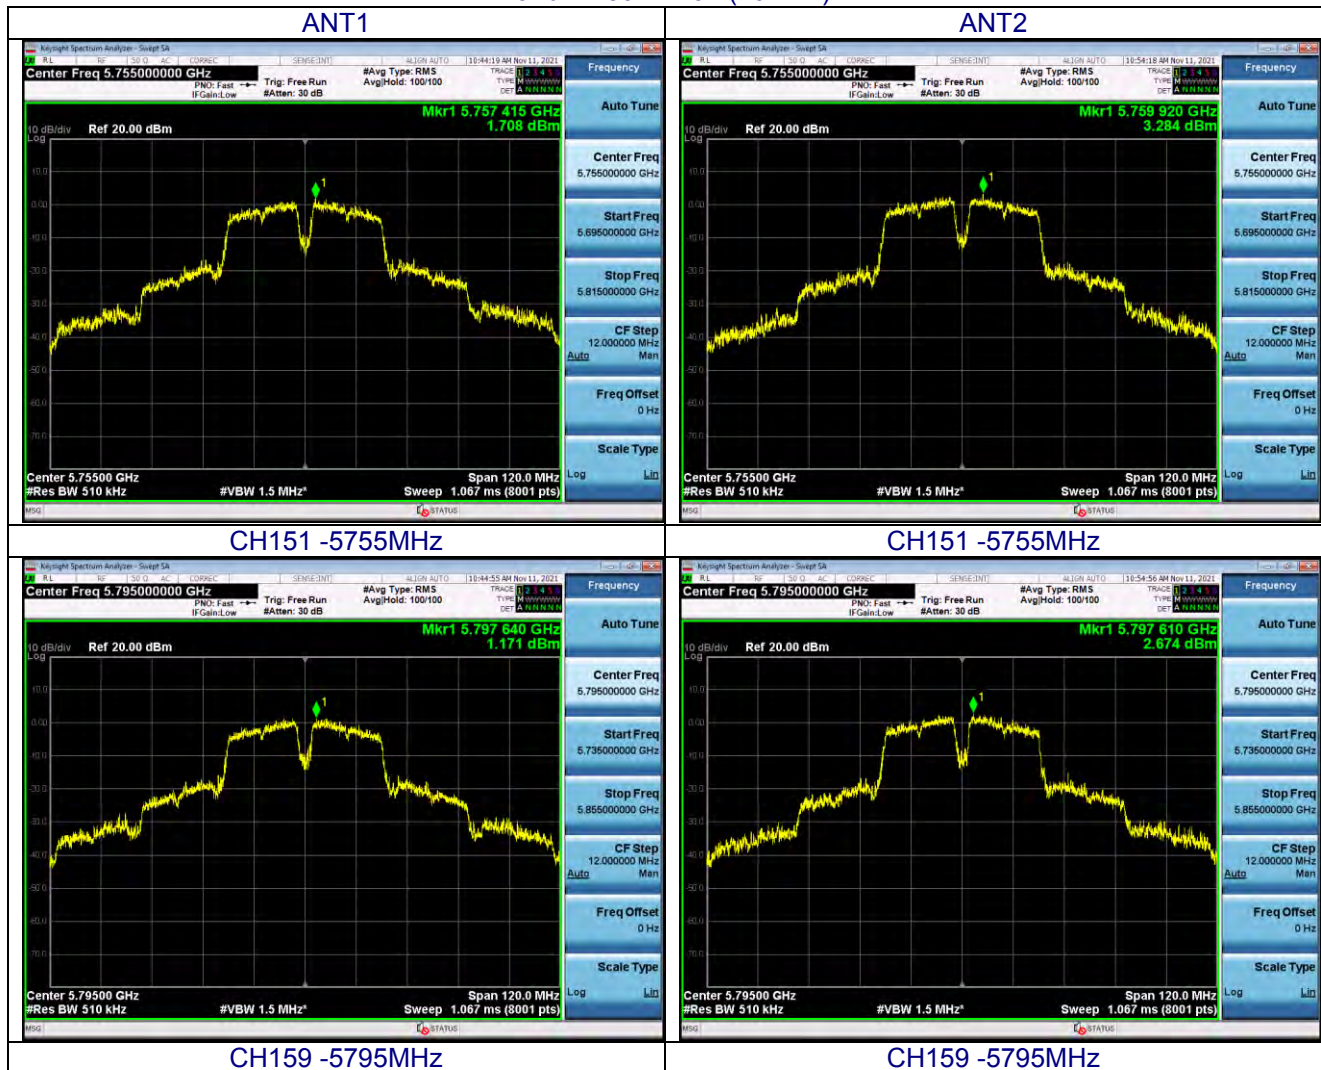

Band4 – 802.11 ax (80MHz)



6. -26 DB & 6DBM EMISSION BANDWIDTH

Test Requirement:	Part 15 Subpart C Section 15.407 (e)
Test Method:	KDB 789033 D02 v02r01

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15.407 (e)		
Bandwidth		
Limit	Band1	N/A
	Band4	≥ 500 kHz

6.2 TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.

Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.

Set the spectrum analyzers RBW = approximately 1% of the emission bandwidth, VBW >RBW, Detector = Peak, Span>26dB bandwidth, and Sweep = auto ,Trace mode = max hold.


Measure the maximum width of the emission that is 26dB down from the maximum of the emission.

Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Repeat until all the rest channels were investigated.

6.3 DEVIATION FROM STANDARD

No deviation.

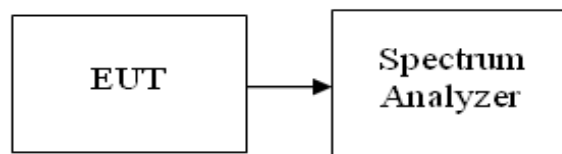6.4 TEST SETUP**6.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V
Test Mode :	TX		

BAND 1


802.11 Mode	Channel No.	Frequency [MHz]	26dB Bandwidth [MHz]		99% Bandwidth [MHz]	
			ANT1	ANT2	ANT1	ANT2
a	36	5180	19.46	19.38	16.406	16.438
	40	5200	19.37	19.38	16.394	16.380
	48	5240	19.30	19.46	16.400	16.372
n (20MHz)	36	5180	19.53	19.53	17.520	17.514
	40	5200	19.74	19.62	17.524	17.521
	48	5240	19.78	19.67	17.561	17.522
n (40MHz)	38	5190	39.87	39.41	36.055	35.942
	46	5230	39.41	40.22	35.976	35.935
ac (20MHz)	36	5180	19.78	19.71	17.539	17.514
	40	5200	19.55	19.85	17.546	17.524
	48	5240	19.88	19.76	17.527	17.521
ac(40MHz)	38	5190	39.37	39.30	36.021	36.037
	46	5230	39.43	39.39	35.916	35.945
ac(80MHz)	42	5210	81.21	80.42	75.551	75.484
ax (20MHz)	36	5180	20.10	19.51	16.569	16.487
	40	5200	20.39	19.91	16.555	16.557
	48	5240	20.45	20.24	16.584	16.520
ax (40MHz)	38	5190	41.01	40.91	36.207	36.291
	46	5230	54.10	44.85	36.542	36.355
ax (80MHz)	42	5210	80.93	80.93	75.619	75.668

BAND 4


802.11 Mode	Channel No.	Frequency [MHz]	-6db Bandwidth [MHz]		Limit
			ANT1	ANT2	
a	149	5745	15.18	15.16	$\geq 500 \text{ kHz}$
	157	5785	15.12	15.15	
	165	5825	15.72	15.13	
n (20MHz)	149	5745	16.07	16.05	
	157	5785	15.16	15.16	
	165	5825	15.69	16.59	
n (40MHz)	151	5755	35.16	16.01	
	159	5795	35.18	15.68	
ac (20MHz)	149	5745	15.15	15.14	
	157	5785	15.15	35.16	
	165	5825	16.07	35.19	
ac(40MHz)	151	5755	35.18	35.19	
	159	5795	35.17	35.19	
ac(80MHz)	155	5775	75.19	75.25	
ax (20MHz)	149	5745	13.81	15.07	
	157	5785	14.39	15.17	
	165	5825	15.10	14.47	
ax (40MHz)	151	5755	33.83	35.15	
	159	5795	31.45	32.63	
ax (80MHz)	155	5775	70.26	72.77	

Test plot as follows:


band 1 – 802.11a

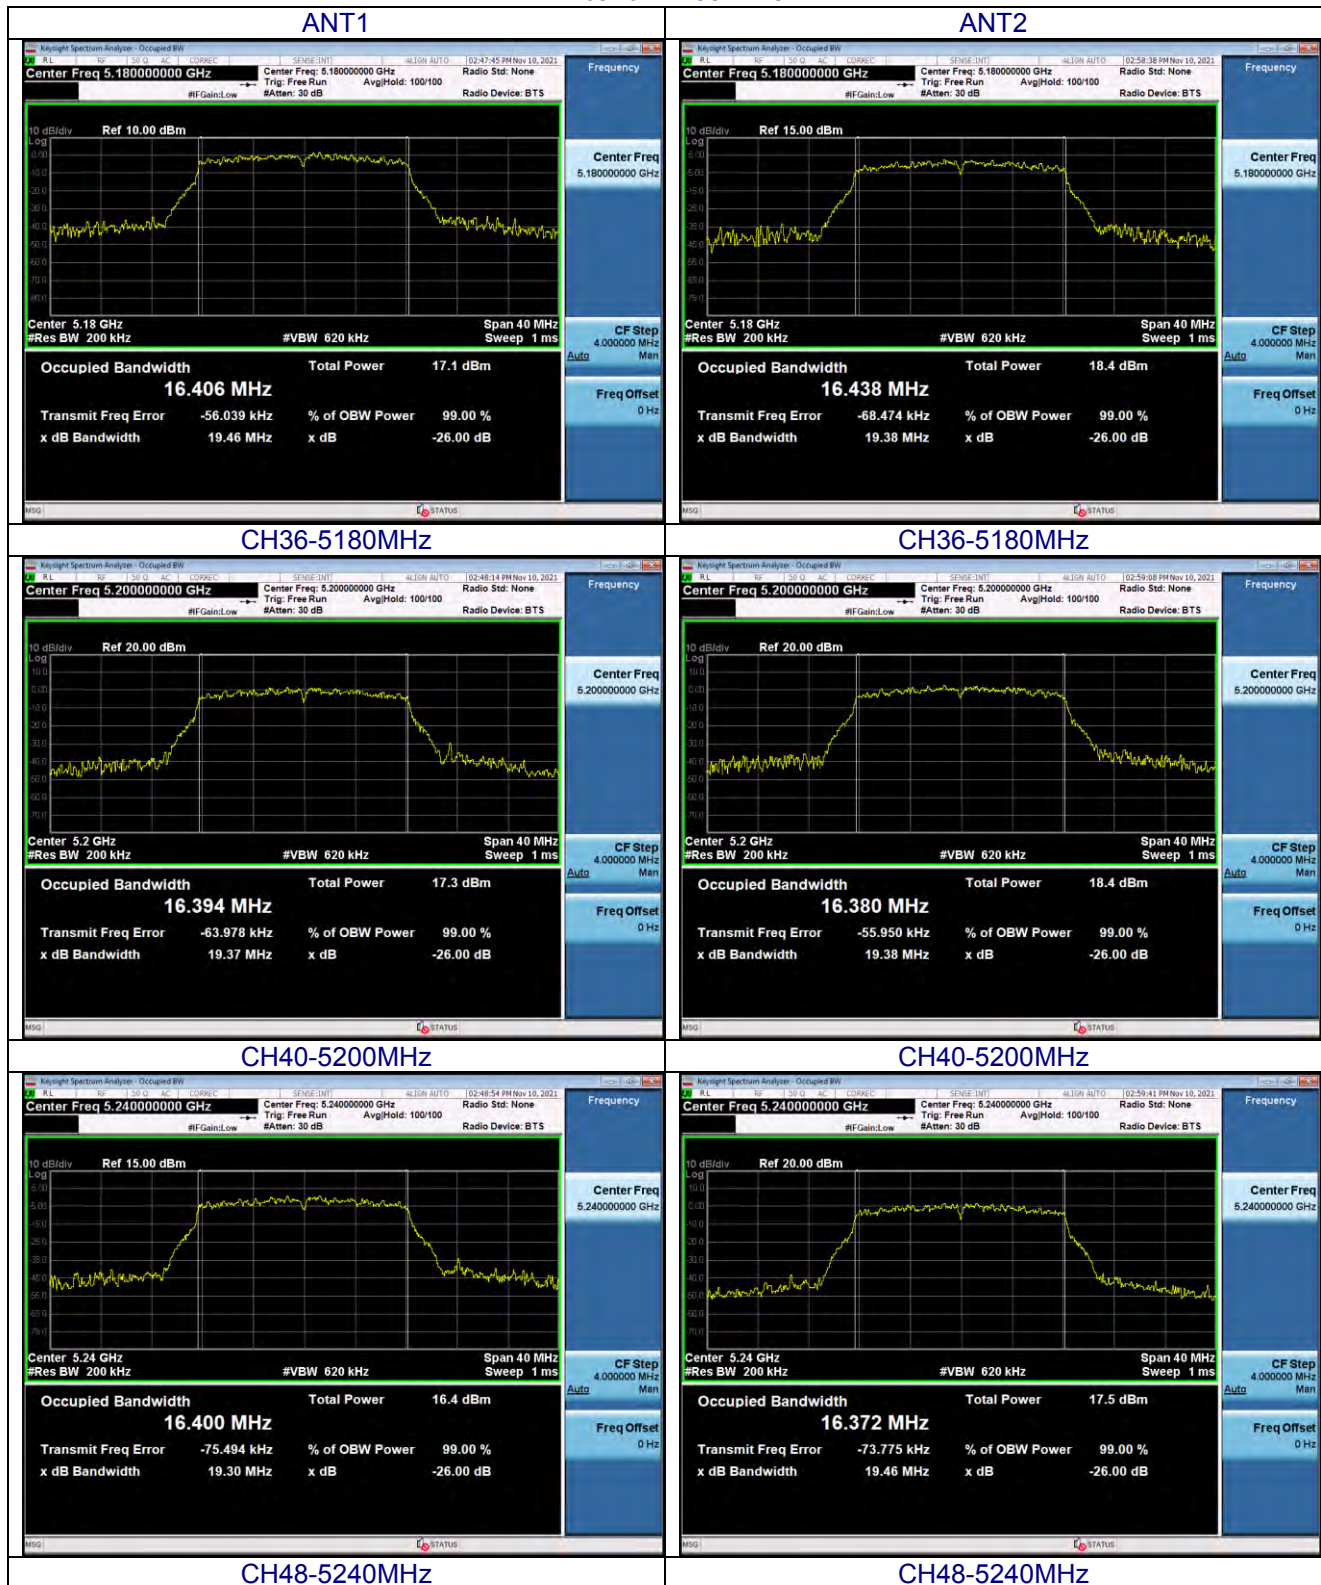


band 1 – 802.11n (20MHz)

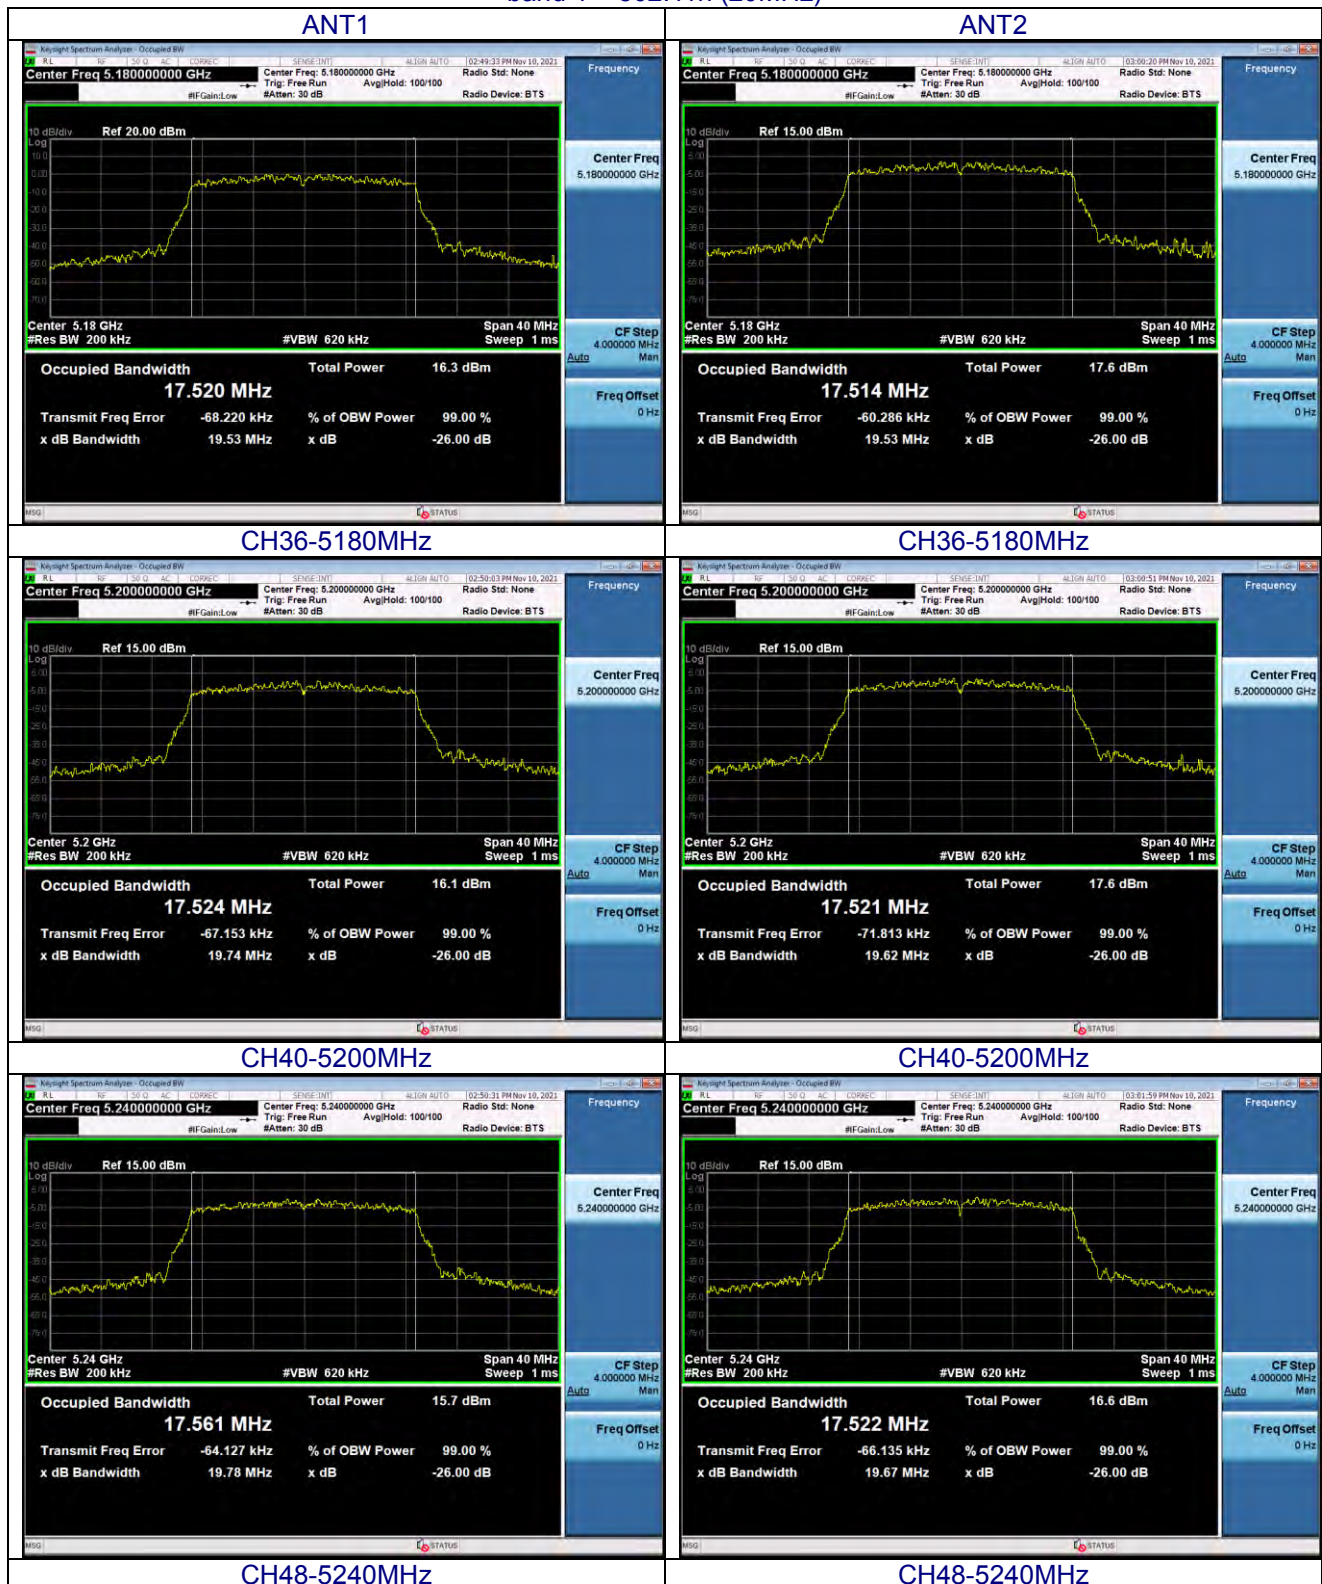


band 1 – 802.11n (40MHz)

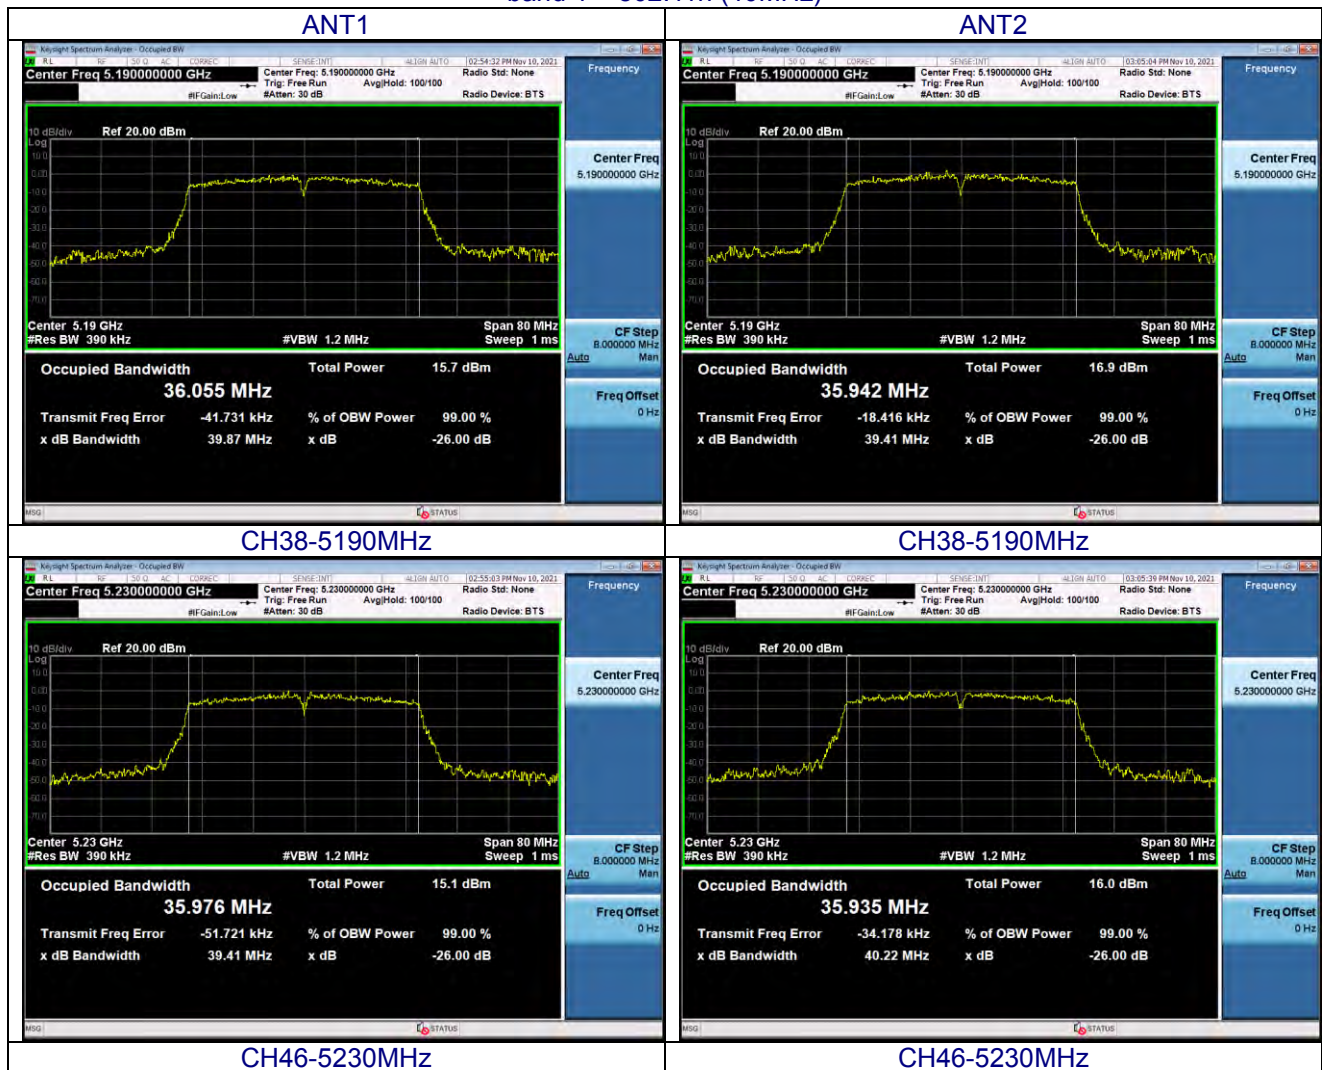


band 1 – 802.11ac 20MHz)

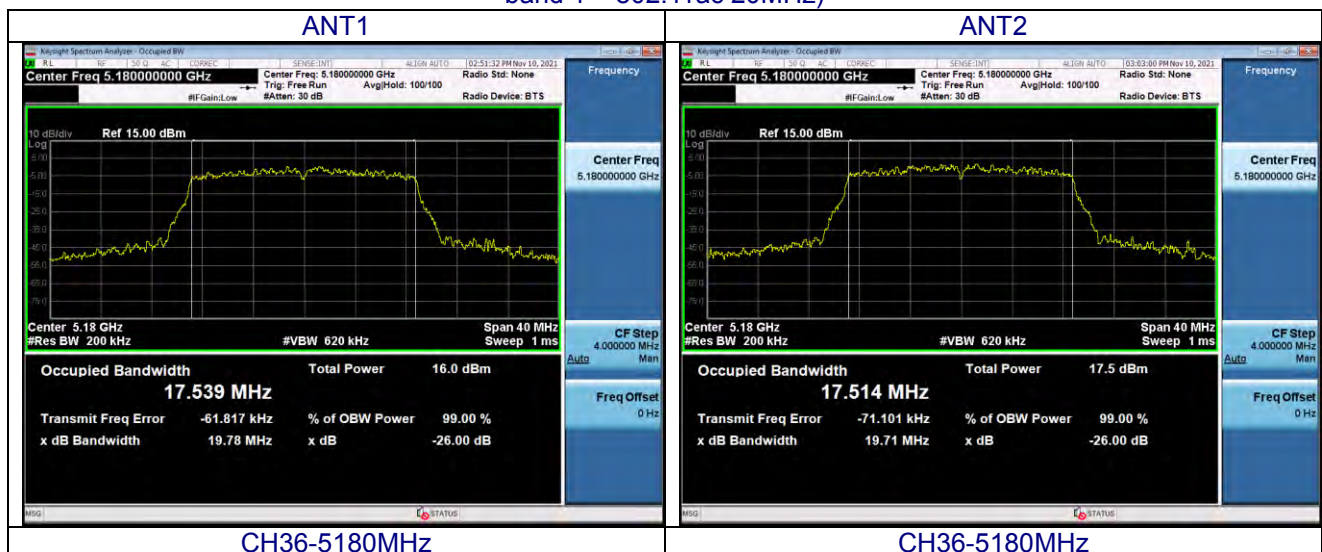

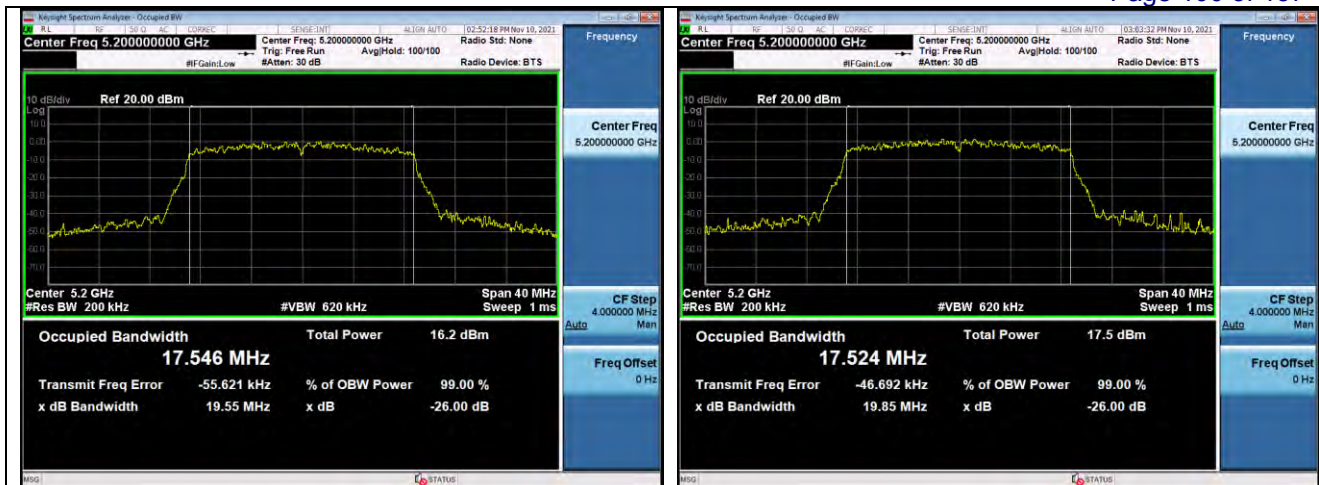

CH40-5200MHz


CH40-5200MHz

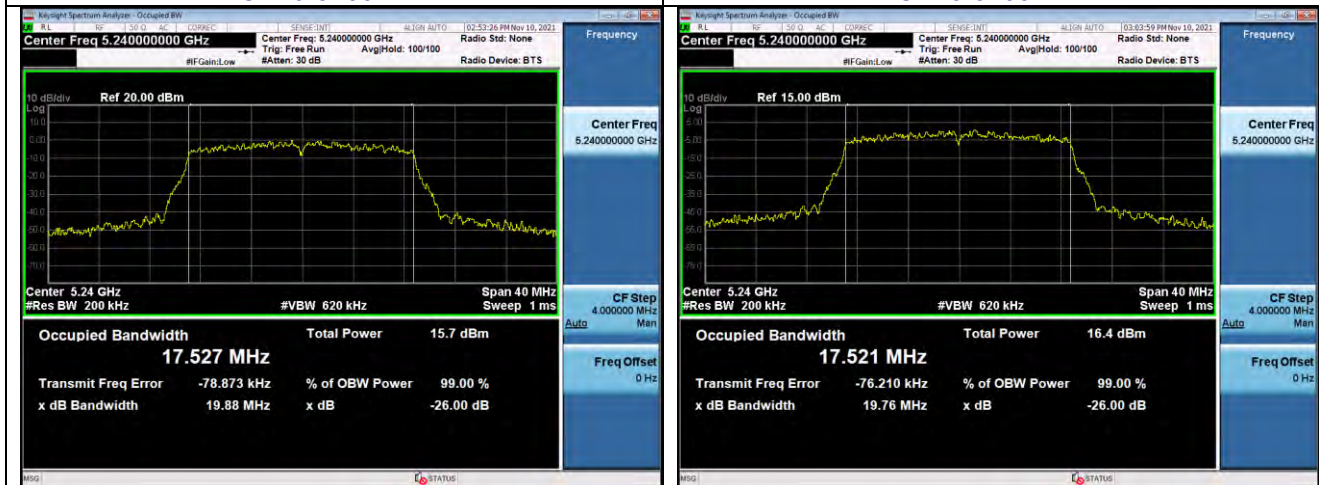

CH48-5240MHz

CH48-5240MHz

band 1 – 802.11ac (40MHz)

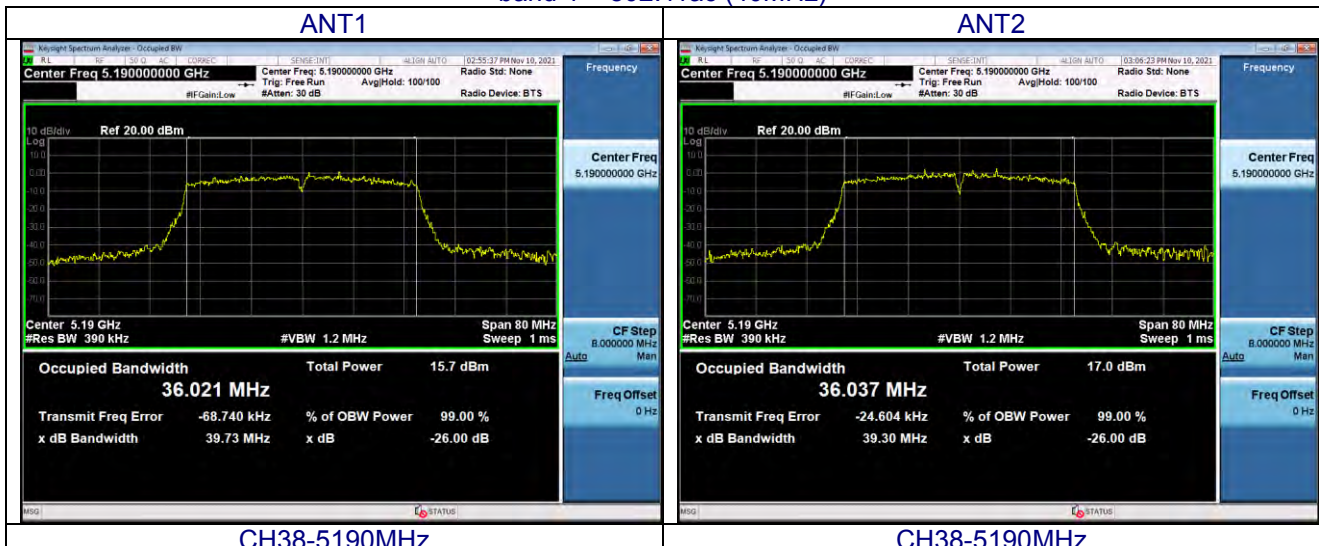

CH38-5190MHz

CH38-5190MHz