

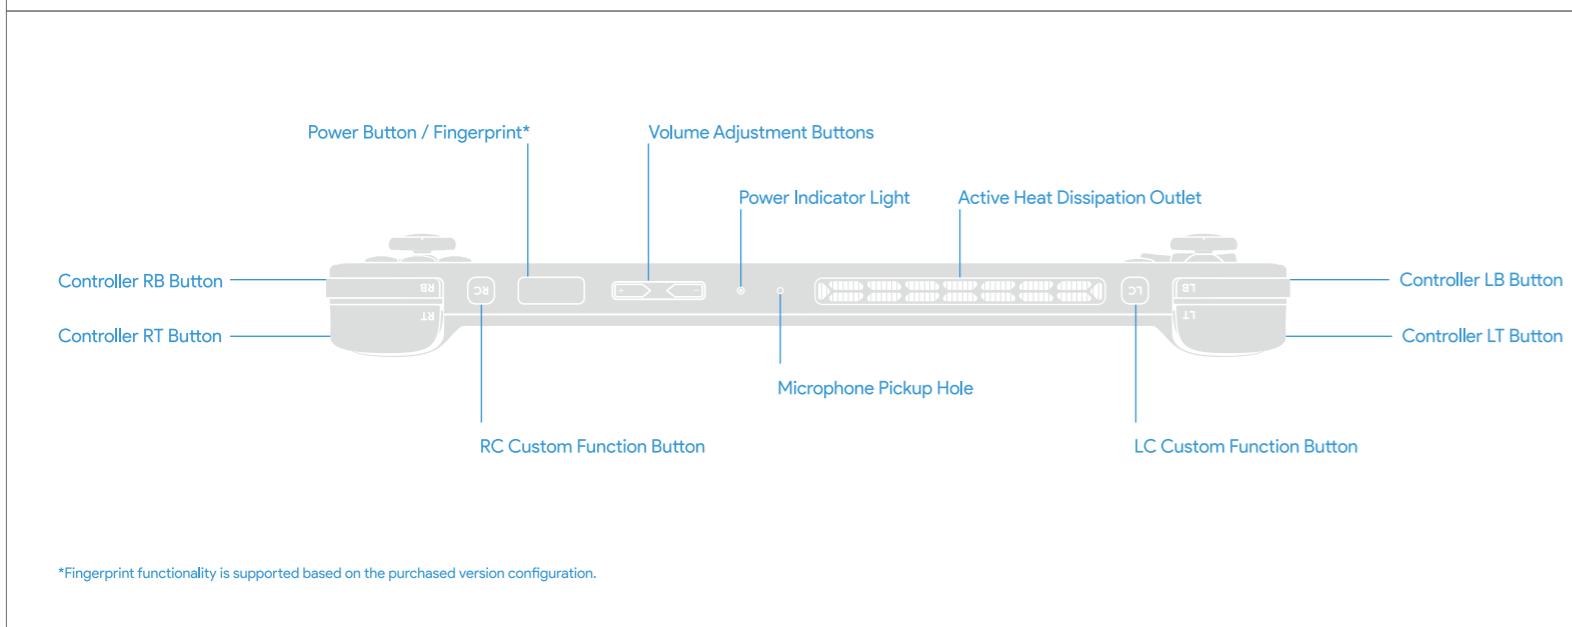
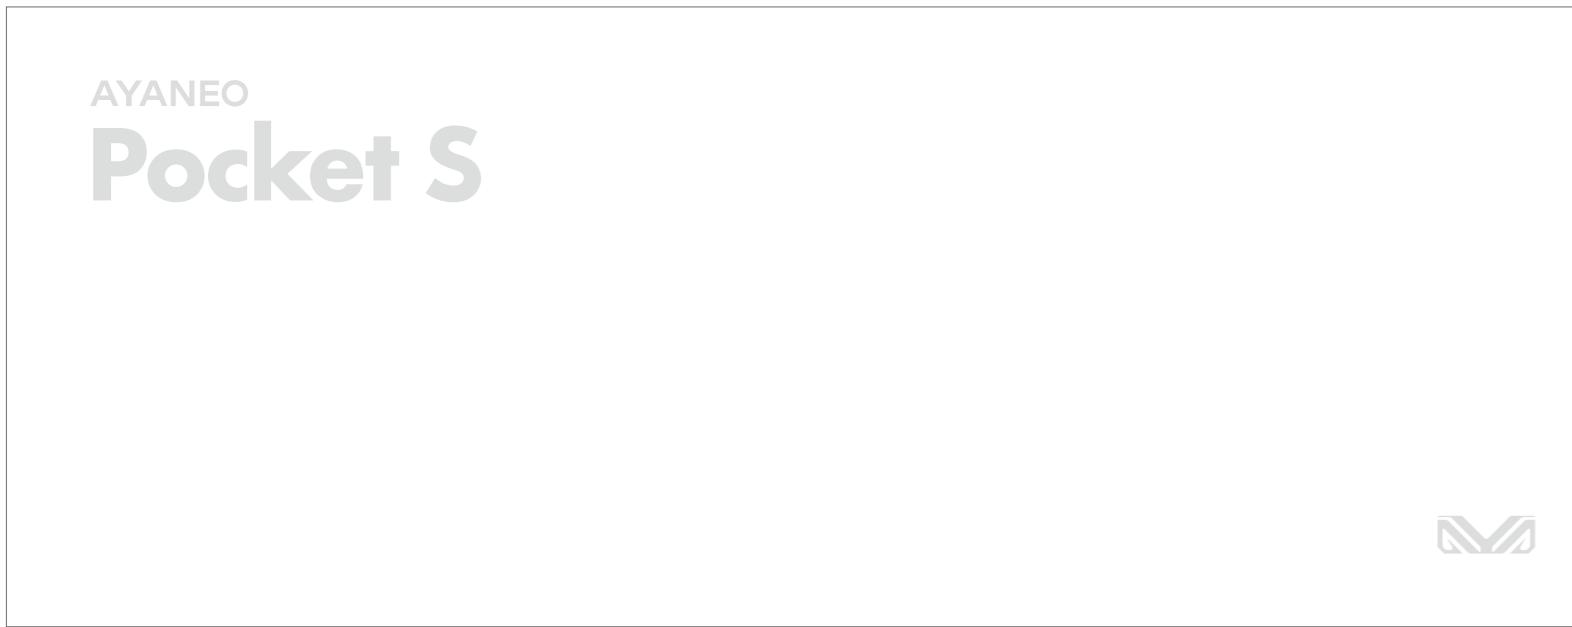



# AYANEO Pocket S (AR03)\_说明书\_20240116

## A卡正面

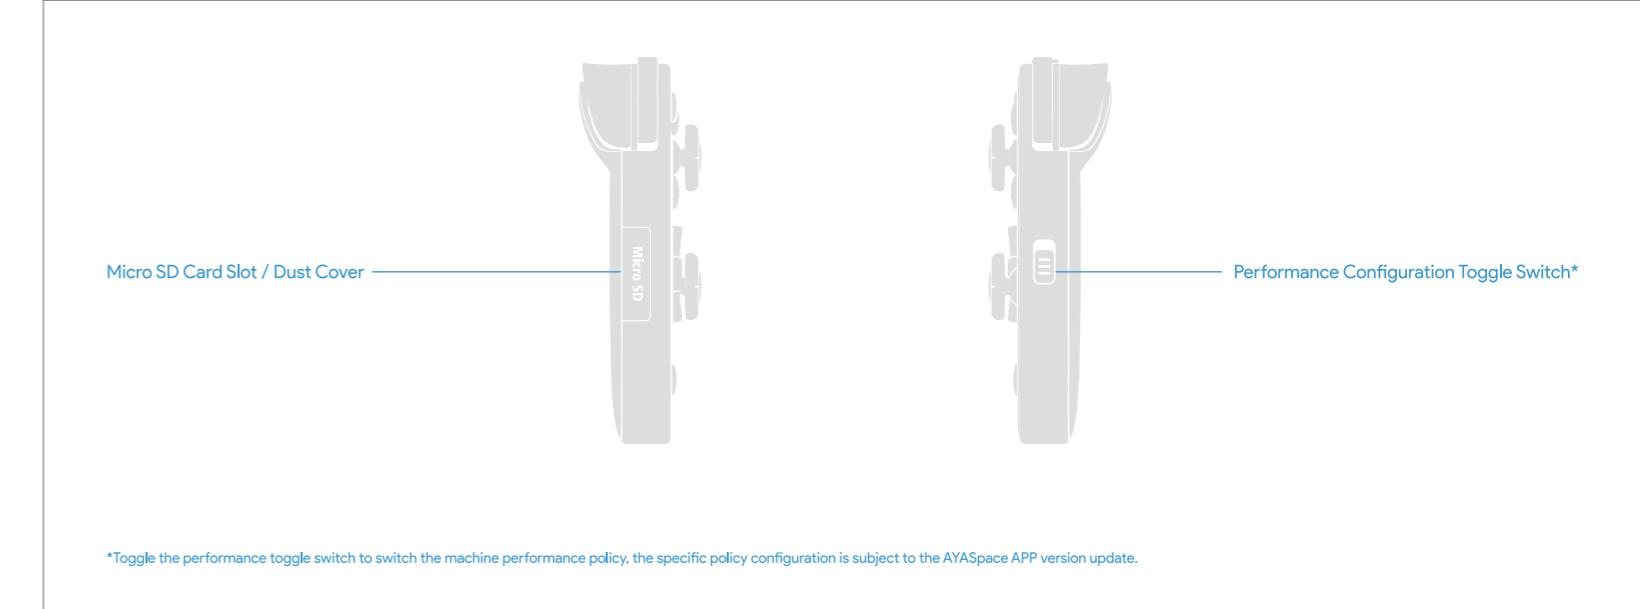

## A卡背面

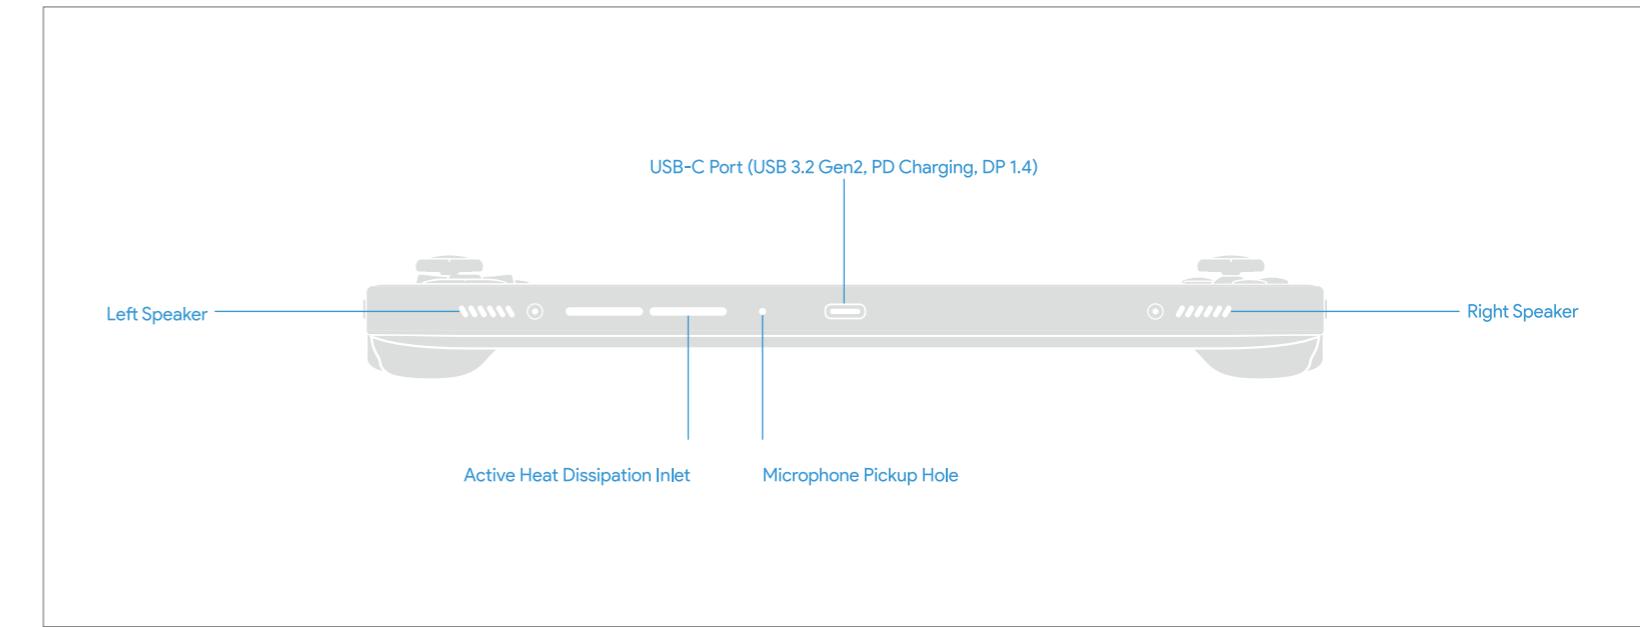

# B卡正面

**Power On / Off / Restart / \* Fingerprint**  
When in the shutdown state, press and hold the power button " " for about 3 seconds and release to power on AYANEO Pocket S.

In the power-on state, press and hold the power button " " for about 2 seconds to bring up the menu, select the  to turn off AYANEO Pocket S, and select the  to restart AYANEO Pocket S.

\*Fingerprint recognition functionality is subject to the configuration of the purchased AYANEO Pocket S version.  
When the purchased version supports fingerprint recognition, screen lock must be set to use fingerprint recognition.

Go to  >  Security > Screen lock, and choose to set a pattern, PIN code, or password. Then, under security options, select fingerprint  , enter the password or PIN to confirm security, and proceed to set and enroll fingerprints.

**Sleep / Wake**  
In the power-on state, press the power button " " to put AYANEO Pocket S to sleep.  
In sleep mode, press the power button " " to wake up AYANEO Pocket S. If a secure screen lock is set, you need to draw a pattern, enter a password, or PIN to confirm security before accessing the OS interface. If both secure screen lock and fingerprint are configured, a light touch on the power button after fingerprint recognition quickly wakes up and enters the OS interface.

After shutting down and restarting or restarting in the power-on state, security screen lock verification is required for fingerprint unlocking.

**Volume**  
Press the volume button " " to incrementally increase the volume; long press for continuous volume increase. Press the volume button " " to decrease the volume. In "Settings  Sound & vibration", adjust media volume, notification volume, alarm volume, etc.

**Text Input**  
When entering text, click on the input box to automatically bring up the touch keyboard for text input.

**Dropdown Menu**  
Swipe down at the top of the screen for the first time to bring up the dropdown menu, allowing quick switching of WLAN, Bluetooth, and other settings. Swipe down again to display the complete dropdown quick menu; slide the brightness adjustment slider for screen brightness adjustment and configure quick buttons.



**Network / Bluetooth**  
AYANEO Pocket S supports WLAN network, when you need to connect to the network via WLAN, Settings  Enter the Settings Menu >  Network & Internet > Internet, enter and select the name of the network you need to connect to, enter the connection password and click "Connect" to connect to the WLAN network, and then click the switch icon  on the right side to turn on or off the WLAN function.

To connect a Bluetooth device, select  Connected Devices > Pairing New Device, from the main page of the Settings menu, and then click the Bluetooth device you want to connect to in the search list.

# B卡背面

**Battery and Charging**  
Please use the provided adapter to charge AYANEO Pocket S. Do not use uncertified adapters for charging, as it may cause internal component damage and unpredictable dangers.

When the Type-C cable is plugged into the power source, avoid prolonged skin contact with the plug to prevent discomfort or injury. Do not attempt to replace the battery in AYANEO Pocket S on your own, as it may damage the battery, leading to overheating and potential fire hazards.

AYANEO Pocket S's lithium-ion battery should be serviced or recycled by AYANEO, separated from household waste. Follow local environmental regulations for battery disposal. Battery replacement can only be done by AYANEO or an authorized service provider; using the wrong battery model may pose an explosion risk.

**Cleaning**  
Use a non-lint cloth to clean AYANEO Pocket S. Avoid moisture in any openings or the use of aerosol sprays, solvents, or abrasives.

**Medical Device Interference**  
AYANEO Pocket S contains internal components that include magnets and emit electromagnetic fields. These fields may interfere with medical devices, pacemakers, defibrillators, or other medical devices. Maintain a safe distance between medical devices and AYANEO Pocket S. Consult your physician and the manufacturer of medical devices for information. If you suspect that AYANEO Pocket S is interfering with your pacemaker, defibrillator, or other medical device, stop using AYANEO Pocket S.

AYANEO guarantees hardware products and accessories for one year from the original retail purchase date. AYANEO does not guarantee normal wear and tear or damage caused by accidents or misuse. For service, visit the AYANEO store or an authorized service provider. Available service options depend on the country or region where the service is requested and may be limited to the original country and region of sale. Call charges and international shipping fees may apply, depending on your location.

When submitting a valid claim under the warranty service policy, AYANEO will repair, replace, or refund your AYANEO Pocket S at its discretion. Your warranty rights are additional to the powers provided by local consumer laws. When filing a claim under this warranty policy, detailed information about the purchase receipt may be required.

**Support**  
For more support and troubleshooting information, please visit [www.ayaneo.com](http://www.ayaneo.com).

**www.ayaneo.com**

## **FCC Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Specific Absorption Rate (SAR) information: This device meets the government's requirements for exposure to radiowaves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health. FCC RF Exposure Information and Statement: the SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device types: device has also been tested against this SAR limit. This device was tested for typical body-worn operations with the back of the phone kept 0mm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain an 0mm separation distance between the user's body and the back of the phone. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.