





Appendix C: Emission Bandwidth Test Result


Test Mode	Antenna	Frequency [MHz]	26db EBW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11A	Ant1	5180	20.360	5169.800	5190.160	---	---
		5200	20.680	5189.600	5210.280	---	---
		5240	21.720	5229.680	5251.400	---	---
		5260	23.600	5249.360	5272.960	---	---
		5300	21.400	5289.440	5310.840	---	---
		5320	21.080	5309.520	5330.600	---	---
		5500	22.920	5489.680	5512.600	---	---
		5580	20.960	5569.640	5590.600	---	---
		5700	20.560	5689.800	5710.360	---	---
		5745	21.280	5734.320	5755.600	---	---
		5785	20.640	5774.560	5795.200	---	---
		5825	20.560	5814.720	5835.280	---	---
11N20SISO	Ant1	5180	21.040	5169.840	5190.880	---	---
		5200	21.280	5189.400	5210.680	---	---
		5240	21.720	5229.280	5251.000	---	---
		5260	21.200	5249.440	5270.640	---	---
		5300	21.080	5289.440	5310.520	---	---
		5320	21.320	5309.480	5330.800	---	---
		5500	21.760	5489.080	5510.840	---	---
		5580	23.120	5568.480	5591.600	---	---
		5700	21.480	5689.080	5710.560	---	---
		5745	21.480	5734.160	5755.640	---	---
		5785	21.200	5774.360	5795.560	---	---
		5825	21.080	5814.440	5835.520	---	---
11N40SISO	Ant1	5190	41.600	5169.280	5210.880	---	---
		5230	40.720	5209.600	5250.320	---	---
		5270	40.880	5249.520	5290.400	---	---
		5310	41.680	5288.960	5330.640	---	---
		5510	41.360	5489.520	5530.880	---	---
		5590	41.600	5569.360	5610.960	---	---
		5670	41.040	5649.440	5690.480	---	---
		5755	41.920	5734.040	5775.960	---	---
		5795	40.960	5774.520	5815.480	---	---


Test Graphs

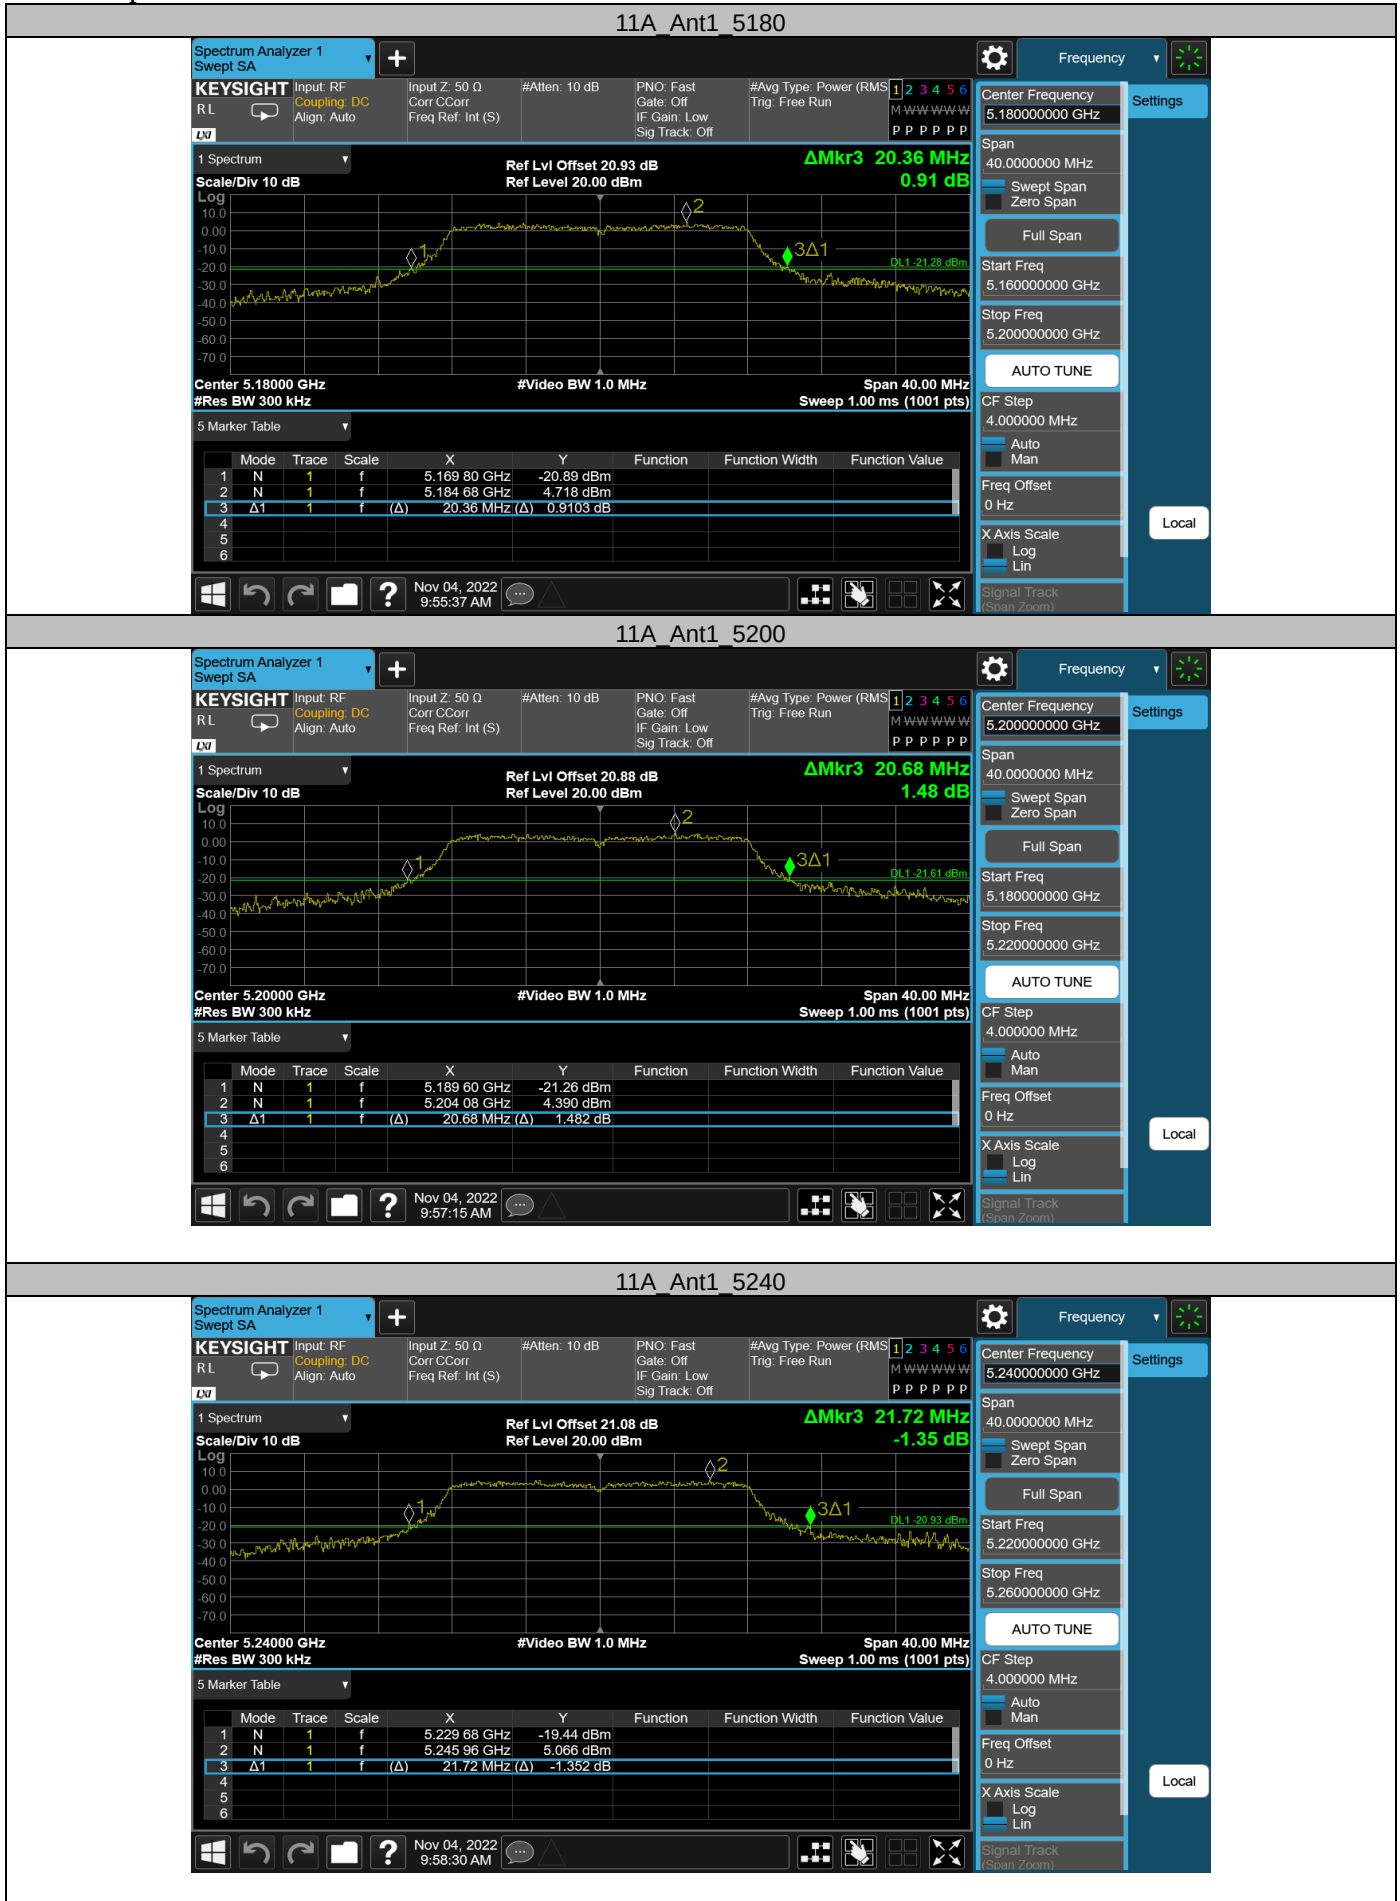


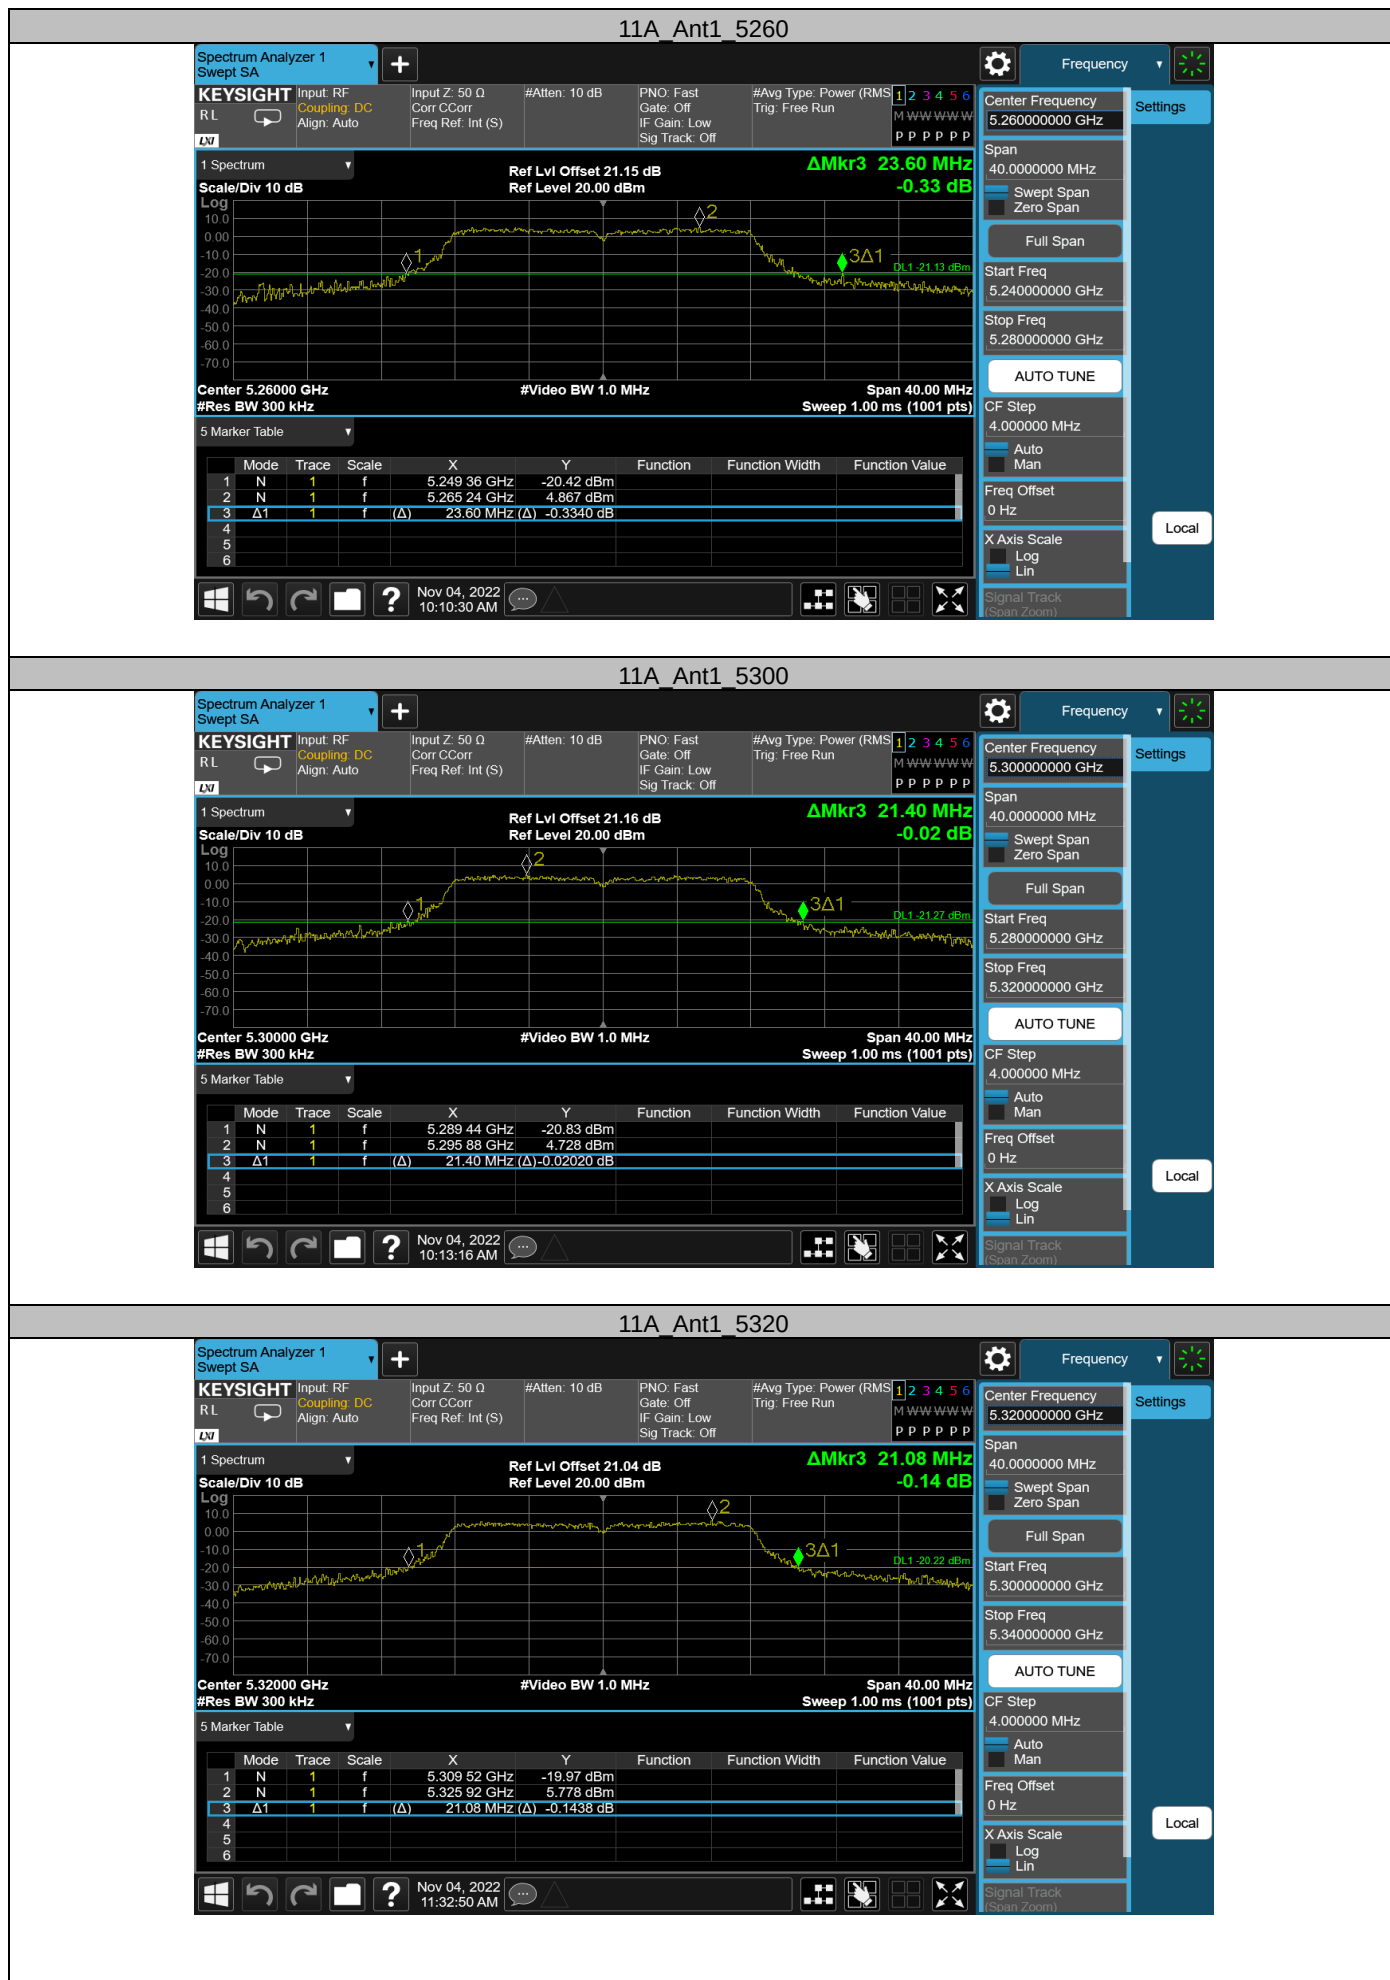


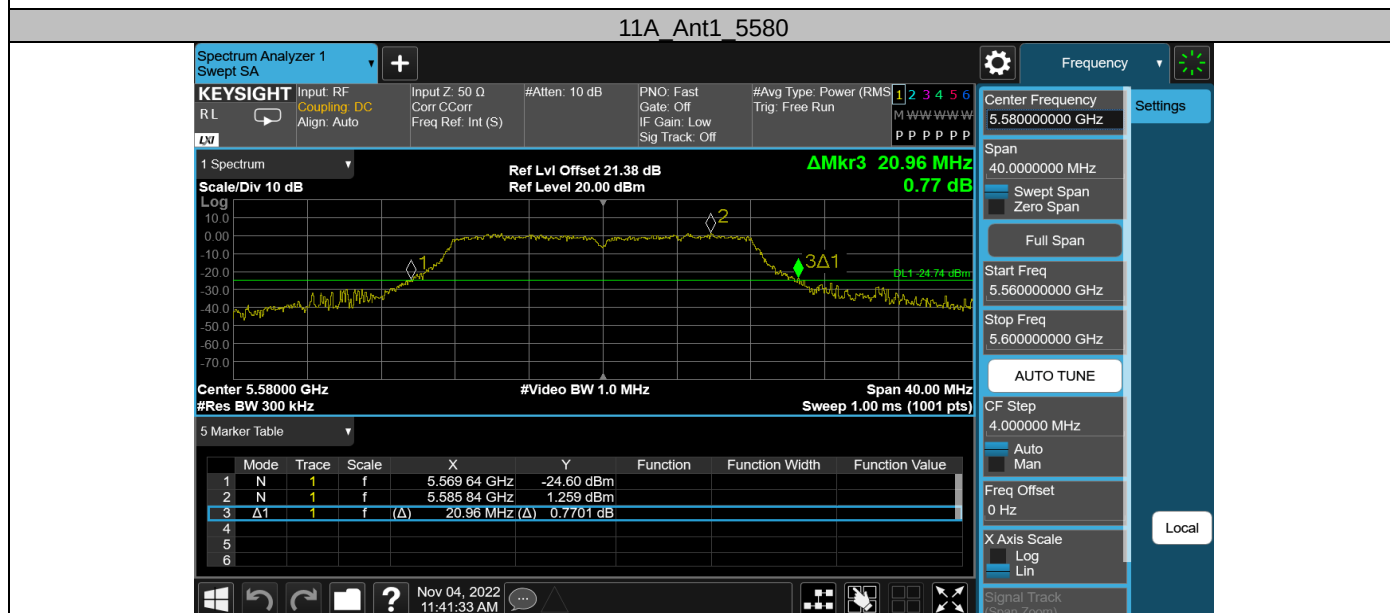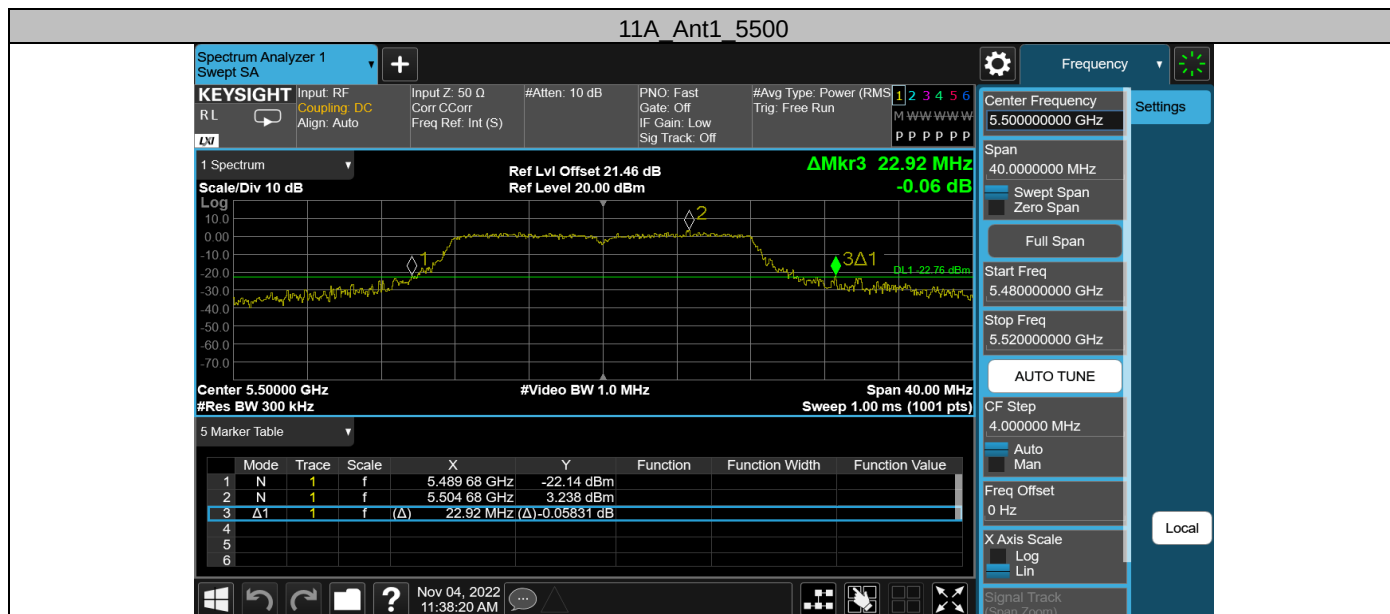

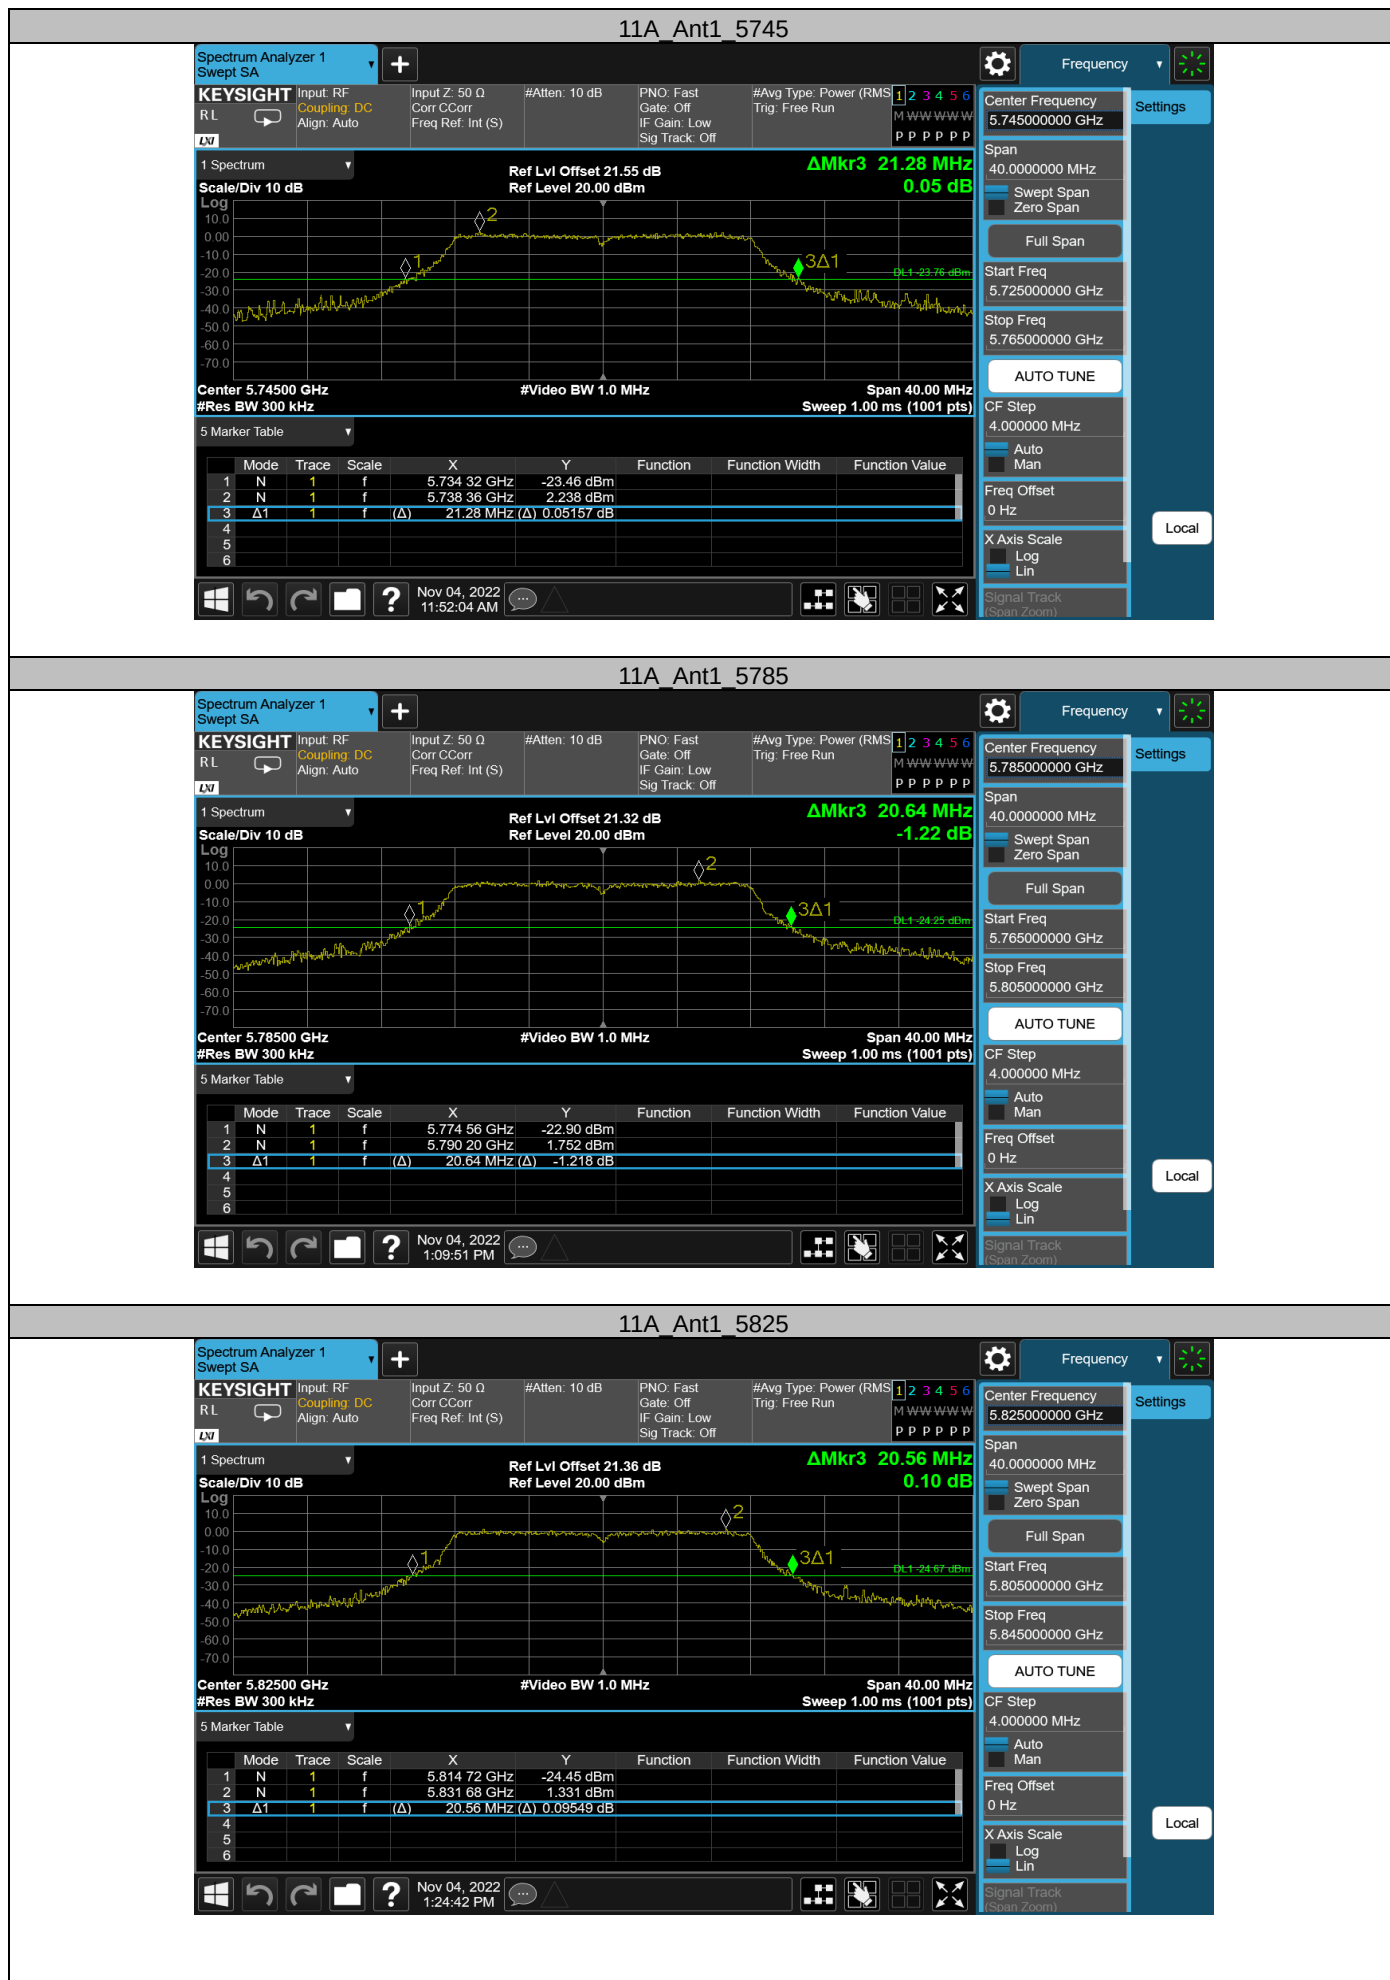

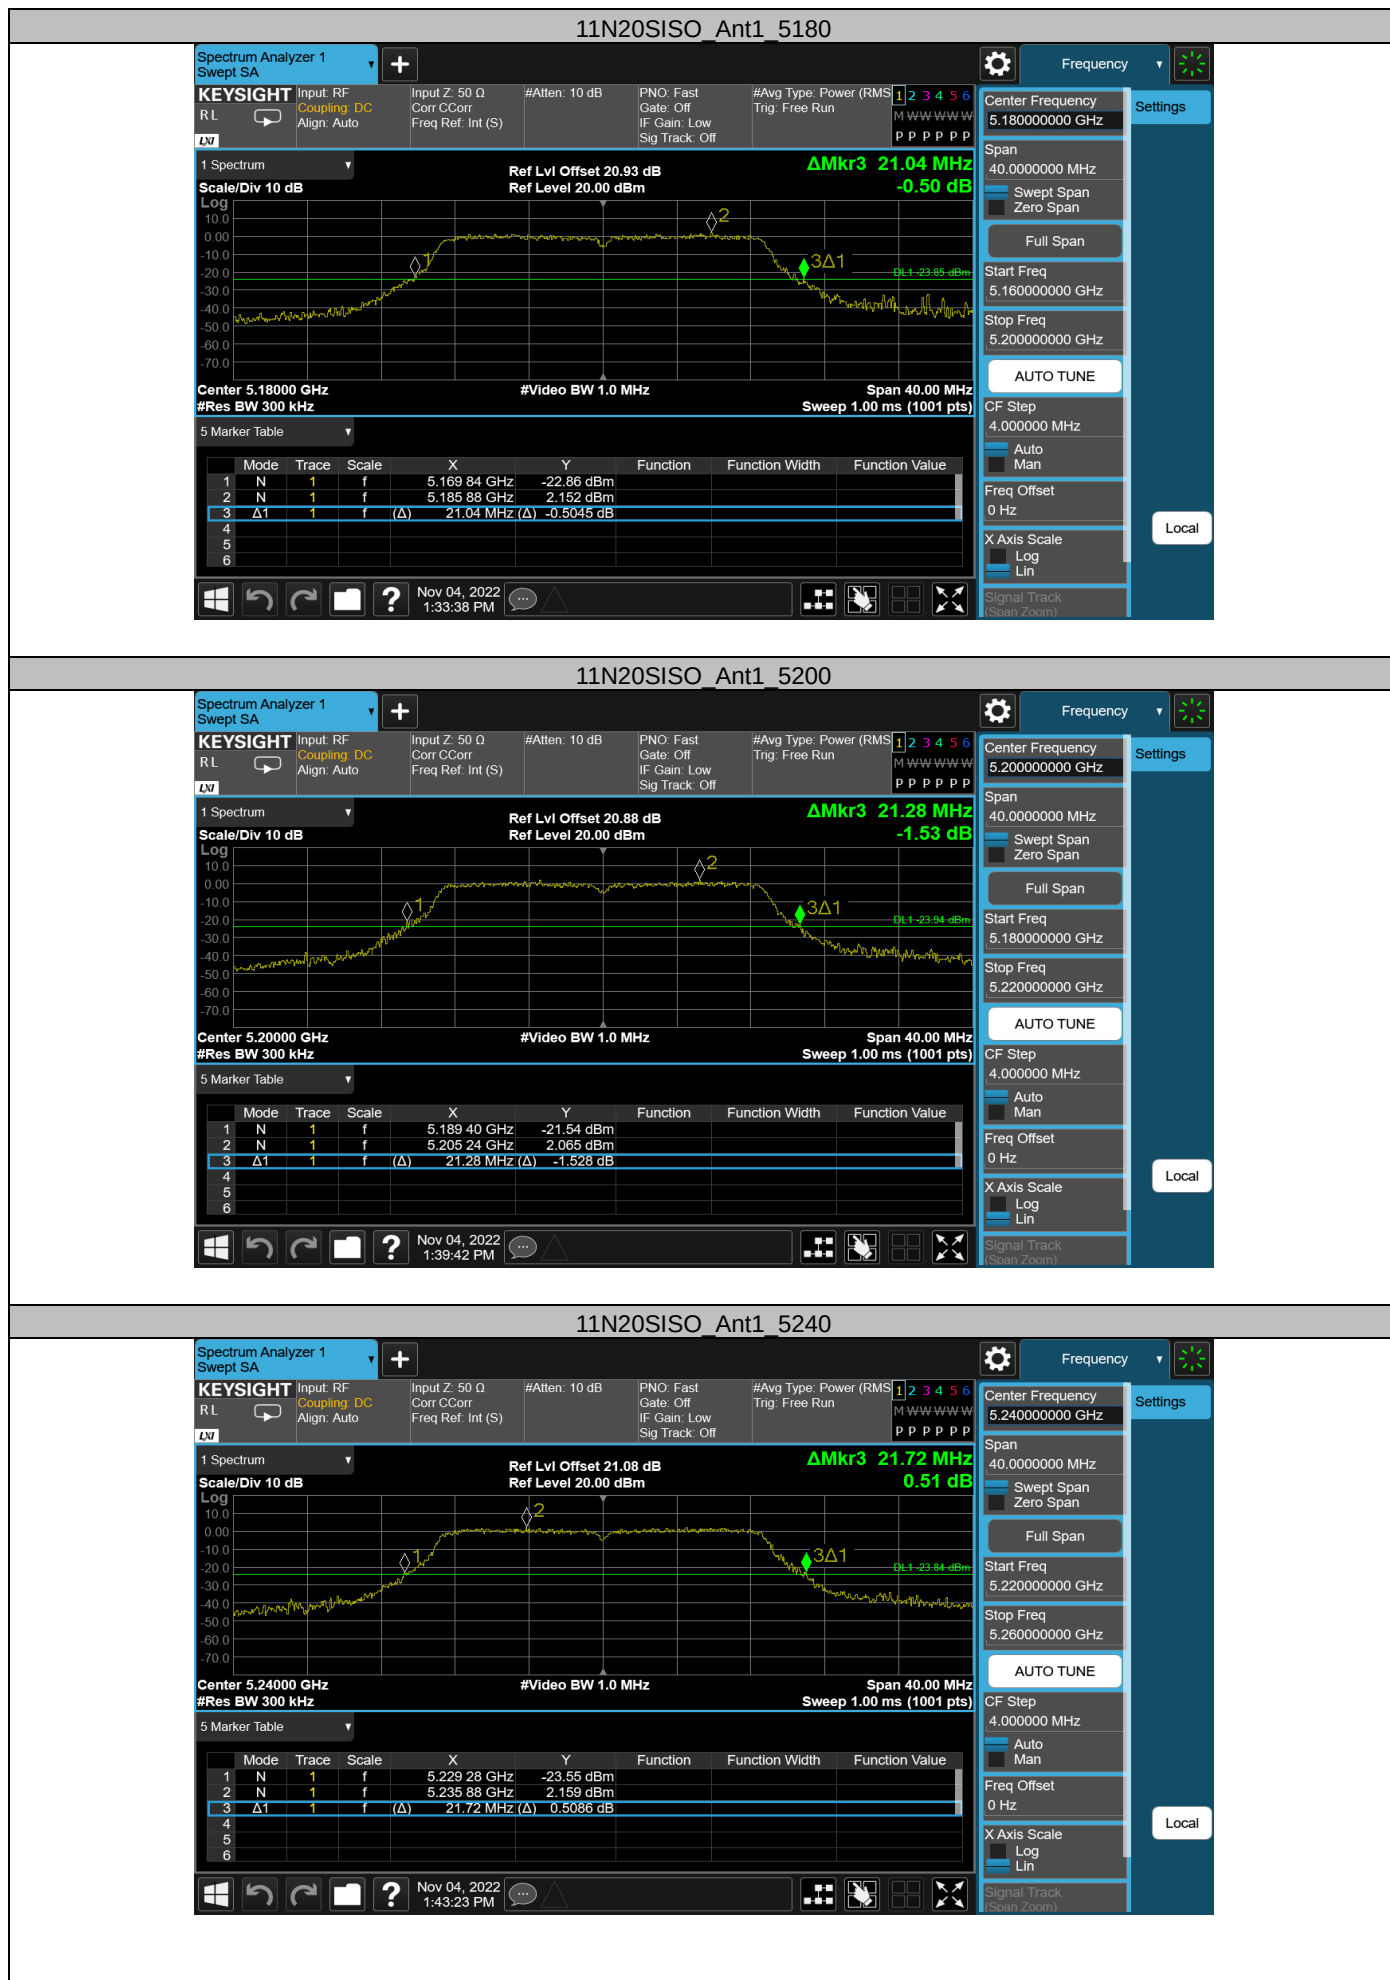

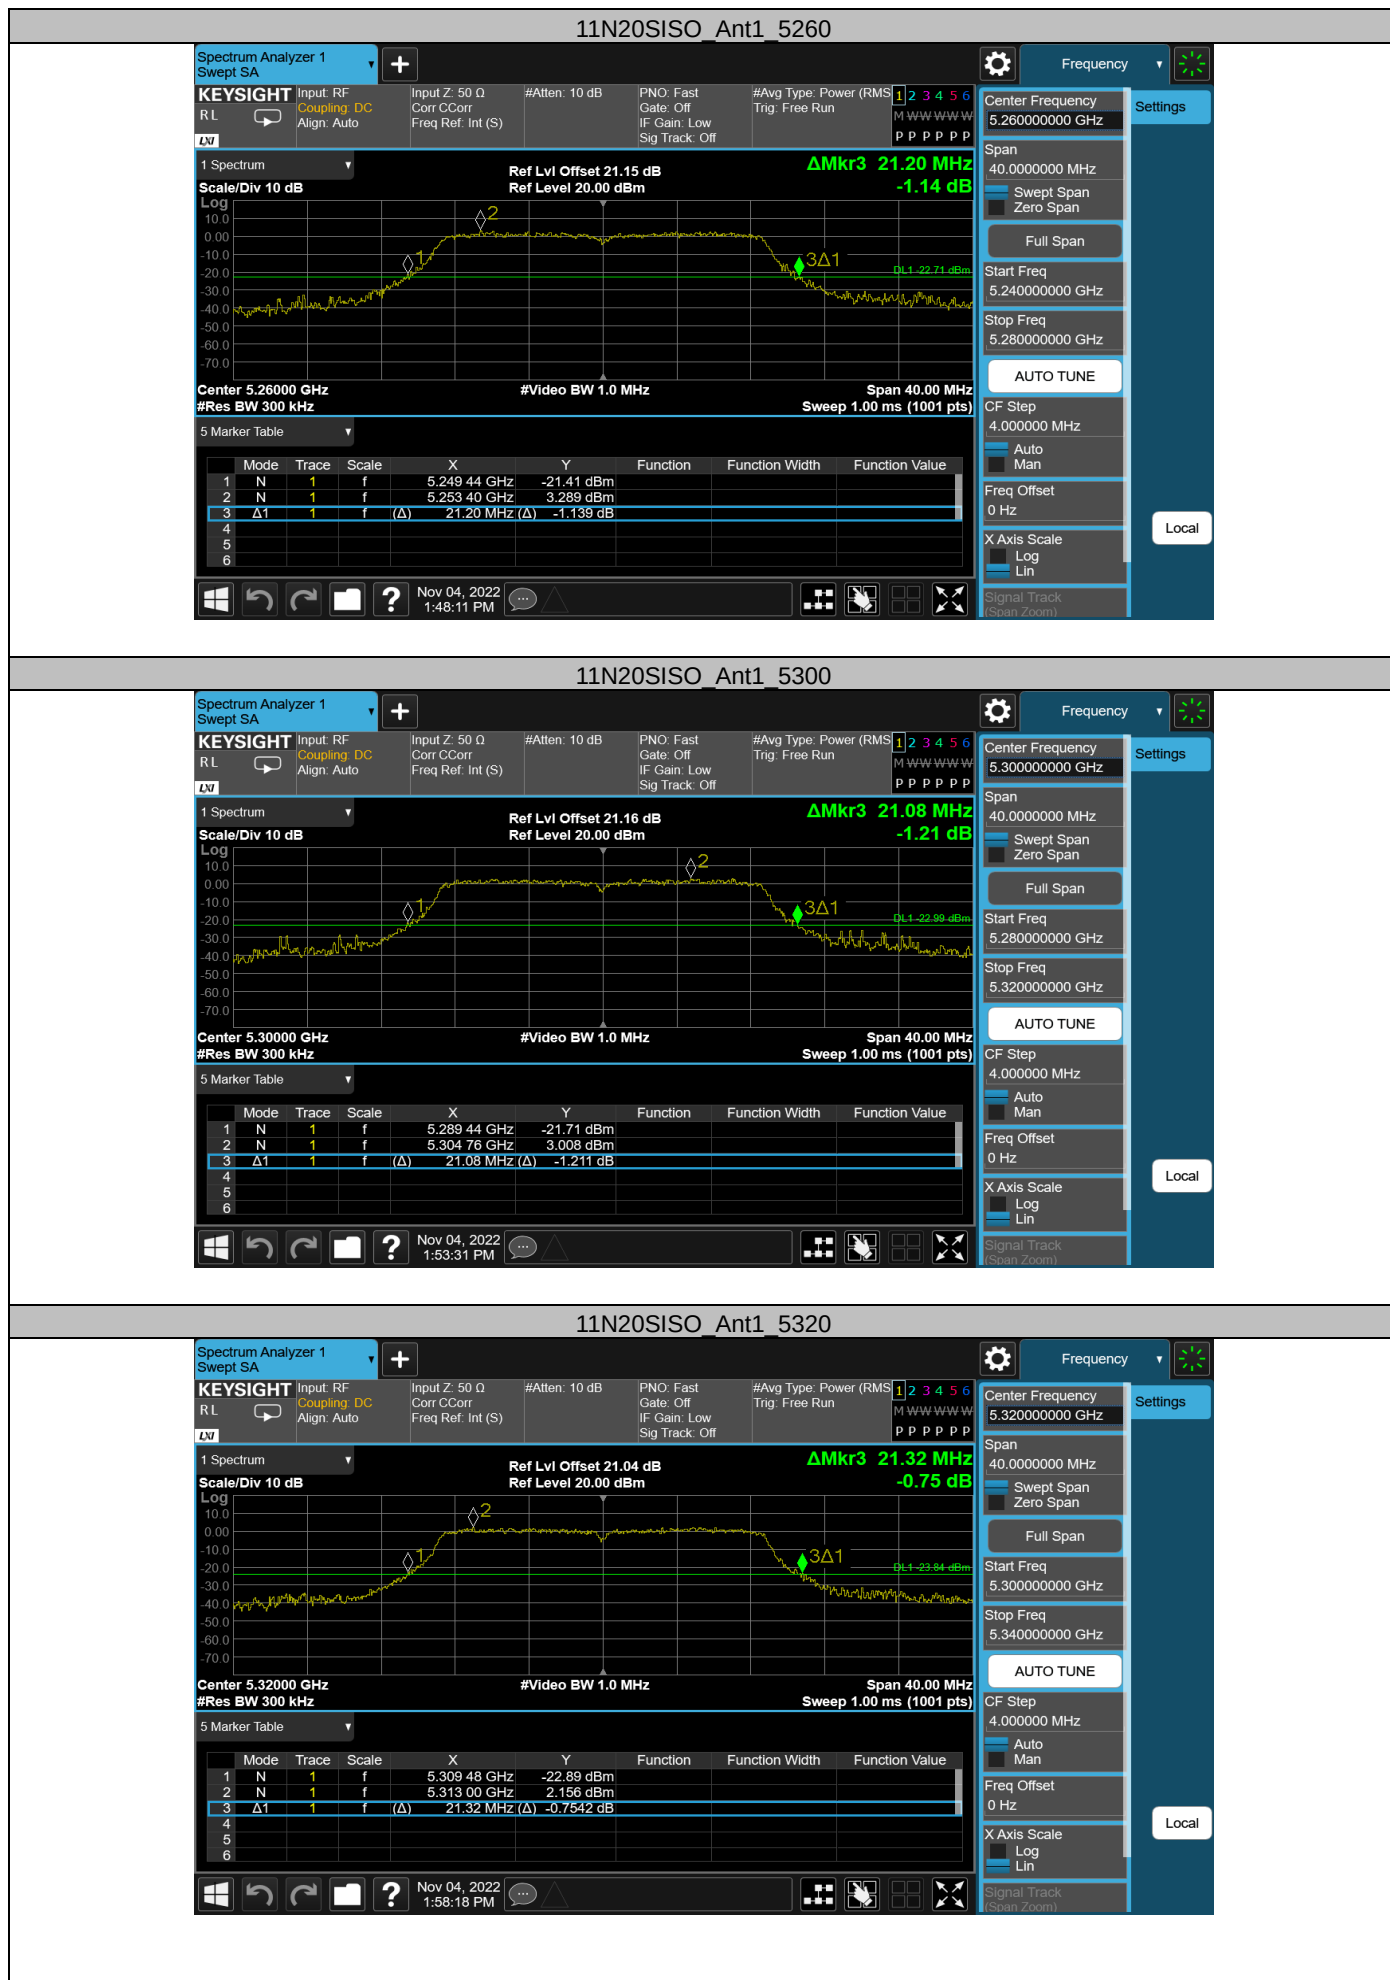

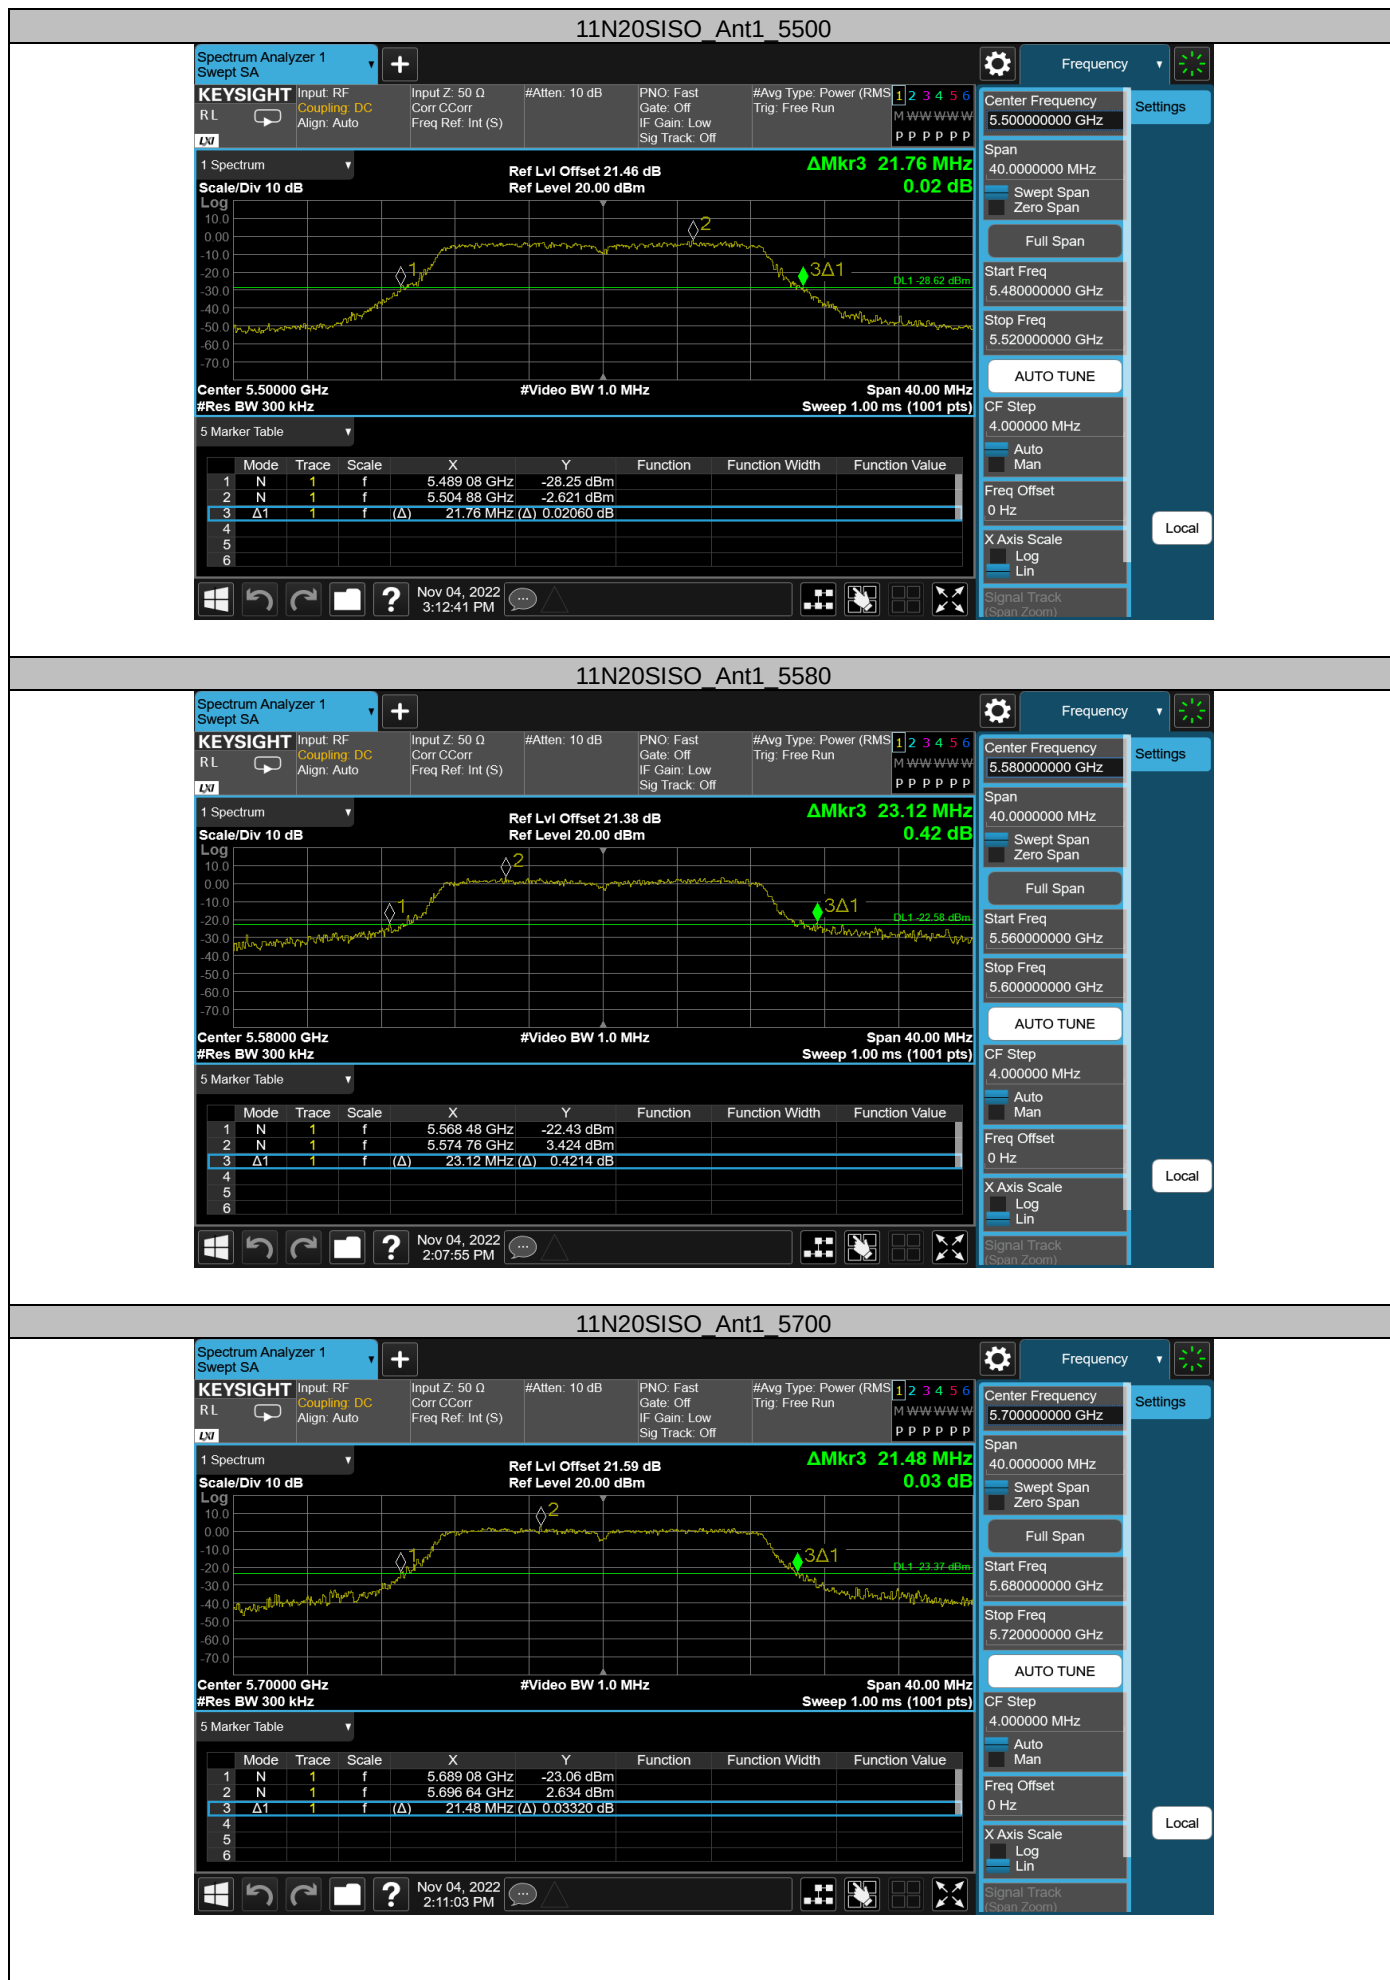

11N20SISO Ant1 5745





11N20SISO Ant1 5785




11N20SISO Ant1 5825



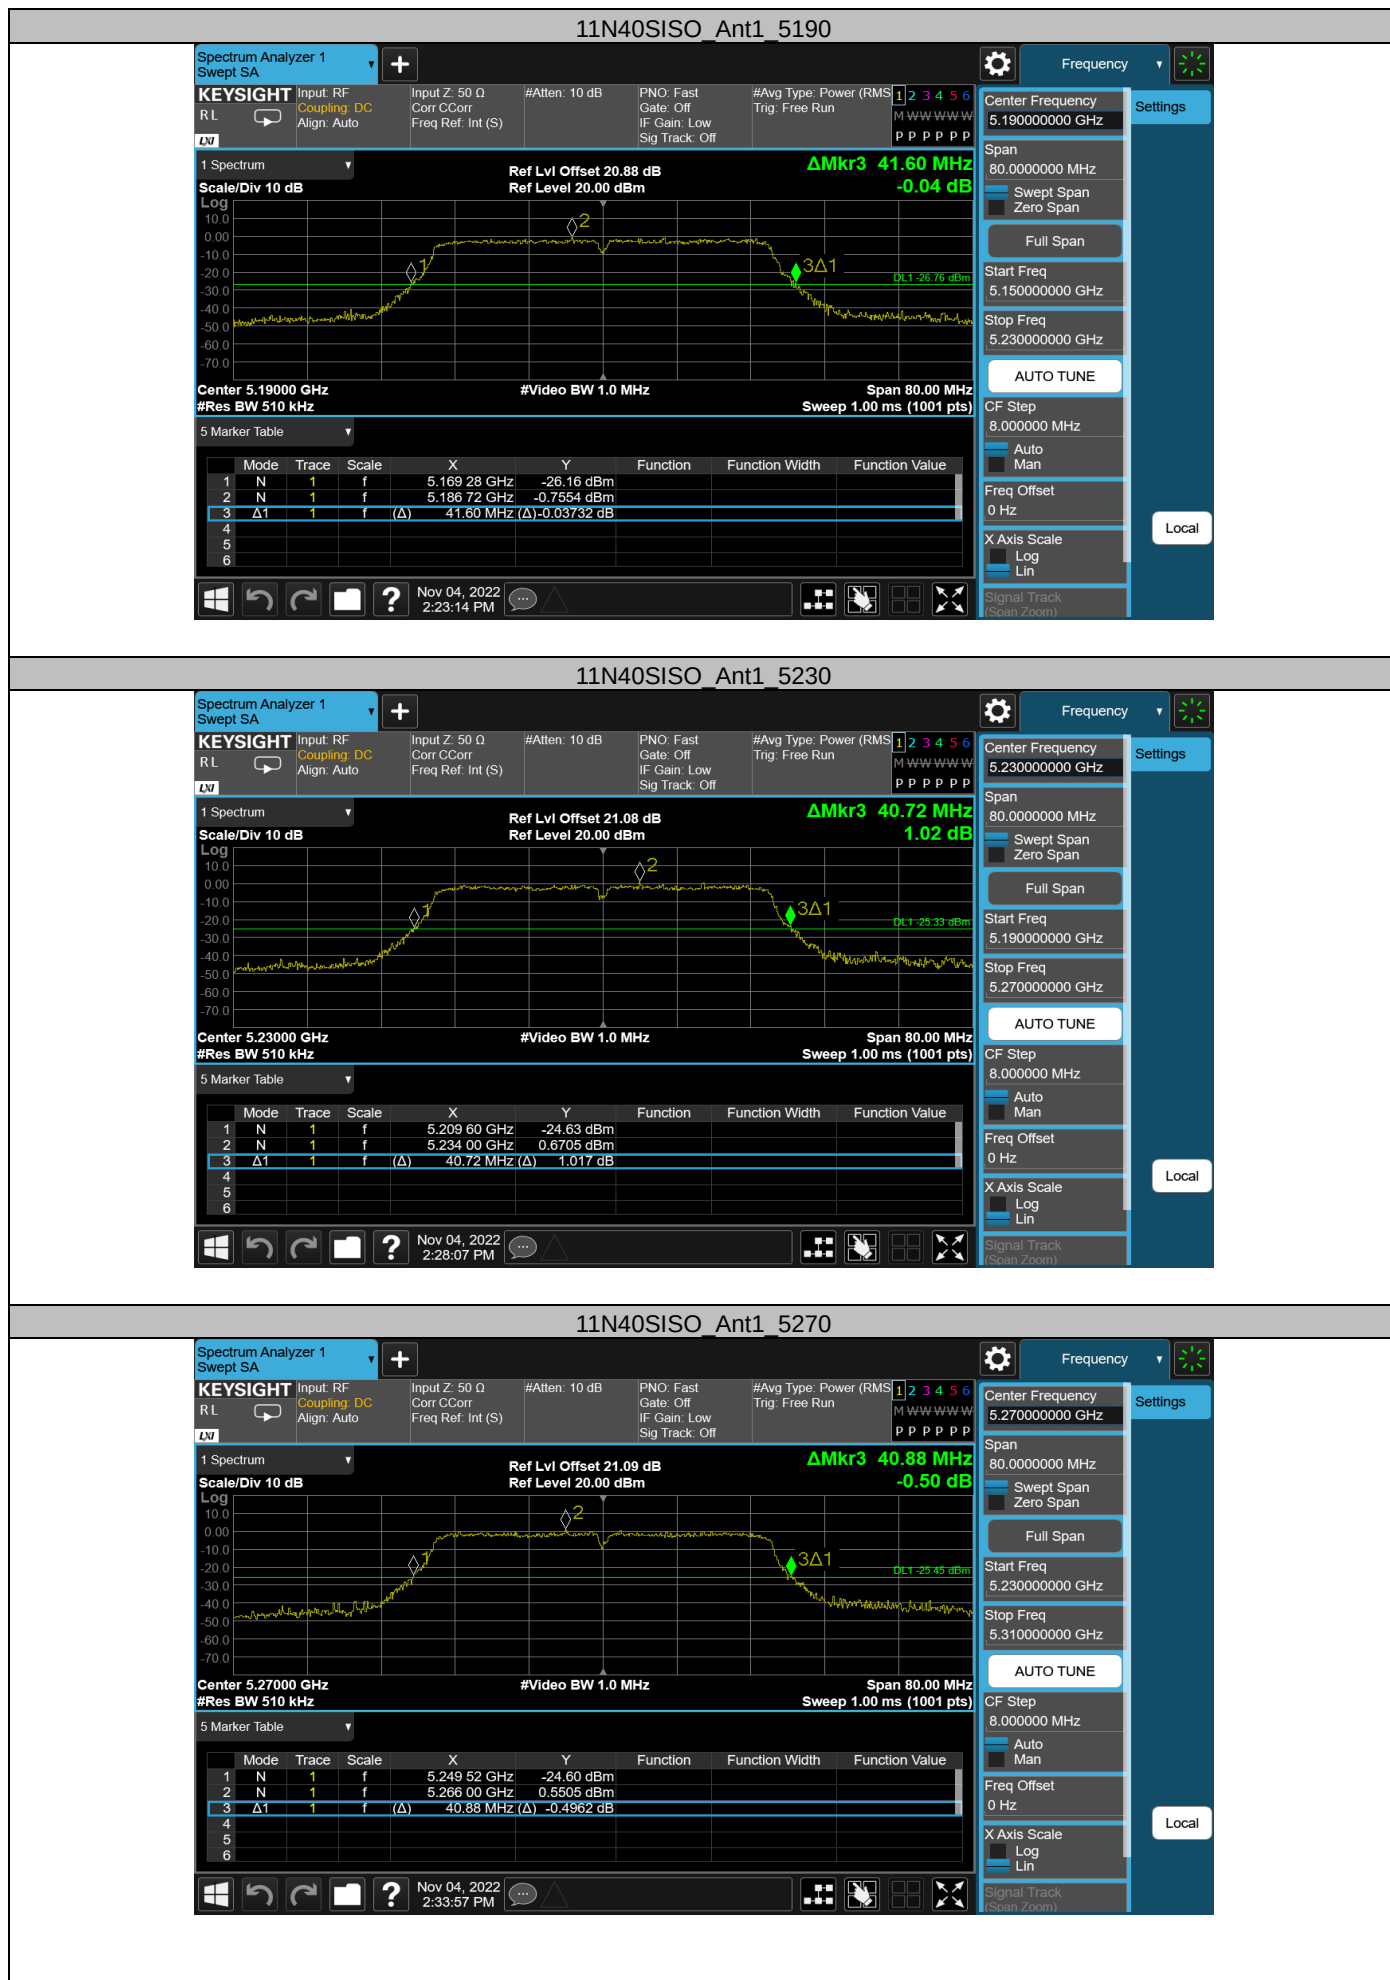

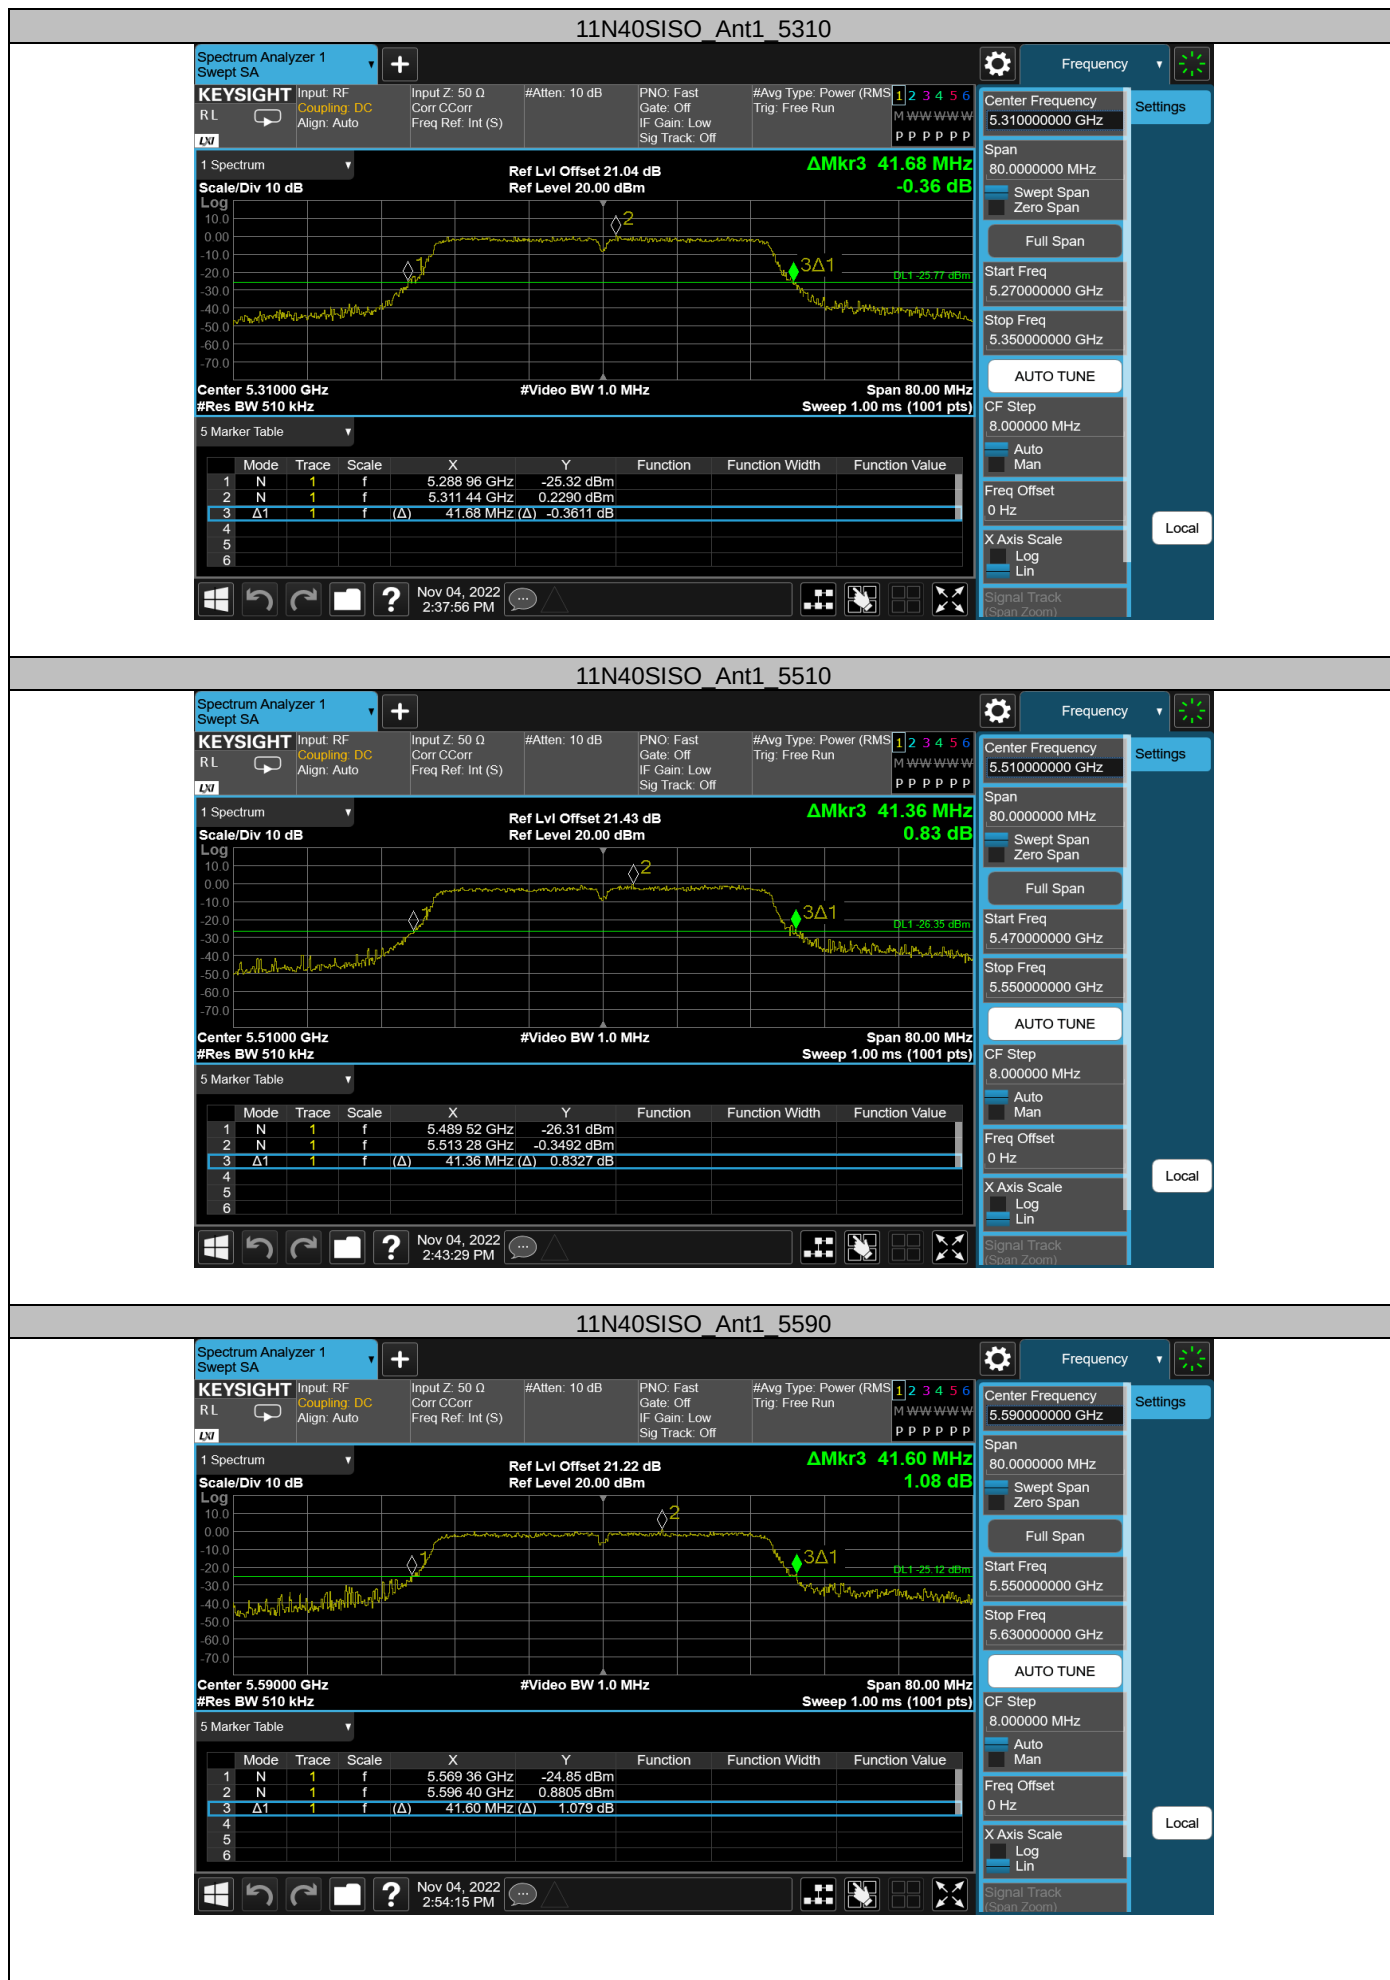


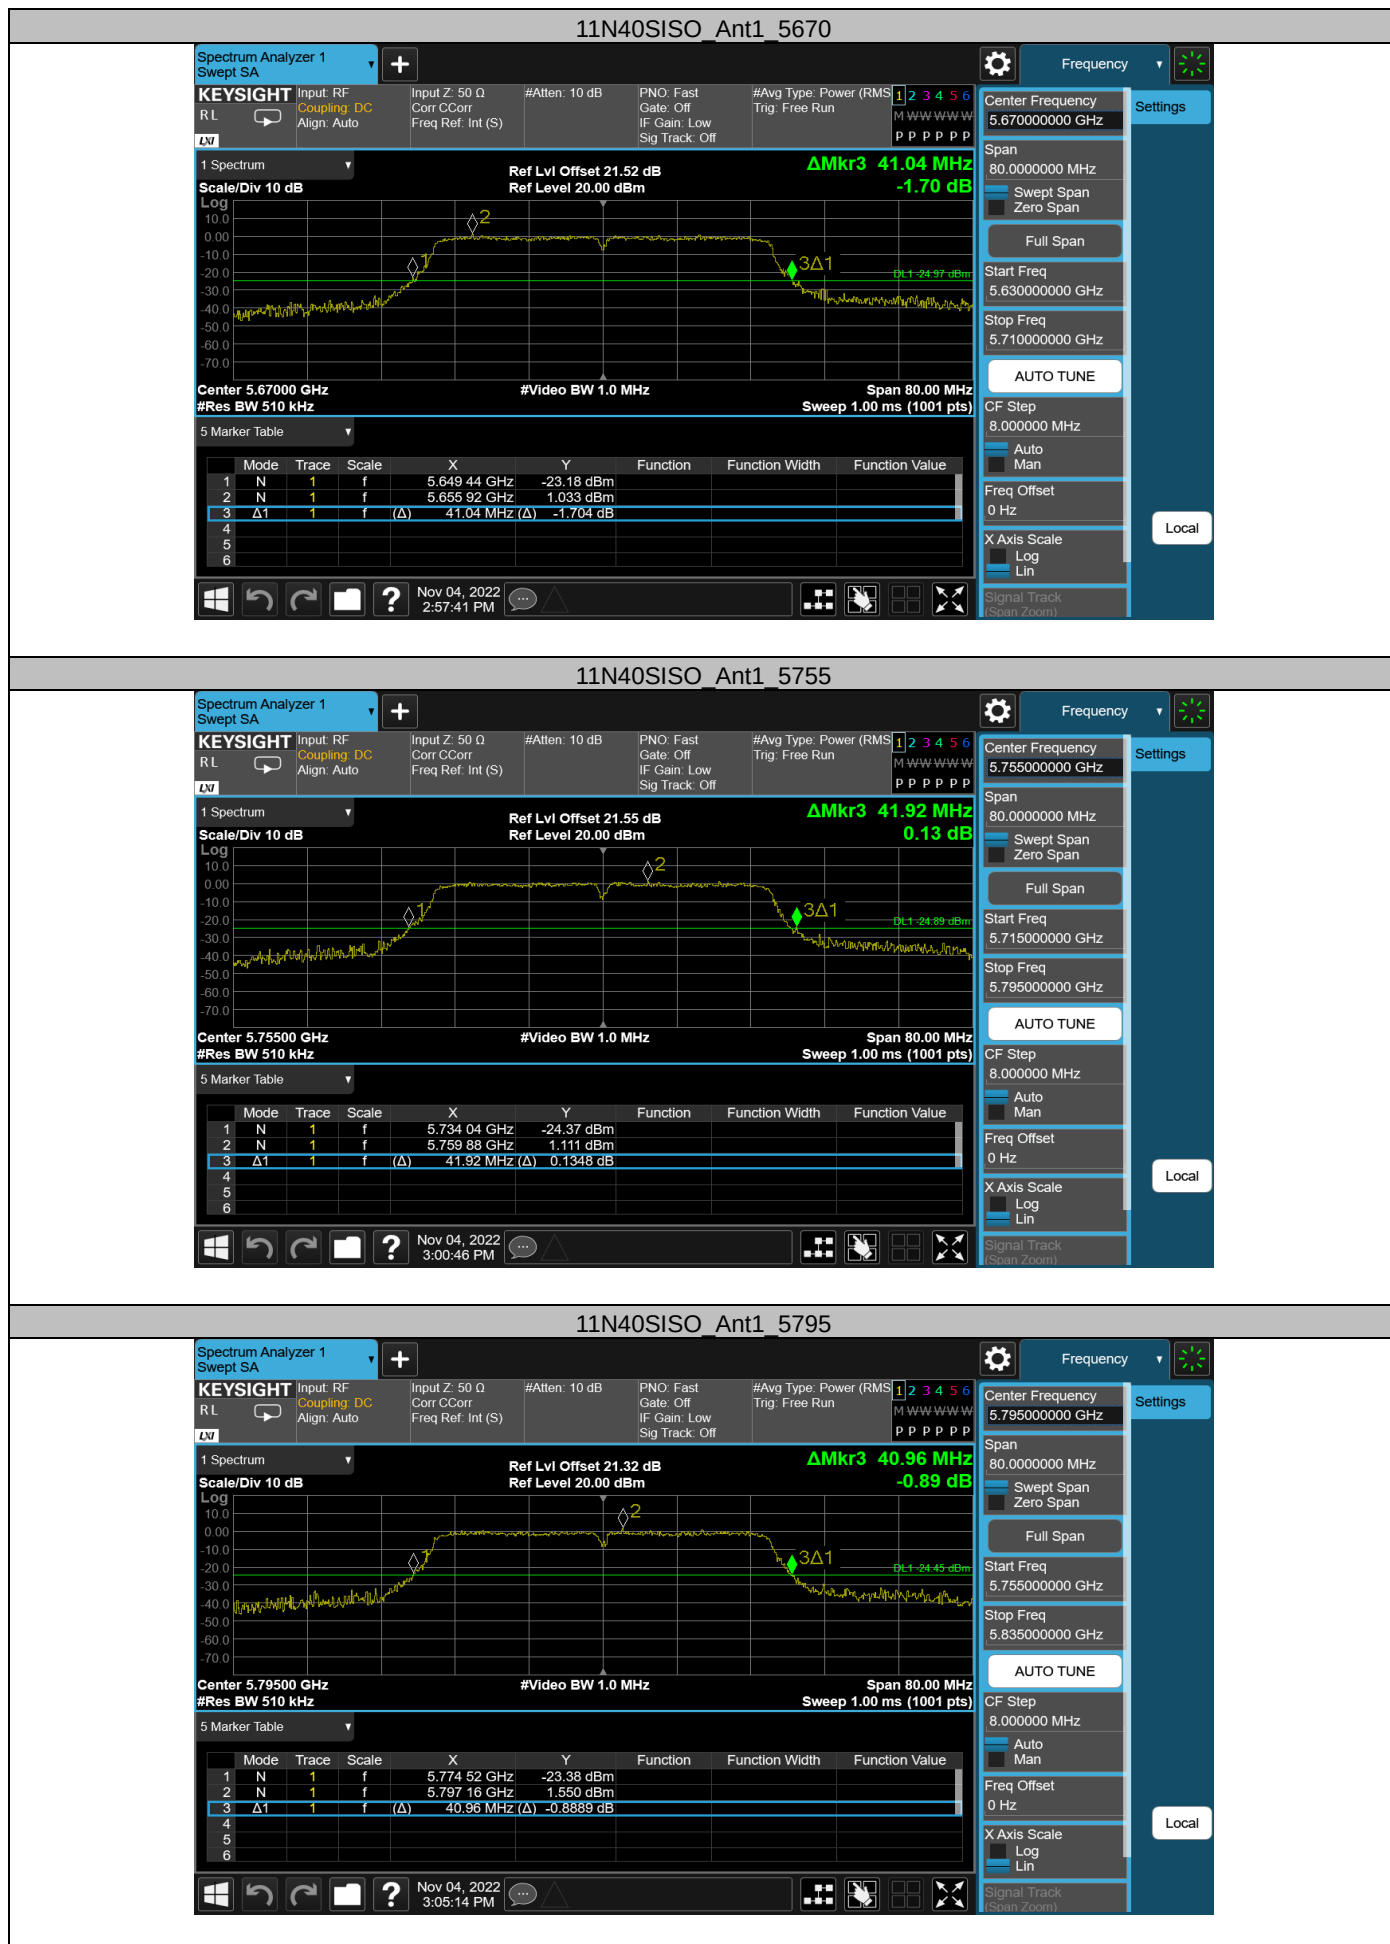

Appendix D: Occupied channel bandwidth Test Result


Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11A	Ant1	5180	16.661	5171.707	5188.368	---	---
		5200	16.717	5191.633	5208.350	---	---
		5240	16.716	5231.668	5248.384	---	---
		5260	16.770	5251.628	5268.398	---	---
		5300	16.779	5291.628	5308.407	---	---
		5320	16.793	5311.598	5328.391	---	---
		5500	16.757	5491.629	5508.386	---	---
		5580	16.732	5571.631	5588.363	---	---
		5700	16.752	5691.632	5708.384	---	---
		5745	16.730	5736.609	5753.339	---	---
		5785	16.688	5776.604	5793.292	---	---
		5825	16.695	5816.634	5833.329	---	---
11N20SISO	Ant1	5180	17.725	5171.152	5188.877	---	---
		5200	17.705	5191.146	5208.851	---	---
		5240	17.729	5231.152	5248.881	---	---
		5260	17.786	5251.099	5268.885	---	---
		5300	17.728	5291.163	5308.891	---	---
		5320	17.714	5311.163	5328.877	---	---
		5500	17.735	5491.117	5508.852	---	---
		5580	17.791	5571.111	5588.902	---	---
		5700	17.768	5691.100	5708.868	---	---
		5745	17.725	5736.117	5753.842	---	---
		5785	17.732	5776.117	5793.849	---	---
		5825	17.732	5816.129	5833.861	---	---
11N40SISO	Ant1	5190	36.333	5171.921	5208.254	---	---
		5230	36.438	5211.805	5248.243	---	---
		5270	36.314	5251.816	5288.130	---	---
		5310	36.337	5291.771	5328.108	---	---
		5510	36.325	5491.896	5528.221	---	---
		5590	36.459	5571.879	5608.338	---	---
		5670	36.362	5651.845	5688.207	---	---
		5755	36.413	5736.802	5773.215	---	---
		5795	36.563	5776.660	5813.223	---	---

Test Graphs

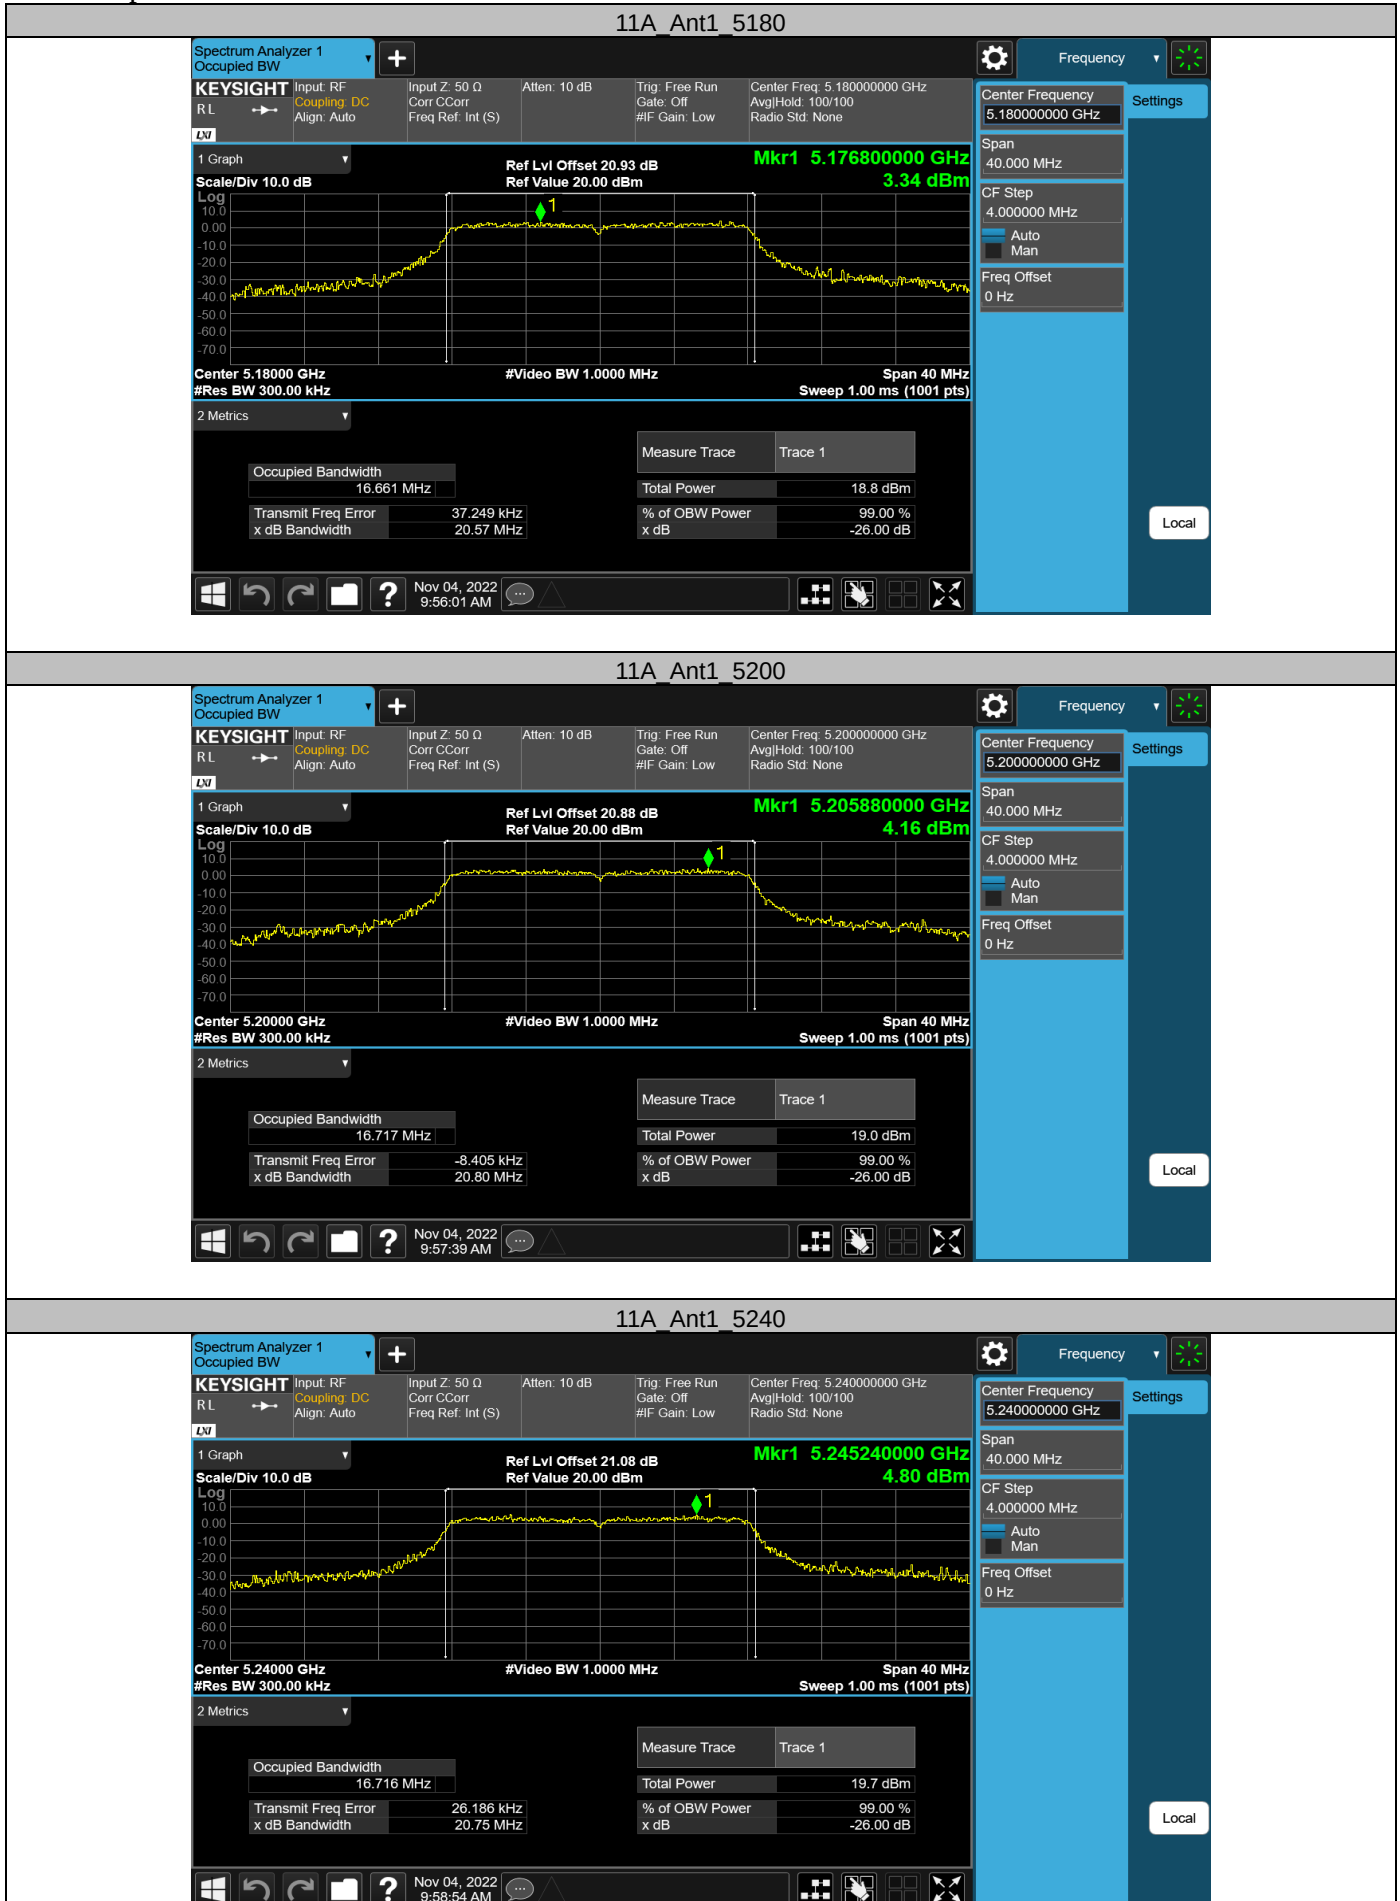




11A_Ant1_5500

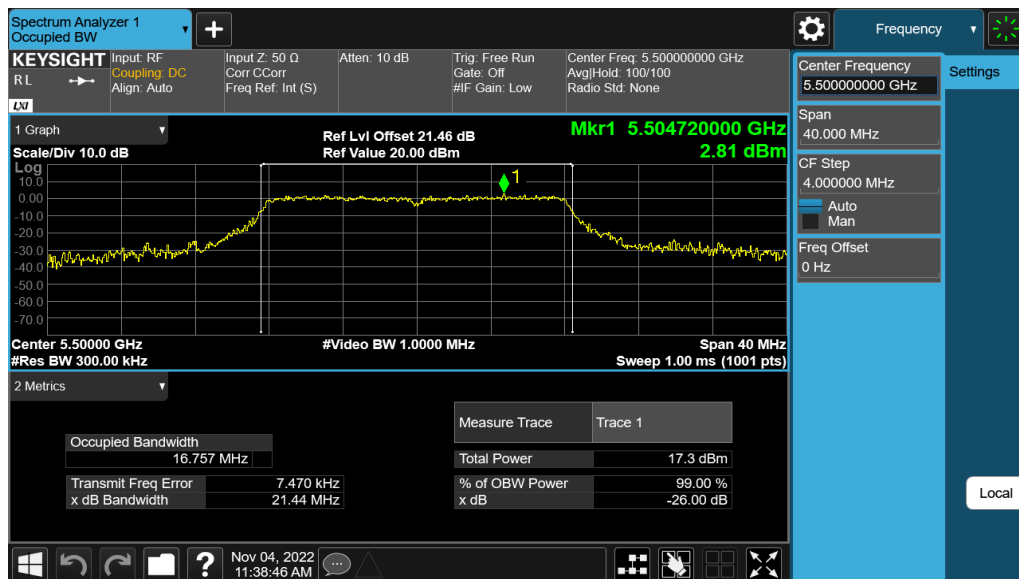

11A_Ant1_5580

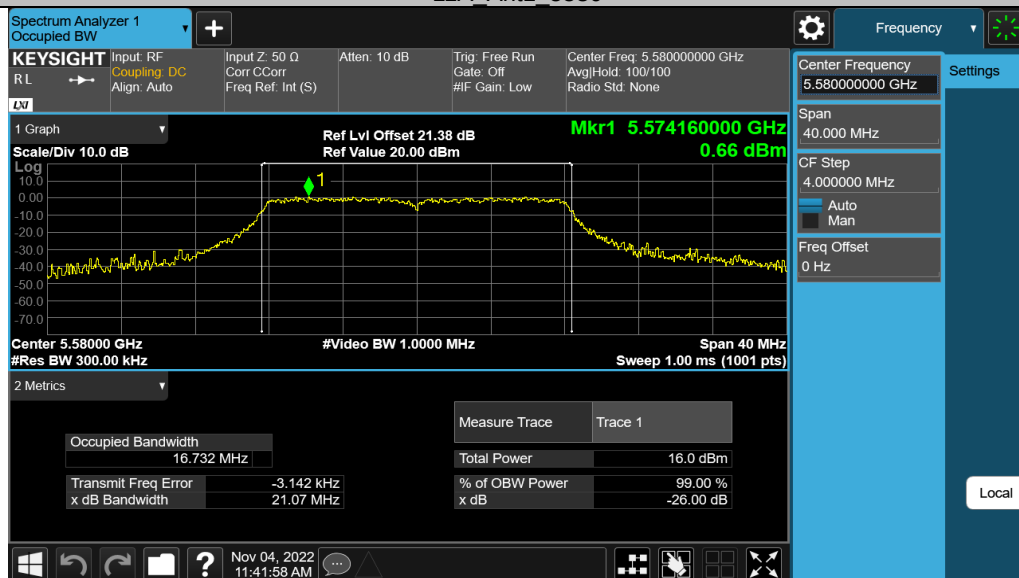

11A_Ant1_5700

