



EKSA

E900^{BT}
Wireless Gaming Headset

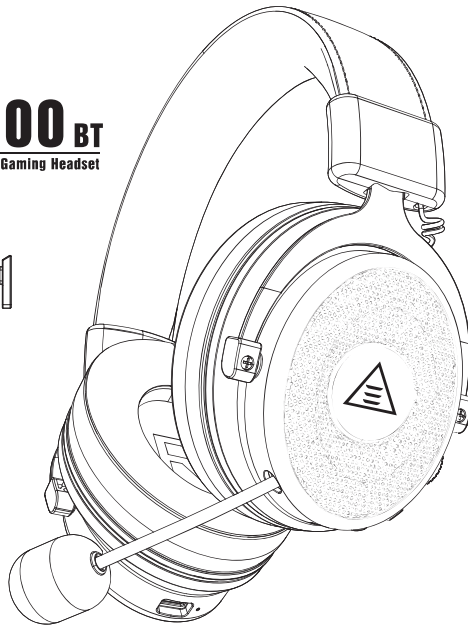

User Manual



Language Guide

English	1
---------	---

Français	12
----------	----

日本語	23
-----	----

Deutsch	34
---------	----

Русский	45
---------	----


Português	56
-----------	----

EN



Package Contents

- ① 1* EKSA E900 BT Wireless Headset
- ② 1* Type-C to USB Adaptor
- ③ 1* Type-C Transmitter
- ④ 1* Microphone Foam Cover
- ⑤ 1* Type-C Charging Cable
- ⑥ 1* 3.5mm Audio Cable
- ⑦ 1* Carry Pouch
- ⑧ 1* User Manual
- ⑨ 1* Card

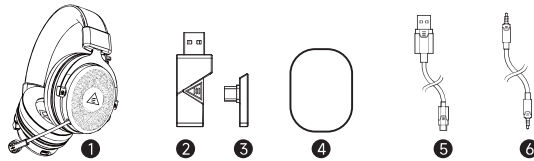


Specification


Brand: EKSA	Play Time: 50 hours (light off)
Product: E900 BT	Frequency Response: 20 Hz ~ 20 kHz
Model: E900 BT	Operating Frequency: 2402-2480 MHz
Bluetooth Version: 5.0	Maximum Transmit Powe: <20 dBm
Driver Diameter: 50 mm	Input: 5 V $\overline{\text{---}}$ 800 mA
Impedance: 32 Ω $\pm$ 15%	Battery Specifications: DC 3.7 V, 1000 mAh, 3.7 Wh
Sensitivity: 98 $\pm$ 3 dB	Battery Type: Li-ion Polymer Battery
Battery: 1000 mAh / 3.7 V	Charging temperature range: 0°C-45°C
Charging Time: 2 hours	Discharging temperature range: -20°C-60°C
Bluetooth Range: 10 m	



Product Overview

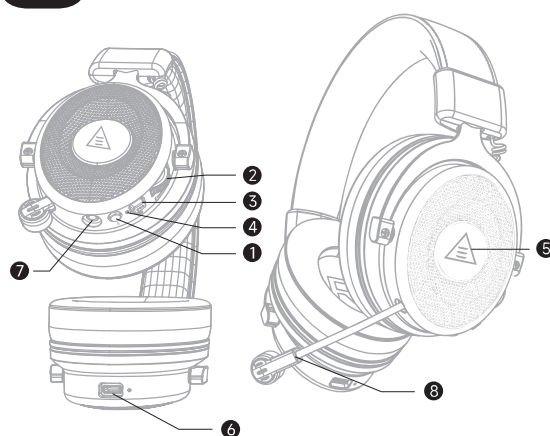

- ① Power Button
- ② Volume Knob
- ③ Microphone Mute Button
- ④ LED Status Indicator
- ⑤ LED Backlight
- ⑥ Type-C Charging Port
- ⑦ 3.5mm Audio Port
- ⑧ Retractable Microphone
- ⑨ Type-C to USB Adaptor
- ⑩ Type-C Transmitter
- ⑪ 3.5mm Audio Cable
- ⑫ Type-C Charging Cable
- ⑬ Microphone Foam Cover
- ⑭ Carrying Pouch

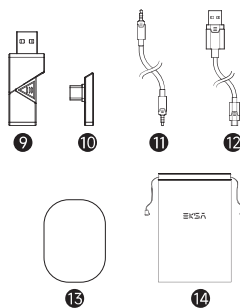





Operation Guide



Power On/Off



(1) Long press the "Power button" for about 2 seconds in the off state. If the blue light is on for 1 second, the headset will be turned on.




(2) Long press the "Power button" for about 2 seconds in the on state. If the red light is on for 1 second, the headset will be turned off.

Note: 1. In the case of no connection, the headset will automatically shut down after 3 minutes.



Bluetooth Pairing Connection


(1) Long press the "Power button" for about 5 seconds in the off state and turn on. If the blue and red lights flash alternately, the headsets will enter the paired state.

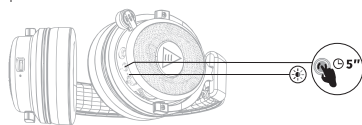

(2) If the connection is not successful after startup, it will automatically enter the pairing state.

(3) When the headset is disconnected, it will automatically enter the pairing state.

(4) Turn on Bluetooth of the device, search for Bluetooth headset, and then select "EKSA E900 BT" for pairing connection. After the connection is successful, the headset will prompt "Connected", the blue light will keep on, and the device will display that the Bluetooth headset is connected.

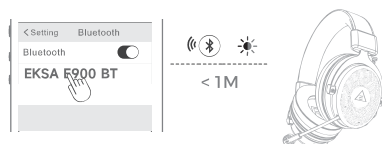


Note: 1. If you want to connect a new device, you need to disconnect the Bluetooth connection from the connected device first, and the headset will automatically enter the pairing state. Then use the new device for Bluetooth search and complete the connection with the headset;

2. Each time the headset is turned on, it will automatically search and connect the most recently connected device.




2.4GHz Transmitter Connection

(1) Insert the 2.4GHz transmitter into the computer or mobile phone and other devices. The adapter will automatically start up and the blue LED flashes to enter the pairing state.

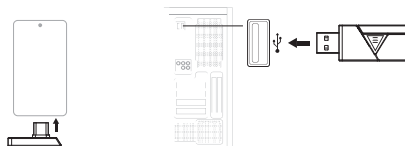

(2) Turn on the headset, and the headset and adapter will be automatically connected successfully.

(3) After successful connection, the blue light of the headset and the blue light of the adapter should remain steady on.

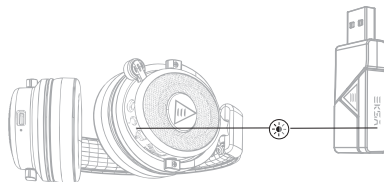

Note: When connecting a computer with Bluetooth to the E900 BT, you can connect through a USB adapter or Bluetooth. Select the audio driver named EKSA E900 BT for Bluetooth connection, and select the audio driver named EKSA E900 BT 2.4G for USB adapter.




2.4GHz Transmitter Settings on Your Computer


Follow the steps below to ensure your EKSA E900 BT 2.4G is the default audio device.

Windows®:


Audio Settings:

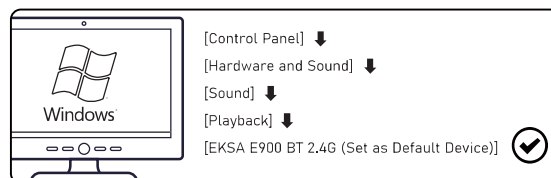

Microphone Settings:

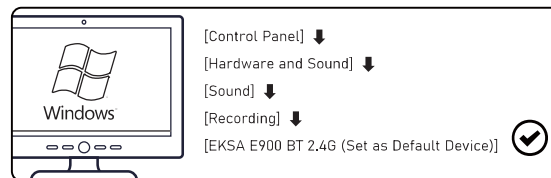

macOS:

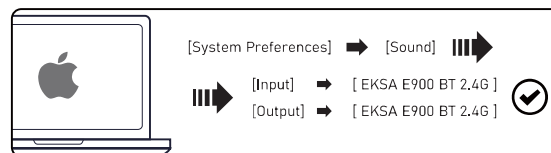




Bluetooth Connection Switch 2.4GHz Transmitter Connection

Note: Bluetooth and 2.4G connection cannot be used on the same device.

- (1) Bluetooth connection mode is enabled by default after turn-on.
- (2) In Bluetooth connection mode, Click the power button to switch to USB adapter connection mode.
- (3) In USB adapter connection mode, Click the power button to switch back to Bluetooth connection mode.

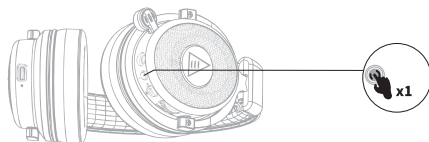


Note: Connection mode switch is invalid in Bluetooth incoming call, canceling call, and call state.



3.5mm Wired Connection


- (1) In the on state, insert the 3.5mm audio cable, the headset will automatically turn off, and the headset will switch to the 3.5mm wired connection mode.

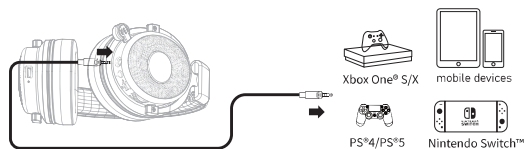


- (2) In the 3.5mm wired connection mode, the headset cannot be turned on.
- (3) In 3.5mm wired connection mode, volume increase or decrease is effective, while other functions are invalid.

Operation Guide


Volume Increase and Decrease

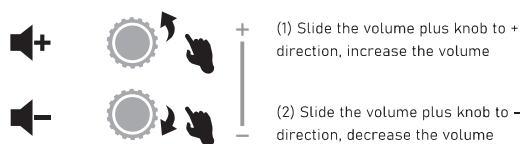

Microphone Mute Button

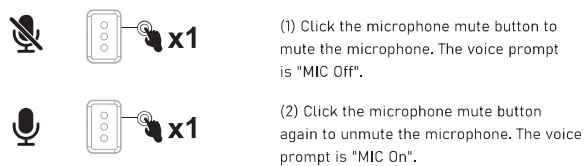

Audio Switch

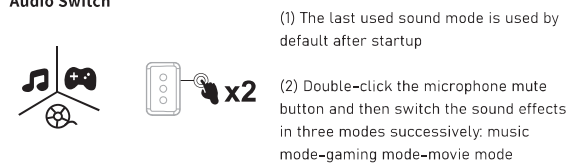



Operation Guide



Backlight On /Off




x2"

(1) By default, the red backlight is turned on.

(2) Turn on and off the backlight by holding down the microphone mute button for 2 seconds.



Headset Charging

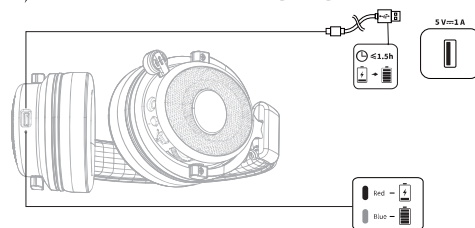

(1) When the headset battery is Low, voice reminder "Low Battery please charge" is performed every 3 minutes, and the red light blinks every 3s;

(2) Insert the USB TypeC charging cable for charging, the headset will reset and automatically turn off, and enter the charging state. The red light will be on when charging, and the red light will be off when fully charged.

Call

(1) When a call comes, click the power button to answer the call



(2) When a call comes, double click the power button to reject the call




(3) When hanging up the phone, short click the power button to cancel the call



(4) During the conversation, short click the power button to hang up the phone



(5) During the conversation, click the microphone mute button to mute the microphone, and press again to cancel the mute.

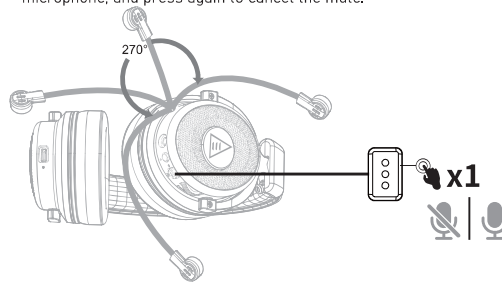



Frequently Asked Questions

Question 1: There is no sound from the microphone or headset, or the sound is low.

1. Refer to the instruction manual first to check whether the headset is correctly connected to the device, and then use the device to talk or listen to music;
2. Ensure that the headset or microphone of the device is not in silent state and the volume is adjusted to the appropriate level. Make sure that the speaker of the headset or device is not silent and adjusted to the appropriate volume;
3. Correctly set the audio driver of the device; Choose EKSA E900 BT Stereo for Bluetooth connection and EKSA E900 BT 2.4G for USB adapter connection;
4. Use another device or another USB jack to ensure that the headset works properly.

Question 2: Headsets do not turn on/work/recognize


1. Refer to the headset instruction manual first, correctly connect the headset to the computer, and make sure that the connection is in good contact;
2. Check whether the power supply of the headset is normal and ensure that the headset can be turned on and off normally;
3. Check whether the headset connector and computer connector are dirty. Keep the connector clean to prevent improper contact;
4. Use another device or another USB jack to ensure that the headset works properly.

FR



Contenu du paquet

- ① 1* Casque sans fil EKSA E900 BT
- ② 1* Adaptateur Type-C vers USB
- ③ 1* Émetteur Type-C
- ④ 1* Couvre-cle en mousse du microphone
- ⑤ 1* Câble de charge de type C
- ⑥ 1* Câble audio 3.5mm
- ⑦ 1* Pochette de transport
- ⑧ 1* Manuel de l'utilisateur
- ⑨ 1* Carte

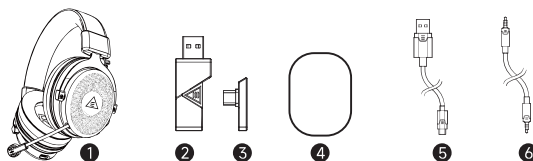


Spécifications


Marque : EKSA	Diamètre du conducteur : 50 mm
Produit : E900 BT	Réponse en fréquence : 20 Hz - 20 kHz
Modèle : E900 BT	Durée de lecture : 50 heures (lumière éteinte)
Version Bluetooth : 5.0	Fréquence de fonctionnement : 2402 - 2480 MHz
Impédance : $32 \Omega \pm 15\%$	Puissance de transmission maximale : <20 dBm
Sensibilité : 98 ± 3 dB	Spécifications de la batterie : DC 3.7 V, 1000 mAh, 3.7 Wh
Batterie : 1000 mAh / 3.7 V	Type de batterie : Batterie polymère Li-ion
Temps de charge : 2 heures	Plage de température de charge : 0°C - 45°C
Portée Bluetooth : 10 m	Plage de température de décharge : -20°C - 60°C
Entrée : 5 V $\approx$ 800 mA	



Aperçu du produit

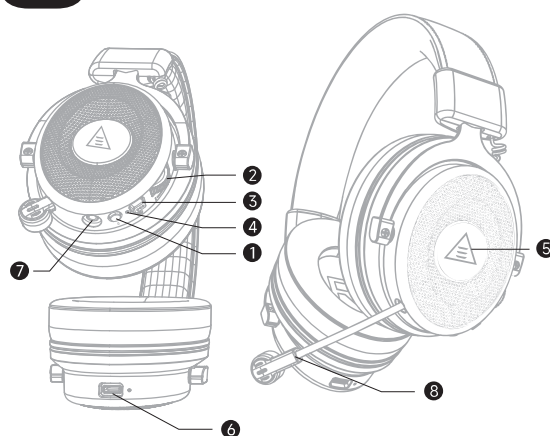

- ① Bouton d'alimentation
- ② Bouton de volume
- ③ Bouton de coupure du microphone
- ④ Indicateur d'état LED
- ⑤ Rétro-éclairage LED
- ⑥ Port de charge de type C
- ⑦ Port audio 3,5 mm
- ⑧ Microphone rétractable
- ⑨ Adaptateur Type-C vers USB
- ⑩ Émetteur de type C
- ⑪ Câble audio 3,5 mm
- ⑫ Câble de charge de type C
- ⑬ Couverture en mousse du microphone
- ⑭ Pochette de transport

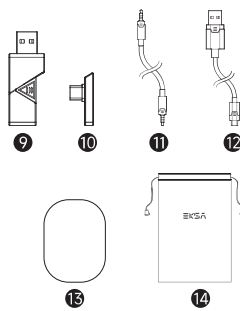



Guide d'utilisation



Mise sous tension/hors tension



(1) Appuyez longuement sur le "bouton d'alimentation" pendant environ 2 secondes lorsque l'oreillette est éteinte. Si la lumière bleue s'allume pendant 1 seconde, l'oreillette s'allume.




(2) Appuyez longuement sur la "touche Marche/Arrêt" pendant environ 2 secondes lorsque l'oreillette est allumée. Si la lumière rouge s'allume pendant 1 seconde, l'oreillette s'éteint.

Note : 1. en cas d'absence de connexion, l'oreillette s'éteint automatiquement au bout de 3 minutes.



Connexion par pairage Bluetooth


(1) Appuyez longuement sur le "bouton d'alimentation" pendant environ 5 secondes lorsque l'oreillette est éteinte, puis allumez-la. Si les lumières bleue et rouge clignotent alternativement, les oreillettes entreront en état d'appairage.

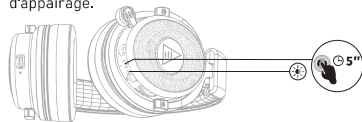

(2) Si la connexion n'est pas réussie après le démarrage, le casque passe automatiquement à l'état d'appairage.

(3) Lorsque le casque est déconnecté, il passe automatiquement à l'état d'appairage.

(4) Activez la fonction Bluetooth de l'appareil, recherchez le casque Bluetooth, puis sélectionnez "EKSA E900 BT" pour la connexion d'appairage. Une fois la connexion réussie, l'oreillette affichera "Connecté", la lumière bleue restera allumée et l'appareil indiquera que l'oreillette Bluetooth est connectée.

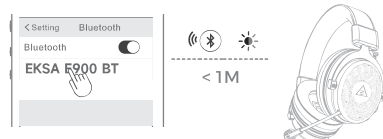

Note : 1. si vous voulez connecter un nouvel appareil, vous devez d'abord déconnecter la connexion Bluetooth de l'appareil connecté, et l'oreillette entrera automatiquement dans l'état d'appairage. Ensuite, utilisez le nouvel appareil pour la recherche Bluetooth et terminez la connexion avec l'oreillette ;
2. à chaque fois que l'oreillette est allumée, elle recherche et connecte automatiquement l'appareil le plus récemment connecté.