

Use Manual



If your printer compatible with bluetooth and computer. The APP
Download & Bluetooth Connection as below:

1. Scan the QR Code to download the APP.
2. Find "Marklife" on Google Play Or App Store.

Bluetooth Connection Steps:

Make sure Bluetooth is enabled——Open APP and click "UNLINK" in the upper left corner——Find printer model and use the printer according to the instruction



Caution: Do not search for the printer to be connected in the Bluetooth settings of your mobile phone.

Contents

02.....	Accessories
03.....	Specifications
04.....	APP Connection
05.....	Creat Label
06-08.....	Windows - Printer Driver Installation
09.....	Windows Printing Note
10-11.....	Mac - Printer Driver Installation
12-13.....	Mac Printing Note
14.....	LED Status
15.....	Maintenance
16.....	Safty notices

Packing list



Power



Adapter



USB Cabel



Use Manual



Printer

Basic parameters

Model: D100

Printing method: thermal

Resolution: 203dpi



Speed: 150mm/s

Width: 38-110mm

Interface: USB/Blue-tooth

Size: 118*98*86 mm

Product net weight: ~840g

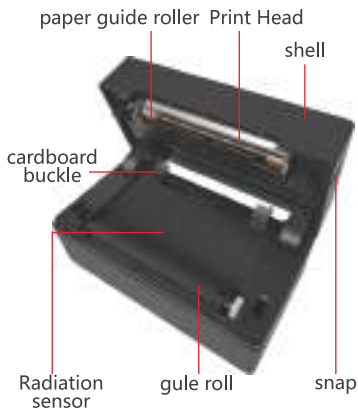

APP connection



Do Not Pair Bluetooth From Setting!

Note:
1. Turn on phone Bluetooth;
2. Open APP click "UNLINK" find printer.

Great label



1). If the size you want is not available in the APP, you can set it yourself.
NOTE: Please set the correct width and height, otherwise it will not print correctly)

2) The label machine is installed with a gap sticker-----100mm*150mm, select the gap label.

3)The default size is shown here: 100mm *150mm,if you use other sizes of stickers, please select the correct size.

Windows - Printer driver installation

Note: Before installing the driver, turn off your computer antivirus software. the printer needs to be connected to the power supply and computer, and the power on state.

1. USB inserted into the computer, will automatically pop up the folder, double-click the compressed package to download.




 **Double - Click**



(NOTE: Before selecting USB, please make sure that the power supply of the machine is connected and the machine is turned on)

3.Click on the installation, display the "Installation Successful" can be.

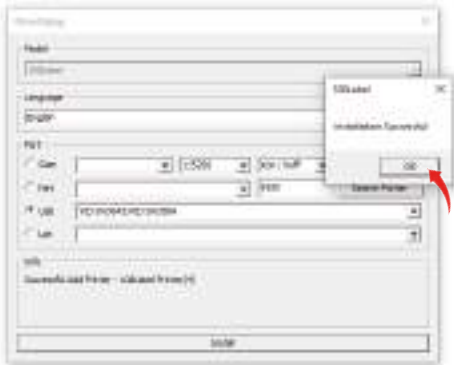

NOTE:

1.If you use PDF to print directly, you need to select the corresponding printer driver **108Label Printer,**

2.the paper size is selected according to the actual paper size used, set the number of copies,

3.click print.

If the paper is inaccurate, press hold the machine button and hear "di" and "didi"

The machine automatically learns the paper type.


Mac - Printer driver installation

Note: Before installing the driver, turn off your computer antivirus software. the printer needs to be connected to the power supply and computer, and the power on state.

1. USB inserted into the computer, will automatically pop up the folder, double-click the compressed package to download.



**Label Printer
Driver In...r(1).pkg**

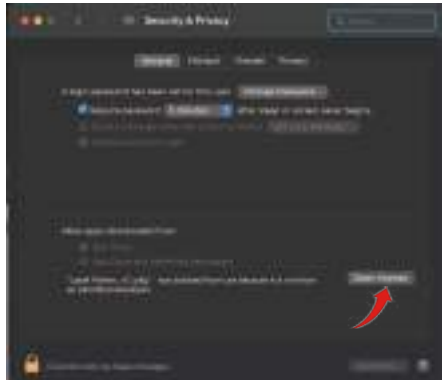


Click Continue




Select the file or picture you need to print—Choose correct size & correct printer name when printing.



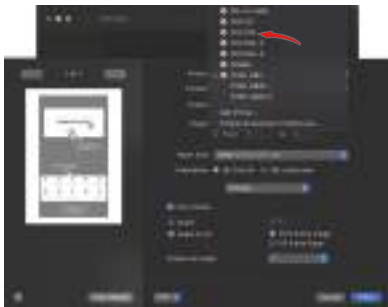

Name: POS120L

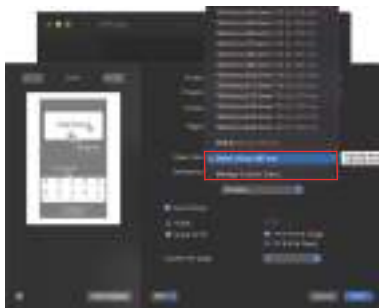

Setting Paper Size (NOTE:If the size you want is not available, you can customize the size.)

LED Status

Light	Description	Troubleshoot
Green	Normal operation	
Flashing Red and Green	Printer head is overheated	Printer will automatically resume once the printer head has cooled down.
Flashing Red (every 2 seconds)	Paper shortage	Be sure that the printer paper is loaded correctly. You may need to run automatic label
Flashing Red (twice every second)	Cover is not closed	Check that the cover is completely closed.

Maintenance

1. Turn the printer off, remove the power cord, and open the cover.
2. Wait until the printer head cools down.
The printer head may be very hot after printing.
3. Completely clean printer head using an alcohol swap (not water).
4. Wait until the alcohol has completely vaporized, then close the cover.
5. Connect the power cord and print a test page to check if it is clean.

NOTICE

Ensure power is off when performing maintenance.
Do not touch or scratch the printer head surface, roller, or sensors.
Avoid using gas, acetone, or other organic solvents.

PRO TIPS

Anytime you change your label, run the automatic label identification. Press the button on the printer to get check-page on the printer to skip a blank label.

To run a self-test, press and hold the feeder button until you hear two short beeps.

Avoid using poor quality labels as they can damage the printer.
Regularly clean the printer head.

If paper is jammed, turn off the printer, and allow the printer head to cool down. Open the cover and ensure that the rubber is clean. If dirty, use alcohol to clean. Allow the area to dry off before turning the printer on.

Insert this printer into the same USB port on your computer every time. This will avoid creating duplicate copies of the printer in your operating system.

Safty notices

The printer head can become very hot after printing labels. Do not touch the printer head.

Do not bend the power cord excessively or place objects on the cord.

Do not use the printer if you find any irregularities as these could result in fire or electrocution.

Keep the printer out of reach of children.

Use only approved accessories and do not try to disassemble or repair the unit by yourself.

Keep the printer away from water and other objects that could penetrate the components.

Please unplug the printer when it is not in use for long periods of time.

After-sales Service Email: marklifeservice@gmail.com

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure statement

The device has been evaluatec to meel general RF exposure requirement. The device can be used in porlable exposure condition without restriction.