

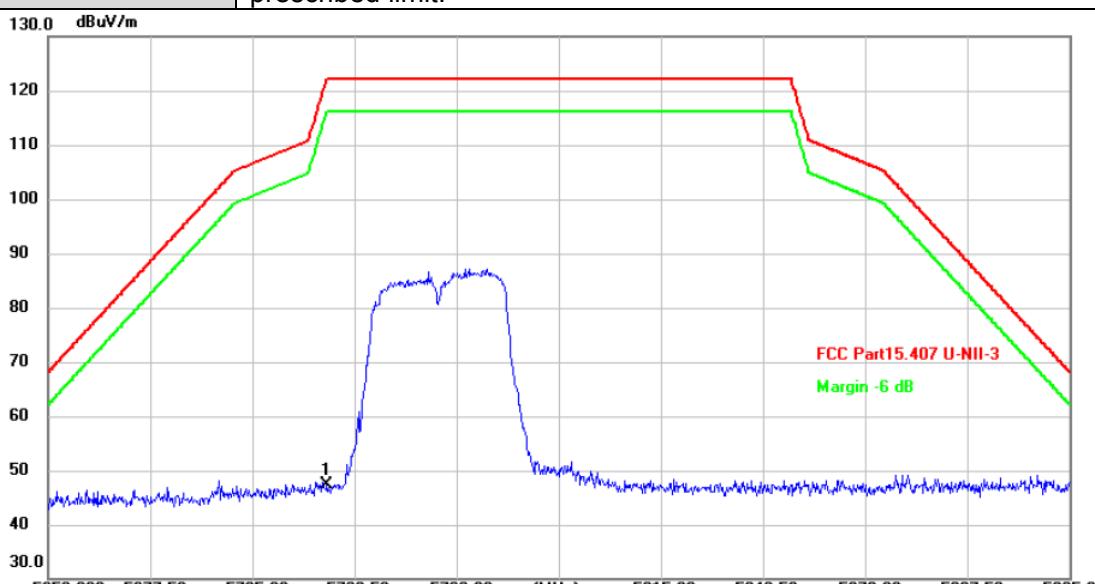
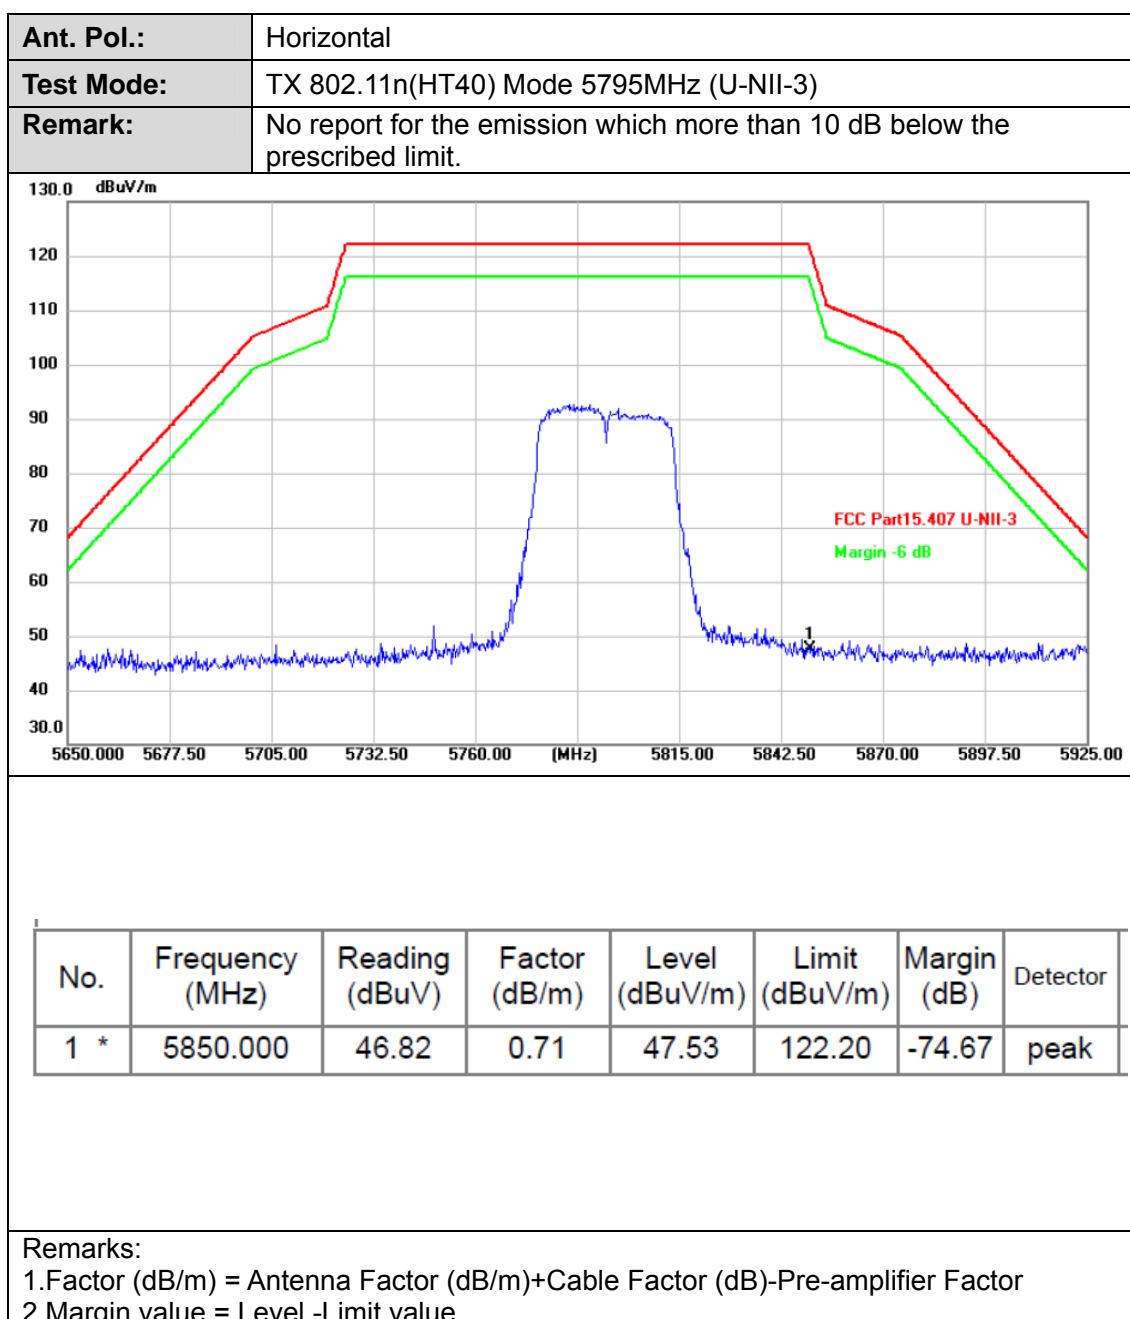
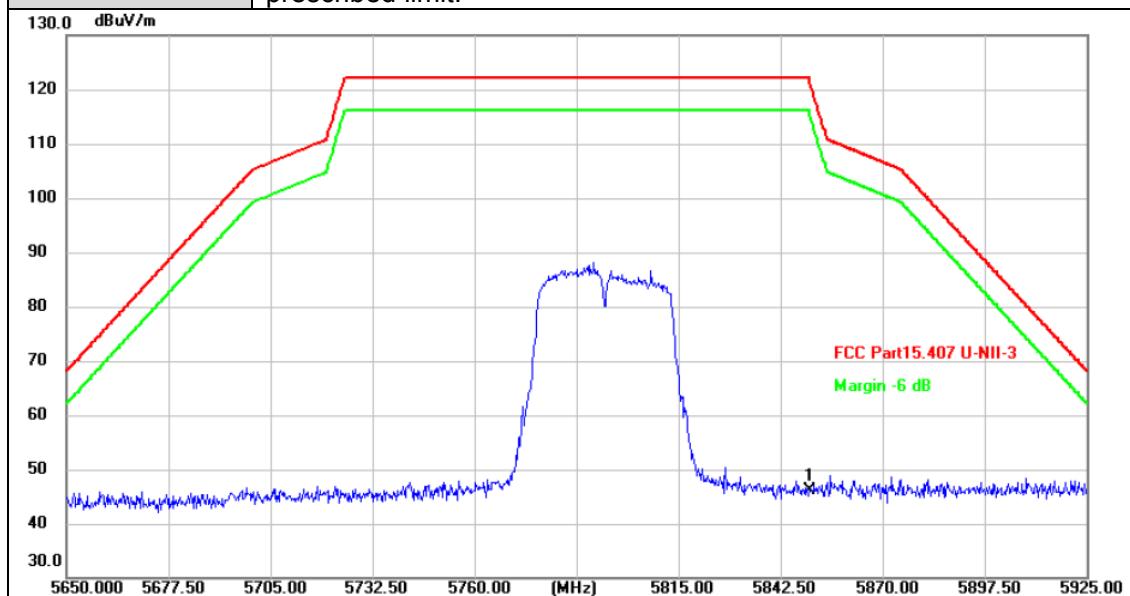



| Ant. Pol.: | Vertical | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|----------------|---------------|----------------|----------------|-------------|----------|--|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|----------|-------|------|-------|--------|--------|------|
| Test Mode: | TX 802.11n(HT40) Mode 5755MHz (U-NII-3) | | | | | | | | | | | | | | | | | | | | | | | |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. | | | | | | | | | | | | | | | | | | | | | | | |
|  | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1 *</td><td>5725.000</td><td>46.91</td><td>0.39</td><td>47.30</td><td>122.20</td><td>-74.90</td><td>peak</td></tr> </tbody> </table> | | | | | | | | | No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | 1 * | 5725.000 | 46.91 | 0.39 | 47.30 | 122.20 | -74.90 | peak |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | | | | | | | | | | | | | | | | | |
| 1 * | 5725.000 | 46.91 | 0.39 | 47.30 | 122.20 | -74.90 | peak | | | | | | | | | | | | | | | | | |
| <p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p> | | | | | | | | | | | | | | | | | | | | | | | | |

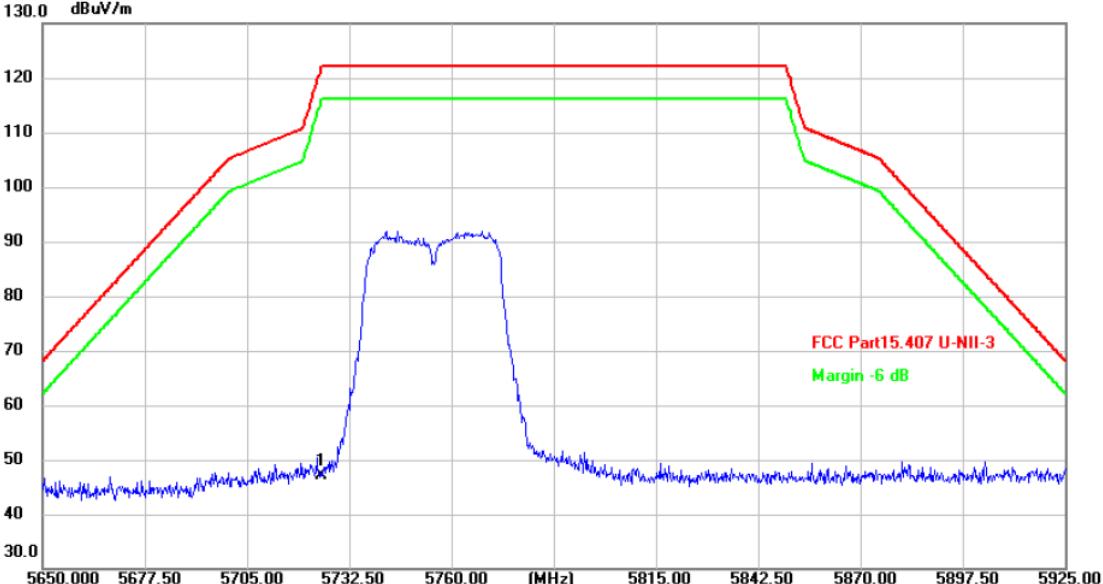



| Ant. Pol.: | Vertical | | | | | | | | | | | | | | | | | | | | | | |
|--|--|----------------|---------------|----------------|----------------|-------------|----------|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|----------|-------|------|-------|--------|--------|------|
| Test Mode: | TX 802.11n(HT40) Mode 5795MHz (U-NII-3) | | | | | | | | | | | | | | | | | | | | | | |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. | | | | | | | | | | | | | | | | | | | | | | |
|  | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5850.000</td> <td>45.40</td> <td>0.71</td> <td>46.11</td> <td>122.20</td> <td>-76.09</td> <td>peak</td> </tr> </tbody> </table> | | | | | | | | No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | 1 * | 5850.000 | 45.40 | 0.71 | 46.11 | 122.20 | -76.09 | peak |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | | | | | | | | | | | | | | | | |
| 1 * | 5850.000 | 45.40 | 0.71 | 46.11 | 122.20 | -76.09 | peak | | | | | | | | | | | | | | | | |
| <p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p> | | | | | | | | | | | | | | | | | | | | | | | |


| Ant. Pol.: | Horizontal | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|----------------|---------------|----------------|----------------|-------------|----------|--|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|----------|-------|------|-------|--------|--------|------|
| Test Mode: | TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3) | | | | | | | | | | | | | | | | | | | | | | | |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. | | | | | | | | | | | | | | | | | | | | | | | |
|  <p>The graph plots dBuV/m (Y-axis, 30.0 to 130.0) against MHz (X-axis, 5650.000 to 5925.000). A red line represents the emission spectrum, which rises from ~65 dBuV/m at 5650 MHz to a peak of ~122 dBuV/m at 5755 MHz, then falls to ~105 dBuV/m at 5925 MHz. A green line represents the FCC Part15.407 U-NII-3 limit, which is flat at 122 dBuV/m from 5725 MHz to 5850 MHz. A blue line shows the noise floor at approximately 45 dBuV/m. A text box in the plot area states 'FCC Part15.407 U-NII-3' and 'Margin -6 dB'.</p> | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5725.000</td> <td>46.73</td> <td>0.39</td> <td>47.12</td> <td>122.20</td> <td>-75.08</td> <td>peak</td> </tr> </tbody> </table> | | | | | | | | | No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | 1 * | 5725.000 | 46.73 | 0.39 | 47.12 | 122.20 | -75.08 | peak |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | | | | | | | | | | | | | | | | | |
| 1 * | 5725.000 | 46.73 | 0.39 | 47.12 | 122.20 | -75.08 | peak | | | | | | | | | | | | | | | | | |
| <p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p> | | | | | | | | | | | | | | | | | | | | | | | | |

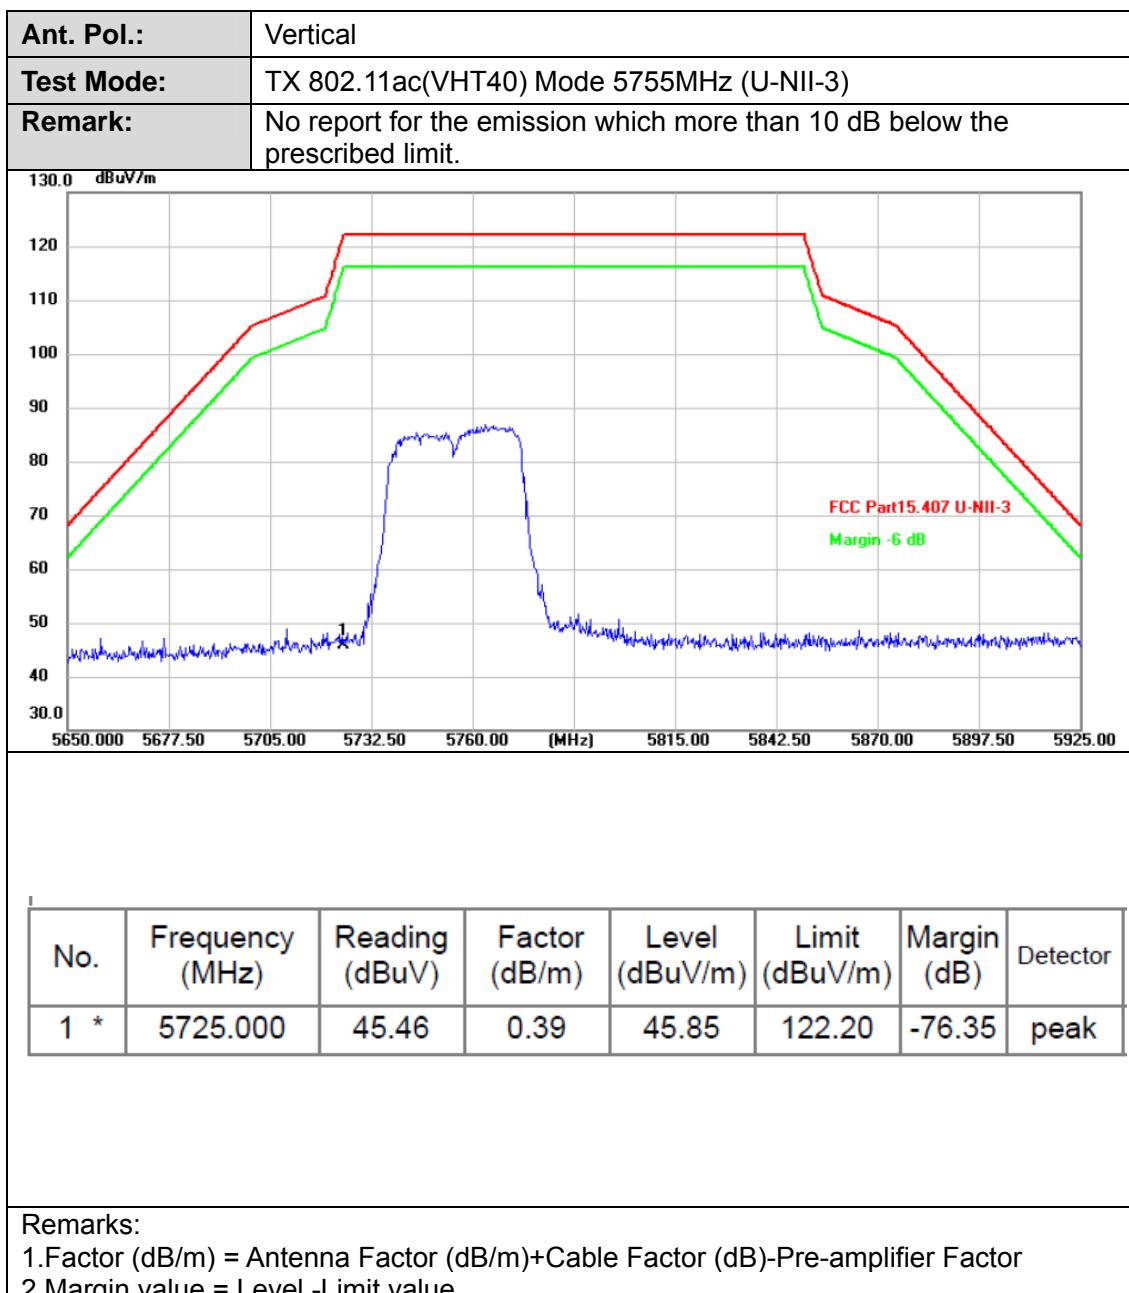


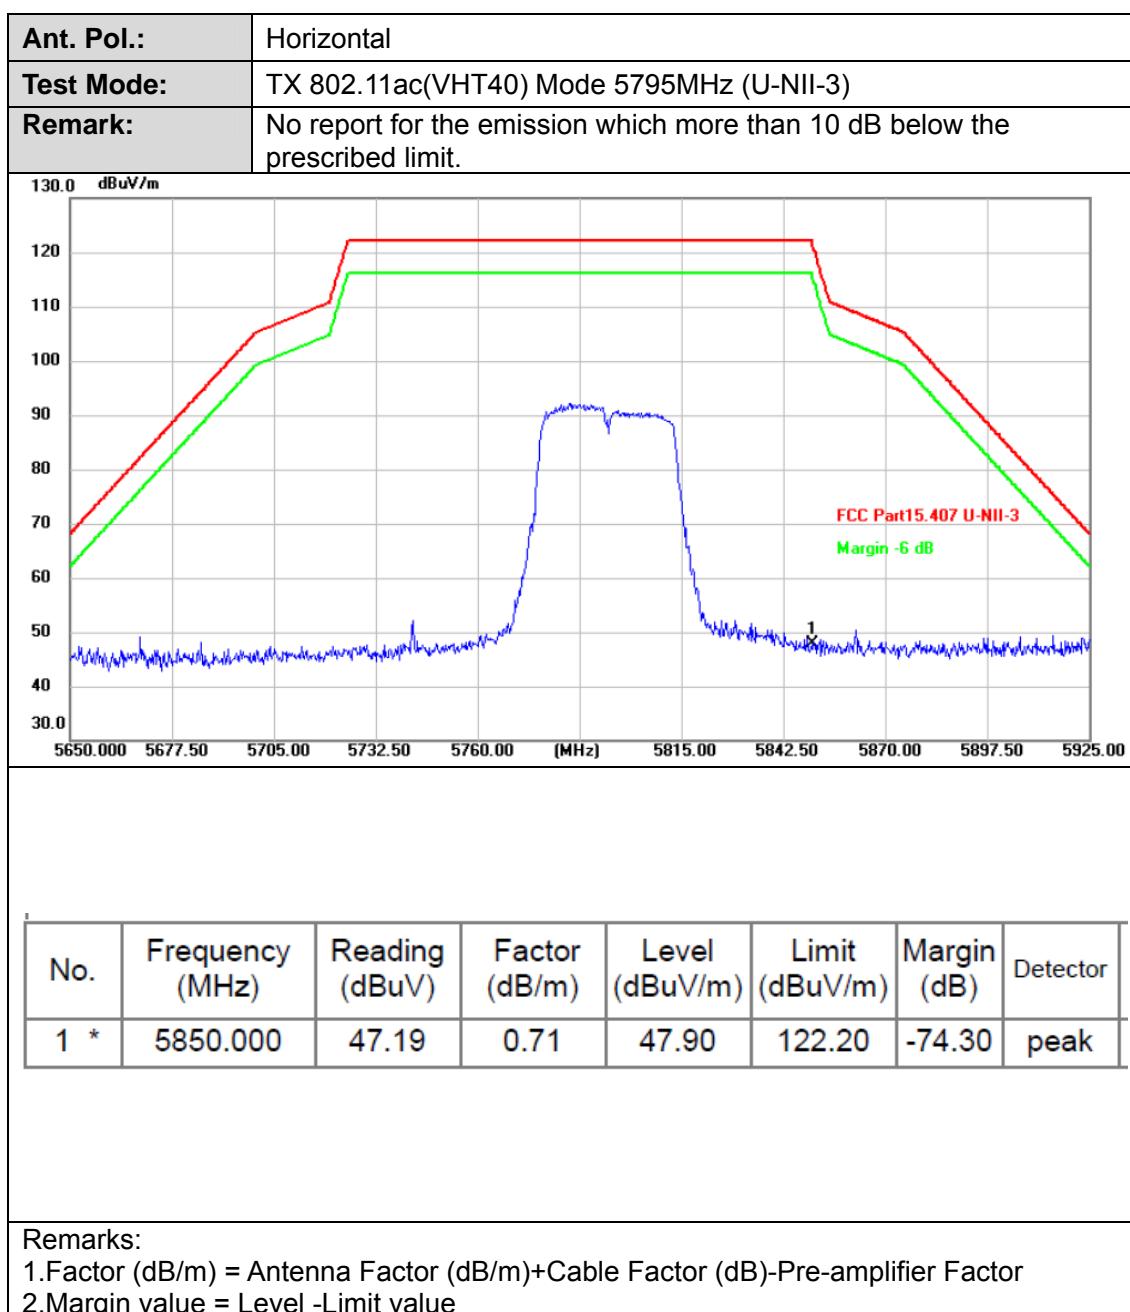

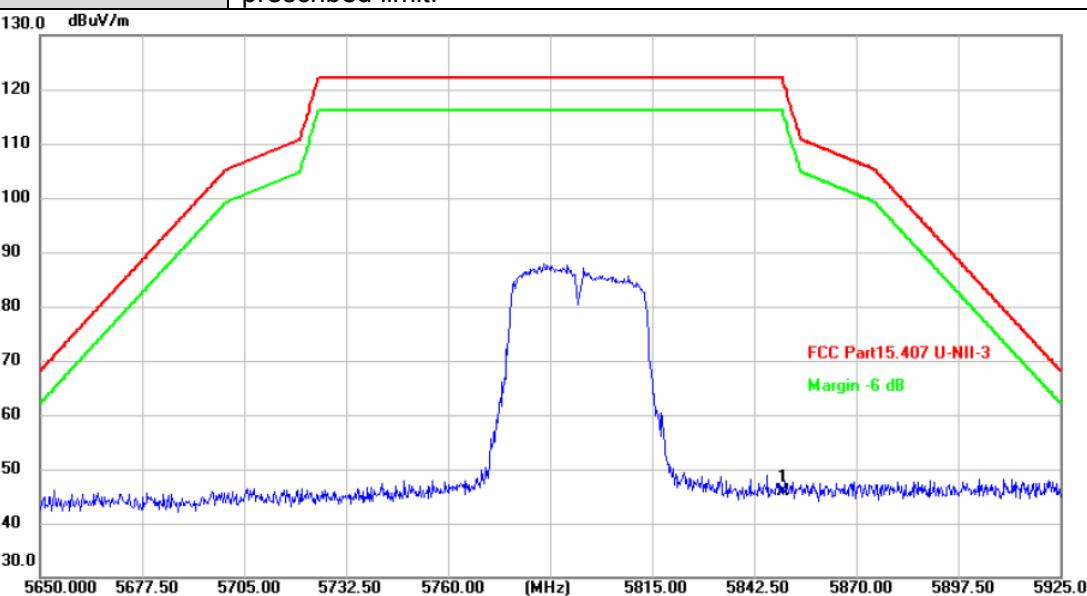
| Ant. Pol.: | Vertical | | | | | | | | | | | | | | | | | | | | | | |
|--|--|----------------|---------------|----------------|----------------|-------------|----------|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|----------|-------|------|-------|--------|--------|------|
| Test Mode: | TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3) | | | | | | | | | | | | | | | | | | | | | | |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. | | | | | | | | | | | | | | | | | | | | | | |
|  | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5850.000</td> <td>45.27</td> <td>0.71</td> <td>45.98</td> <td>122.20</td> <td>-76.22</td> <td>peak</td> </tr> </tbody> </table> | | | | | | | | No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | 1 * | 5850.000 | 45.27 | 0.71 | 45.98 | 122.20 | -76.22 | peak |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | | | | | | | | | | | | | | | | |
| 1 * | 5850.000 | 45.27 | 0.71 | 45.98 | 122.20 | -76.22 | peak | | | | | | | | | | | | | | | | |
| <p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p> | | | | | | | | | | | | | | | | | | | | | | | |

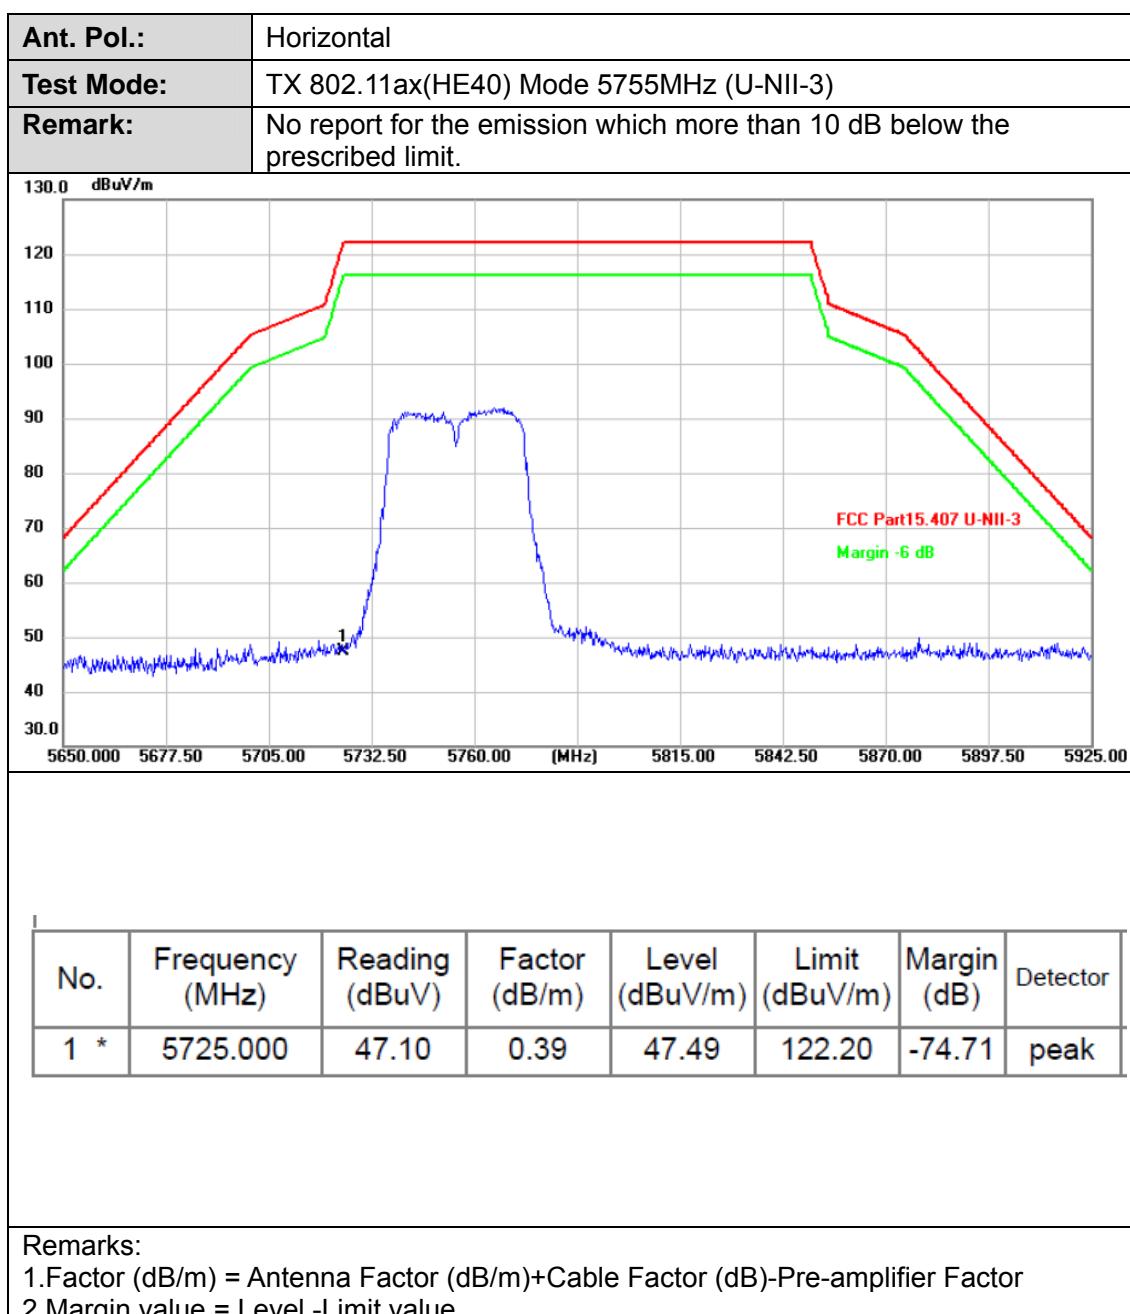
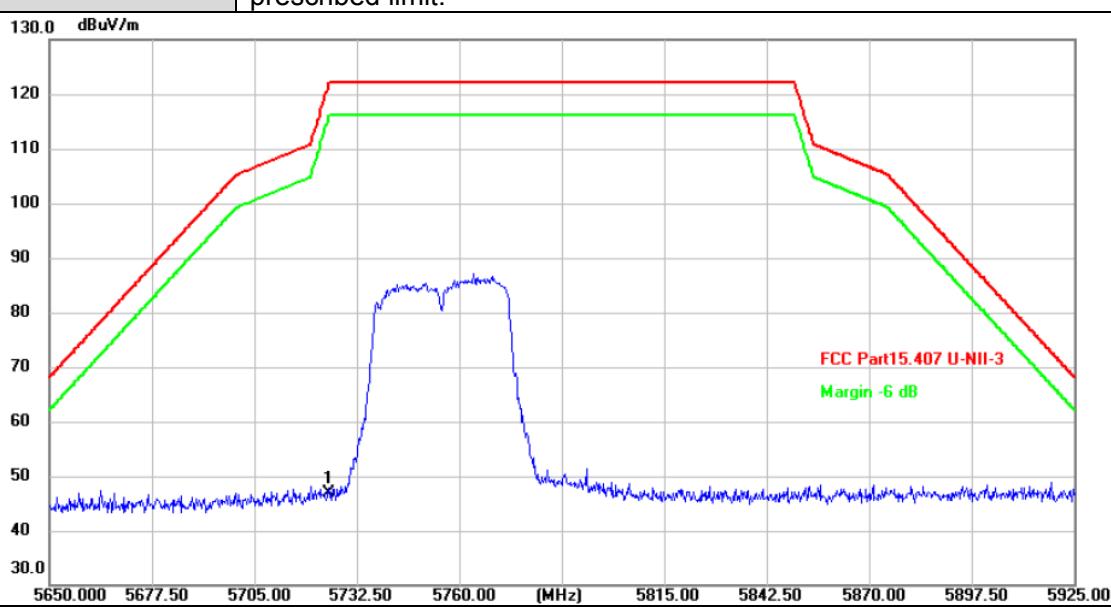
| Ant. Pol.: | Vertical | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|----------------|---------------|----------------|----------------|-------------|----------|--|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|----------|-------|------|-------|--------|--------|------|
| Test Mode: | TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) | | | | | | | | | | | | | | | | | | | | | | | |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. | | | | | | | | | | | | | | | | | | | | | | | |
|  <p>The graph plots dBuV/m (Y-axis, 30.0 to 130.0) against MHz (X-axis, 5650.000 to 5925.000). A red line represents the FCC Part15.407 U-NII-3 limit, which is 122.20 dBuV/m. A green line represents the measured emission, which stays below the limit. A blue line shows the noise floor. A vertical line at 5725.000 MHz is labeled '1'. Text in the plot area indicates 'FCC Part15.407 U-NII-3' and 'Margin -6 dB'.</p> | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1 *</td><td>5725.000</td><td>46.53</td><td>0.39</td><td>46.92</td><td>122.20</td><td>-75.28</td><td>peak</td></tr> </tbody> </table> <p>Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value</p> | | | | | | | | | No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | 1 * | 5725.000 | 46.53 | 0.39 | 46.92 | 122.20 | -75.28 | peak |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | | | | | | | | | | | | | | | | | |
| 1 * | 5725.000 | 46.53 | 0.39 | 46.92 | 122.20 | -75.28 | peak | | | | | | | | | | | | | | | | | |

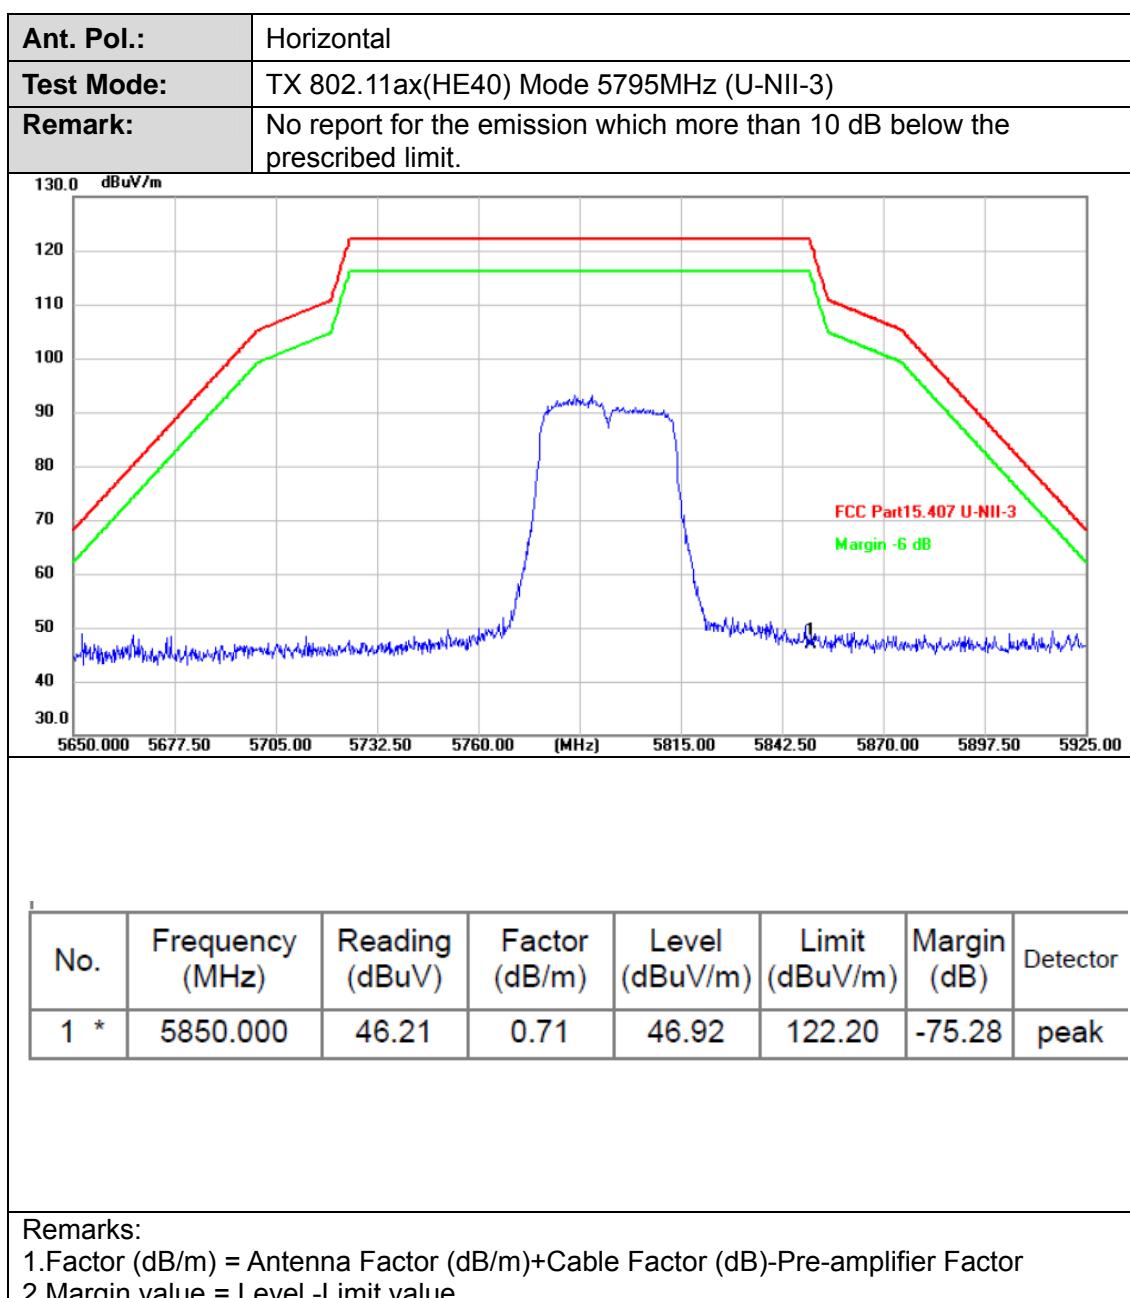
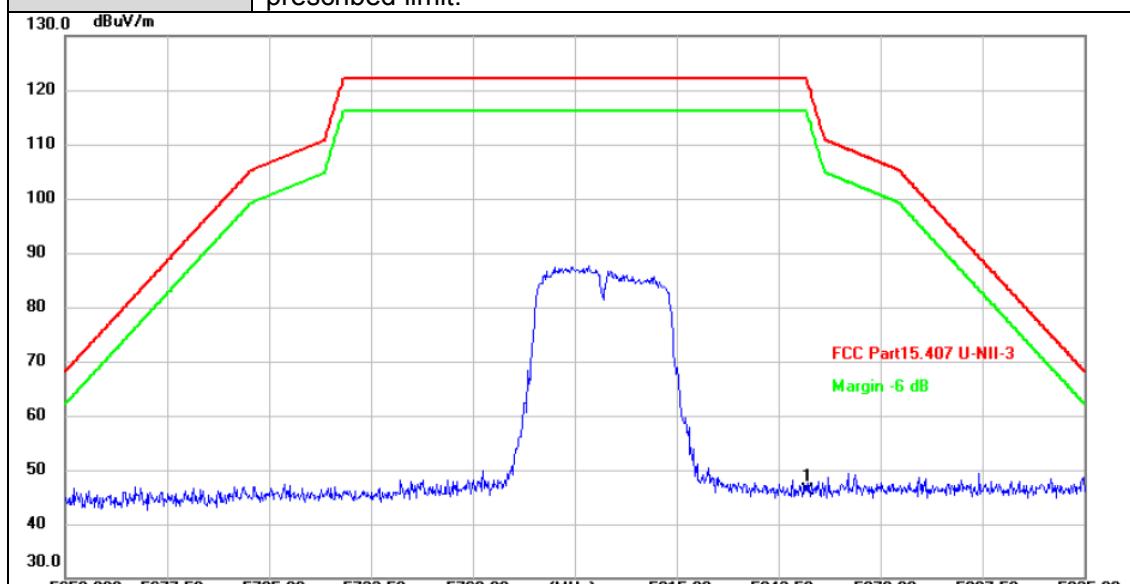
| Ant. Pol.: | Vertical | | | | | | | | | | | | | | | | | | | | | | |
|--|--|----------------|---------------|----------------|----------------|-------------|----------|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|----------|-------|------|-------|--------|--------|------|
| Test Mode: | TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) | | | | | | | | | | | | | | | | | | | | | | |
| Remark: | No report for the emission which more than 10 dB below the prescribed limit. | | | | | | | | | | | | | | | | | | | | | | |
|  | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5850.000</td> <td>45.51</td> <td>0.71</td> <td>46.22</td> <td>122.20</td> <td>-75.98</td> <td>peak</td> </tr> </tbody> </table> | | | | | | | | No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | 1 * | 5850.000 | 45.51 | 0.71 | 46.22 | 122.20 | -75.98 | peak |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | | | | | | | | | | | | | | | | |
| 1 * | 5850.000 | 45.51 | 0.71 | 46.22 | 122.20 | -75.98 | peak | | | | | | | | | | | | | | | | |
| <p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p> | | | | | | | | | | | | | | | | | | | | | | | |




3.4. Bandwidth Test

Limit

| FCC Part 15 Subpart C(15.407)/ RSS-247 | | |
|--|---------|-----------------------|
| Test Item | Limit | Frequency Range (MHz) |
| 26 Bandwidth | N/A | 5150~5250 |
| | | 5250~5350 |
| | | 5500~5700 |
| 6 dB Bandwidth | >500kHz | 5725~5850 |

Test Configuration

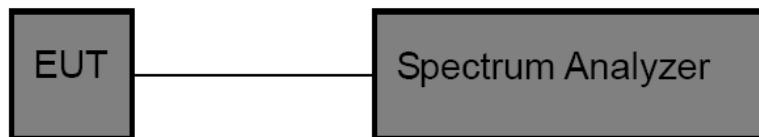

Test Procedure

Please refer to According to KDB789033 D02, for the measurement methods.

The setting of the spectrum analyser as below:

| 26dB Bandwidth Test | |
|---------------------|--|
| Spectrum Parameters | Setting |
| Attenuation | Auto |
| Span | >26 dB Bandwidth |
| RBW | Approximately 1% of the emission bandwidth |
| VBW | VBW>RBW |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |



| 6dB Bandwidth Test | |
|---------------------|-----------------|
| Spectrum Parameters | Setting |
| Attenuation | Auto |
| Span | >6 dB Bandwidth |
| RBW | 100 kHz |
| VBW | VBW>=3*RBW |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

| 99% Occupied Bandwidth Test | |
|-----------------------------|---------------------|
| Spectrum Parameters | Setting |
| Attenuation | Auto |
| RBW | 1% to 5% of the OBW |
| VBW | $\geq 3\text{RBW}$ |
| Detector | Peak |
| Trace | Max Hold |

Note: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.4.

Test Results

Please see the Appendix A1, A2, A3.




3.5. Output Power Test

Limit

| FCC Part 15 Subpart E (15.407) | | |
|--------------------------------|--|----------------------|
| Test Item | Limit | Frequency Range(MHz) |
| Conducted Output Power | Fixed: 1 Watt (30dBm) Mobile and Portable: 250mW (24dBm) | 5150~5250 |
| | 250mW (24dBm) | 5250~5350 |
| | 250mW (24dBm) | 5500~5700 |
| | 1 Watt (30dBm) | 5725~5850 |

| IC Power&PSD Limit | | | | | |
|------------------------------------|-----------------|---|--|----------------------------------|-----------------------------|
| Frequency | Type of devices | Maximum Conducted Output Power | EIRP Output Power | Conducted Power Spectral Density | EIRP Power Spectral Density |
| 5150MHz-5250MHz | in vehicles | | 30mW or $1.76 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | | |
| | Other Devices | | 200mW or $10 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | | 10dBm/MHz |
| 5250MHz-5350MHz | in vehicles | | 30mW or $1.76 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | | |
| | Other Devices | 250mW or $11 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | 1W or $17 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | 11dBm/Mhz | |
| 5470MHz-5600MHz 5650MHz-5725MHz | ALL Devices | 250mW or $11 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | 1W or $17 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | 11dBm/Mhz | |
| 5725MHz-5850MHz | ALL Devices | 1W | | 30dBm/500KHz | |

Test Configuration

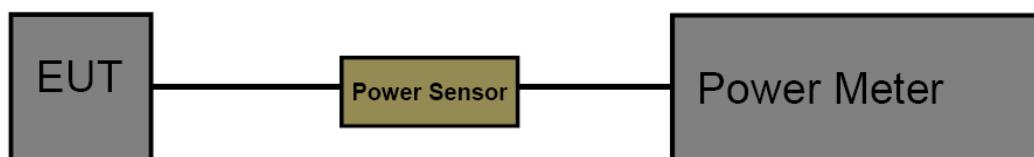



Test Procedure

The measurement is according to section 3 of KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

Test Mode

Please refer to the clause 2.4.

Test Result

Please see the Appendix B.



3.6. Power Spectral Density Test

Limit

FCC Part 15 Subpart E(15.407)/ RSS-247

For the 5.15~5.25GHz band:

- Outdoor AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
If $G_{Tx} > 6$ dBi, then PSD = $17 - (G_{Tx} - 6)$.
- Indoor AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
If $G_{Tx} > 6$ dBi, then PSD = $17 - (G_{Tx} - 6)$.
- Point-to-point AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
If $G_{Tx} > 23$ dBi, then PSD = $17 - (G_{Tx} - 23)$.
- Client devices
The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.
If $G_{Tx} > 6$ dBi, then PSD = $11 - (G_{Tx} - 6)$.

For the 5.25~5.35GHz band:

The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.
If $G_{Tx} > 6$ dBi, then PSD = $11 - (G_{Tx} - 6)$.

For the 5.47~5.725GHz band:

The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.
If $G_{Tx} > 6$ dBi, then PSD = $11 - (G_{Tx} - 6)$.

For the 5.725~5.85GHz band:

- Point-to-multipoint systems (P2M)
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.
If $G_{Tx} > 6$ dBi, then PSD = $30 - (G_{Tx} - 6)$.
- Point-to-point systems (P2P)
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.

Note: G_{Tx} : EUT Antenna gain.

| IC Power&PSD Limit | | | | | |
|------------------------------------|-----------------|---|--|----------------------------------|-----------------------------|
| Frequency | Type of devices | Maximum Conducted Output Power | EIRP Output Power | Conducted Power Spectral Density | EIRP Power Spectral Density |
| 5150MHz-5250MHz | in vehicles | | 30mW or $1.76 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | | |
| | Other Devices | | 200mW or $10 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | | 10dBm/MHz |
| 5250MHz-5350MHz | in vehicles | | 30mW or $1.76 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | | |
| | Other Devices | 250mW or $11 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | 1W or $17 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | 11 dBm/Mhz | |
| 5470MHz-5600MHz 5650MHz-5725MHz | ALL Devices | 250mW or $11 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | 1W or $17 + 10 \times \log_{10} B$ dBm, whichever is less (B=99% OBW in MHz) | 11 dBm/Mhz | |
| 5725MHz-5850MHz | ALL Devices | 1W | | 30 dBm/500KHz | |

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011


[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : yz.cnca.cn



Test Configuration

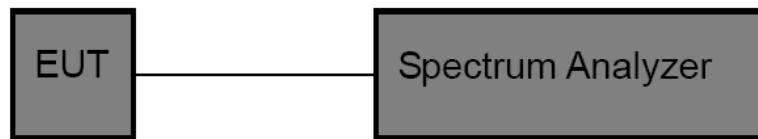

Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement is according to KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyzer center frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW)(alternatively, the entire 99% OBW) of the signal.
- (4) RBW=1MHz for devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz
RBW=500kHz for devices operating in the band 5.725-5.85 GHz
- (5) Set the VBW to: ≥ 3 RBW
- (6) Detector: AVG
- (7) Trace: Max Hold and View
- (7) Sweep time: auto
- (8) Trace average at least 100 traces in power averaging.
- (9) Use the peak marker function to determine the maximum amplitude level within the RBW. Apply correction to the result if different RBW is used.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.4.

Test Result


Please see the Appendix C.

3.7. Frequency Stability Measurement

Limit

| FCC Part 15 Subpart C(15.407) | | |
|-------------------------------|--|----------------------|
| Test Item | Limit | Frequency Range(MHz) |
| Peak Excursion Measurement | Specified in the user's manual, the transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification) | 5150~5250 |
| | | 5250~5350 |
| | | 5500~5700 |
| | | 5725~5850 |

Test Configuration

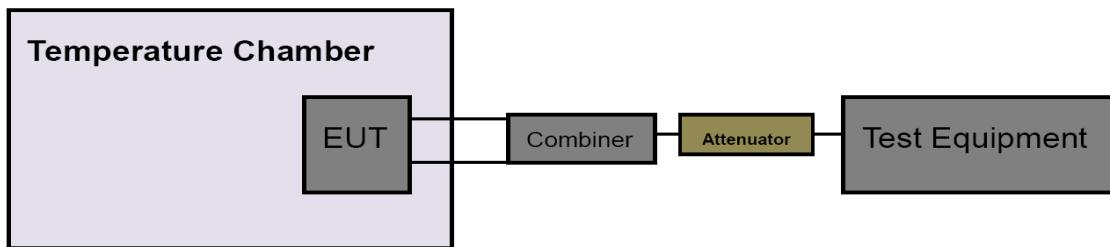

Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyzer center frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW) of the signal.
- (4) Set the RBW to: 10MHz, VBW=10MHz with peak detector and maxhold settings.
- (5) The test extreme voltage is to change the primary supply voltage from 4.5V to 5.5V percent of the nominal value.
- (6) Extreme temperature is 0°C ~ 45°C

NOTE: The EUT was set to continuously transmitting in continuously un-modulation transmitting mode.

Test Mode

Please refer to the clause 2.4.

Test Result

Please see the Appendix D.



3.8. Antenna Requirement

Standard Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.



3.9. Dynamic Frequency Selection(DFS)

Requirement

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

| Requirement | Operational Mode | | |
|---------------------------------|------------------|--------------------------------|-----------------------------|
| | Master | Client Without Radar Detection | Client With Radar Detection |
| Non-Occupancy Period | Yes | Not required | Yes |
| DFS Detection Threshold | Yes | Not required | Yes |
| Channel Availability Check Time | Yes | Not required | Not required |
| U-NII Detection Bandwidth | Yes | Not required | Yes |

Table 2: Applicability of DFS requirements during normal operation

| Requirement | Operational Mode | |
|-----------------------------------|--|--------------------------------|
| | Master Device or Client with Radar Detection | Client Without Radar Detection |
| DFS Detection Threshold | Yes | Not required |
| Channel Closing Transmission Time | Yes | Yes |
| Channel Move Time | Yes | Yes |
| U-NII Detection Bandwidth | Yes | Not required |

| | | |
|---|--|--|
| Additional requirements for devices with multiple bandwidth modes | Master Device or Client with Radar Detection | Client Without Radar Detection |
| U-NII Detection Bandwidth and Statistical Performance Check | All BW modes must be tested | Not required |
| Channel Move Time and Channel Closing Transmission Time | Test using widest BW mode available | Test using the widest BW mode available for the link |
| All other tests | Any single BW mode | Not required |

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

**LIMIT****1. DFS Detection Thresholds**

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

| Maximum Transmit Power | Value (See Notes 1, 2, and 3) |
|--|-------------------------------|
| EIRP \geq 200 milliwatt | -64 dBm |
| EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz | -62 dBm |
| EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement | -64 dBm |

Note 1: This is the level at the input of the receiver assuming a 0dBi receive antenna.
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.
 Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

2. DFS Response Requirements

Table 4: DFS Response Requirement Values

| Parameter | Value |
|-----------------------------------|--|
| Non-occupancy period | Minimum 30 minutes |
| Channel Availability Check Time | 60 seconds |
| Channel Move Time | 10 seconds See Note 1. |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2. |
| U-NII Detection Bandwidth | Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3. |

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.
 Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
 Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

RADAR TEST WAVEFORMS

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.



Table 5 Short Pulse Radar Test Waveforms

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Number of Pulses | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|-----------------------------|--------------------|---|---|--|--------------------------|
| 0 | 1 | 1428 | 18 | See Note 1 | See Note 1 |
| 1 | 1 | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a | Roundup $\left\lceil \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\rceil$ | 60% | 30 |
| | | Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A | | | |
| 2 | 1-5 | 150-230 | 23-29 | 60% | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 |
| Aggregate (Radar Types 1-4) | | | | 80% | 120 |

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 μsec is selected, the number of pulses

$$\left\lceil \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{3066} \right) \right\rceil$$

would be Round up = Round up {17.2} = 18.

Table 5a - Pulse Repetition Intervals Values for Test A

| Pulse Repetition Frequency Number | Pulse Repetition Frequency (Pulses Per Second) | Pulse Repetition Interval (Microseconds) |
|-----------------------------------|--|--|
| 1 | 1930.5 | 518 |
| 2 | 1858.7 | 538 |
| 3 | 1792.1 | 558 |
| 4 | 1730.1 | 578 |
| 5 | 1672.2 | 598 |
| 6 | 1618.1 | 618 |
| 7 | 1567.4 | 638 |
| 8 | 1519.8 | 658 |
| 9 | 1474.9 | 678 |
| 10 | 1432.7 | 698 |

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : yz.cnca.cn



| | | |
|----|--------|------|
| 11 | 1392.8 | 718 |
| 12 | 1355 | 738 |
| 13 | 1319.3 | 758 |
| 14 | 1285.3 | 778 |
| 15 | 1253.1 | 798 |
| 16 | 1222.5 | 818 |
| 17 | 1193.3 | 838 |
| 18 | 1165.6 | 858 |
| 19 | 1139 | 878 |
| 20 | 1113.6 | 898 |
| 21 | 1089.3 | 918 |
| 22 | 1066.1 | 938 |
| 23 | 326.2 | 3066 |

Table 6 – Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--|--------------------------|
| 5 | 50-100 | 5-20 | 1000-2000 | 1-3 | 8-20 | 80% | 30 |

The parameters for this waveforms are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type wave forms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Table 7 – Frequency Hopping Radar Test Waveform

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|------------|----------------|--------------------|--------------------------------|--|--------------------------|
| 6 | 1 | 333 | 9 | 0.333 | 300 | 70% | 30 |

For the Frequency Hopping Radar Type, the same Burst parameters are used for each wave form. The hopping sequence is different for each wave form and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250–5724MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

Calibration of Radar Waveform


Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$ that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was

used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.


4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

Conducted Calibration Setup

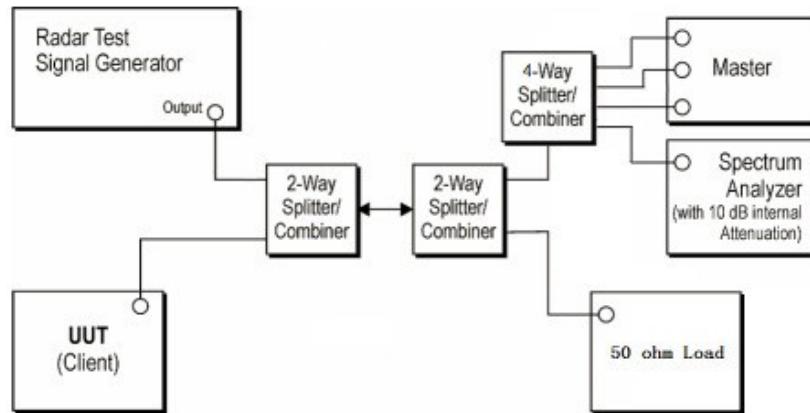

Test Configuration

Setup for Client with injection at the Master

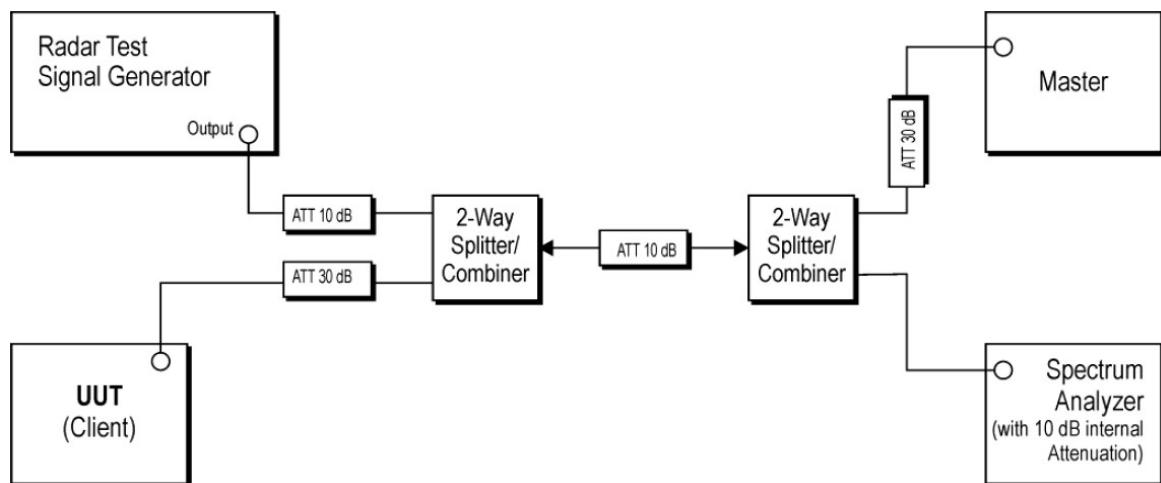



Test Procedure

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: Dwell (0.3ms) = S (12000ms) / B (4000); where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: C (ms) = N X Dwell (0.3ms); where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Test Mode

Please refer to the clause 2.4.

Test Results

Passed

Not Applicable

*****THE END*****