



FCC Part 24 Test Report Part 24 Subpart E

Report Reference No.: HK2302270554-1E

FCC ID.: 2A2FCBT4101

Compiled by

(position+printed name+signature): File administrators Gary Qian

Supervised by

(position+printed name+signature): Technique principal Eden Hu

Approved by

(position+printed name+signature): Manager Jason Zhou

Date of issue: Apr. 28, 2023

Testing Laboratory Name : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name : PowUnity GmbH

Address : Feldstrasse 9d Innsbruck, 6020 Austria

Test specification :

Standard : FCC CFR Title 47 Part 2, Part 24E

TRF Originator : Shenzhen HUAKE Testing Technology Co., Ltd.

Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : GPS Tracker

Trade Mark : BikeTrax

Manufacturer : PowUnity GmbH

Model/Type reference : BT41-01

Series Models : T4101-03-04

Modulation Type : QPSK, 16QAM

Rating : DC 3.7V from battery

Hardware version : V2.2

Software version : V2.2

Result : PASS

**TEST REPORT**

Test Report No. :	HK2302270554-1E	Apr. 28, 2023
		Date of issue

Equipment under Test : GPS Tracker

Model /Type : BT41-01

Series Models : T4101-03-04

Applicant : **PowUnity GmbH**

Address : Feldstrasse 9d Innsbruck, 6020 Austria

Manufacturer : **PowUnity GmbH**

Address : Feldstrasse 9d Innsbruck, 6020 Austria

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Contents

<u>1</u>	<u>Test Standards</u>	<u>5</u>
<u>2</u>	<u>Summary</u>	<u>6</u>
2.1	General Remarks	6
2.2	Product Description	6
2.3	Equipment Under Test	6
2.4	Short Description of the Equipment Under Test (EUT)	6
2.5	Test Frequency List	7
2.6	Normal Accessory Setting	7
2.7	EUT Configuration	7
2.8	Related Submittal(s) / Grant (s)	7
2.9	Modifications	7
2.10	General Test Conditions/Configurations	8
<u>3</u>	<u>Test Environment</u>	<u>9</u>
3.1	Information of the Test Laboratory	9
3.2	Environmental Conditions	9
3.3	Test Description	9
3.4	Equipments Used During the Test	10
<u>4</u>	<u>Test Conditions and Results</u>	<u>11</u>
4.1	Output Power	11
4.2	Peak-to-Average Ratio (PAR)	17
4.3	Occupied Bandwidth and Emission Bandwidth	24
4.4	Band Edge Compliance	31
4.5	Spurious Emission on Antenna Port	38
4.6	Radiated Spurious Emission	57
4.7	Frequency Stability	65
<u>5</u>	<u>Test Setup Photos of the EUT</u>	<u>67</u>
<u>6</u>	<u>Photos of the EUT</u>	<u>68</u>



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Apr. 28, 2023	Jason Zhou



1 Test Standards

The tests were performed according to following standards:

[FCC Part 24](#):PUBLIC MOBILE SERVICES.

[TIA/EIA 603 D June 2010](#):Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): Unintentional Radiators.

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS.

[KDB971168 D01:v02r02](#):MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS.

[ANSI C63.4:2014](#):Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.



2 Summary

2.1 General Remarks

Date of receipt of test sample	:	Feb. 27, 2023
Testing commenced on	:	Feb. 27, 2023
Testing concluded on	:	Apr. 28, 2023

2.2 Product Description

The PowUnity GmbH's Model:BT41-01 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT:	GPS Tracker
Model/Type reference:	BT41-01
Series Models:	T4101-03-04
Power supply:	DC 3.7V from battery
Modulation Type:	QPSK, 16QAM
Antenna Type:	Internal Antenna
Antenna Gain:	1dBi
Operation Frequency Band:	LTE Band 2
Operation frequency:	LTE Band 2: 1850~1910 MHz(TX), 1930~1990 MHz(TX)
LTE Release:	R8
Extreme temp. Tolerance:	-30°C to +70°C
Extreme vol. Limits:	3.15VDC to 4.26VDC (nominal: 3.7VDC)

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 120V/ 60 Hz	☐ 115V/60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 3.7V from battery

2.4 Short Description of the Equipment Under Test (EUT)

2.4.1 General Description

This is a GPS Tracker.

For more details, refer to the user's manual of the EUT.



2.5 Test Frequency List

TX Channel Bandwidth	Frequency (MHz)	channel
1.4 MHz	1850.7	18607
	1880.0	18900
	1909.3	19193
3 MHz	1851.5	18615
	1880.0	18900
	1908.5	19185
5 MHz	1852.5	18625
	1880.0	18900
	1907.5	19175
10 MHz	1855.0	18650
	1880.0	18900
	1905.0	19150
15 MHz	1857.5	18675
	1880.0	18900
	1902.5	19125
20 MHz	1860.0	18700
	1880.0	18900
	1900.0	19100

2.6 Normal Accessory Setting

Fully charged battery was used during the test.

2.7 EUT Configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

○	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
○	Multimeter	Manufacturer :	/
		Model No. :	/

2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2A2FCBT4101 filing to comply with FCC Part 24, Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.



2.10 General Test Conditions/Configurations

2.10.1 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.15V
	VN	3.70V
	VH	4.26V

NOTE: VL=lower extreme test voltage VN=nominal voltage
VH=upper extreme test voltage TN=normal temperature



3 Test Environment

3.1 Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.
FCC Designation Number is CN1229.
Canada IC CAB identifier is CN0045.
CNAS Registration Number is L9589.

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 °C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.3 Test Description

PCSBand (1850-1915MHz pairedwith 1930-1995MHz)

Test Item	FCCRuleNo.	Requirements	Verdict
Effective(Isotropic)Radiated Output Power	Part§2.1046, Part§24.232	EIRP ≤ 2W	Pass
Peak-Average Ratio	Part§2.1046, Part§24.232	FCC:Limit≤13dB	Pass
Bandwidth	Part§2.1049 RSS-133	OBW: Nolimit. EBW: Nolimit.	Pass
Band Edges Compliance	Part§2.1051, Part§24.238	≤ -13dBm/1%*EBW, In1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	Part§2.1051, Part§24.238	≤-13dBm/1MHz, from 9kHz to10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	Part§2.1053, Part§24.238	≤ -13dBm/1MHz.	Pass
Frequency Stability	Part§2.1055, Part§24.235	FCC:within authorized frequency block.	Pass
NOTE 1:For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".			

Remark:

1. The measurement uncertainty is not included in the test result.



3.4 Equipments Used During the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	ENV216	R&S	HKE-059	2023/02/17	2024/02/16
LISN	R&S	ENV216	HKE-002	2023/02/17	2024/02/16
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	2023/02/17	2024/02/16
Receiver	R&S	ESR-7	HKE-010	2023/02/17	2024/02/16
Spectrum analyzer	Agilent	N9020A	HKE-048	2023/02/17	2024/02/16
RF automatic control unit	Tonscend	JS0806-2	HKE-060	2023/02/17	2024/02/16
Horn antenna	Schwarzbeck	9120D	HKE-013	2023/02/17	2024/02/16
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	2023/02/17	2024/02/16
Preamplifier	EMCI	EMC051845SE	HKE-015	2023/02/17	2024/02/16
Preamplifier	Agilent	83051A	HKE-016	2023/02/17	2024/02/16
Temperature and humidity meter	Boyang	HTC-1	HKE-075	2023/02/17	2024/02/16
High pass filter unit	Tonscend	JS0806-F	HKE-055	2023/02/17	2024/02/16
RF cable	Times	1-40G	HKE-034	2023/02/17	2024/02/16
Power meter	Agilent	E4419B	HKE-085	2023/02/17	2024/02/16
Power Sensor	Agilent	E9300A	HKE-086	2023/02/17	2024/02/16
Wireless Communication Test Set	R&S	CMU200	HKE-026	2023/02/17	2024/02/16
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	2023/02/17	2024/02/16
Horn antenna	Schwarzbeck	9120D	HKE-135	2023/02/17	2024/02/16
High gain antenna	Schwarzbeck	LB-180400KF	HKE-128	2023/02/17	2024/02/16
Broadband antenna	Schwarzbeck	VULB 9163	HKE-087	2023/02/17	2024/02/16
Signal generator	Agilent	E4433B	HKE-120	2023/02/17	2024/02/16
Signal generator	Agilent	E4421B	HKE-121	2023/02/17	2024/02/16



4 Test Conditions and Results


4.1 Output Power

4.1.1 Conducted Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

TEST CONFIGURATION

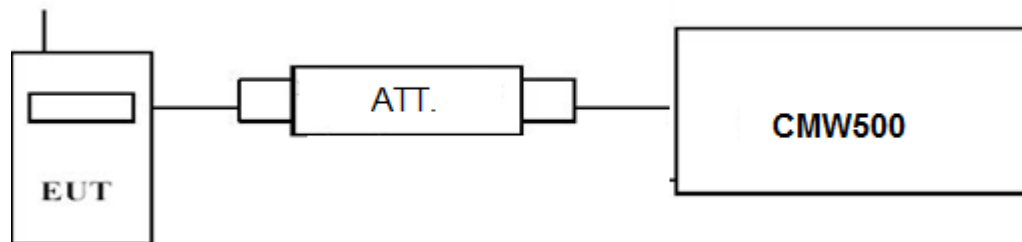

TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

TEST RESULTS

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2;

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Burst Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1850.7	1 RB low	21.60	20.57
		1 RB high	22.02	19.17
		50% RB mid	23.27	22.65
		100% RB	22.68	20.83
	1880.0	1 RB low	18.42	17.21
		1 RB high	19.26	17.92
		50% RB mid	20.22	20.07
		100% RB	19.30	18.39
	1909.3	1 RB low	23.13	21.79
		1 RB high	21.32	19.76
		50% RB mid	22.92	19.81
		100% RB	21.74	21.36
3 MHz	1851.5	1 RB low	22.52	19.63
		1 RB high	21.63	18.61
		50% RB mid	22.02	18.45
		100% RB	22.25	20.56
	1880.0	1 RB low	23.45	21.06

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



5 MHz		1 RB high	22.69	18.31
		50% RB mid	21.72	18.16
		100% RB	22.84	19.41
	1908.5	1 RB low	24.46	20.96
		1 RB high	24.81	21.05
		50% RB mid	23.22	22.01
	1852.5	100% RB	23.16	19.64
		1 RB low	22.12	20.92
		1 RB high	21.34	18.85
	1880.0	50% RB mid	21.69	18.38
		100% RB	22.49	21.49
		1 RB low	22.24	19.71
10 MHz	1907.5	1 RB high	23.47	22.53
		50% RB mid	21.83	17.50
		100% RB	22.28	19.06
	1855.0	1 RB low	21.71	20.27
		1 RB high	23.40	21.62
		50% RB mid	23.15	22.18
	1880.0	100% RB	22.28	18.27
		1 RB low	22.81	18.01
		1 RB high	21.85	17.57
	1905.0	50% RB mid	22.73	18.93
		100% RB	21.24	20.51
		1 RB low	21.62	19.09
15 MHz	1880.0	1 RB high	22.93	21.68
		50% RB mid	22.53	17.75
		100% RB	21.17	19.69
	1857.5	1 RB low	22.70	20.40
		1 RB high	21.91	19.37
		50% RB mid	22.83	20.57
	1902.5	100% RB	21.23	20.18
		1 RB low	22.98	17.69
		1 RB high	21.22	18.75
	1860.0	50% RB mid	22.01	17.81
		100% RB	21.58	20.07
		1 RB low	21.14	19.42
20 MHz	1880.0	1 RB high	22.62	21.66
		50% RB mid	21.17	15.67
		100% RB	21.19	18.61
	1900.0	1 RB low	21.89	19.40
		1 RB high	22.51	18.98
		50% RB mid	22.63	20.59
	1860.0	100% RB	21.72	20.55
		1 RB low	22.61	20.04
		1 RB high	22.59	18.79
	1880.0	50% RB mid	21.38	19.14
		100% RB	21.68	20.58
		1 RB low	20.88	19.24
20 MHz	1880.0	1 RB high	21.41	20.55
		50% RB mid	21.75	17.31
		100% RB	20.83	16.81
	1900.0	1 RB low	21.29	19.46
		1 RB high	20.54	18.78
		50% RB mid	21.97	20.28
	1860.0	100% RB	20.63	18.55
		1 RB low	22.61	20.04
		1 RB high	22.59	18.79
	1880.0	50% RB mid	21.38	19.14
		100% RB	21.68	20.58
		1 RB low	20.88	19.24

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China


4.1.2. Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p.

TEST CONFIGURATION

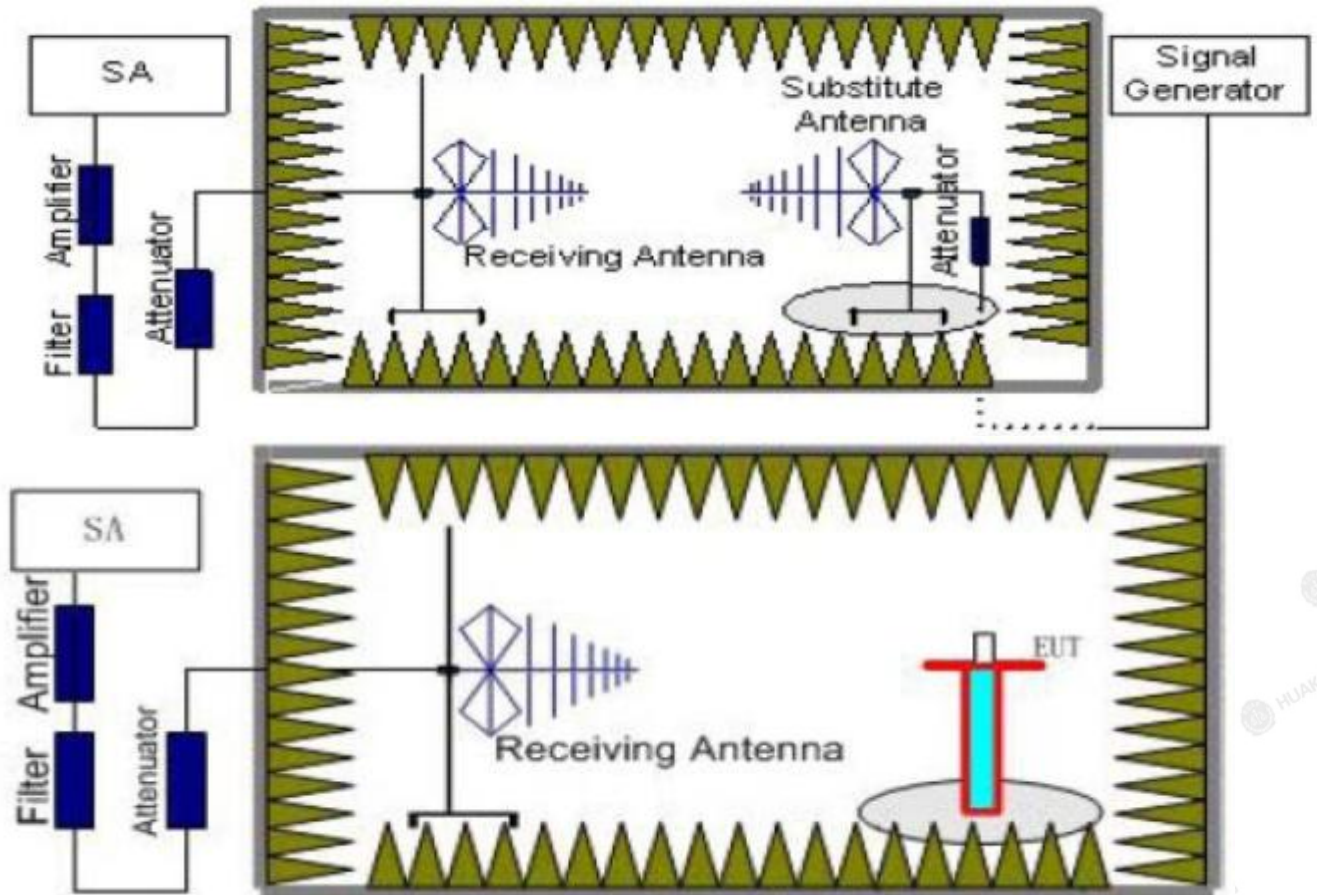

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna.



5. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
Power(EIRP)= $P_{Mea} - P_{cl} + G_a$
We used SMF100A microwave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:
Power(EIRP)= $P_{Mea} - P_{cl} + G_a$
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

TEST RESULTS

Radiated Measurement:

Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.
2. $EIRP = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
3. We measured both Horizontal and Vertical direction, recorded worst case direction.

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-12.9	3.41	10.24	33.6	27.53	33.01	5.48	V
1880.0	-14.41	3.49	10.24	33.6	25.94	33.01	7.07	V
1909.3	-14.77	3.55	10.23	33.6	25.51	33.01	7.5	V

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-12.6	3.41	10.24	33.6	27.83	33.01	5.18	V
1880.0	-14.48	3.49	10.24	33.6	25.87	33.01	7.14	V
1908.5	-14.47	3.55	10.23	33.6	25.81	33.01	7.2	V

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-14.16	3.41	10.24	33.6	26.27	33.01	6.74	V
1880.0	-14.09	3.49	10.24	33.6	26.26	33.01	6.75	V
1907.5	-15.28	3.55	10.23	33.6	25	33.01	8.01	V

*LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-16.59	3.41	10.24	33.6	23.84	33.01	9.17	V
1880.0	-14.26	3.49	10.24	33.6	26.09	33.01	6.92	V
1905.0	-14.71	3.55	10.23	33.6	25.57	33.01	7.44	V

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-14.86	3.41	10.24	33.6	25.57	33.01	7.44	V
1880.0	-15.77	3.49	10.24	33.6	24.58	33.01	8.43	V
1902.5	-15.44	3.55	10.23	33.6	24.84	33.01	8.17	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-13.45	3.41	10.24	33.6	26.98	33.01	6.03	V
1880.0	-14.75	3.49	10.24	33.6	25.6	33.01	7.41	V
1900.0	-16.88	3.55	10.23	33.6	23.4	33.01	9.61	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-14.5	3.41	10.24	33.6	25.93	33.01	7.08	V
1880.0	-14.05	3.49	10.24	33.6	26.3	33.01	6.71	V
1909.3	-13.23	3.55	10.23	33.6	27.05	33.01	5.96	V

LTE FDD Band 2_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-15.52	3.41	10.24	33.6	24.91	33.01	8.1	V
1880.0	-14.42	3.49	10.24	33.6	25.93	33.01	7.08	V
1908.5	-14.38	3.55	10.23	33.6	25.9	33.01	7.11	V

LTE FDD Band 2_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-14.27	3.41	10.24	33.6	26.16	33.01	6.85	V
1880.0	-13.25	3.49	10.24	33.6	27.1	33.01	5.91	V
1907.5	-16.06	3.55	10.23	33.6	24.22	33.01	8.79	V

*LTE FDD Band 2_Channel Bandwidth 10MHz_16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-15.49	3.41	10.24	33.6	24.94	33.01	8.07	V
1880.0	-14.47	3.49	10.24	33.6	25.88	33.01	7.13	V
1905.0	-14.48	3.55	10.23	33.6	25.8	33.01	7.21	V

LTE FDD Band 2_Channel Bandwidth 15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-14.18	3.41	10.24	33.6	26.25	33.01	6.76	V
1880.0	-14.16	3.49	10.24	33.6	26.19	33.01	6.82	V
1902.5	-14.39	3.55	10.23	33.6	25.89	33.01	7.12	V

LTE FDD Band 2_Channel Bandwidth 20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-14.39	3.41	10.24	33.6	26.04	33.01	6.97	V
1880.0	-13.41	3.49	10.24	33.6	26.94	33.01	6.07	V
1900.0	-15.28	3.55	10.23	33.6	25	33.01	8.01	V




4.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

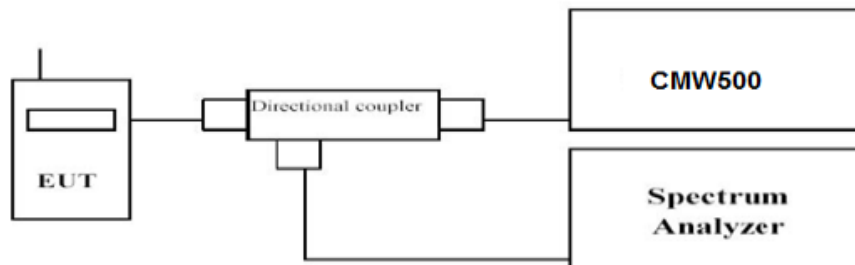

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms;
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR(dB)	
			QPSK	16QAM
1.4 MHz	1850.7	6RB#0	8.84	8.71
	1880.0		9.12	9.05
	1909.3		8.96	10.51
3 MHz	1851.5	6RB#0	8.95	9.52
	1880.0		10.14	10.16
	1908.5		10.30	9.72
5 MHz	1852.5	6RB#0	7.96	8.77
	1880.0		8.79	8.87
	1907.5		9.97	9.01
10 MHz	1855.0	6RB#0	8.80	10.33
	1880.0		8.85	10.72
	1905.0		9.08	8.63
15 MHz	1857.5	6RB#0	8.47	8.49
	1880.0		8.63	11.54
	1902.5		8.96	11.47
20 MHz	1860.0	6RB#0	8.49	8.46
	1880.0		8.49	8.51
	1900.0		8.49	8.53

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 2 – 1.4 MHz Channel BandwidthPAPR

QPSK

16QAM

Low Channel



6RB#0



6RB#0

Middle Channel



6RB#0



6RB#0

High Channel



6RB#0



6RB#0




LTE FDD Band 2-3MHz Channel Bandwidth PAPR

QPSK

16QAM



Low Channel

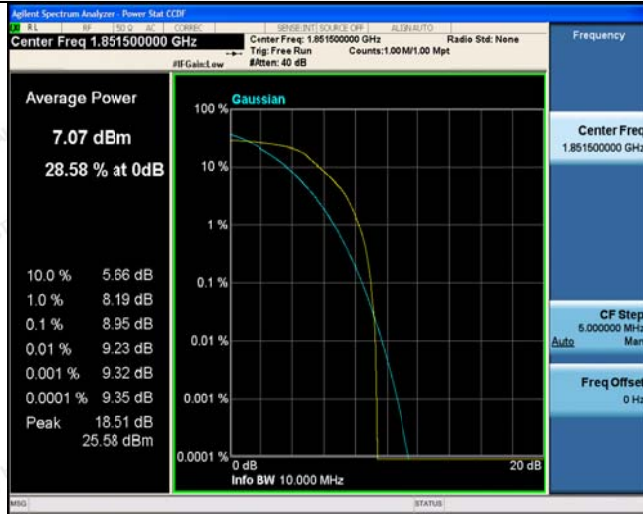

6RB#0

6RB#0

Middle Channel

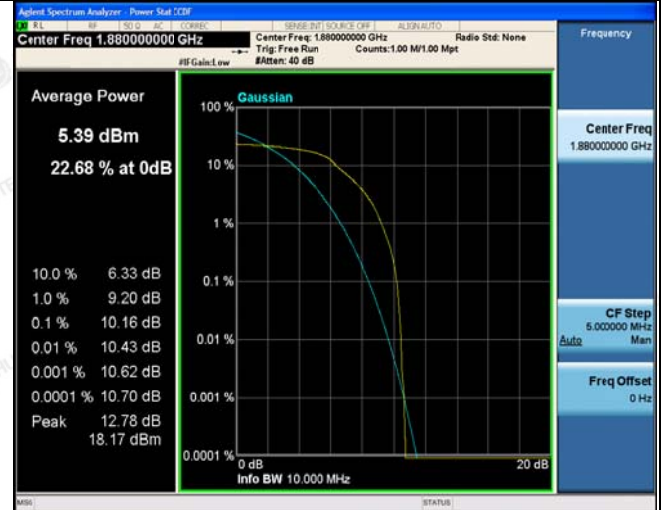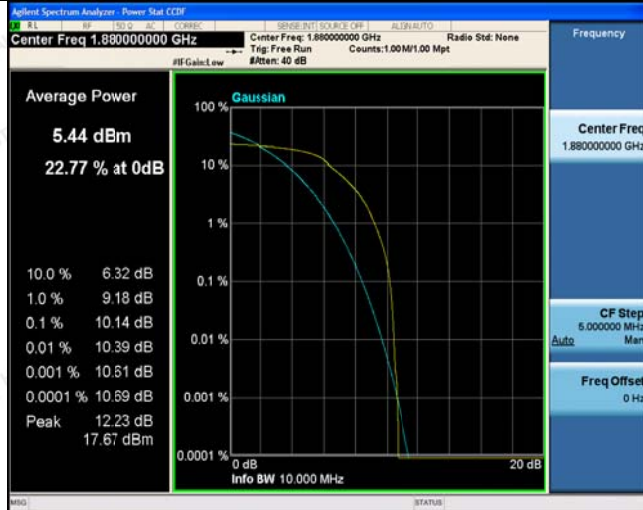

6RB#0

6RB#0

High Channel



6RB#0

6RB#0



LTE FDD Band 2-5MHz Channel Bandwidth PAPR

QPSK

16QAM

Low Channel



6RB#0



6RB#0

Middle Channel



6RB#0



6RB#0

High Channel



6RB#0



6RB#0



LTE FDD Band 2-10MHz Channel BandwidthPAPR

QPSK

16QAM

Low Channel




6RB#0



6RB#0

Middle Channel

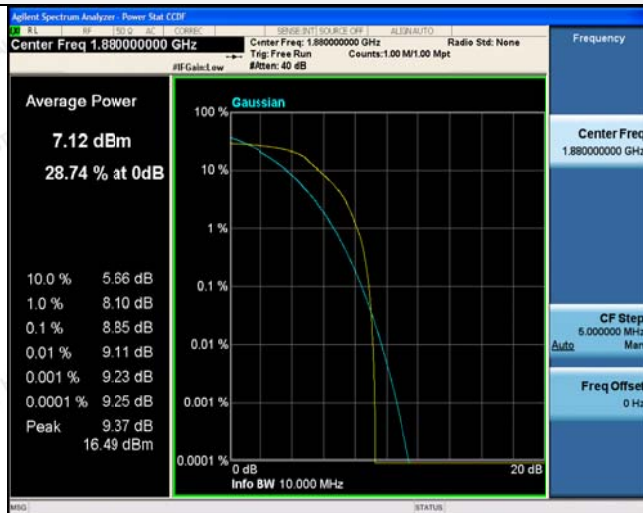

6RB#0




6RB#0

High Channel



6RB#0

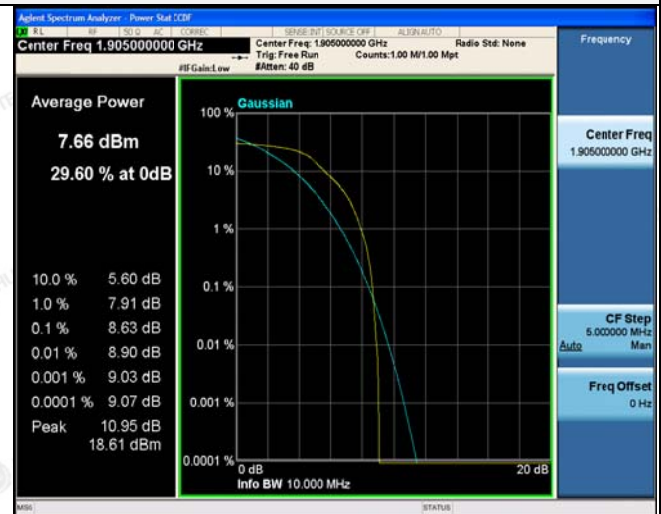

6RB#0



LTE FDD Band 2- 15 MHz Channel Bandwidth PAPR

QPSK

16QAM

Low Channel




6RB#0



6RB#0

Middle Channel

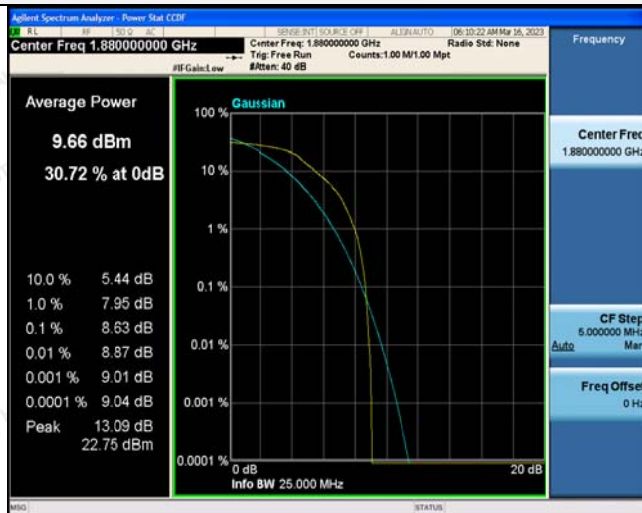


6RB#0



6RB#0

High Channel

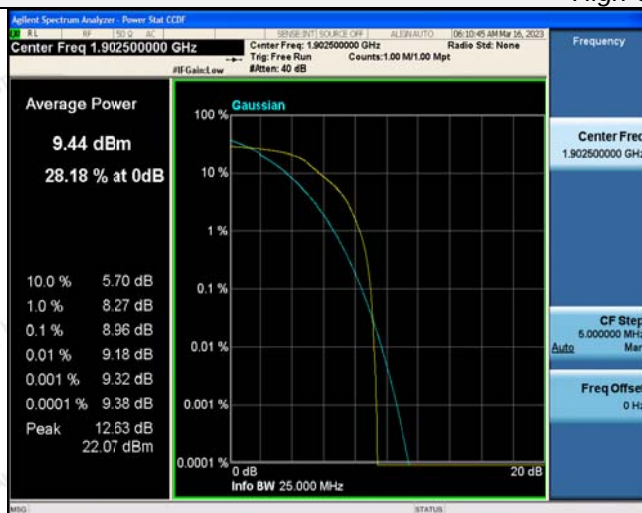

6RB#0



6RB#0



LTE FDD Band 2-20MHz Channel BandwidthPAPR

QPSK

16QAM

Low Channel



6RB#0

6RB#0

Middle Channel



6RB#0

6RB#0

High Channel



6RB#0

6RB#0




4.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

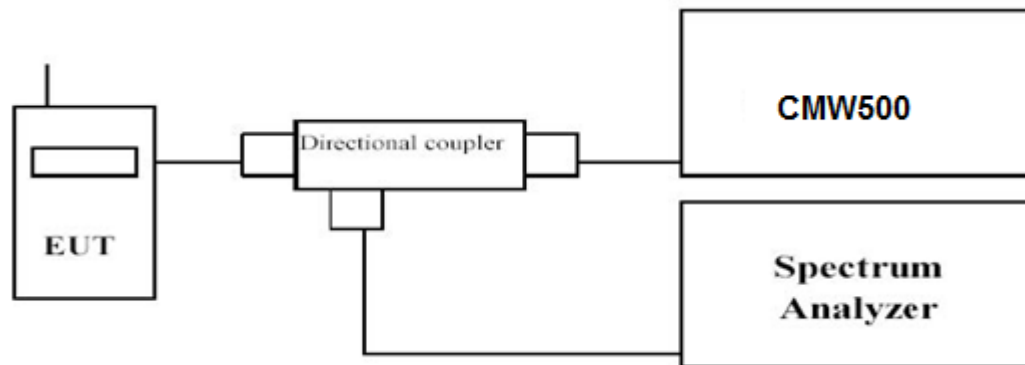

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW ≥ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.

LTE FDD Band 2						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	1850.7	1.252	1.255	1.0888	1.0865
		1880.0	1.241	1.236	1.0900	1.0900
		1909.3	1.265	1.261	1.0901	1.0886
3 MHz	6RB#0	1851.5	1.254	1.264	1.0917	1.0901
		1880.0	1.264	1.273	1.0892	1.0917
		1908.5	1.235	1.244	1.0878	1.0901
5 MHz	6RB#0	1852.5	1.271	1.289	1.0974	1.0984
		1880.0	1.270	1.279	1.0955	1.0956
		1907.5	1.238	1.245	1.0863	1.0860
10 MHz	6RB#0	1855.0	1.243	1.258	1.0989	1.0930
		1880.0	1.262	1.271	1.0942	1.0957
		1905.0	1.270	1.263	1.0901	1.0933
15 MHz	6RB#0	1857.5	1.293	1.311	1.1032	1.1035
		1880.0	1.284	1.285	1.1029	1.1035
		1902.5	1.262	1.272	1.0950	1.1007
20 MHz	6RB#0	1860.0	1.302	1.294	1.1075	1.1115
		1880.0	1.256	1.297	1.1102	1.1131
		1900.0	1.267	1.289	1.1045	1.1057

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 2 – 1.4 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

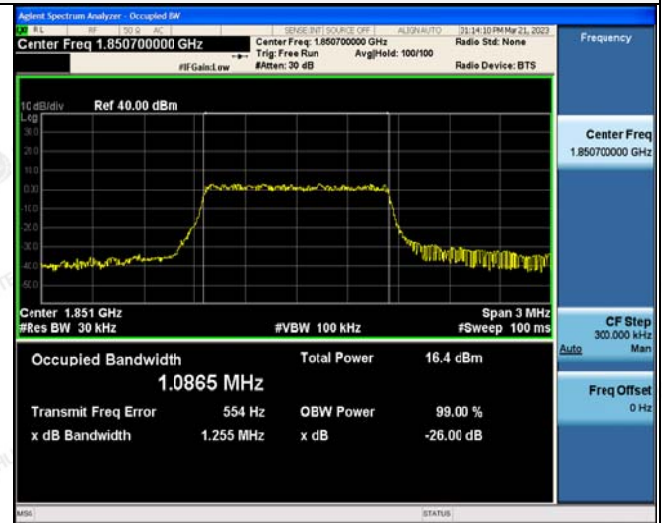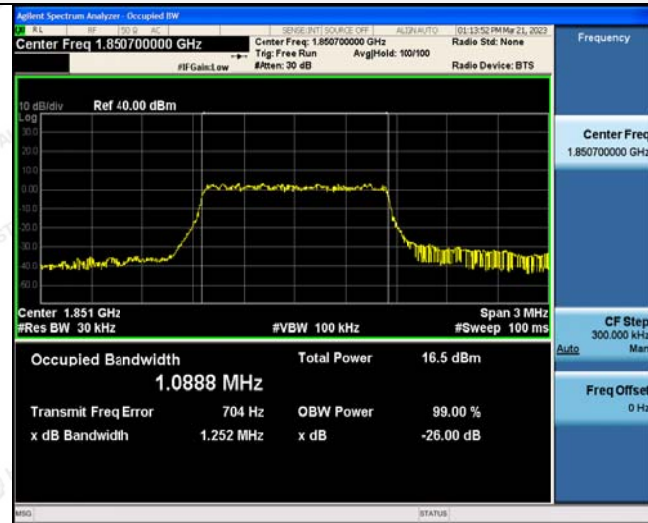

6RB#0

6RB#0


Middle Channel

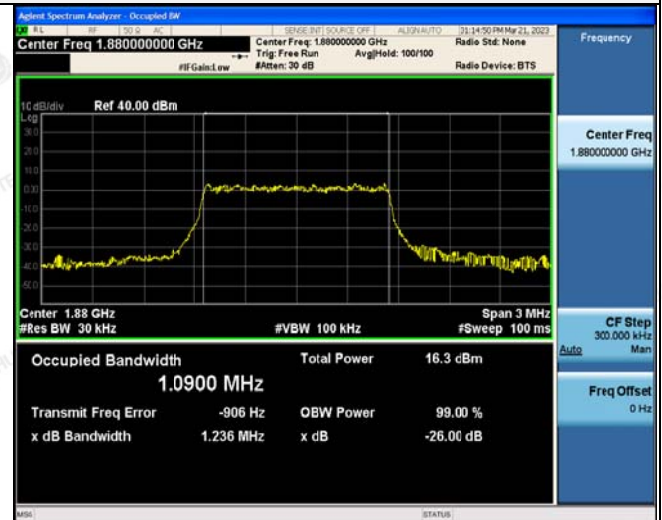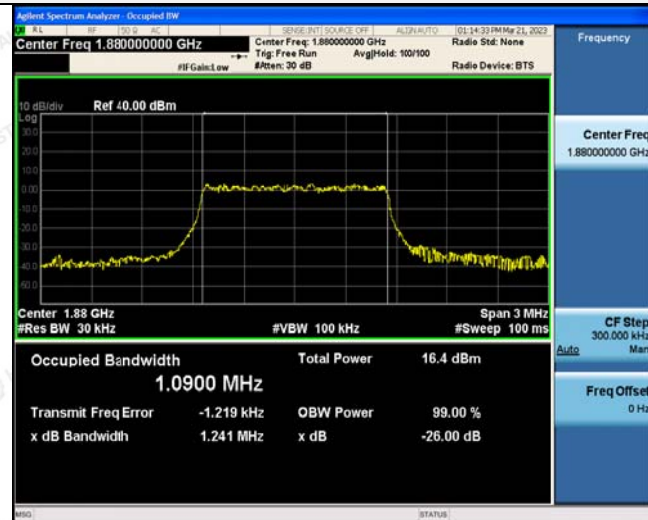

6RB#0

6RB#0

High Channel

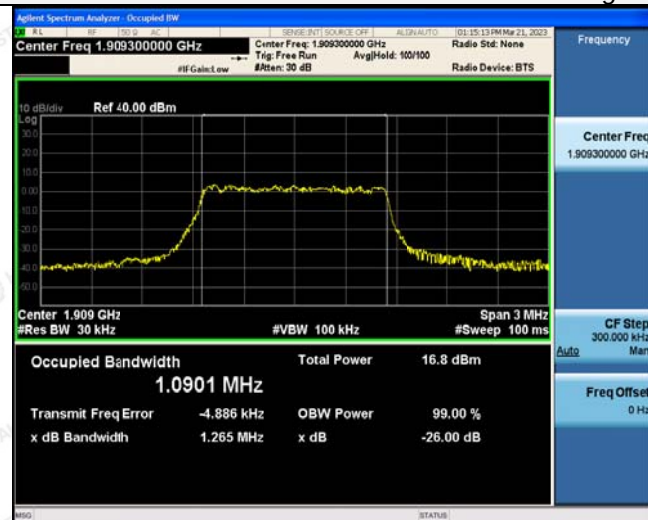

6RB#0

6RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 2-3MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

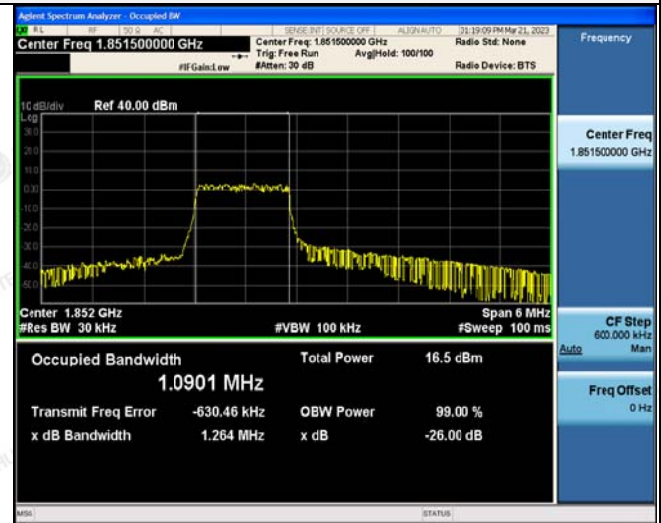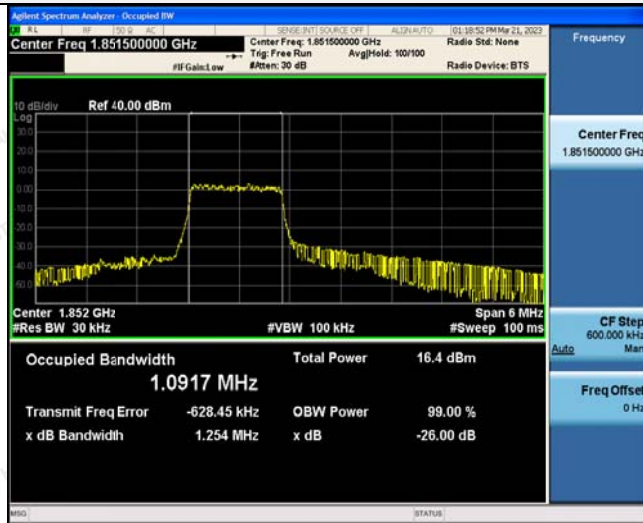

6RB#0

6RB#0



Middle Channel

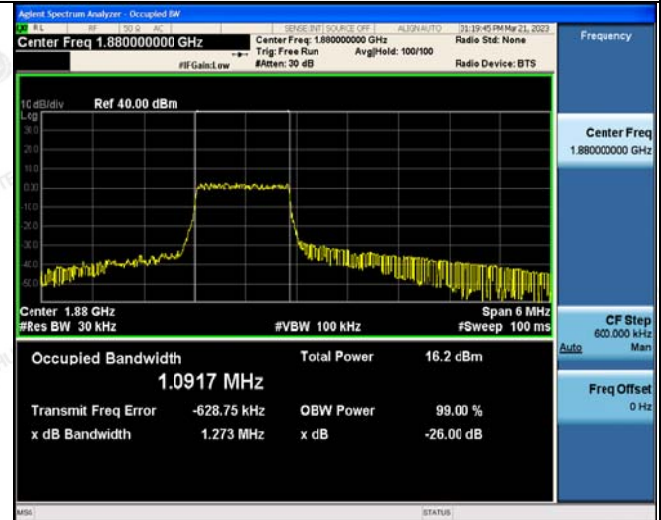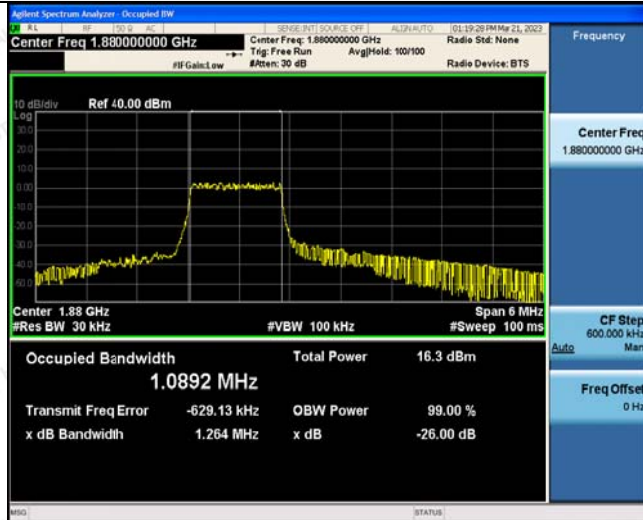

6RB#0

6RB#0

High Channel

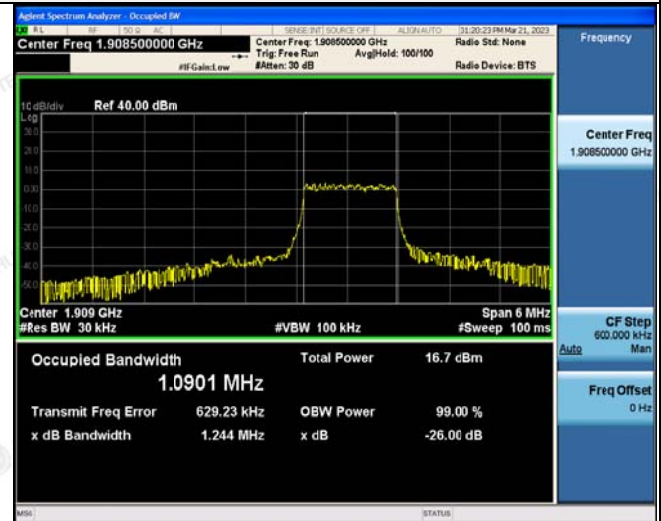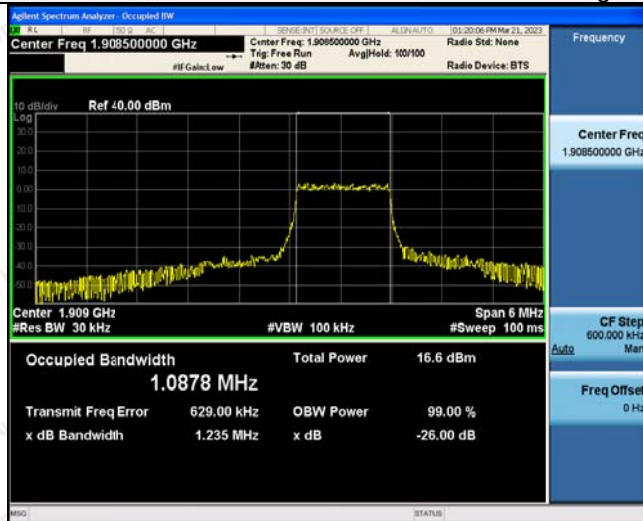

6RB#0

6RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 2-5MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

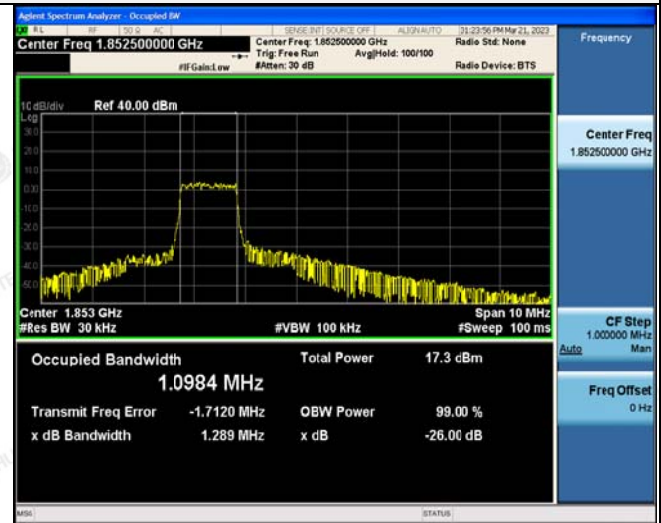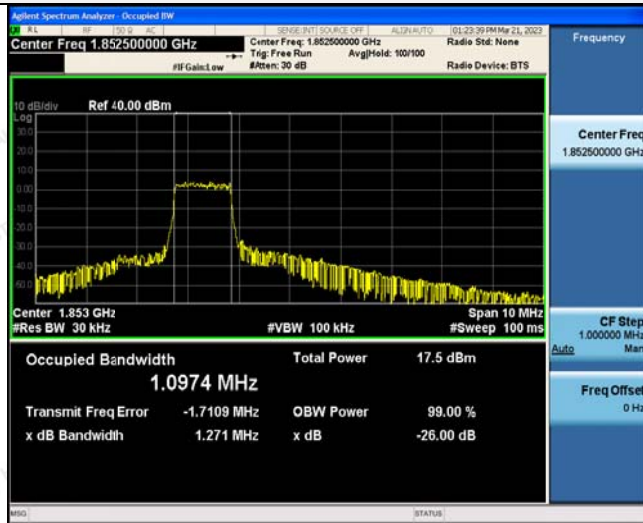

6RB#0

6RB#0


Middle Channel

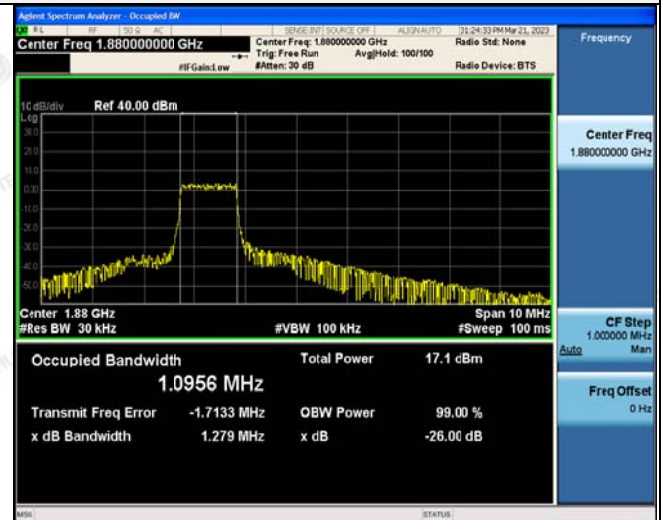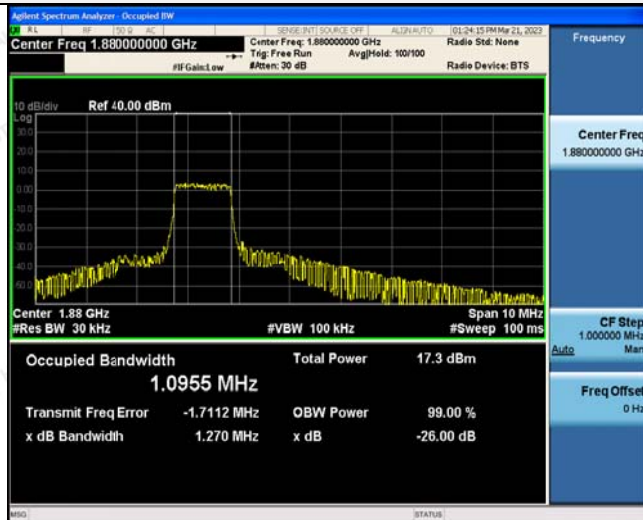

6RB#0

6RB#0

High Channel

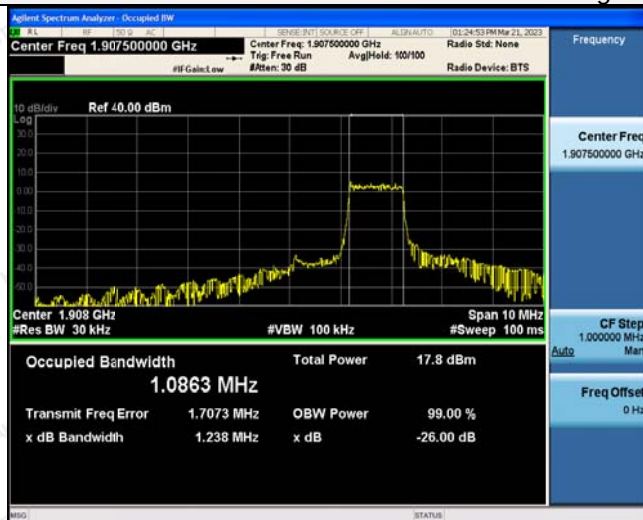

6RB#0

6RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 2-10MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

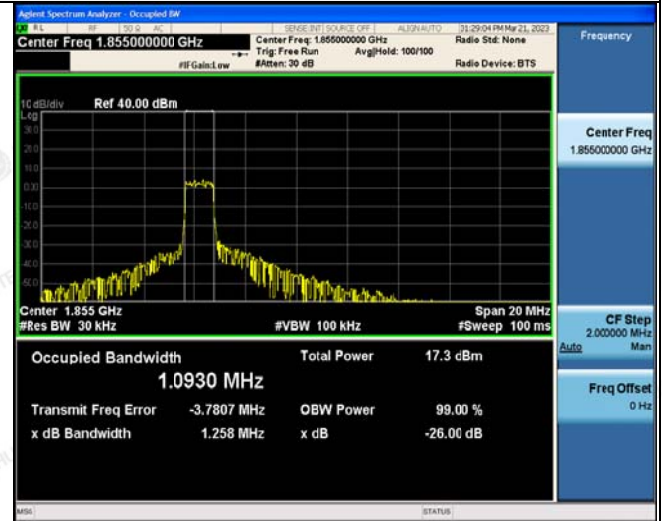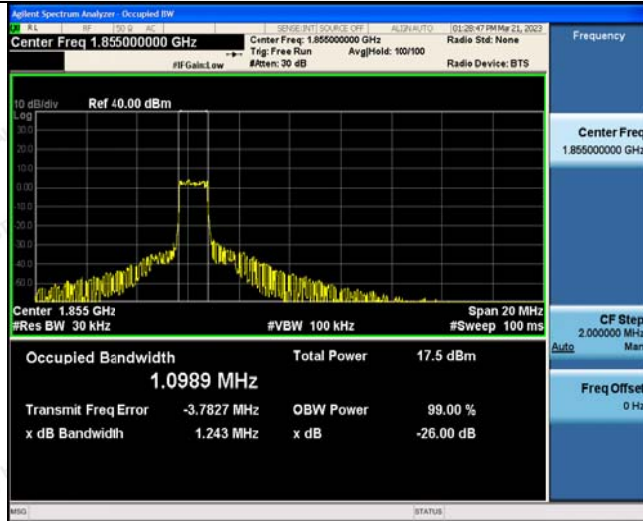

6RB#0

6RB#0



Middle Channel

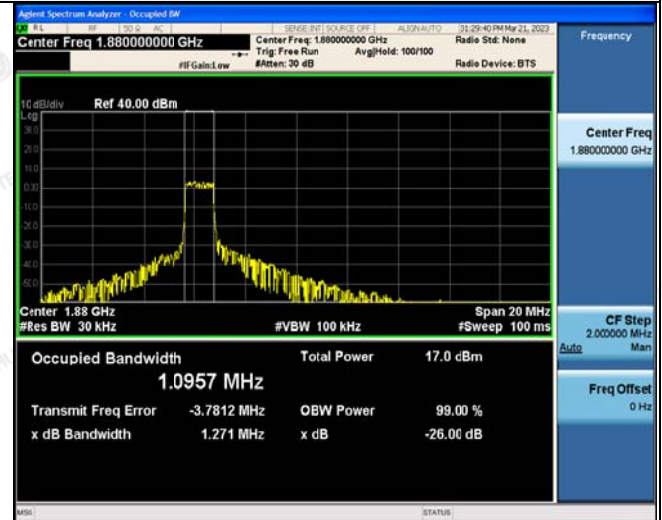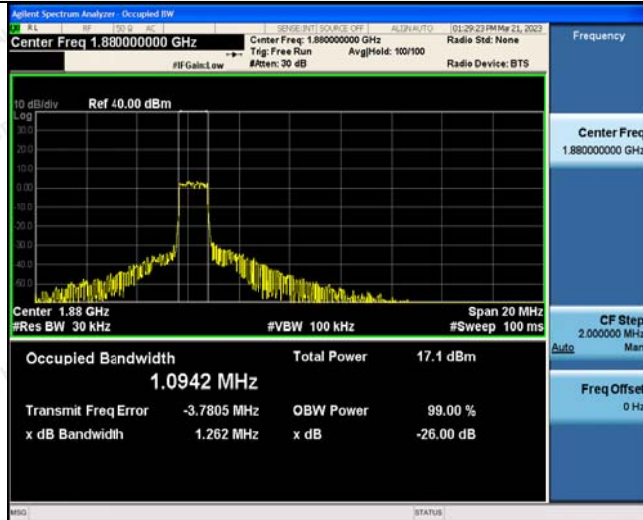

6RB#0

6RB#0

High Channel

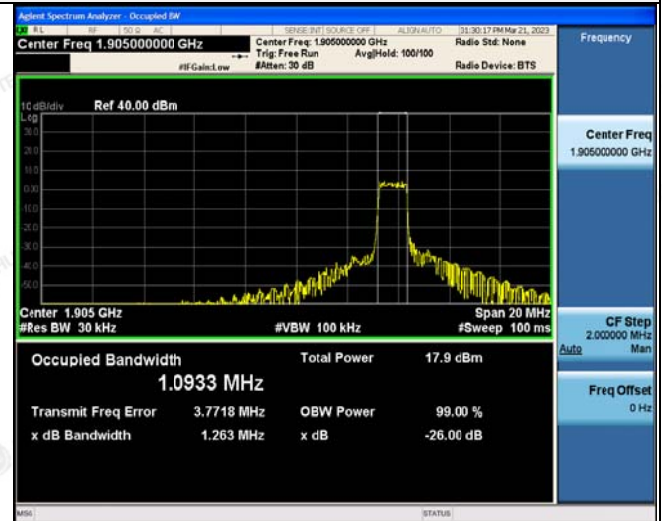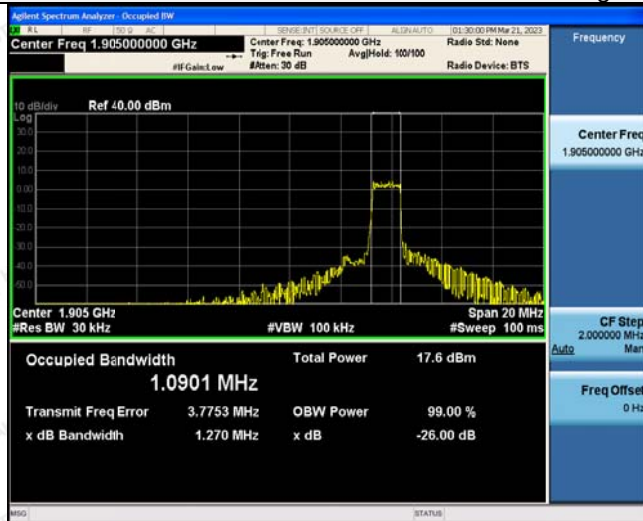

6RB#0

6RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

LTE FDD Band 2–15MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM

Low Channel

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.857500000 GHz

Ref 40.00 dBm

Center Freq 1.858 GHz

Span 30 MHz

Res BW 30 kHz

VBW 100 kHz

Sweep 100 ms

CF Step 3.000000 MHz

Auto

Man

Occupied Bandwidth 1.1032 MHz

Total Power 18.4 dBm

Transmit Freq Error -6.0326 MHz

OBW Power 99.00 %

x dB Bandwidth 1.293 MHz

x dB -26.00 dB

Freq Offset 0 Hz

Frequency

Center Freq 1.857500000 GHz

Radio Device: BTS

Trig: Free Run

Avg/Hold: 100/100

#Att: 30 dB

#Gain: Low

ISO: 35:51 PM Mar 21, 2023

31:36:08 PM Mar 21, 2023

Radio Std: None

Frequency

Center Freq 1.857500000 GHz

Radio Device: BTS

Trig: Free Run

Avg/Hold: 100/100

#Att: 30 dB

#Gain: Low

ISO: 35:51 PM Mar 21, 2023

31:36:08 PM Mar 21, 2023

Radio Std: None

6RB#0

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.857500000 GHz

Ref 40.00 dBm

Center Freq 1.858 GHz

Span 30 MHz

Res BW 30 kHz

VBW 100 kHz

Sweep 100 ms

CF Step 3.000000 MHz

Auto

Man

Occupied Bandwidth 1.1035 MHz

Total Power 18.4 dBm

Transmit Freq Error -6.0329 MHz

OBW Power 99.00 %

x dB Bandwidth 1.311 MHz

x dB -26.00 dB

Freq Offset 0 Hz

Frequency

Center Freq 1.857500000 GHz

Radio Device: BTS

Trig: Free Run

Avg/Hold: 100/100

#Att: 30 dB

#Gain: Low

ISO: 35:51 PM Mar 21, 2023

31:36:08 PM Mar 21, 2023

Radio Std: None

Frequency

Center Freq 1.857500000 GHz

Radio Device: BTS

Trig: Free Run

Avg/Hold: 100/100

#Att: 30 dB

#Gain: Low

ISO: 35:51 PM Mar 21, 2023

31:36:08 PM Mar 21, 2023

Radio Std: None

6RB#0

Middle Channel

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.880000000 GHz

Ref 40.00 dBm

Center Freq 1.88 GHz

Span 30 MHz

Res BW 30 kHz

VBW 100 kHz

Sweep 100 ms

CF Step 3.000000 MHz

Auto

Man

Occupied Bandwidth 1.1029 MHz

Total Power 18.4 dBm

Transmit Freq Error -6.0326 MHz

OBW Power 99.00 %

x dB Bandwidth 1.284 MHz

x dB -26.00 dB

Freq Offset 0 Hz

Frequency

Center Freq 1.880000000 GHz

Radio Device: BTS

Trig: Free Run

Avg/Hold: 100/100

#Att: 30 dB

#Gain: Low

ISO: 35:26 PM Mar 21, 2023

31:36:26 PM Mar 21, 2023

Radio Std: None

Frequency

Center Freq 1.880000000 GHz

Radio Device: BTS

Trig: Free Run

Avg/Hold: 100/100

#Att: 30 dB

#Gain: Low

ISO: 35:26 PM Mar 21, 2023

31:36:26 PM Mar 21, 2023

Radio Std: None

6RB#0

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.880000000 GHz

Ref 40.00 dBm

Center Freq 1.88 GHz

Span 30 MHz

Res BW 30 kHz

VBW 100 kHz

Sweep 100 ms

CF Step 3.000000 MHz

Auto

Man

Occupied Bandwidth 1.1035 MHz

Total Power 18.3 dBm

Transmit Freq Error -6.0314 MHz

OBW Power 99.00 %

x dB Bandwidth 1.285 MHz

x dB -26.00 dB

Freq Offset 0 Hz

Frequency

Center Freq 1.880000000 GHz

Radio Device: BTS

Trig: Free Run

Avg/Hold: 100/100

#Att: 30 dB

#Gain: Low

ISO: 35:44 PM Mar 21, 2023

31:36:44 PM Mar 21, 2023

Radio Std: None

Frequency

Center Freq 1.880000000 GHz

Radio Device: BTS

Trig: Free Run

Avg/Hold: 100/100

#Att: 30 dB

#Gain: Low

ISO: 35:44 PM Mar 21, 2023

31:36:44 PM Mar 21, 2023

Radio Std: None

6RB#0

High Channel

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.902500000 GHz

Ref 40.00 dBm

Center Freq 1.903 GHz

Span 30 MHz

Res BW 30 kHz

VBW 100 kHz

Sweep 100 ms

CF Step 3.000000 MHz

Auto

Man

Occupied Bandwidth 1.0950 MHz

Total Power 18.7 dBm

Transmit Freq Error 6.0244 MHz

OBW Power 99.00 %

x dB Bandwidth 1.262 MHz

x dB -26.00 dB

Freq Offset 0 Hz

Frequency

Center Freq 1.902500000 GHz

Radio Device: BTS

Trig: Free Run

Avg/Hold: 100/100

#Att: 30 dB

#Gain: Low

ISO: 37:04 PM Mar 21, 2023

31:37:04 PM Mar 21, 2023

Radio Std: None

Frequency

Center Freq 1.902500000 GHz

Radio Device: BTS

Trig: Free Run

Avg/Hold: 100/100

#Att: 30 dB

#Gain: Low

ISO: 37:04 PM Mar 21, 2023

31:37:04 PM Mar 21, 2023

Radio Std: None

6RB#0

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.902500000 GHz

Ref 40.00 dBm

Center Freq 1.903 GHz

Span 30 MHz

Res BW 30 kHz

VBW 100 kHz

Sweep 100 ms

CF Step 3.000000 MHz

Auto

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 2-20MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

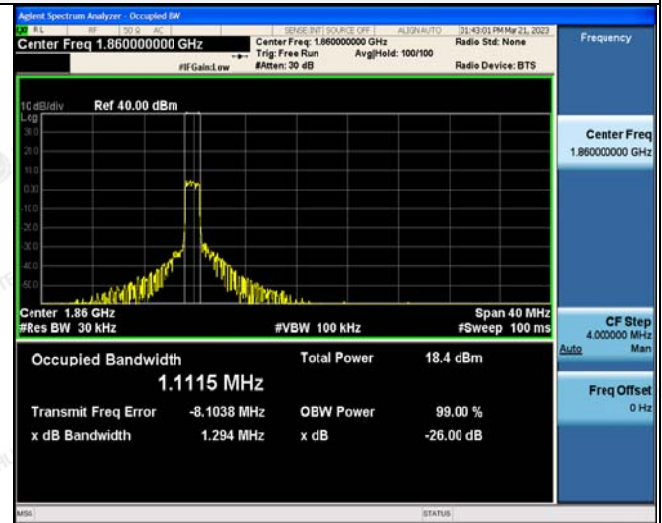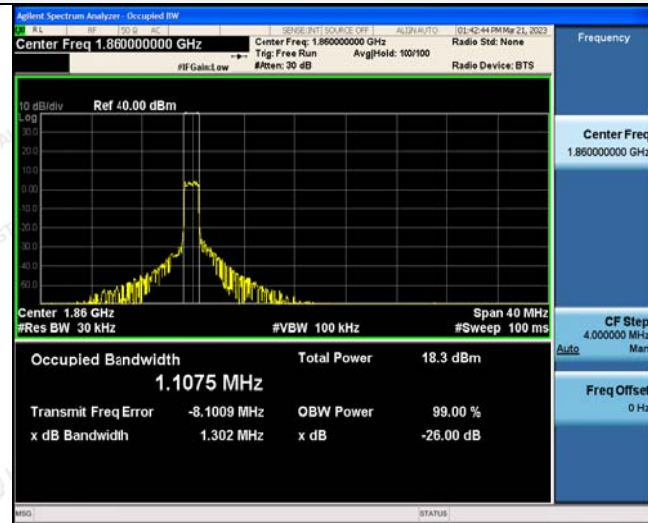

6RB#0

6RB#0



Middle Channel

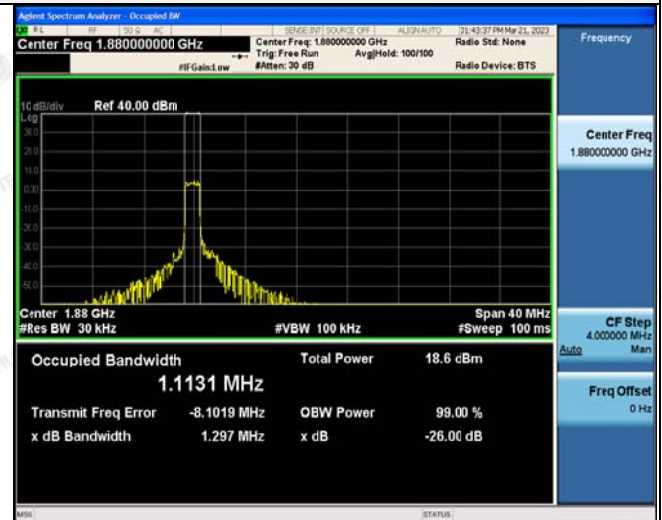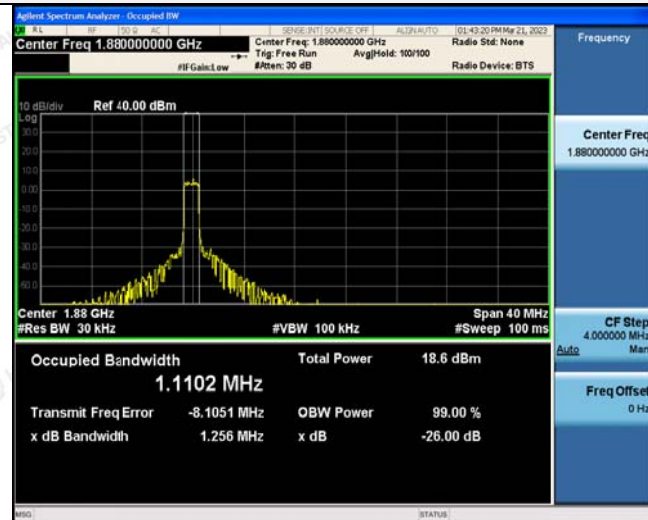

6RB#0

6RB#0

High Channel

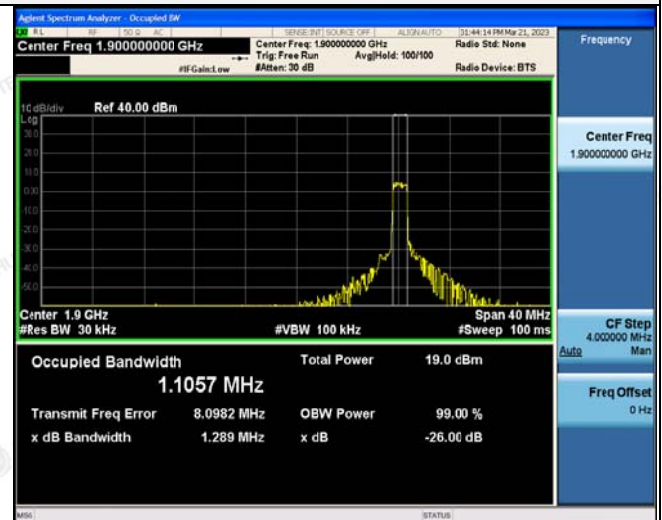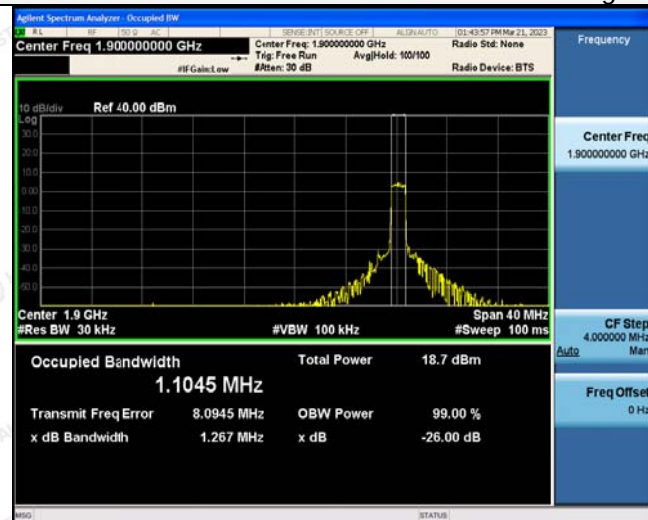

6RB#0

6RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China