



FCC Test Report FCC Part 27

Report Reference No.....: HK2302270554-10E
FCC ID.....: 2A2FCBT4101
Compiled by
(position+printed name+signature)...: File administrators Gary Qian
Supervised by
(position+printed name+signature)...: Technique principal Eden Hu
Approved by
(position+printed name+signature)...: Manager Jason Zhou
Date of issue.....: Apr. 28, 2023

Gary Qian
Eden Hu
Jason Zhou

Testing Laboratory Name: **Shenzhen HUAKE Testing Technology Co., Ltd.**
Address: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong,
China

Applicant's name.....: **PowUnity GmbH**
Address: Feldstrasse 9d Innsbruck, 6020 Austria

Test specification:
Standard: **FCC CFR Title 47 Part 2, Part 27**
TRF Originator.....: Shenzhen HUAKE Testing Technology Co., Ltd.

Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: GPS Tracker
Trade Mark: BikeTrax
Manufacturer.....: **PowUnity GmbH**
Model/Type reference.....: BT41-01
Series Models: T4101-03-04
Modulation Type.....: QPSK, 16QAM
Rating: DC 3.7V from battery
Hardware version: V2.2
Software version: V2.2
Result.....: **PASS**

**TEST REPORT**

Test Report No. :	HK2302270554-10E	Apr. 28, 2023 Date of issue
--------------------------	-------------------------	--------------------------------

Equipment under Test : GPS Tracker

Model /Type : BT41-01

Series Models : T4101-03-04

Applicant : **PowUnity GmbH**

Address : Feldstrasse 9d Innsbruck, 6020 Austria

Manufacturer : **PowUnity GmbH**

Address : Feldstrasse 9d Innsbruck, 6020 Austria

Test result	Pass
--------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Contents

<u>1</u>	<u>Summary</u>	<u>5</u>
1.1	Test Standards	5
1.2	Test Description	5
1.3	Information of The Test Laboratory	6
1.4	Statement of The Measurement Uncertainty	6
<u>2</u>	<u>General Information</u>	<u>7</u>
2.1	Environmental Conditions	7
2.2	Description of Test Modes	7
2.3	Test Frequency List	7
2.4	Equipments Used during the Test	8
2.5	Related Submittal(s) / Grant (s)	8
2.6	Modifications	8
<u>3</u>	<u>Test Conditions and Results</u>	<u>9</u>
3.1	Output Power	9
3.2	Peak-to-Average Ratio (PAR)	15
3.3	Occupied Bandwidth and Emission Bandwidth	22
3.4	Band Edge Compliance	29
3.5	Spurious Emission	36
3.6	Frequency Stability under Temperature & Voltage Variations	70
<u>4</u>	<u>Test Setup Photos of the EUT</u>	<u>72</u>
<u>5</u>	<u>Photos of the EUT</u>	<u>73</u>



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Apr. 28, 2023	Jason Zhou



1 Summary

1.1 Test Standards

The tests were performed according to following standards:

[FCC Part 27](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES.

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards 47 CFR FCC Part 15 Subpart B: - Unintentional Radiators.

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS.

[KDB971168 D01: v02r02](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS.

1.2 Test Description

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 27.50(d)(4)	Pass
Peak-to-Average Ratio	Part 27.50(d)(4)	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 27.53(h)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 27.53(h)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 27.53(h)	Pass
Out of band emission, Band Edge	Part 2.1051 Part 27.53(h)	Pass
Frequency stability	Part 2.1055 Part 27.54	Pass



1.3 Information of The Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.
FCC Designation Number is CN1229.
Canada IC CAB identifier is CN0045.
CNAS Registration Number is L9589.

1.4 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen HUAKE Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen HUAKE Testing Technology Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



2 General Information

2.1 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2 Description of Test Modes

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest ☐ middle and highest frequency of channel were selected to perform the test, then shown on this report.

Note:

1. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.
2. Test method and refer to 3GPP TS136521.

2.3 Test Frequency List

TX Channel Bandwidth	Frequency (MHz)	channel
1.4 MHz	1710.7	131979
	1745	132322
	1779.3	132665
3 MHz	1711.5	131987
	1745	132322
	1778.5	132657
5 MHz	1712.5	131997
	1745	132322
	1777.5	132647
10 MHz	1715.0	132022
	1745	132322
	1775.0	132622
15 MHz	1717.5	132047
	1745	132322
	1772.5	132597
20 MHz	1720.0	132072
	1745	132322
	1770.0	132572



2.4 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	ENV216	R&S	HKE-059	2023/02/17	2024/02/16
LISN	R&S	ENV216	HKE-002	2023/02/17	2024/02/16
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	2023/02/17	2024/02/16
Receiver	R&S	ESR-7	HKE-010	2023/02/17	2024/02/16
Spectrum analyzer	Agilent	N9020A	HKE-048	2023/02/17	2024/02/16
RF automatic control unit	Tonscend	JS0806-2	HKE-060	2023/02/17	2024/02/16
Horn antenna	Schwarzbeck	9120D	HKE-013	2023/02/17	2024/02/16
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	2023/02/17	2024/02/16
Preamplifier	EMCI	EMC051845SE	HKE-015	2023/02/17	2024/02/16
Preamplifier	Agilent	83051A	HKE-016	2023/02/17	2024/02/16
Temperature and humidity meter	Boyang	HTC-1	HKE-075	2023/02/17	2024/02/16
High pass filter unit	Tonscend	JS0806-F	HKE-055	2023/02/17	2024/02/16
RF cable	Times	1-40G	HKE-034	2023/02/17	2024/02/16
Power meter	Agilent	E4419B	HKE-085	2023/02/17	2024/02/16
Power Sensor	Agilent	E9300A	HKE-086	2023/02/17	2024/02/16
Wireless Communication Test Set	R&S	CMW500	HKE-026	2023/02/17	2024/02/16
Wireless Communication Test Set	R&S	CMU200	HKE-029	2023/02/17	2024/02/16
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	2023/02/17	2024/02/16
Horn antenna	Schwarzbeck	9120D	HKE-135	2023/02/17	2024/02/16
High gain antenna	Schwarzbeck	LB-180400KF	HKE-128	2023/02/17	2024/02/16
Broadband antenna	Schwarzbeck	VULB 9163	HKE-087	2023/02/17	2024/02/16
Signal generator	Agilent	E4433B	HKE-120	2023/02/17	2024/02/16
Signal generator	Agilent	E4421B	HKE-121	2023/02/17	2024/02/16

2.5 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2A2FCBT4101 filing to comply with of the FCC Part 27 Rules.

2.6 Modifications

No modifications were implemented to meet testing criteria.



3 Test Conditions and Results


3.1 Output Power

LIMIT


According to §27.50 (d) (4): Fixed, mobile, and portable (hand- held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

TEST CONFIGURATION

Conducted Power Measurement

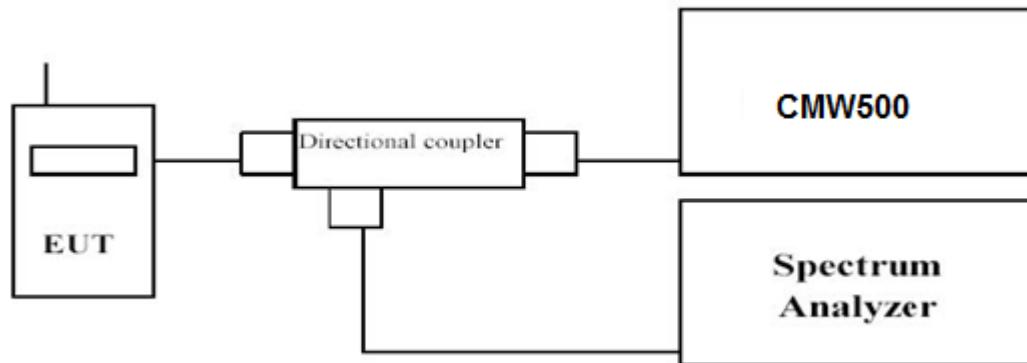

Radiated Power Measurement:

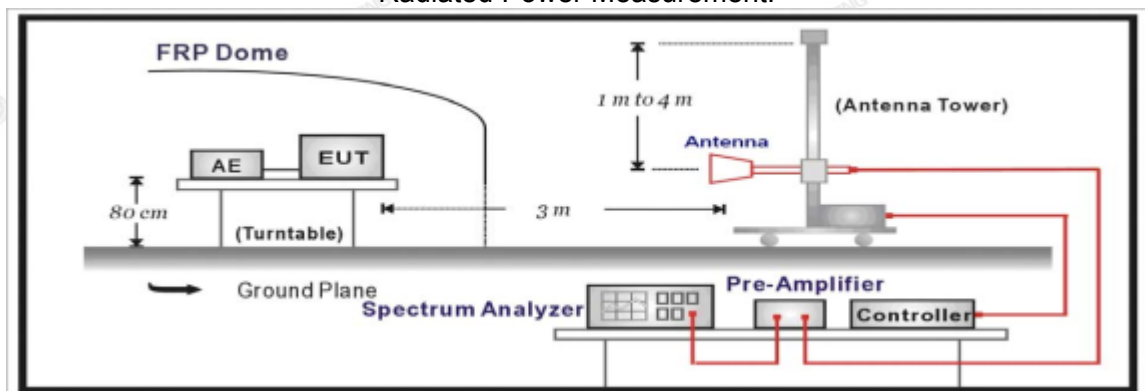

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D.

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal



level is detected by the measuring receiver.

- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4.

TEST RESULTS

Conducted Measurement:

LTE FDD Band 66				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1710.7	1 RB low	22.29	21.09
		1 RB high	22.10	20.94
		50% RB mid	20.76	19.73
		100% RB	21.98	20.77
	1745	1 RB low	20.96	20.72
		1 RB high	19.37	19.35
		50% RB mid	19.25	19.31
		100% RB	20.43	19.26
	1779.3	1 RB low	21.98	17.86
		1 RB high	20.34	17.63
		50% RB mid	20.91	19.20
		100% RB	20.54	17.11
3 MHz	1711.5	1 RB low	22.12	20.94
		1 RB high	21.98	20.84
		50% RB mid	21.65	19.53
		100% RB	20.58	20.12
	1745	1 RB low	21.60	19.68
		1 RB high	21.90	18.98
		50% RB mid	20.28	19.21
		100% RB	20.84	18.99
	1778.5	1 RB low	19.70	17.55
		1 RB high	18.46	18.78
		50% RB mid	19.15	17.76
		100% RB	19.94	17.22
5 MHz	1712.5	1 RB low	22.38	22.50
		1 RB high	21.82	22.20
		50% RB mid	21.41	20.49
		100% RB	20.78	21.56

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



10 MHz	1745	1 RB low	21.31	21.61
		1 RB high	20.79	19.79
		50% RB mid	20.04	20.68
		100% RB	20.42	20.69
	1777.5	1 RB low	20.98	18.77
		1 RB high	19.06	18.26
		50% RB mid	20.23	19.34
		100% RB	19.69	17.82
	1715.0	1 RB low	22.40	22.59
		1 RB high	21.80	22.15
		50% RB mid	22.28	20.34
		100% RB	21.22	21.82
	1745	1 RB low	20.94	21.08
		1 RB high	19.40	19.40
		50% RB mid	20.18	20.79
		100% RB	20.25	20.73
	1775.0	1 RB low	19.95	18.85
		1 RB high	20.47	19.00
		50% RB mid	20.86	17.26
		100% RB	19.27	18.95
15 MHz	1717.5	1 RB low	21.88	22.74
		1 RB high	21.63	21.96
		50% RB mid	20.87	21.49
		100% RB	21.10	21.71
	1745	1 RB low	20.96	21.26
		1 RB high	20.77	20.85
		50% RB mid	20.43	21.03
		100% RB	20.46	21.07
	1772.5	1 RB low	20.46	20.45
		1 RB high	20.77	19.20
		50% RB mid	20.43	19.47
		100% RB	19.08	18.83
20 MHz	1720.0	1 RB low	21.67	21.90
		1 RB high	21.69	21.85
		50% RB mid	20.74	21.46
		100% RB	21.09	21.74
	1745	1 RB low	21.03	21.63
		1 RB high	20.74	20.83
		50% RB mid	20.48	21.05
		100% RB	20.77	21.13
	1770.0	1 RB low	20.42	20.42
		1 RB high	21.49	20.46
		50% RB mid	21.56	19.75
		100% RB	20.42	19.84

**Radiated Measurement:**

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case for each Channel Bandwidth of LTE FDD Band 66.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$

LTE FDD Band 66_Channel Bandwidth 1.4MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.7	-16.51	3.06	9.68	34.80	24.91	30.00	5.09	V
1745	-16.8	3.17	9.68	34.80	24.51	30.00	5.49	V
1779.3	-17.8	3.22	9.75	34.80	23.53	30.00	6.47	V
1710.7	-16.86	3.06	9.68	34.80	24.56	30.00	5.44	H
1745	-17.28	3.17	9.68	34.80	24.03	30.00	5.97	H
1779.3	-17.49	3.22	9.75	34.80	23.84	30.00	6.16	H

LTE FDD Band 66_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1711.5	-16.82	3.06	9.68	34.80	24.60	30.00	5.40	V
1745	-17.49	3.17	9.68	34.80	23.82	30.00	6.18	V
1778.5	-16.55	3.22	9.75	34.80	24.78	30.00	5.22	V
1711.5	-15.42	3.06	9.68	34.80	26.00	30.00	4.00	H
1745	-16.63	3.17	9.68	34.80	24.68	30.00	5.32	H
1778.5	-17.03	3.22	9.75	34.80	24.30	30.00	5.70	H

LTE FDD Band 66_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1712.5	-18.41	3.06	9.68	34.80	23.01	30.00	6.99	V
1745	-16.78	3.17	9.68	34.80	24.53	30.00	5.47	V
1777.5	-16.65	3.22	9.75	34.80	24.68	30.00	5.32	V
1712.5	-17.61	3.06	9.68	34.80	23.81	30.00	6.19	H
1745	-17.12	3.17	9.68	34.80	24.19	30.00	5.81	H
1777.5	-18.28	3.22	9.75	34.80	23.05	30.00	6.95	H

LTE FDD Band 66_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1715.0	-16.84	3.06	9.68	34.80	24.58	30.00	5.42	V
1745	-14.98	3.17	9.68	34.80	26.33	30.00	3.67	V
1775.0	-17.54	3.22	9.75	34.80	23.79	30.00	6.21	V
1715.0	-17.55	3.06	9.68	34.80	23.87	30.00	6.13	H
1745	-16.8	3.17	9.68	34.80	24.51	30.00	5.49	H
1775.0	-17.76	3.22	9.75	34.80	23.57	30.00	6.43	H

LTE FDD Band 66_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1717.5	-17.13	3.06	9.68	34.80	24.29	30.00	5.71	V
1745	-16.77	3.17	9.68	34.80	24.54	30.00	5.46	V
1772.5	-16.57	3.22	9.75	34.80	24.76	30.00	5.24	V
1717.5	-17.9	3.06	9.68	34.80	23.52	30.00	6.48	H
1745	-16.88	3.17	9.68	34.80	24.43	30.00	5.57	H
1772.5	-18.03	3.22	9.75	34.80	23.30	30.00	6.70	H

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 66_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1720.0	-16.75	3.06	9.68	34.80	24.67	30.00	5.33	V
1745	-17.66	3.17	9.68	34.80	23.65	30.00	6.35	V
1770.0	-16.83	3.22	9.75	34.80	24.50	30.00	5.50	V
1720.0	-18.93	3.06	9.68	34.80	22.49	30.00	7.51	H
1745	-17.28	3.17	9.68	34.80	24.03	30.00	5.97	H
1770.0	-18.12	3.22	9.75	34.80	23.21	30.00	6.79	H

LTE FDD Band 66_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.7	-17.04	3.06	9.68	34.80	24.38	30.00	5.62	V
1745	-16.69	3.17	9.68	34.80	24.62	30.00	5.38	V
1779.3	-18.32	3.22	9.75	34.80	23.01	30.00	6.99	V
1710.7	-16.14	3.06	9.68	34.80	25.28	30.00	4.72	H
1745	-18.62	3.17	9.68	34.80	22.69	30.00	7.31	H
1779.3	-17.65	3.22	9.75	34.80	23.68	30.00	6.32	H

LTE FDD Band 66_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1711.5	-17.49	3.06	9.68	34.80	23.93	30.00	6.07	V
1745	-16.09	3.17	9.68	34.80	25.22	30.00	4.78	V
1778.5	-17.53	3.22	9.75	34.80	23.80	30.00	6.20	V
1711.5	-17.87	3.06	9.68	34.80	23.55	30.00	6.45	H
1745	-16.32	3.17	9.68	34.80	24.99	30.00	5.01	H
1778.5	-17.65	3.22	9.75	34.80	23.68	30.00	6.32	H

LTE FDD Band 66_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1712.5	-16.33	3.06	9.68	34.80	25.09	30.00	4.91	V
1745	-16.73	3.17	9.68	34.80	24.58	30.00	5.42	V
1777.5	-18.66	3.22	9.75	34.80	22.67	30.00	7.33	V
1712.5	-17.03	3.06	9.68	34.80	24.39	30.00	5.61	H
1745	-15.56	3.17	9.68	34.80	25.75	30.00	4.25	H
1777.5	-16.68	3.22	9.75	34.80	24.65	30.00	5.35	H

LTE FDD Band 66_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1715.0	-16.65	3.06	9.68	34.80	24.77	30.00	5.23	V
1745	-17.01	3.17	9.68	34.80	24.30	30.00	5.70	V
1775.0	-16.89	3.22	9.75	34.80	24.44	30.00	5.56	V
1715.0	-15.77	3.06	9.68	34.80	25.65	30.00	4.35	H
1745	-17.48	3.17	9.68	34.80	23.83	30.00	6.17	H
1775.0	-18.94	3.22	9.75	34.80	22.39	30.00	7.61	H

*LTE FDD Band 66 Channel Bandwidth 15MHz 16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1717.5	-17.69	3.06	9.68	34.80	23.73	30.00	6.27	V
1745	-15.83	3.17	9.68	34.80	25.48	30.00	4.52	V
1772.5	-16.22	3.22	9.75	34.80	25.11	30.00	4.89	V
1717.5	-17.4	3.06	9.68	34.80	24.02	30.00	5.98	H
1745	-16.16	3.17	9.68	34.80	25.15	30.00	4.85	H
1772.5	-18.05	3.22	9.75	34.80	23.28	30.00	6.72	H

LTE FDD Band 66 Channel Bandwidth 20MHz 16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1720.0	-17.35	3.06	9.68	34.80	24.07	30.00	5.93	V
1745	-16.72	3.17	9.68	34.80	24.59	30.00	5.41	V
1770.0	-18.26	3.22	9.75	34.80	23.07	30.00	6.93	V
1720.0	-18.03	3.06	9.68	34.80	23.39	30.00	6.61	H
1745	-17.35	3.17	9.68	34.80	23.96	30.00	6.04	H
1770.0	-18.61	3.22	9.75	34.80	22.72	30.00	7.28	H




3.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

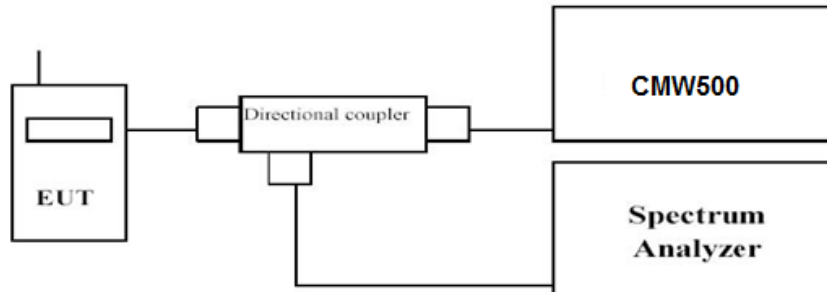

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms;
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case for each Channel Bandwidth of LTE FDD Band 66.

LTE FDD Band 66				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
1.4 MHz	1710.7	1RB#0	8.47	9.64
	1745		7.89	10.44
	1779.3		8.50	8.98
3 MHz	1711.5	1RB#0	10.12	10.58
	1745		9.16	10.60
	1778.5		10.11	11.20
5 MHz	1712.5	1RB#0	8.45	8.45
	1745		8.41	8.47
	1777.5		8.47	8.47
10 MHz	1715.0	1RB#0	9.05	8.96
	1745		10.27	8.78
	1775.0		9.31	9.61
15 MHz	1717.5	1RB#0	8.18	7.57
	1745		10.29	8.28
	1772.5		9.34	9.97
20 MHz	1720.0	1RB#0	8.45	8.50
	1745		8.51	8.52
	1770.0		10.01	10.62

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 66-1.4MHz Channel Bandwidth PAPR

QPSK

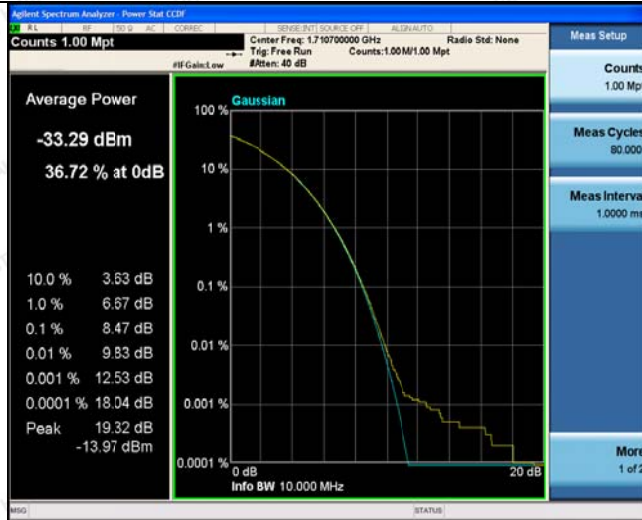

1RB#0

16QAM



1RB#0

Low Channel



1RB#0



1RB#0

Middle Channel



1RB#0



1RB#0

High Channel

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 66-3MHz Channel Bandwidth PAPR

QPSK

16QAM

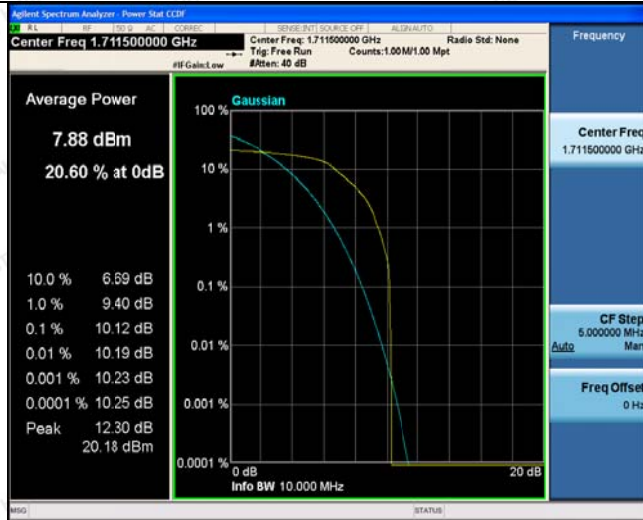

1RB#0

1RB#0

Low Channel



1RB#0

1RB#0

Middle Channel



1RB#0

1RB#0

High Channel

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 66-5MHz Channel Bandwidth PAPR

QPSK

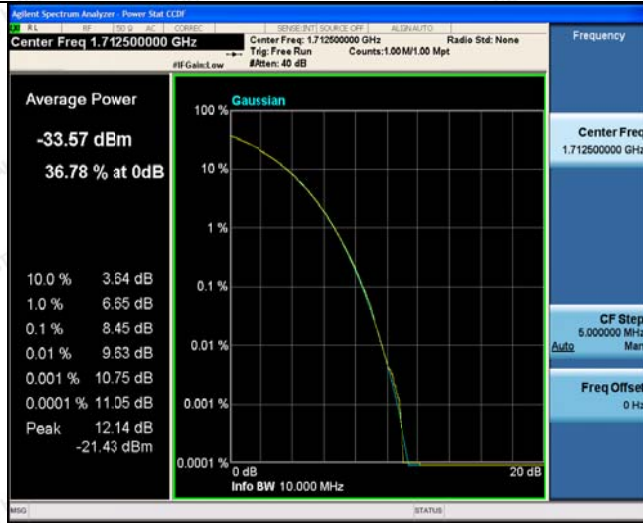


1RB#0

16QAM

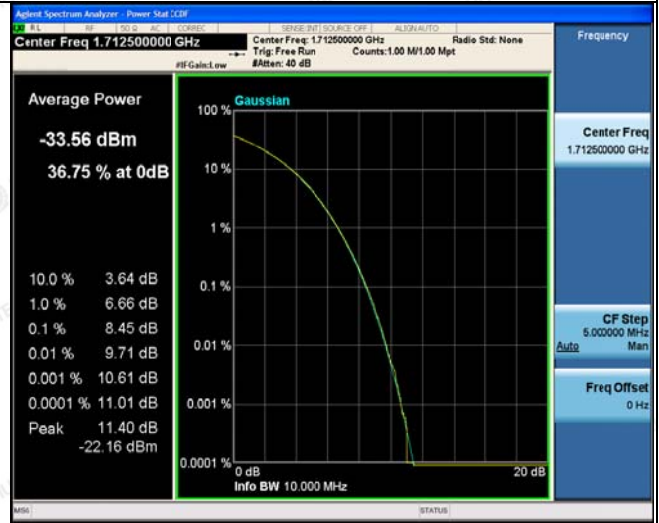

1RB#0

Low Channel

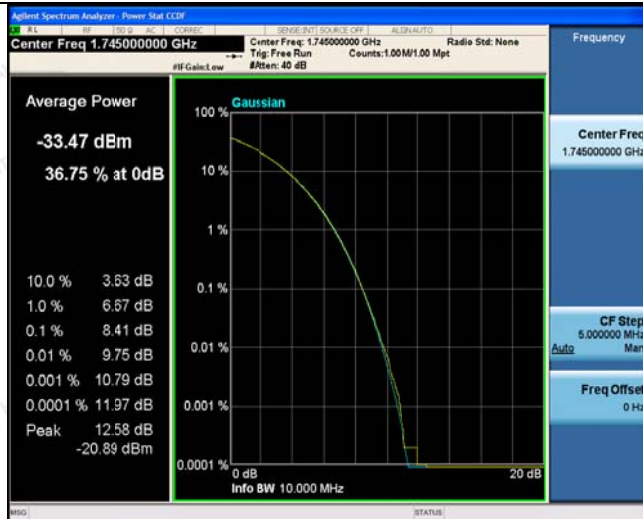

1RB#0



1RB#0

Middle Channel



1RB#0



1RB#0

High Channel

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 66-10MHz Channel Bandwidth PAPR

QPSK



16QAM

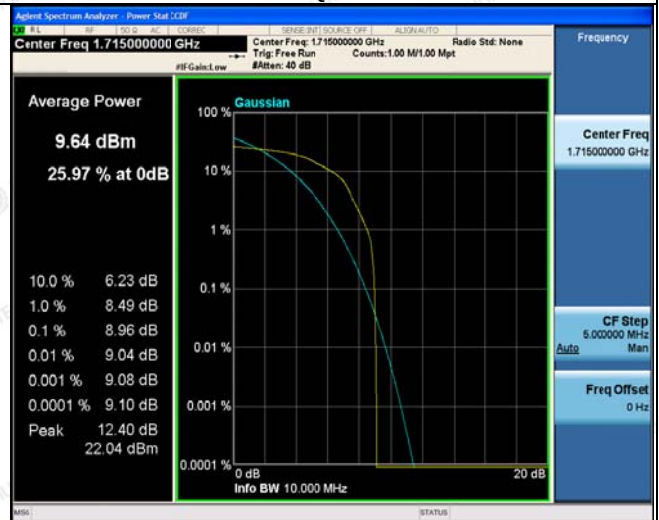

1RB#0

1RB#0

Low Channel



1RB#0



1RB#0

Middle Channel



1RB#0



1RB#0

High Channel

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 66-15MHz Channel Bandwidth PAPR

QPSK



1RB#0

16QAM



1RB#0

Low Channel



1RB#0



1RB#0

Middle Channel



1RB#0



1RB#0

High Channel

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 66-20MHz Channel Bandwidth PAPR

QPSK



1RB#0

16QAM



1RB#0

Low Channel



1RB#0



1RB#0

Middle Channel



1RB#0



1RB#0

High Channel




3.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

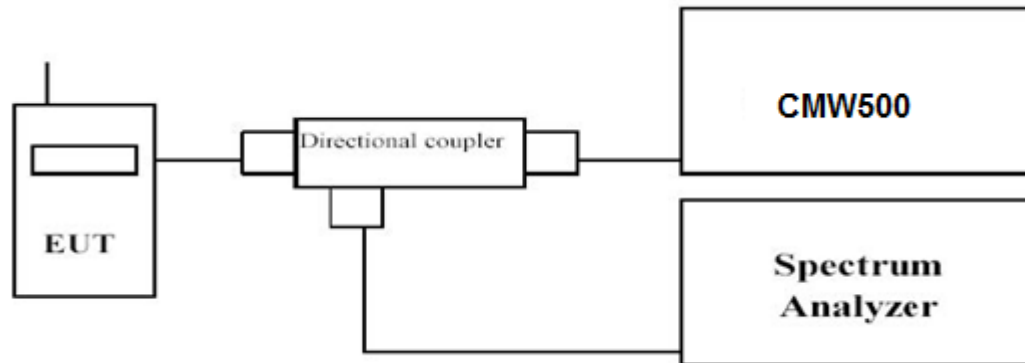

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case for each Channel Bandwidth of LTE FDD Band 66.

LTE FDD Band 66						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	1710.7	1.270	1.242	1.0913	1.0897
		1745	1.245	1.254	1.0921	1.0918
		1779.3	1.253	1.251	1.0892	1.0894
3 MHz	6RB#0	1711.5	1.258	1.247	1.0890	1.0890
		1745	1.241	1.259	1.0863	1.0884
		1778.5	1.251	1.246	1.0914	1.0899
5 MHz	6RB#0	1712.5	1.282	1.273	1.0918	1.0967
		1745	1.268	1.280	1.0965	1.0972
		1777.5	1.242	1.252	1.0858	1.0846
10 MHz	6RB#0	1715.0	1.259	1.265	1.0915	1.0902
		1745	1.266	1.258	1.0972	1.0938
		1775.0	1.259	1.238	1.0955	1.0838
15 MHz	6RB#0	1717.5	1.280	1.300	1.1072	1.1079
		1745	1.295	1.279	1.1037	1.1039
		1772.5	1.273	1.283	1.1000	1.0987
20 MHz	6RB#0	1720.0	1.314	1.318	1.1067	1.1111
		1745	1.287	1.280	1.1107	1.1123
		1770.0	1.273	1.279	1.1055	1.1097

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

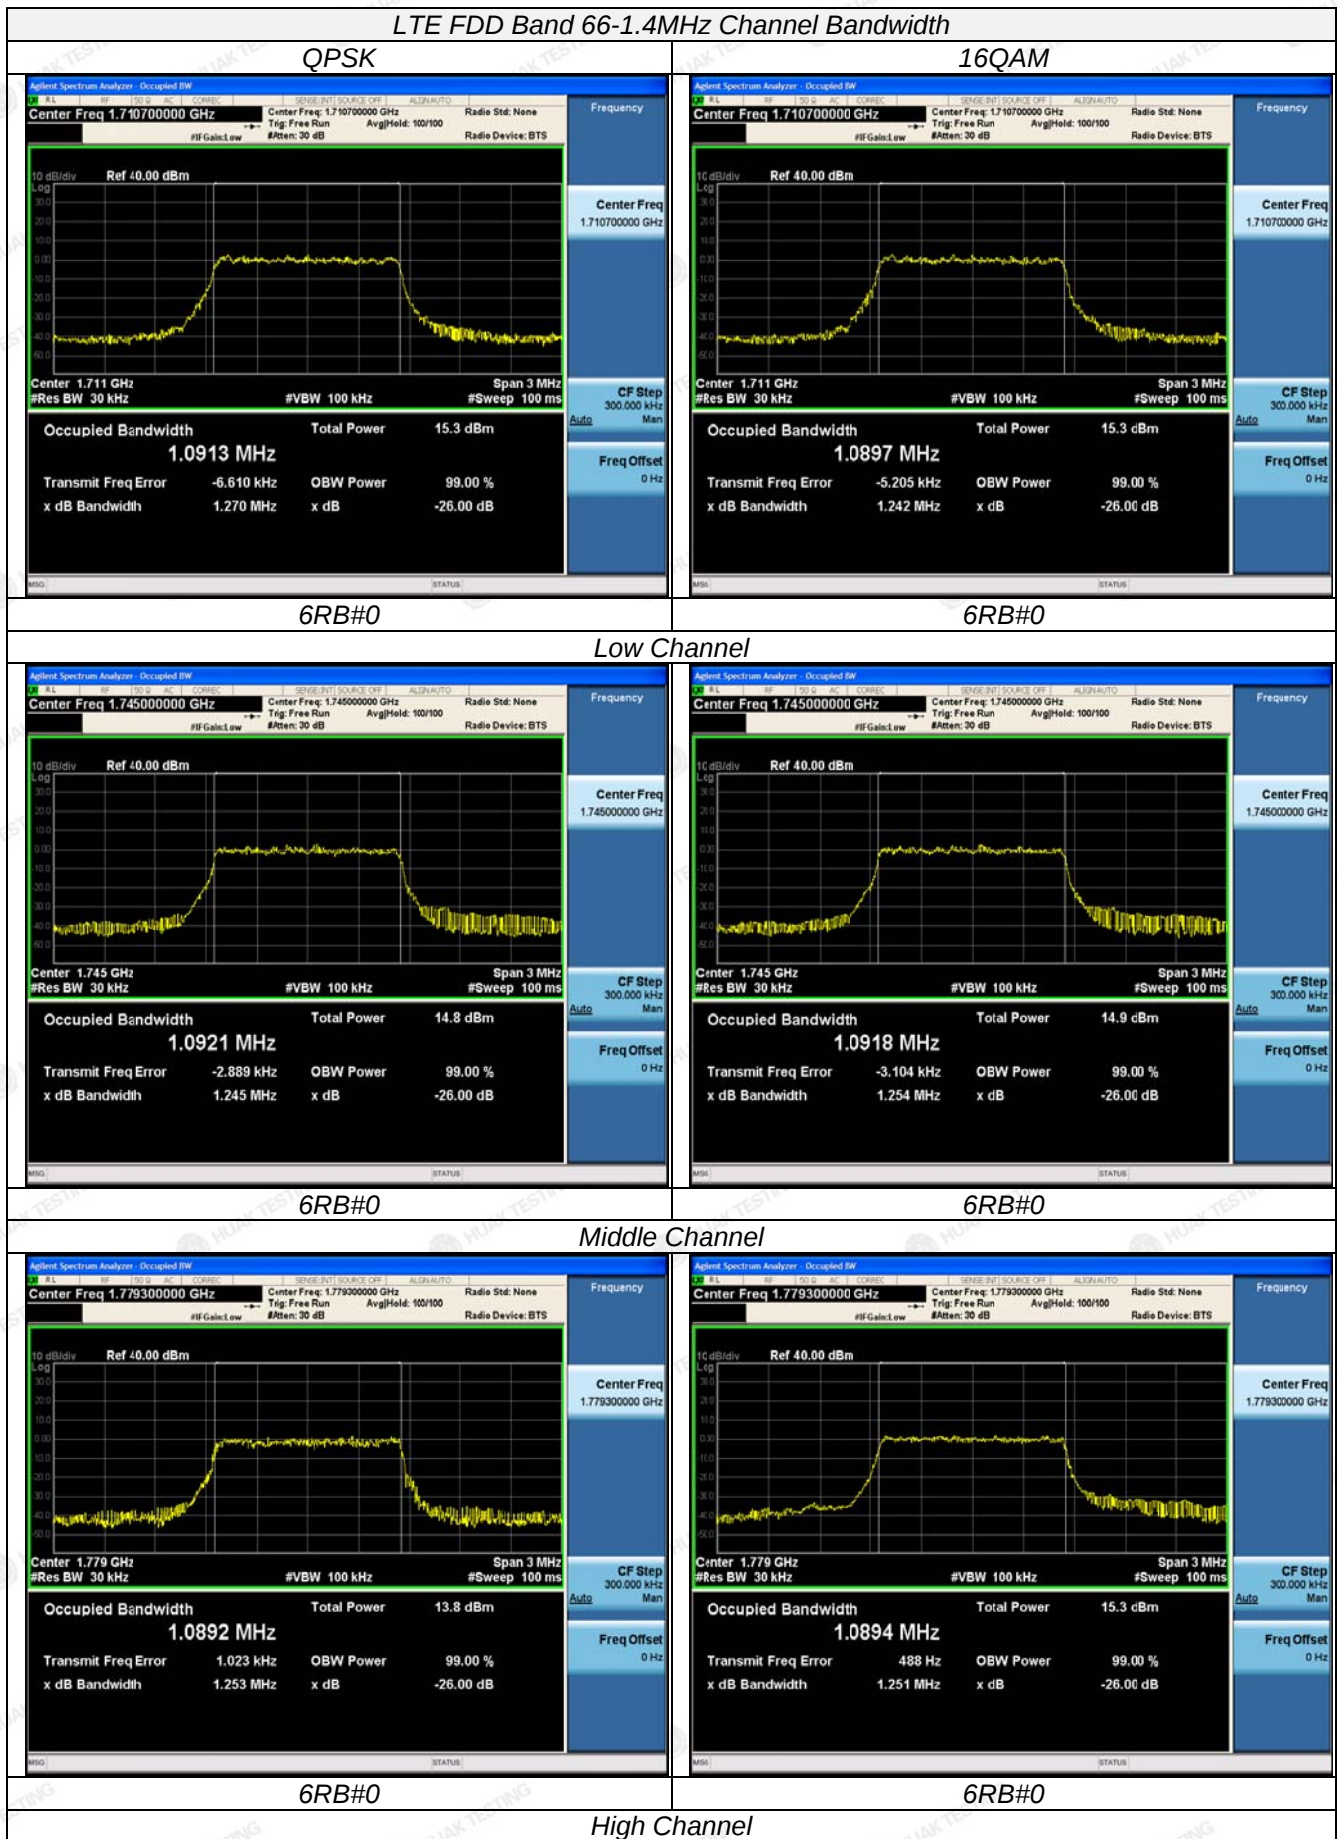

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

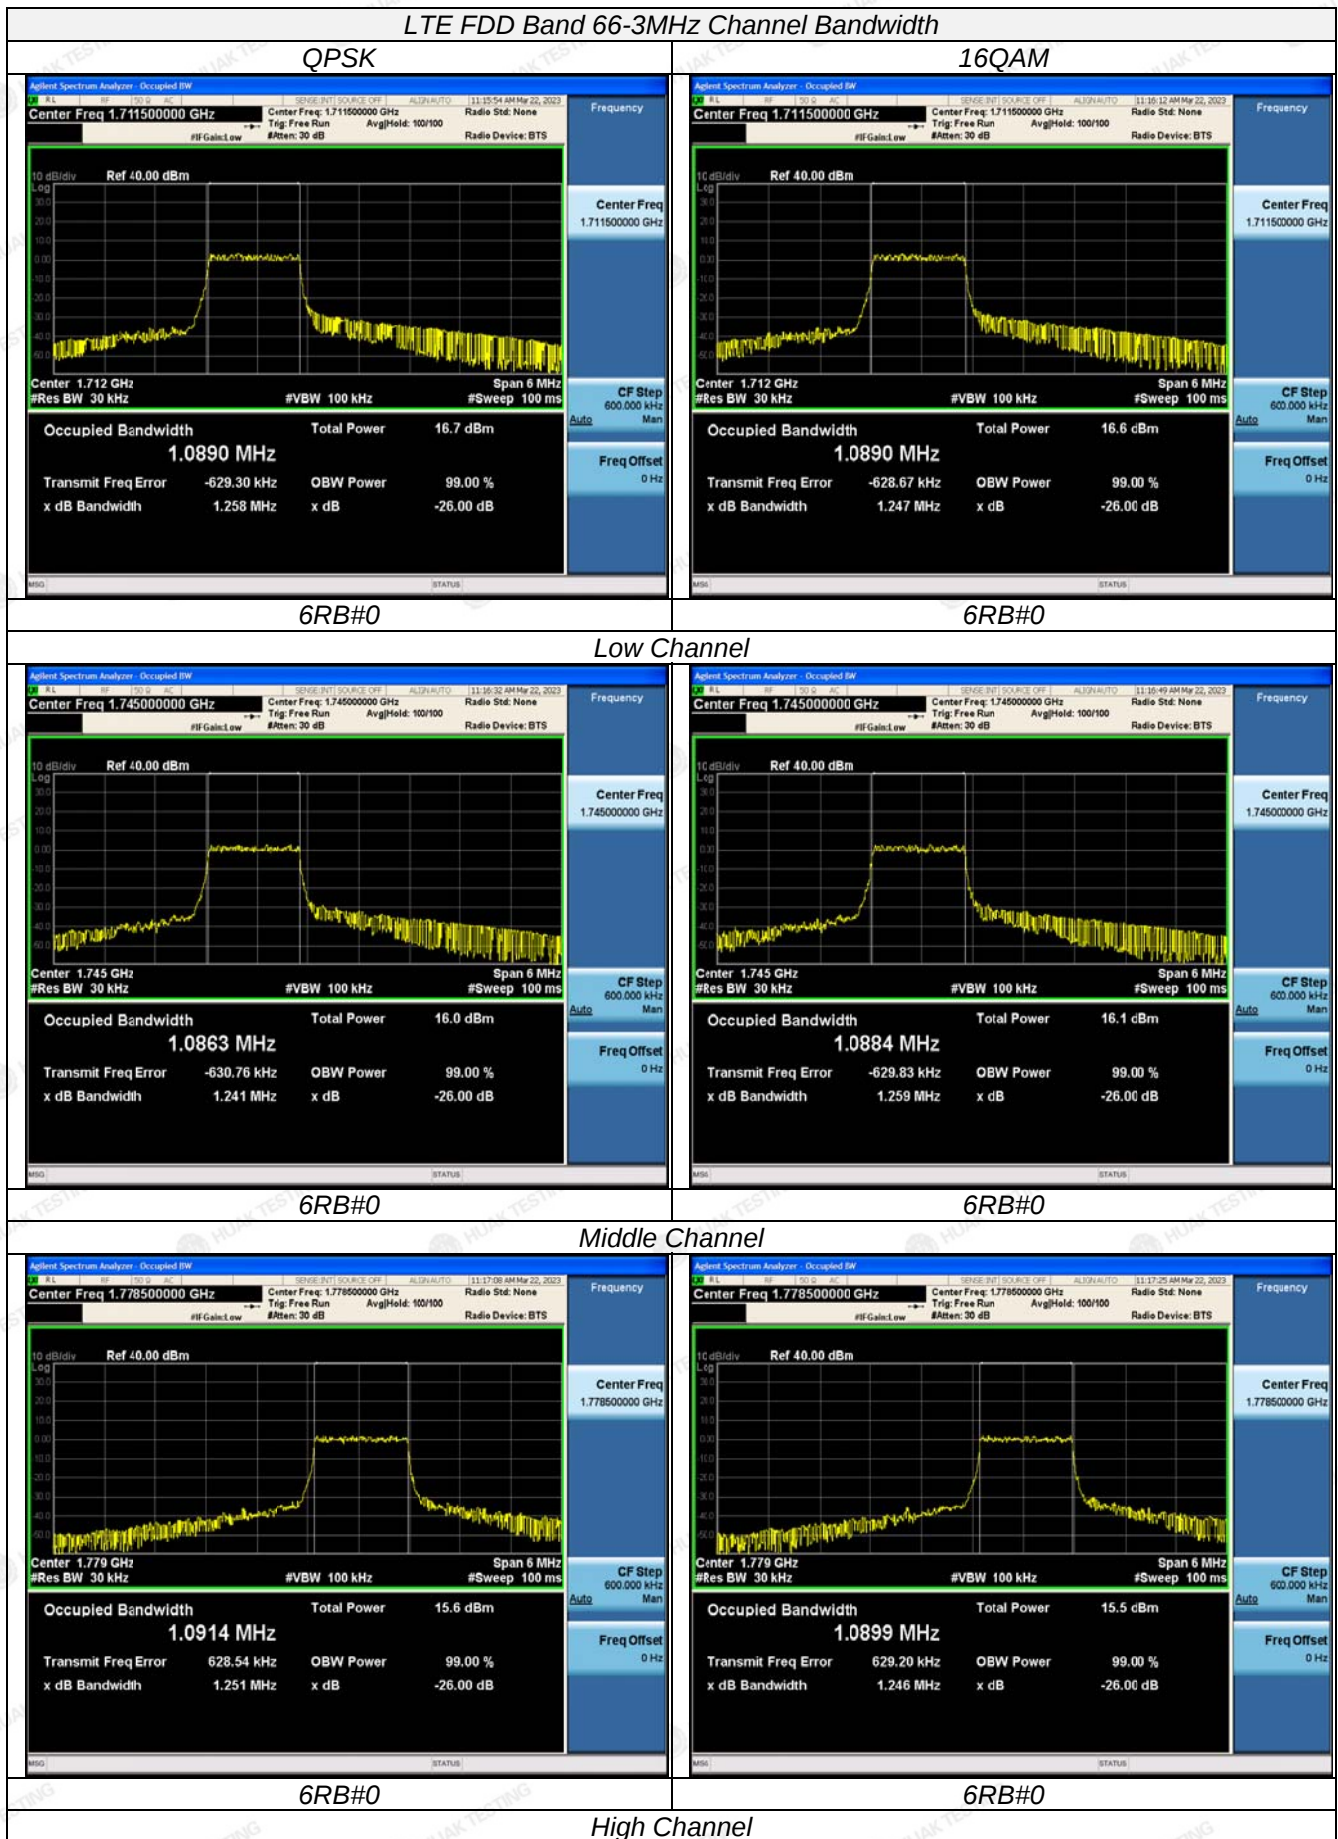

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

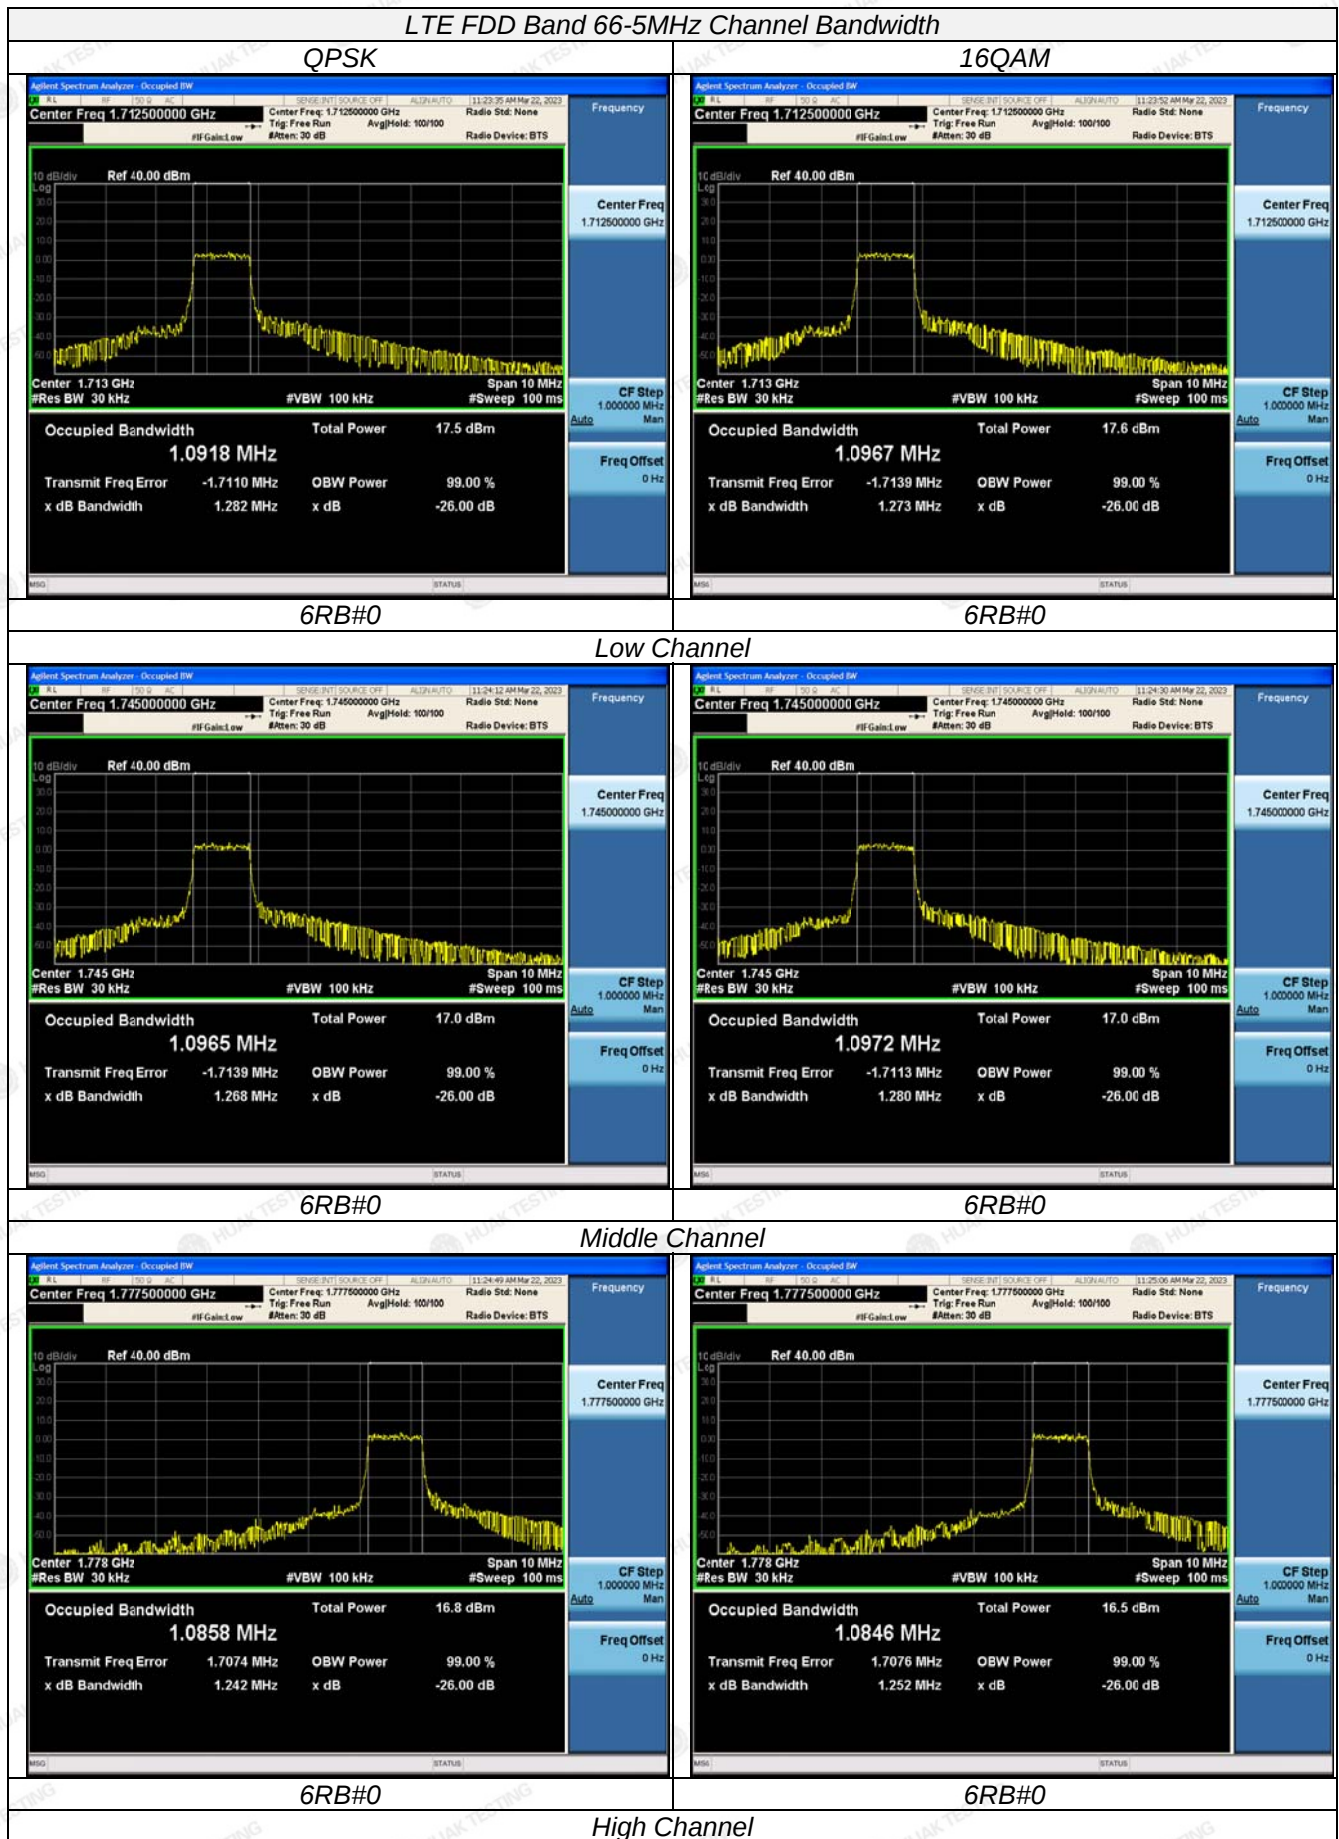

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

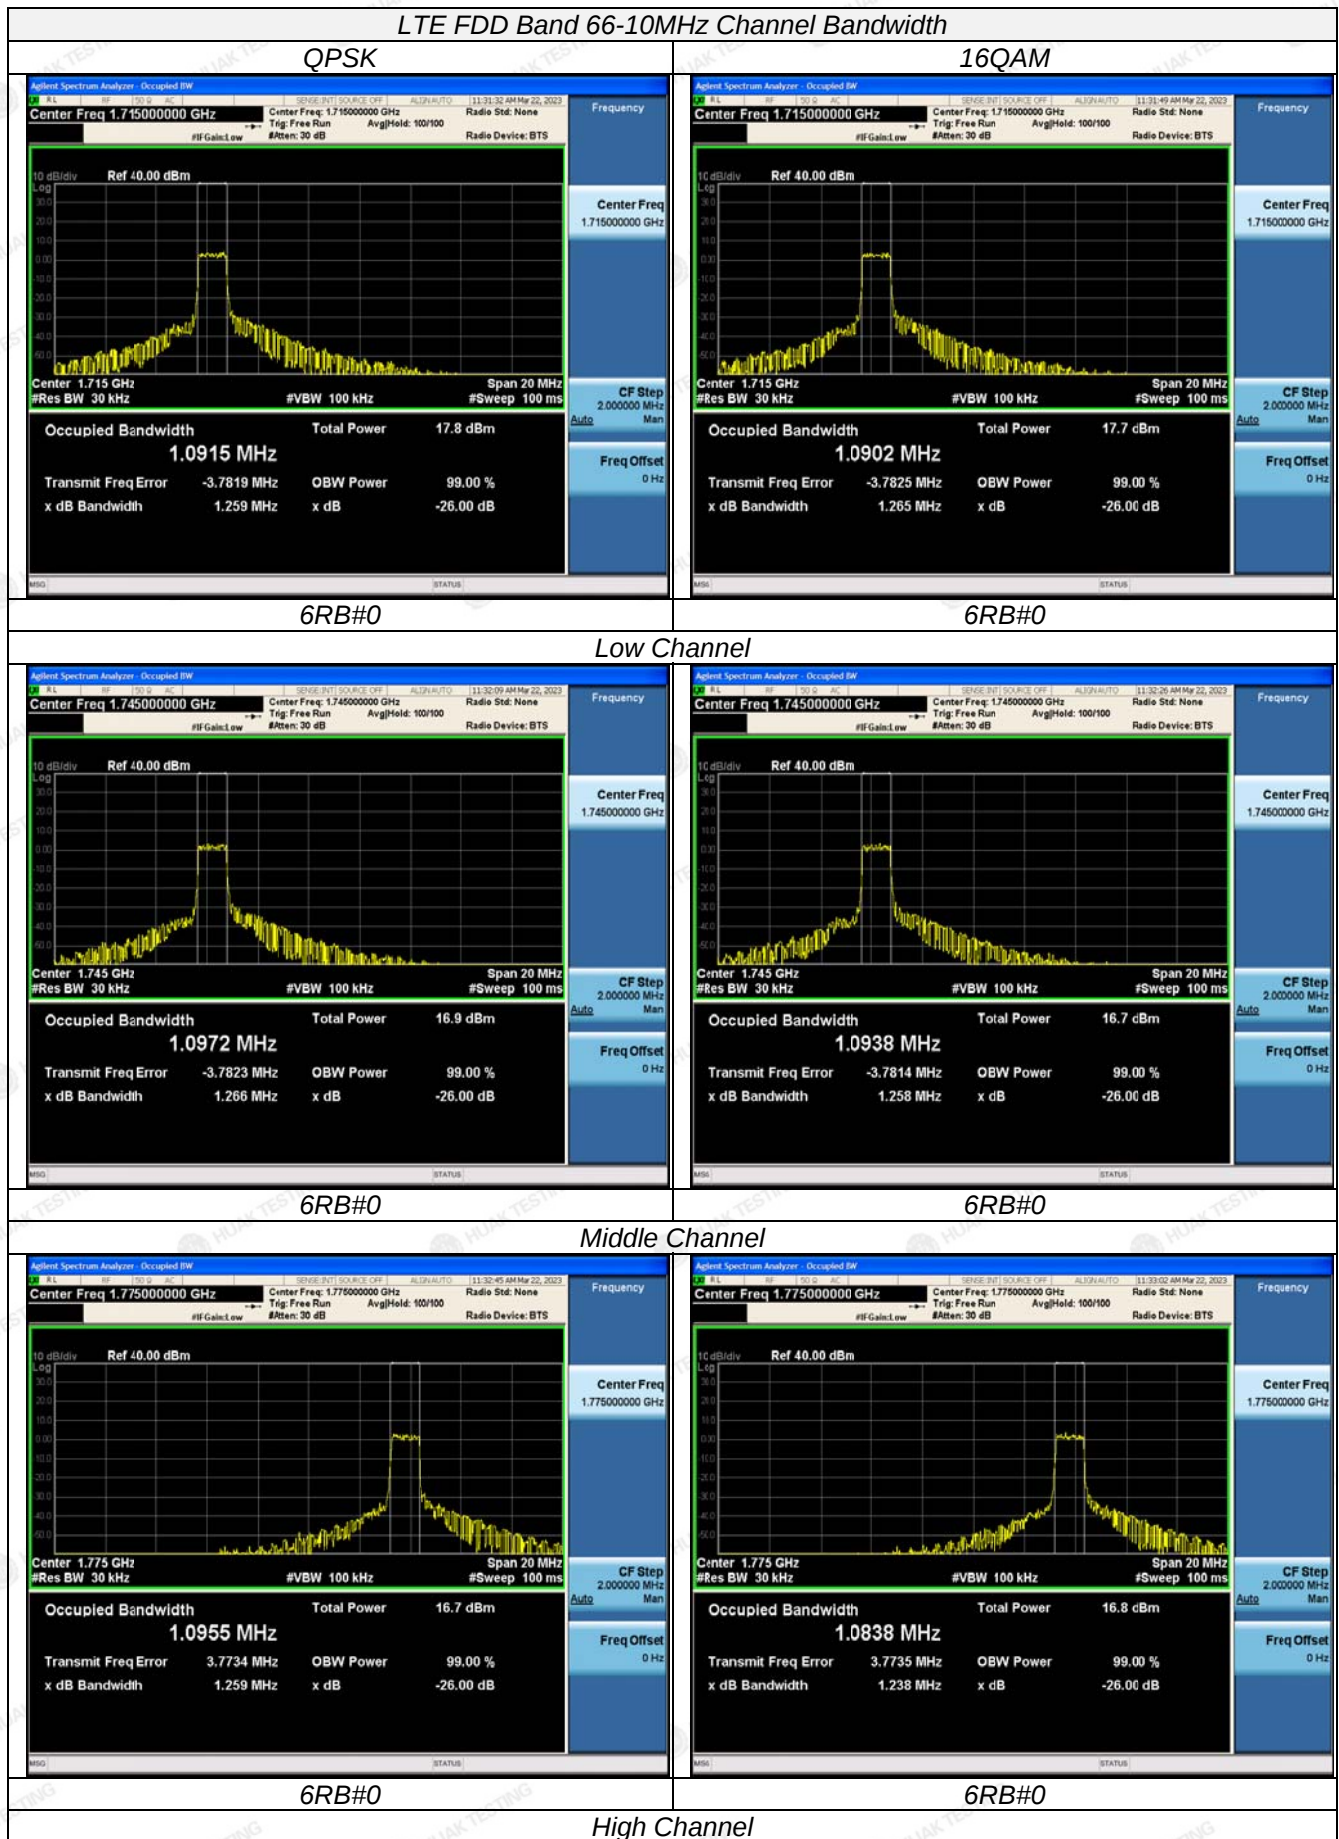

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

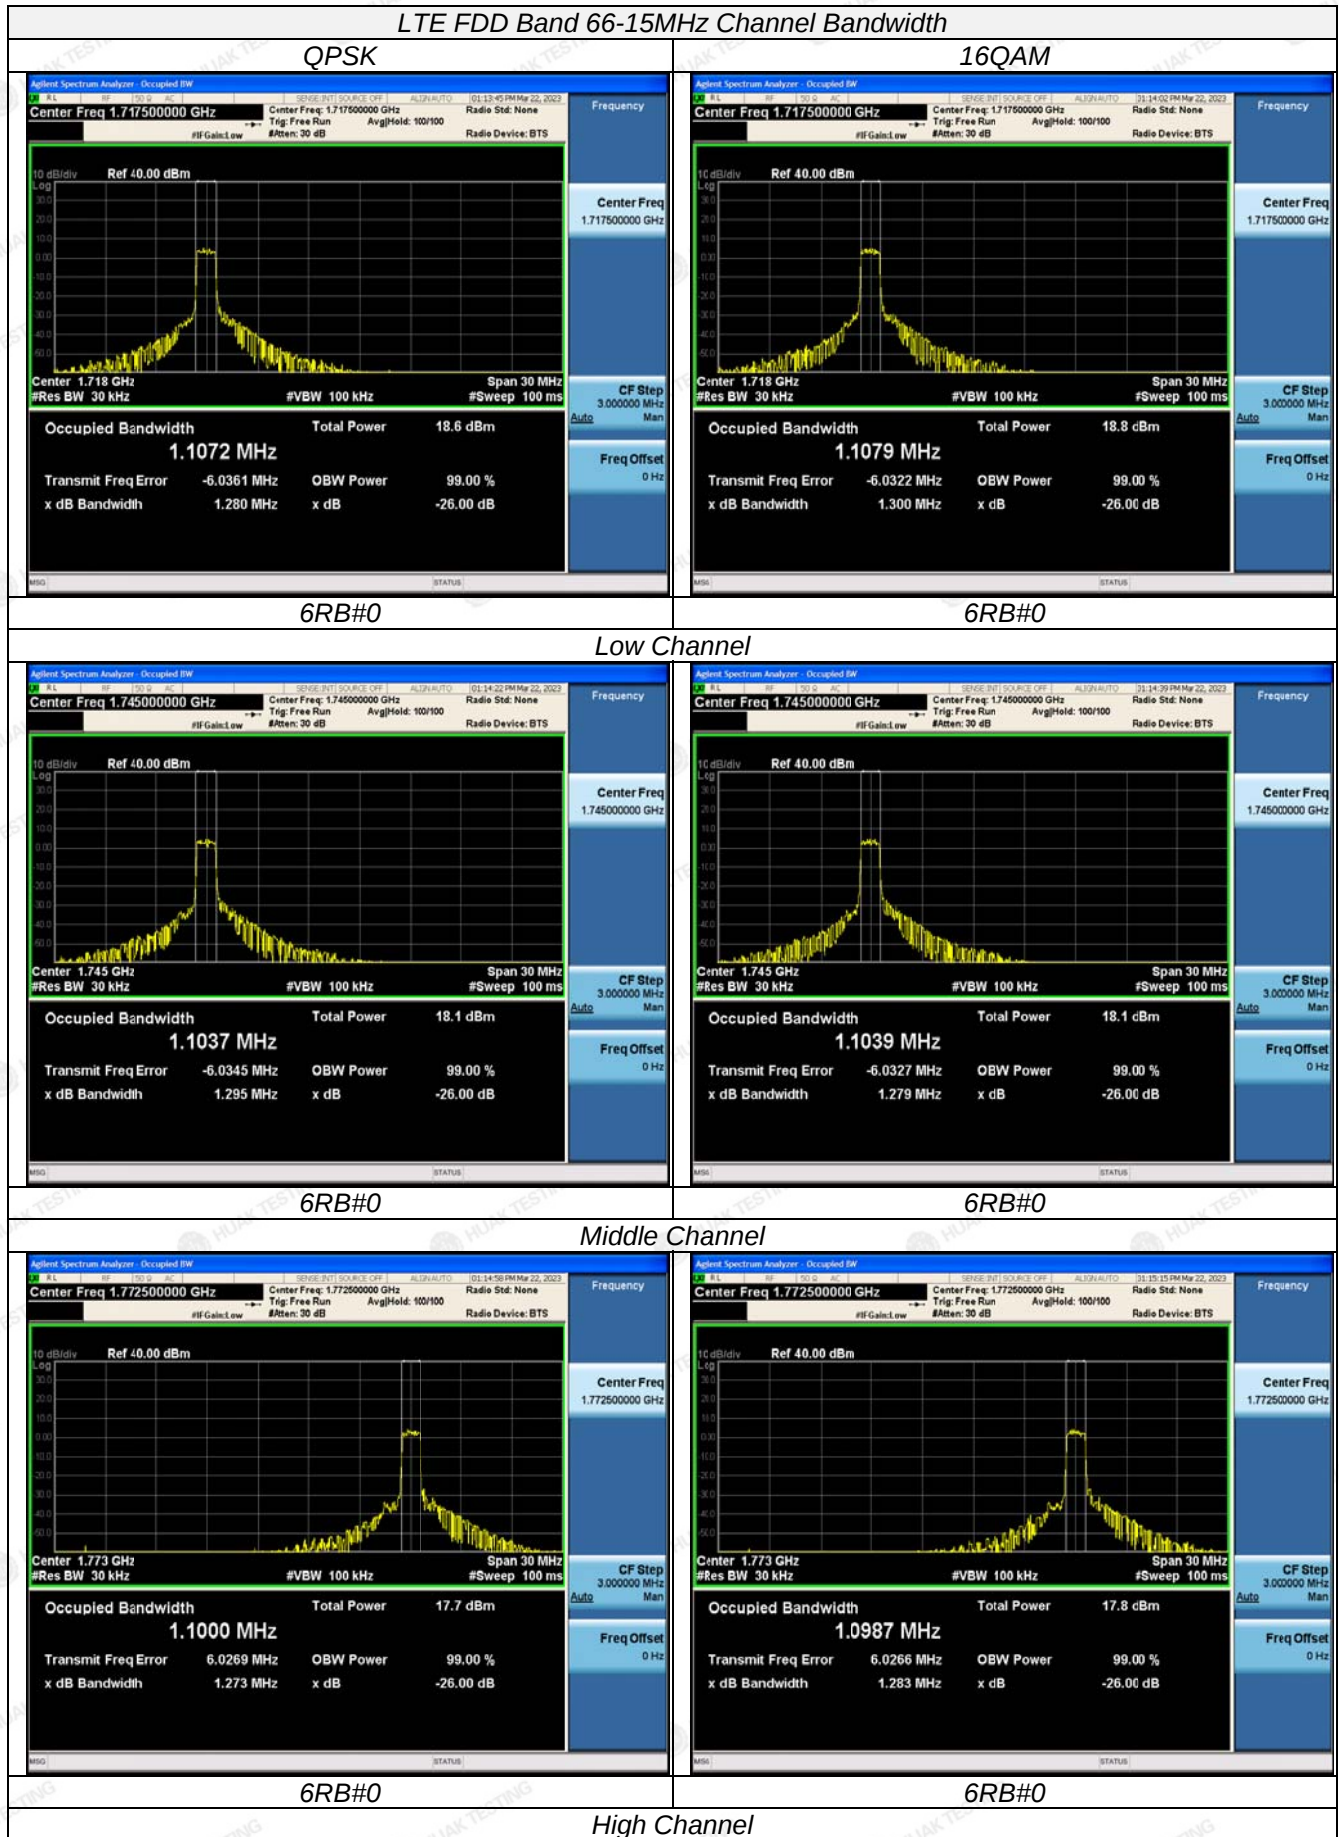

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

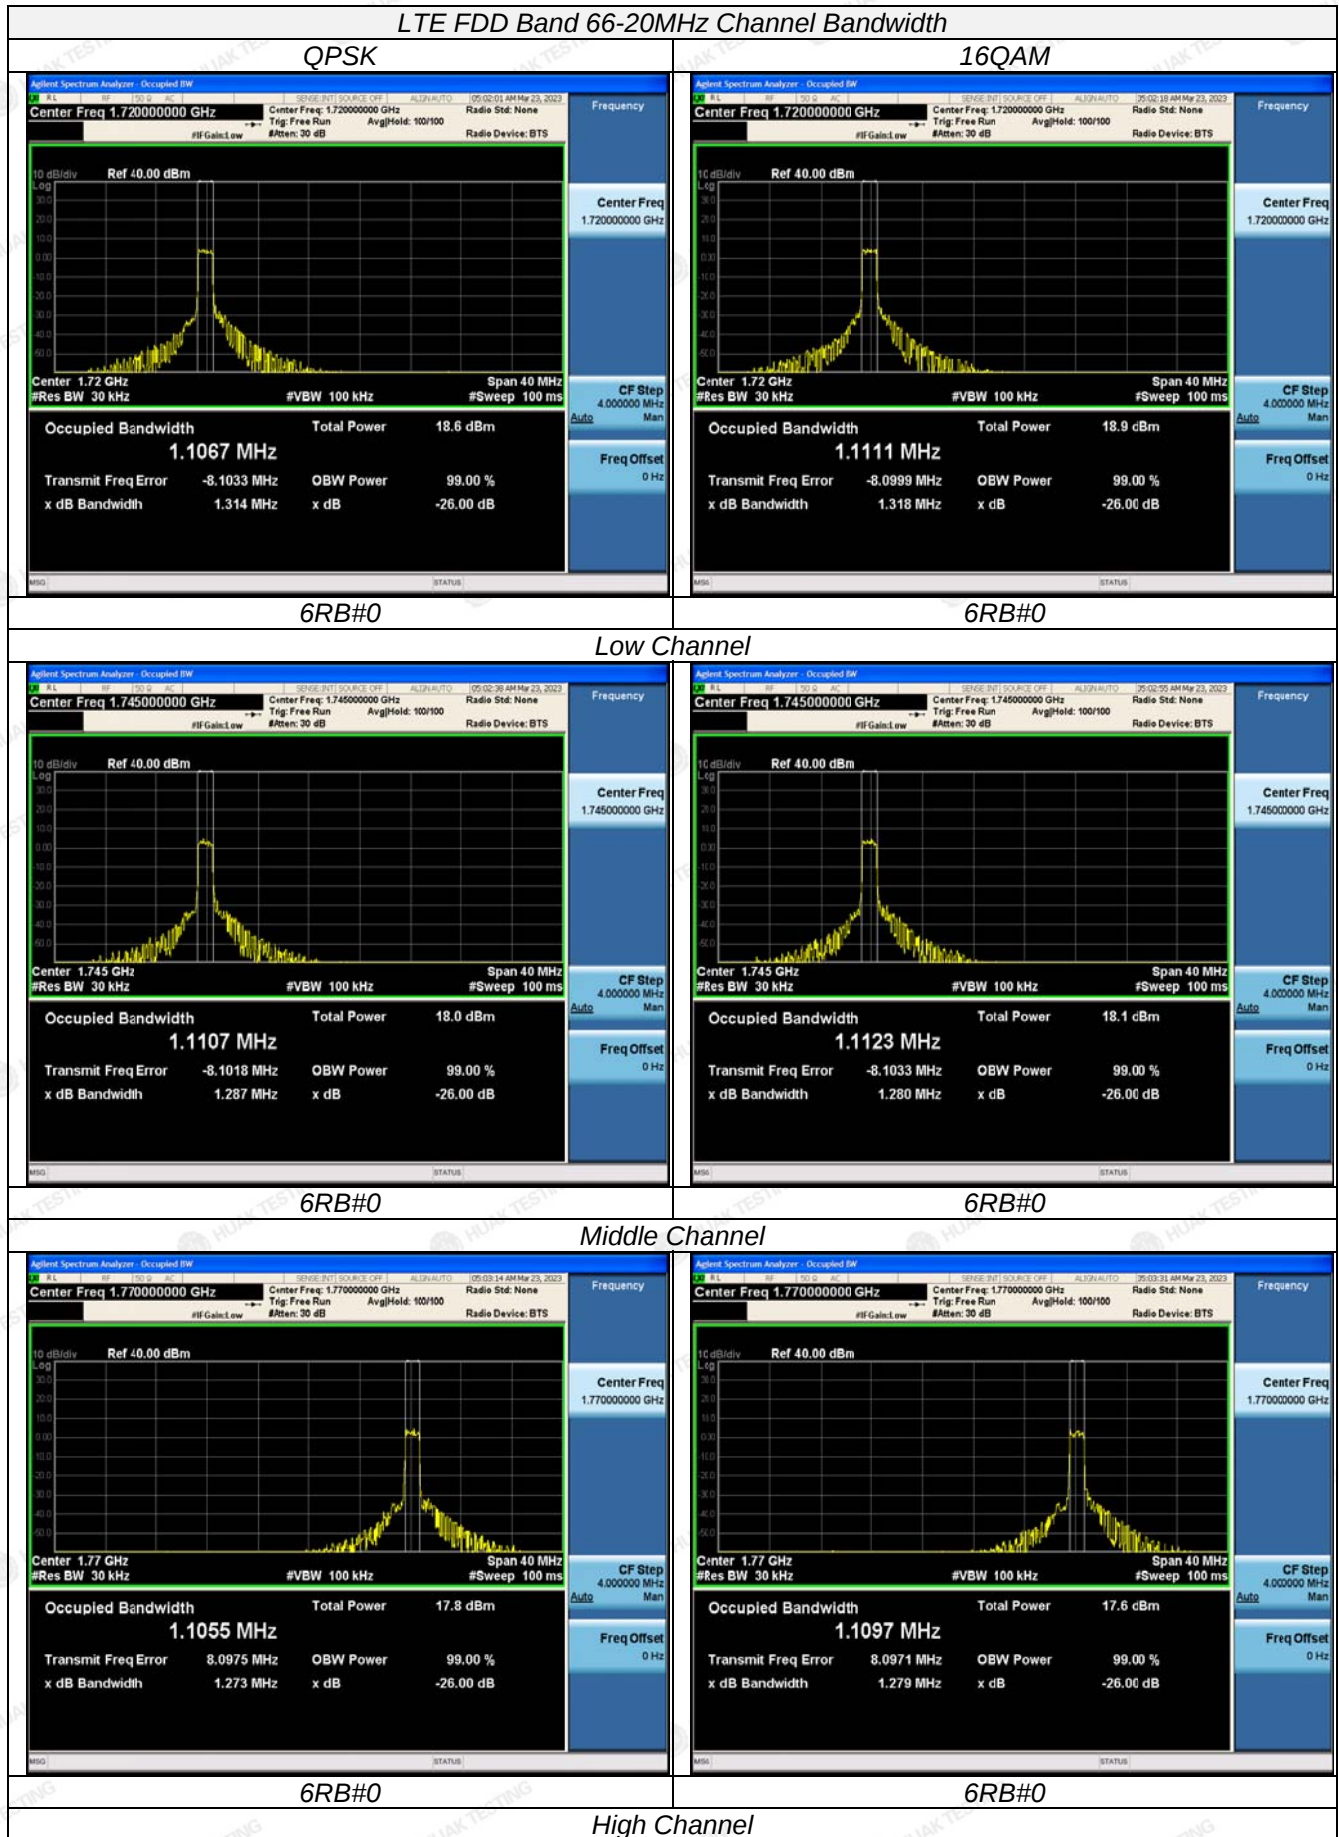

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China