



FCC Test Report
FCC Part 27

Report Reference No.....: HK2302270554-20E
FCC ID.....: 2A2FCBT4101
Compiled by
(position+printed name+signature)...: File administrators Gary Qian
Supervised by
(position+printed name+signature)...: Technique principal Eden Hu
Approved by
(position+printed name+signature)...: Manager Jason Zhou
Date of issue.....: Apr. 28, 2023

Gary Qian
Eden Hu
Jason Zhou

Testing Laboratory Name: Shenzhen HUAKE Testing Technology Co., Ltd.
Address: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong,
China

Applicant's name.....: PowUnity GmbH
Address: Feldstrasse 9d Innsbruck, 6020 Austria

Test specification:
Standard: FCC CFR Title 47 Part 2, Part 27
TRF Originator.....: Shenzhen HUAKE Testing Technology Co., Ltd.

Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: GPS Tracker
Trade Mark: BikeTrax
Manufacturer.....: PowUnity GmbH
Model/Type reference.....: BT41-01
Series Models: T4101-03-04
Modulation Type.....: BPSK, QPSK
Rating: DC 3.7V from battery
Hardware version: V2.2
Software version: V2.2
Result.....: PASS

**TEST REPORT**

Test Report No. :	HK2302270554-20E	Apr. 28, 2023 Date of issue
--------------------------	-------------------------	--------------------------------

Equipment under Test : GPS Tracker

Model /Type : BT41-01

Series Models : T4101-03-04

Applicant : **PowUnity GmbH**

Address : Feldstrasse 9d Innsbruck, 6020 Austria

Manufacturer : **PowUnity GmbH**

Address : Feldstrasse 9d Innsbruck, 6020 Austria

Test result	Pass
--------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Contents

<u>1</u>	<u>Summary</u>	<u>5</u>
1.1	Test Standards	5
1.2	Test Description	5
1.3	Information of The Test Laboratory	6
1.4	Statement of The Measurement Uncertainty	6
<u>2</u>	<u>General Information</u>	<u>7</u>
2.1	Environmental Conditions	7
2.2	Description of Test Modes	7
2.3	Test Frequency List	7
2.4	Equipments Used during the Test	8
2.5	Related Submittal(s) / Grant (s)	8
2.6	Modifications	8
<u>3</u>	<u>Test Conditions and Results</u>	<u>9</u>
3.1	Output Power	9
3.2	Peak-to-Average Ratio (PAR)	13
3.3	Occupied Bandwidth and Emission Bandwidth	16
3.4	Band Edge Compliance	20
3.5	Spurious Emission	25
3.6	Frequency Stability under Temperature & Voltage Variations	38
<u>4</u>	<u>Test Setup Photos of the EUT</u>	<u>40</u>
<u>5</u>	<u>Photos of the EUT</u>	<u>41</u>



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Apr. 28, 2023	Jason Zhou



1 Summary

1.1 Test Standards

The tests were performed according to following standards:

[FCC Part 27](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES.

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards 47 CFR FCC Part 15 Subpart B: - Unintentional Radiators.

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS.

[KDB971168 D01: v02r02](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS.

1.2 Test Description

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 27.50(d)(4)	Pass
Peak-to-Average Ratio	Part 27.50(d)(4)	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 27.53(h)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 27.53(h)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 27.53(h)	Pass
Out of band emission, Band Edge	Part 2.1051 Part 27.53(h)	Pass
Frequency stability	Part 2.1055 Part 27.54	Pass



1.3 Information of The Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.
FCC Designation Number is CN1229.
Canada IC CAB identifier is CN0045.
CNAS Registration Number is L9589.

1.4 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen HUAKE Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen HUAKE Testing Technology Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



2 General Information

2.1 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2 Description of Test Modes

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest ☐ middle and highest frequency of channel were selected to perform the test, then shown on this report.

Note:

1. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.
2. Test method and refer to 3GPP TS136521.

2.3 Test Frequency List

TX Channel Bandwidth	Frequency (MHz)	channel
3.75KHz	1710.1	131973
	1745.0	132322
	1779.9	132671
15KHz	1710.1	131973
	1745.0	132322
	1779.9	132671



2.4 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	ENV216	R&S	HKE-059	2023/02/17	2024/02/16
LISN	R&S	ENV216	HKE-002	2023/02/17	2024/02/16
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	2023/02/17	2024/02/16
Receiver	R&S	ESR-7	HKE-010	2023/02/17	2024/02/16
Spectrum analyzer	Agilent	N9020A	HKE-048	2023/02/17	2024/02/16
RF automatic control unit	Tonscend	JS0806-2	HKE-060	2023/02/17	2024/02/16
Horn antenna	Schwarzbeck	9120D	HKE-013	2023/02/17	2024/02/16
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	2023/02/17	2024/02/16
Preamplifier	EMCI	EMC051845SE	HKE-015	2023/02/17	2024/02/16
Preamplifier	Agilent	83051A	HKE-016	2023/02/17	2024/02/16
Temperature and humidity meter	Boyang	HTC-1	HKE-075	2023/02/17	2024/02/16
High pass filter unit	Tonscend	JS0806-F	HKE-055	2023/02/17	2024/02/16
RF cable	Times	1-40G	HKE-034	2023/02/17	2024/02/16
Power meter	Agilent	E4419B	HKE-085	2023/02/17	2024/02/16
Power Sensor	Agilent	E9300A	HKE-086	2023/02/17	2024/02/16
Wireless Communication Test Set	R&S	CMW500	HKE-026	2023/02/17	2024/02/16
Wireless Communication Test Set	R&S	CMU200	HKE-029	2023/02/17	2024/02/16
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	2023/02/17	2024/02/16
Horn antenna	Schwarzbeck	9120D	HKE-135	2023/02/17	2024/02/16
High gain antenna	Schwarzbeck	LB-180400KF	HKE-128	2023/02/17	2024/02/16
Broadband antenna	Schwarzbeck	VULB 9163	HKE-087	2023/02/17	2024/02/16
Signal generator	Agilent	E4433B	HKE-120	2023/02/17	2024/02/16
Signal generator	Agilent	E4421B	HKE-121	2023/02/17	2024/02/16

2.5 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2A2FCBT4101 filing to comply with of the FCC Part 27 Rules.

2.6 Modifications

No modifications were implemented to meet testing criteria.



3 Test Conditions and Results


3.1 Output Power

LIMIT


According to §27.50 (d) (4): Fixed, mobile, and portable (hand- held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

TEST CONFIGURATION

Conducted Power Measurement

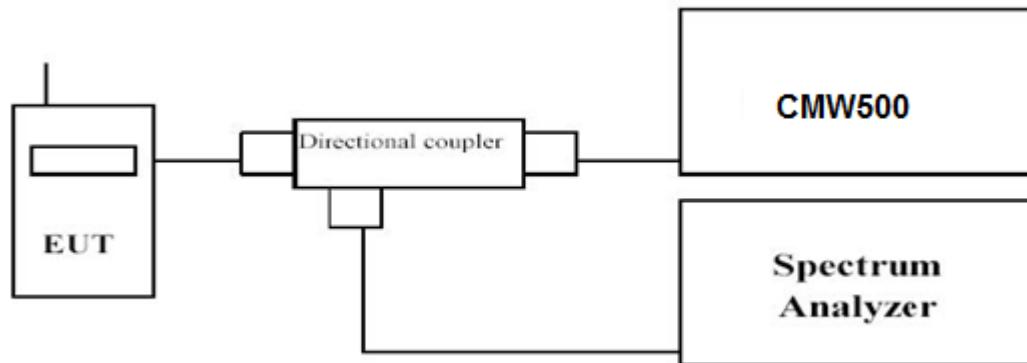

Radiated Power Measurement:

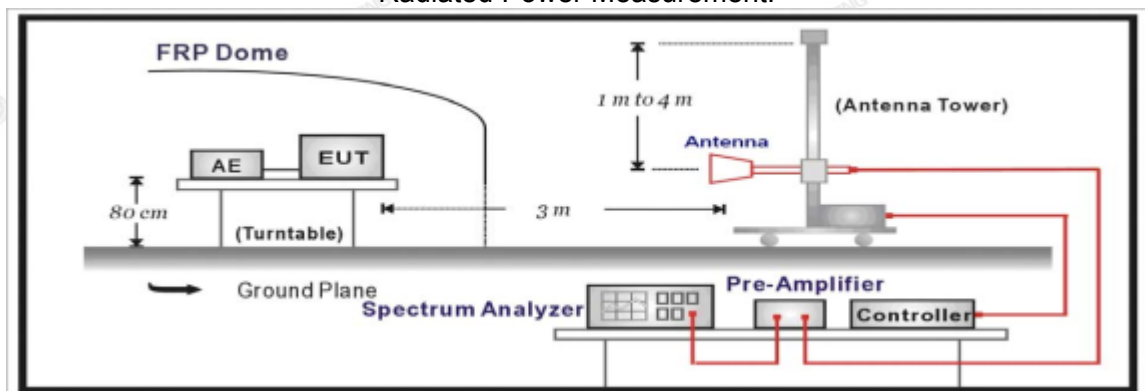

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D.

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal



level is detected by the measuring receiver.

- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4.

TEST RESULTS

Conducted Measurement:

LTE FDD Band 66				
Modulation	Sub-carrier spacing (KHz)	Tones	Frequency (MHz)	Average Power [dBm]
BPSK	3.75	1@0	1710.1	22.83
		1@47	1710.1	22.98
		1@0	1745.0	22.01
		1@47	1745.0	21.97
		1@0	1779.9	21.87
		1@47	1779.9	21.94
	15	1@0	1710.1	22.79
		1@11	1710.1	22.83
		12@0	1710.1	22.29
		1@0	1745.0	21.98
		1@11	1745.0	21.89
		12@0	1745.0	21.79
		1@0	1779.9	22.03
		1@11	1779.9	21.95
		12@0	1779.9	21.53
QPSK	3.75	1@0	1710.1	22.79
		1@47	1710.1	22.76
		1@0	1745.0	22.06
		1@47	1745.0	21.84
		1@0	1779.9	21.84
		1@47	1779.9	22.00



	15	1@0	1710.1	22.98
		1@11	1710.1	22.43
		12@0	1710.1	22.70
		1@0	1745.0	21.90
		1@11	1745.0	21.82
		12@0	1745.0	21.71
		1@0	1779.9	21.76
		1@11	1779.9	21.61
		12@0	1779.9	21.79

**Radiated Measurement:**

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case for each Channel Bandwidth of LTE FDD Band 66.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$

LTE FDD Band 66-3.75KHz-BPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.1	-16.82	3.06	9.68	34.80	24.60	30.00	5.40	V
1745.0	-16.62	3.17	9.68	34.80	24.69	30.00	5.31	V
1779.9	-18.22	3.22	9.75	34.80	23.11	30.00	6.89	V
1710.1	-16.93	3.06	9.68	34.80	24.49	30.00	5.51	H
1745.0	-17.5	3.17	9.68	34.80	23.81	30.00	6.19	H
1779.9	-17.97	3.22	9.75	34.80	23.36	30.00	6.64	H

LTE FDD Band 66-15KHz-BPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.1	-16.93	3.06	9.68	34.80	24.49	30.00	5.51	V
1745.0	-17.78	3.17	9.68	34.80	23.53	30.00	6.47	V
1779.9	-16.45	3.22	9.75	34.80	24.88	30.00	5.12	V
1710.1	-15.02	3.06	9.68	34.80	26.40	30.00	3.60	H
1745.0	-16.52	3.17	9.68	34.80	24.79	30.00	5.21	H
1779.9	-16.77	3.22	9.75	34.80	24.56	30.00	5.44	H

LTE FDD Band 66-3.75KHz-QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.1	-18.49	3.06	9.68	34.80	22.93	30.00	7.07	V
1745.0	-17.02	3.17	9.68	34.80	24.29	30.00	5.71	V
1779.9	-16.67	3.22	9.75	34.80	24.66	30.00	5.34	V
1710.1	-18	3.06	9.68	34.80	23.42	30.00	6.58	H
1745.0	-17.49	3.17	9.68	34.80	23.82	30.00	6.18	H
1779.9	-18.35	3.22	9.75	34.80	22.98	30.00	7.02	H

LTE FDD Band 66-15KHz-QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.1	-17.12	3.06	9.68	34.80	24.30	30.00	5.70	V
1745.0	-15.17	3.17	9.68	34.80	26.14	30.00	3.86	V
1779.9	-17.75	3.22	9.75	34.80	23.58	30.00	6.42	V
1710.1	-17.62	3.06	9.68	34.80	23.80	30.00	6.20	H
1745.0	-16.8	3.17	9.68	34.80	24.51	30.00	5.49	H
1779.9	-17.37	3.22	9.75	34.80	23.96	30.00	6.04	H




3.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

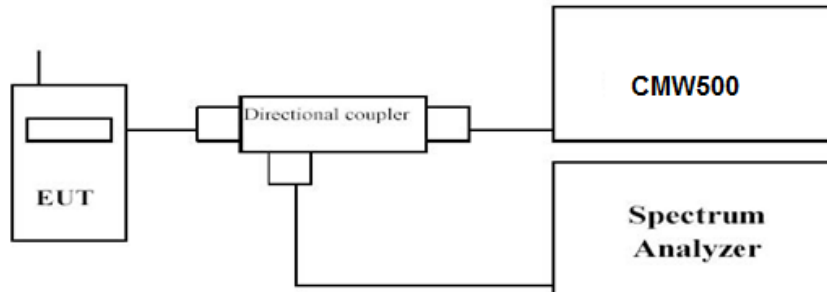

TEST PROCEDURE


1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms;
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case for each Channel Bandwidth of LTE FDD Band 66.

LTE FDD Band 66				
Frequency (MHz)	Sub-carrier spacing (KHz)	Tones	Modulation PAPR (dB)	
			BPSK	QPSK
1745.0	3.75	1@0	2.55	3.56
		1@47	2.77	3.59
1745.0	15	1@0	6.76	6.45
		1@11	8.48	8.08

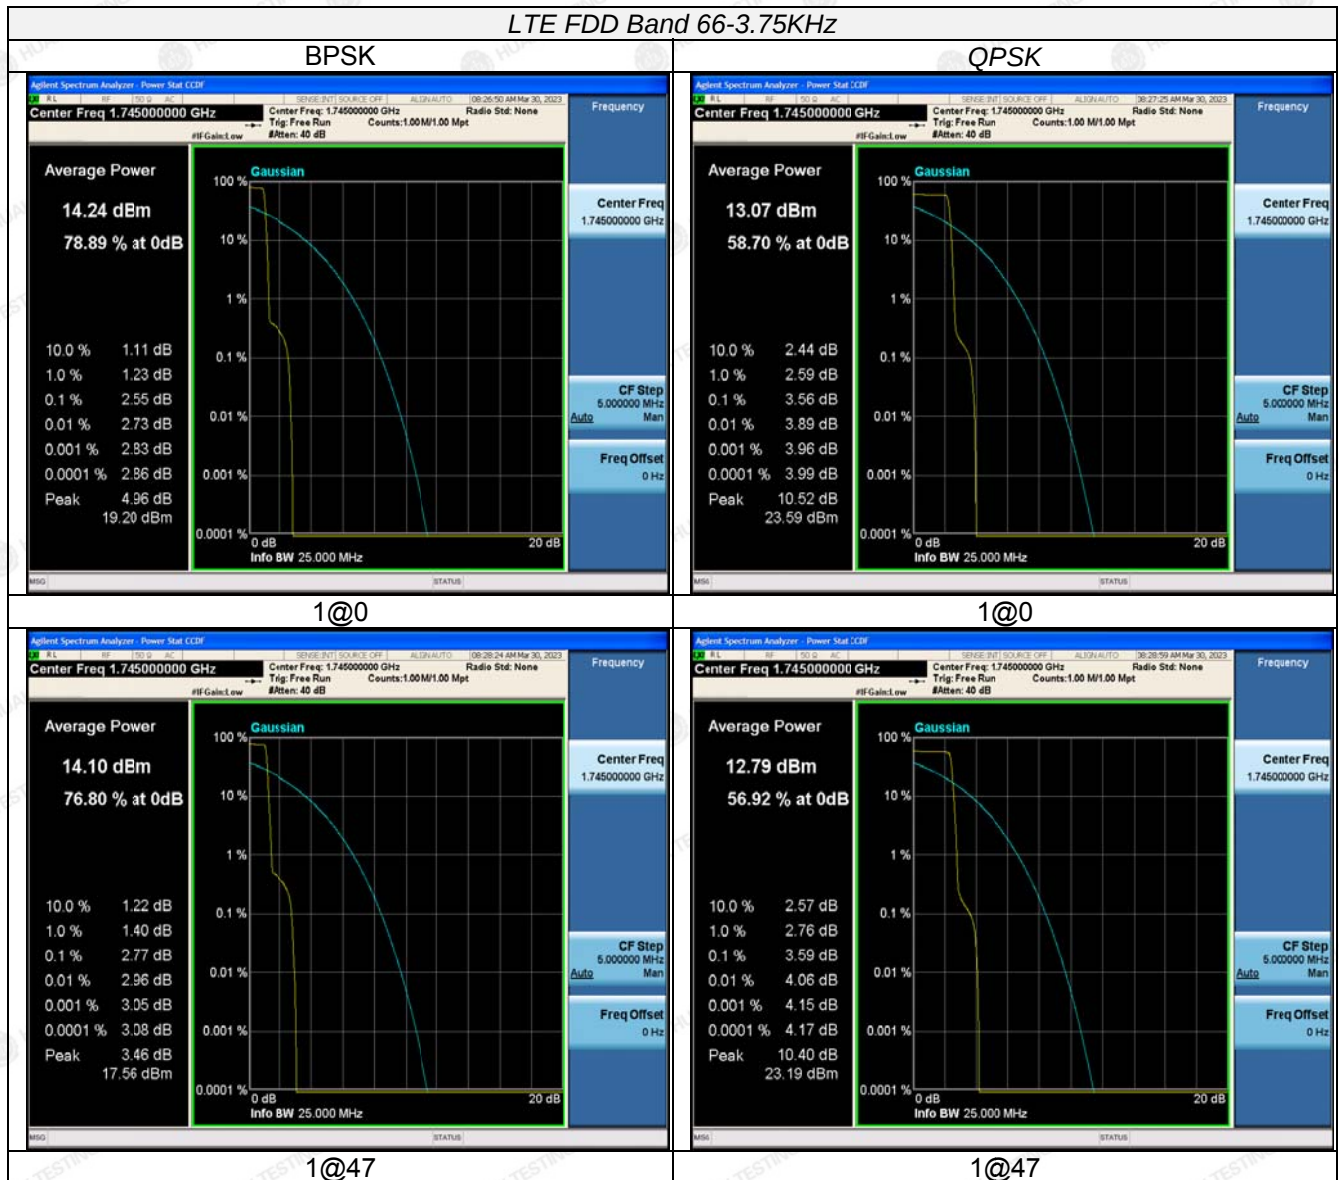

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 66-15KHz

BPSK

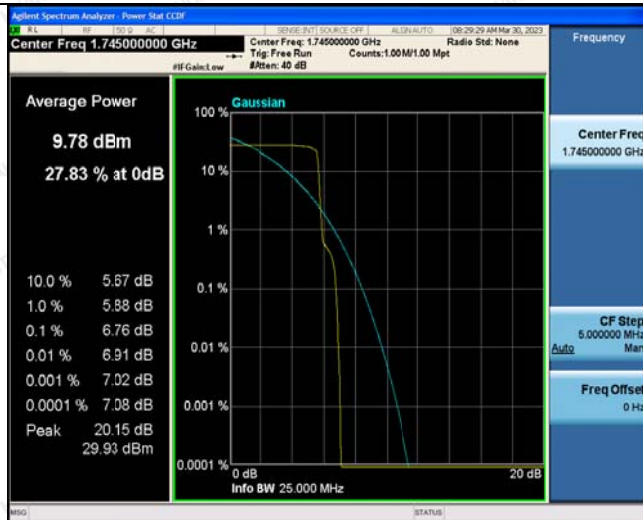

1@0

QPSK

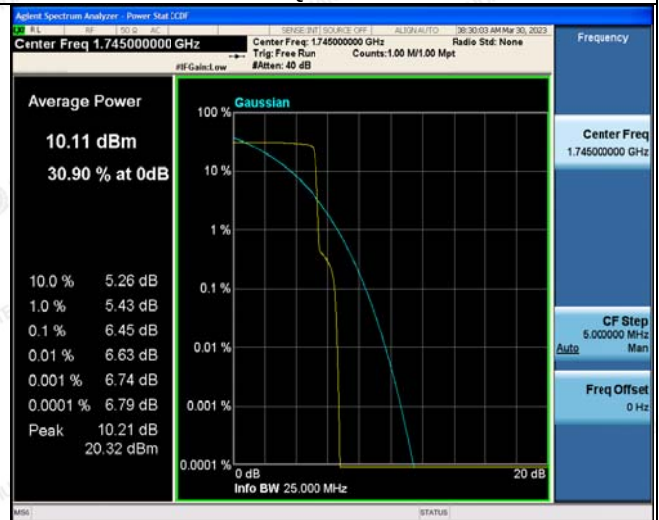

1@0



1@11



1@11




3.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

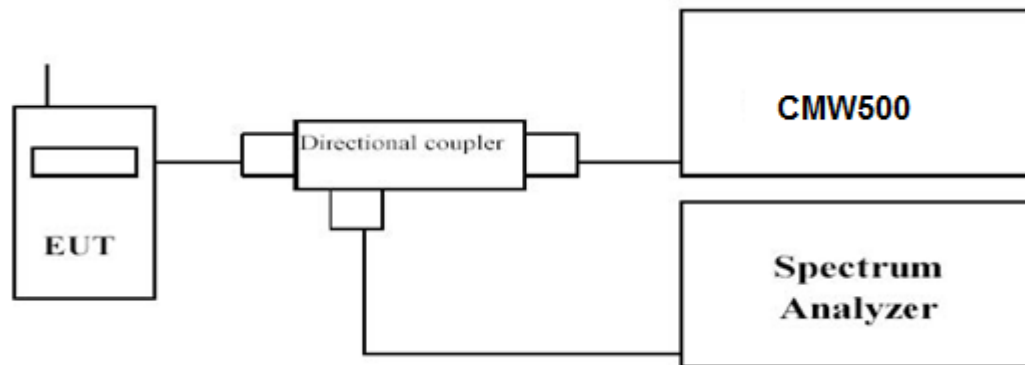

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.


-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case for each Channel Bandwidth of LTE FDD Band 66.

LTE FDD Band 66						
Sub-carrier spacing (KHz)	Tones	Frequency (MHz)	-26dBc Emission bandwidth (KHz)		99% Occupied bandwidth (KHz)	
			BPSK	QPSK	BPSK	QPSK
3.75	1@0	1710.1	30.95	30.07	49.162	44.944
	1@0	1745.0	30.87	33.85	49.177	44.841
	1@0	1779.9	30.89	30.23	48.967	44.677
15	1@0	1710.1	105.0	116.9	124.41	118.74
	1@0	1745.0	104.6	116.2	124.76	121.61
	1@0	1779.9	105.7	116.4	127.64	124.83
	12@0	1710.1	221.9	247.8	194.21	184.85
	12@0	1745.0	247.3	249.9	185.09	184.37
	12@0	1779.9	217.7	247.4	193.66	185.80

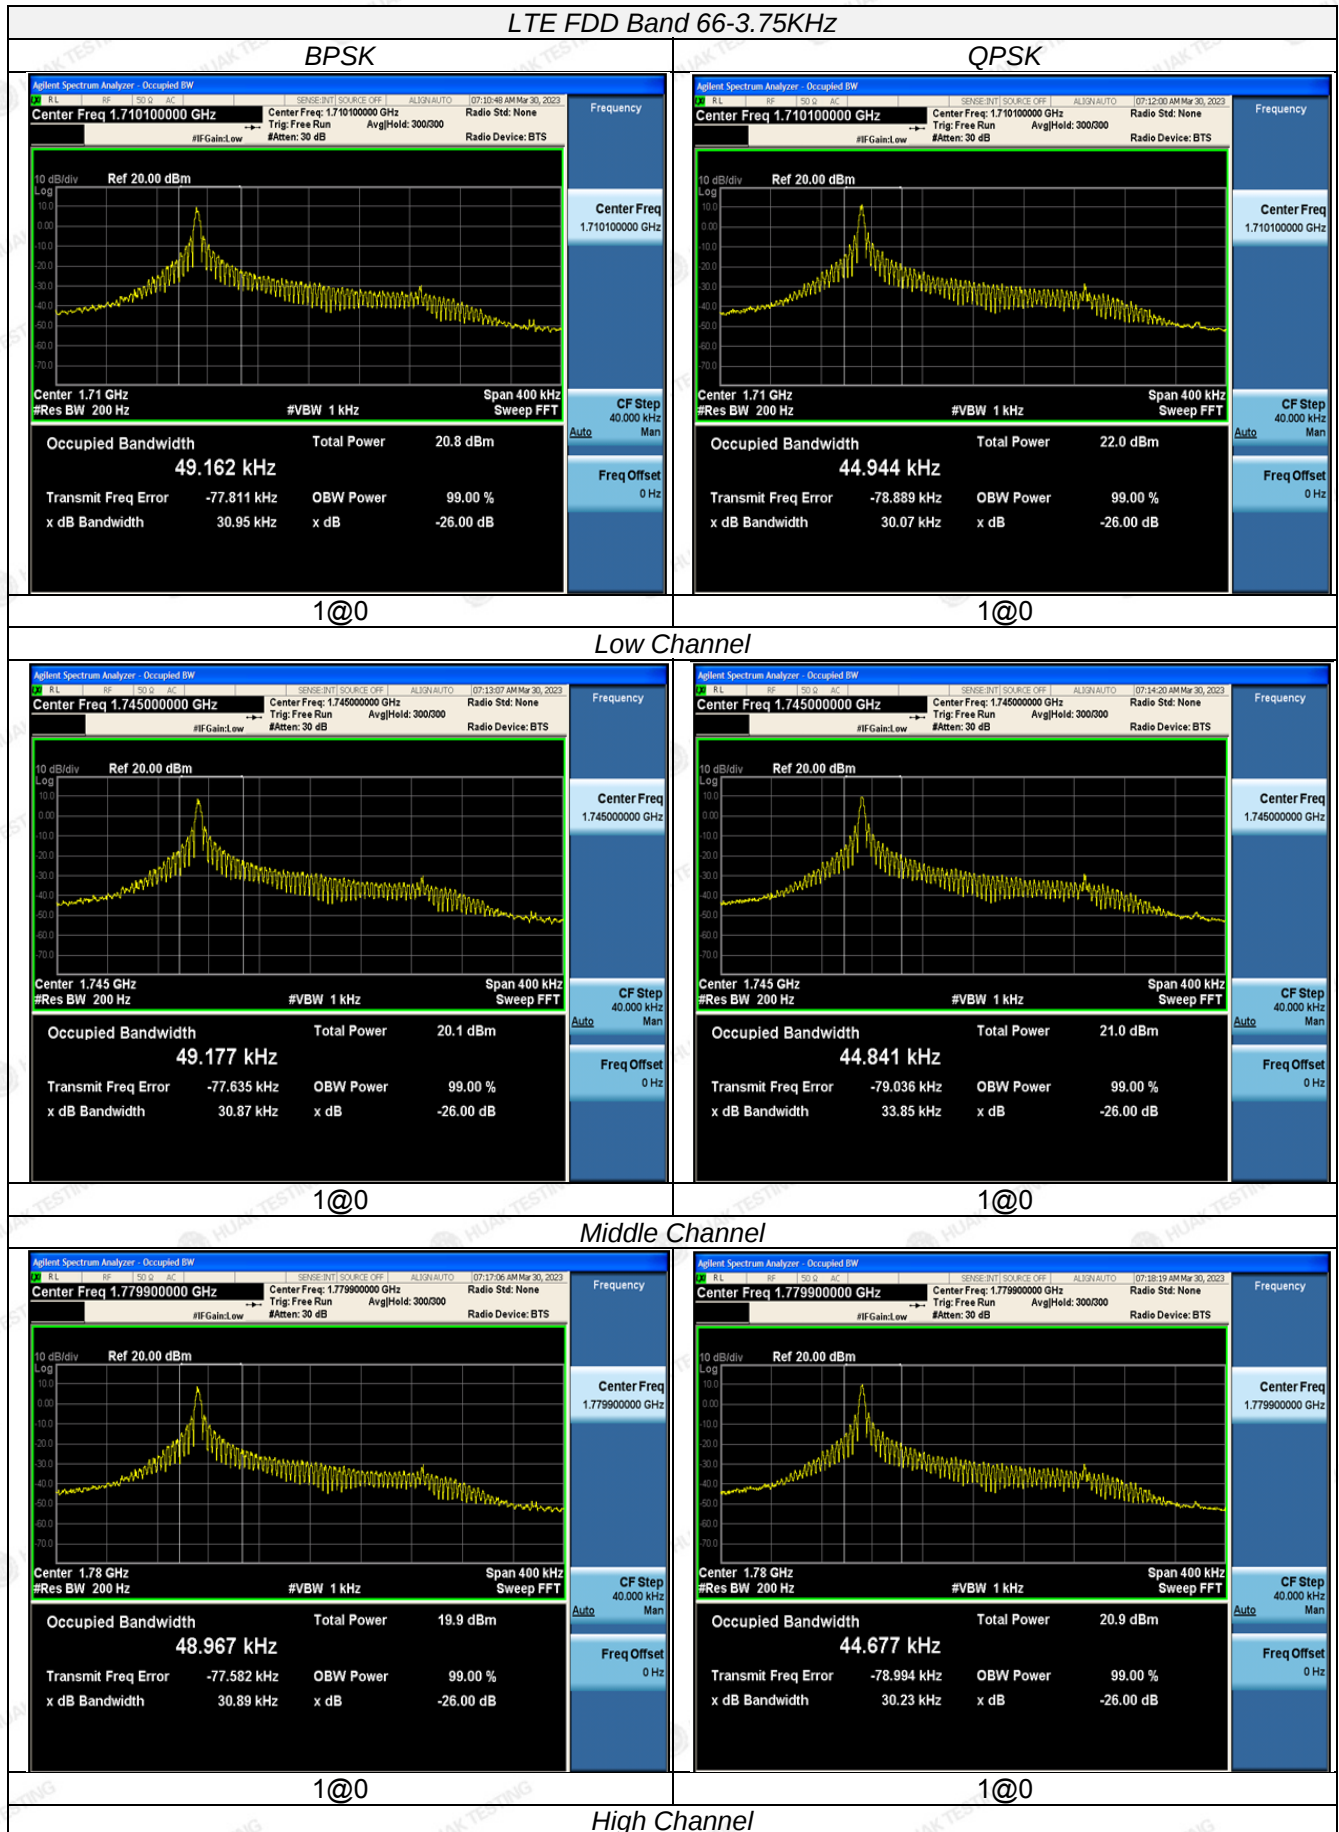

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 66-15KHz

BPSK



1@0

QPSK



1@0

Low Channel



1@0



1@0

Middle Channel



1@0



1@0

High Channel

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 66-15KHz

BPSK

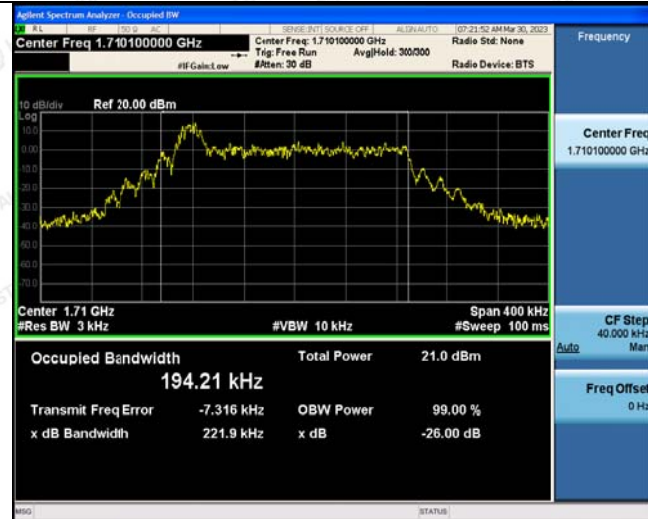

12@0

QPSK



12@0

Low Channel




12@0



12@0

Middle Channel

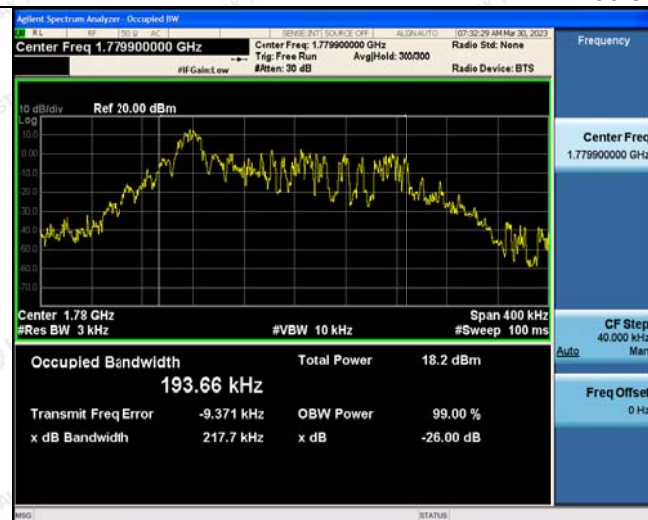

12@0



12@0

High Channel




3.4 Band Edge Compliance

LIMIT

According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST CONFIGURATION

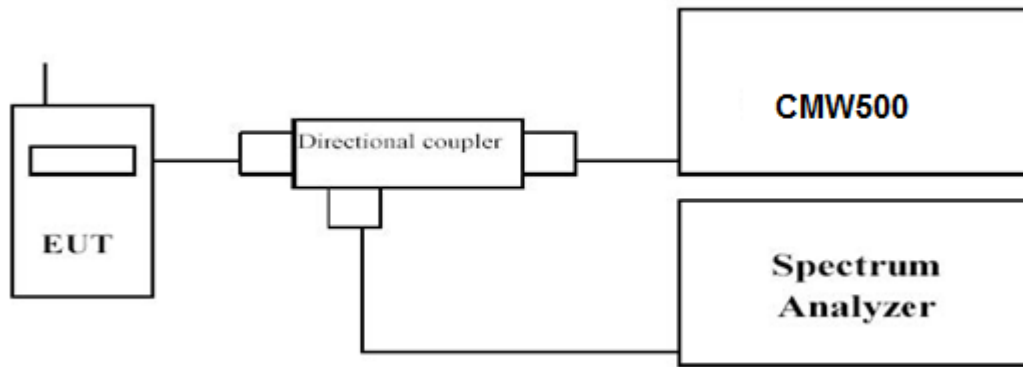

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum.


TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case for each Channel Bandwidth of LTE FDD Band 66.



LTE FDD Band 66-BPSK- 3.75KHz

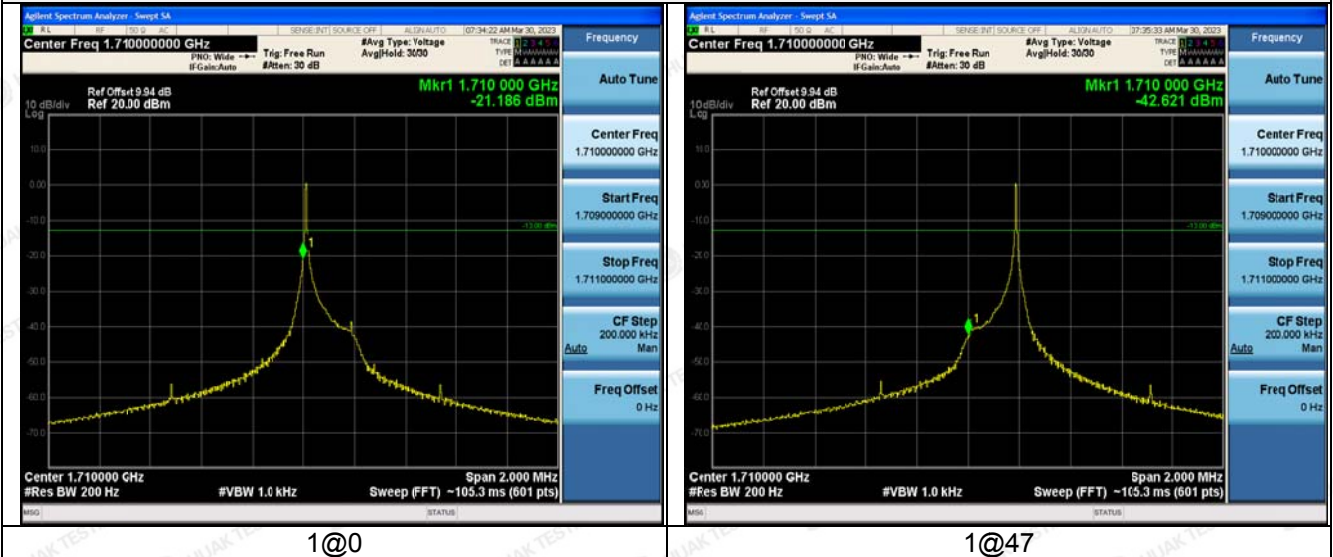


Low Channel

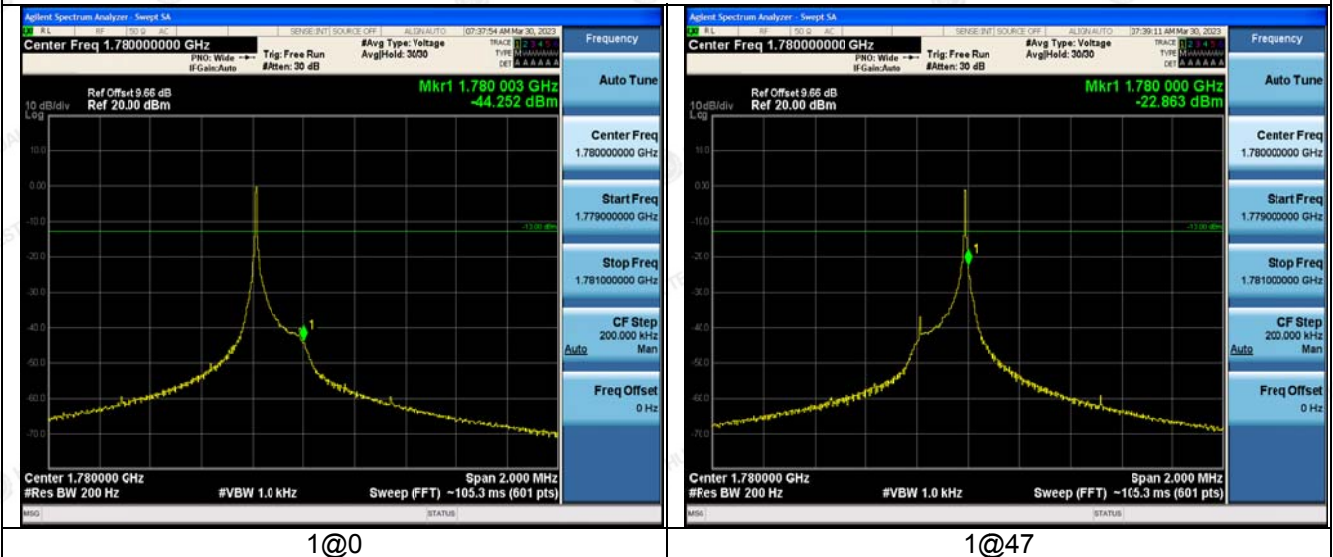

High Channel



LTE FDD Band 66-QPSK- 3.75KHz

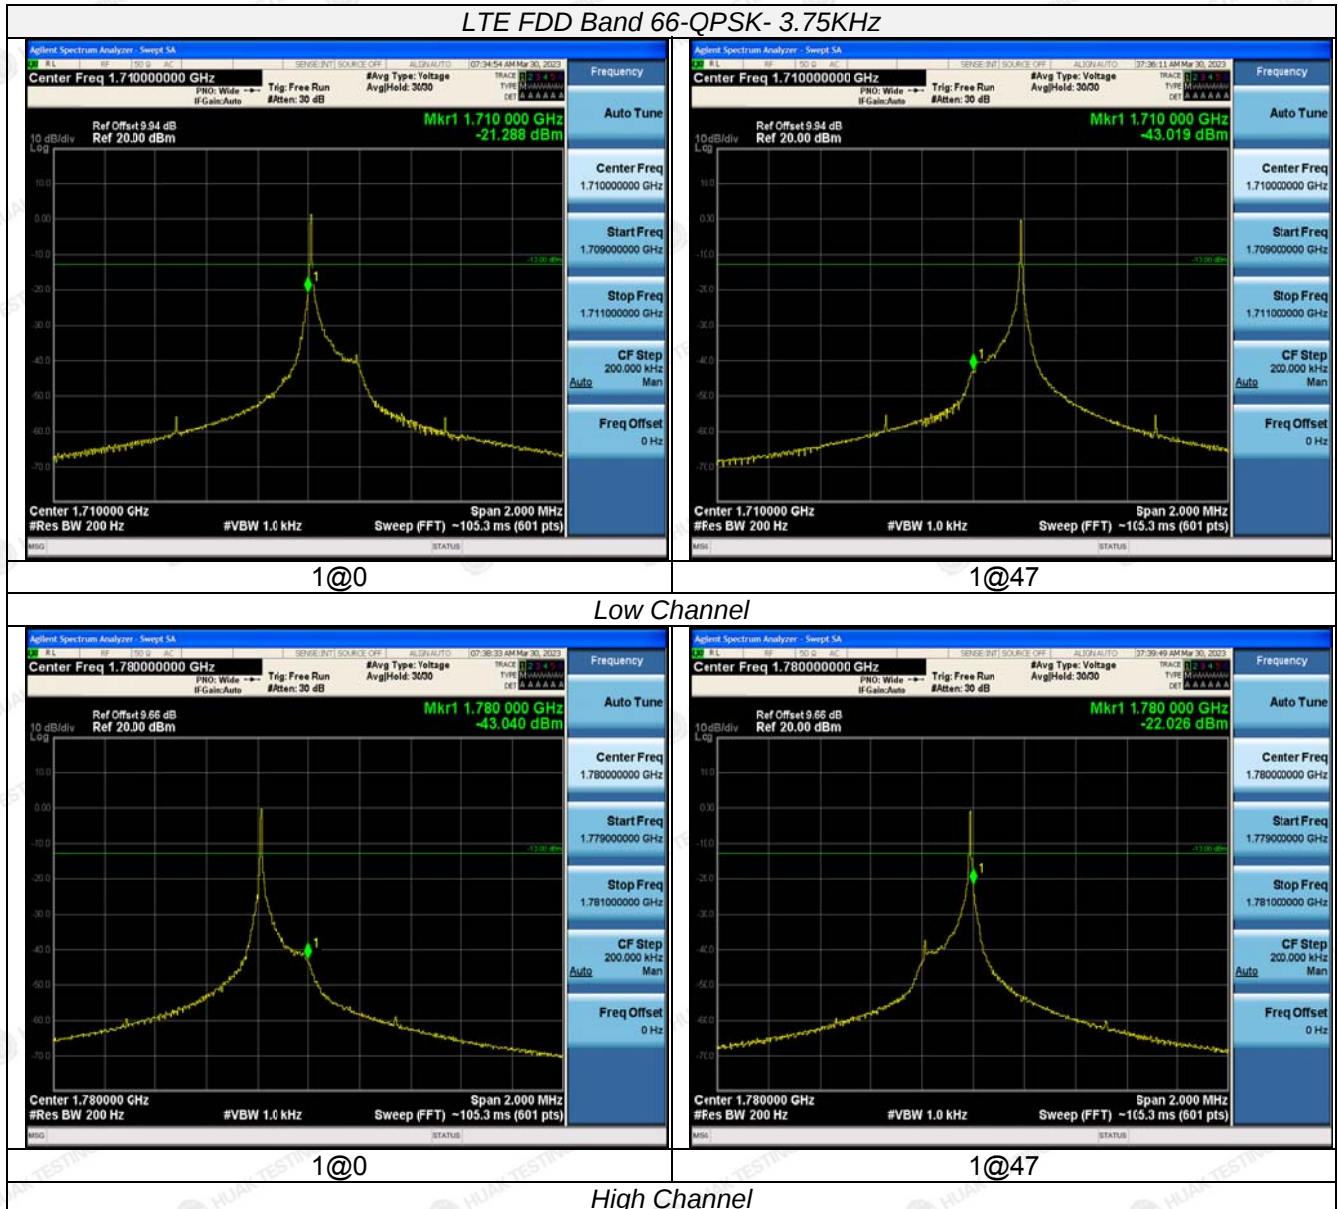



LTE FDD Band 66-BPSK- 15KHz

Low Channel



1@0

High Channel




1@0




1@11



1@11

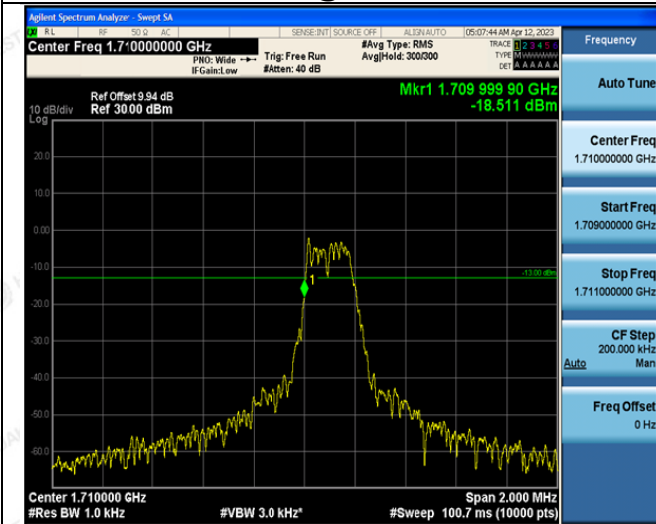

12@0

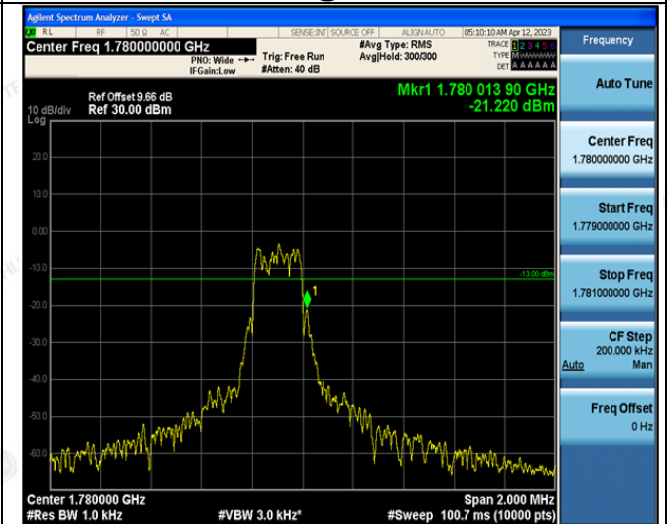

12@0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 66-QPSK- 15KHz

Low Channel



1@0

High Channel




1@0




1@11



1@11

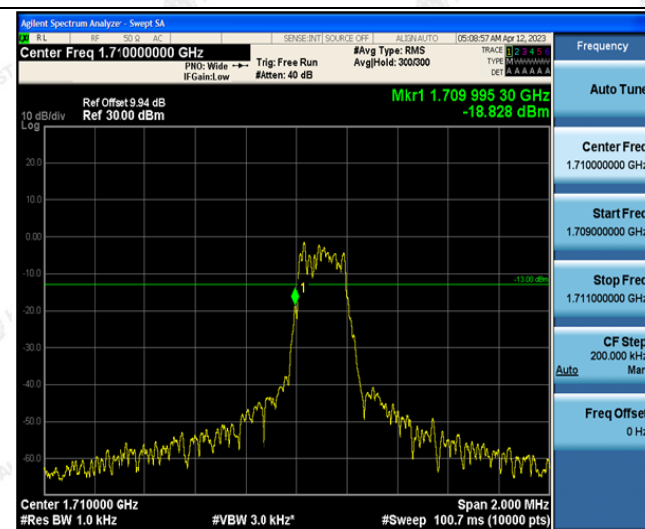

12@0

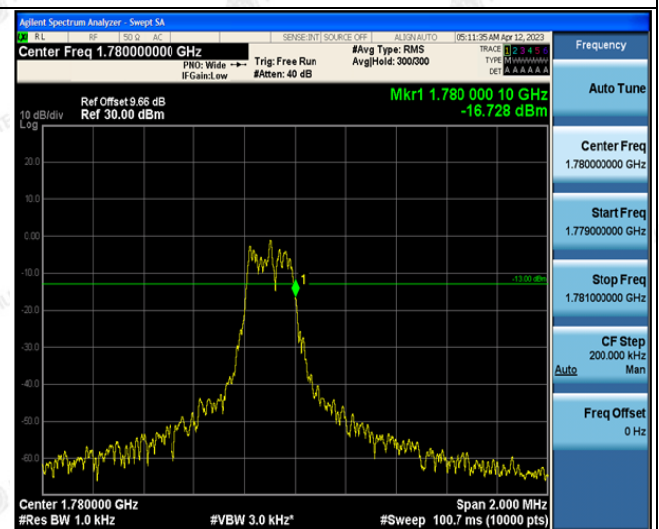

12@0




3.5 Spurious Emission

LIMIT


According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST CONFIGURATION

Conducted Spurious Measurement:

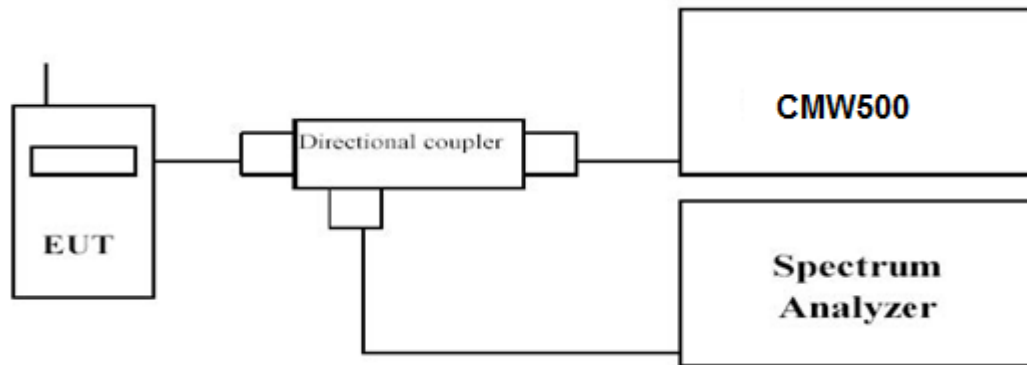

Radiated Spurious Measurement:

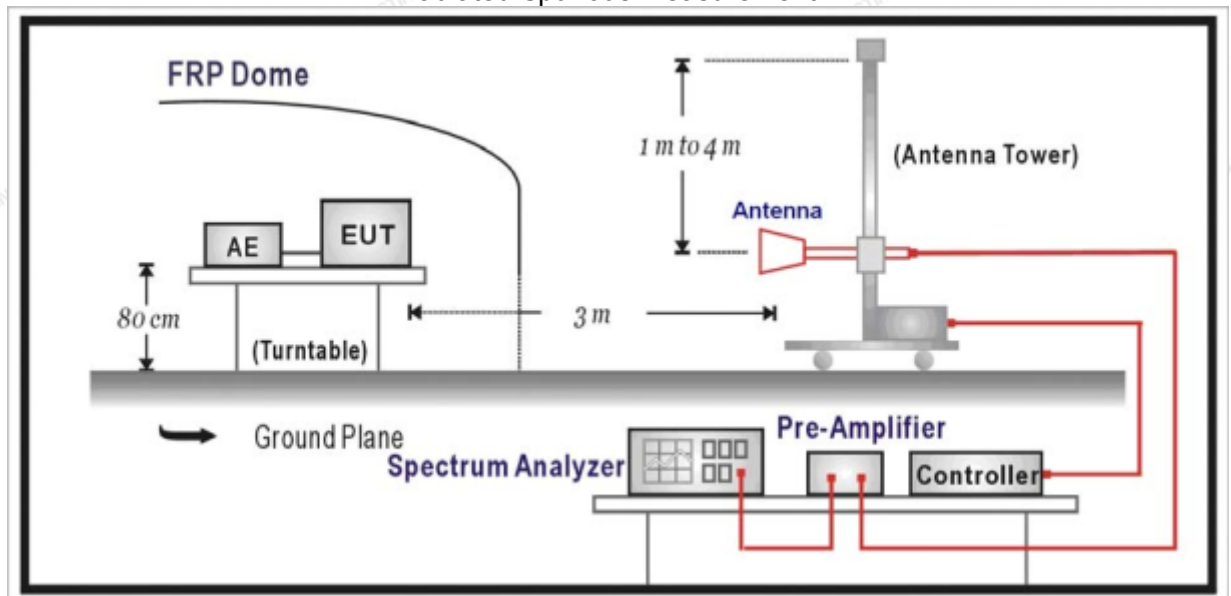

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D.

Conducted Spurious Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10^{th} harmonic.



f. Please refer to following tables for test antenna conducted emissions.

Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 66	0.000009~0.000015	1KHz	3KHz	Auto
	0.000015~0.03	10KHz	30KHz	Auto
	0.03~26.5	1 MHz	3 MHz	Auto

Radiated Spurious Measurement:


- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The maximum signal level detected by the measuring receiver shall be noted.
- The transmitter shall be replaced by a substitution antenna.
- The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- The substitution antenna shall be connected to a calibrated signal generator.
- If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- Test site anechoic chamber refer to ANSI C63.

TEST RESULTS

Remark:

- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case for each Channel Bandwidth of LTE FDD Band 66.


Conducted Measurement:

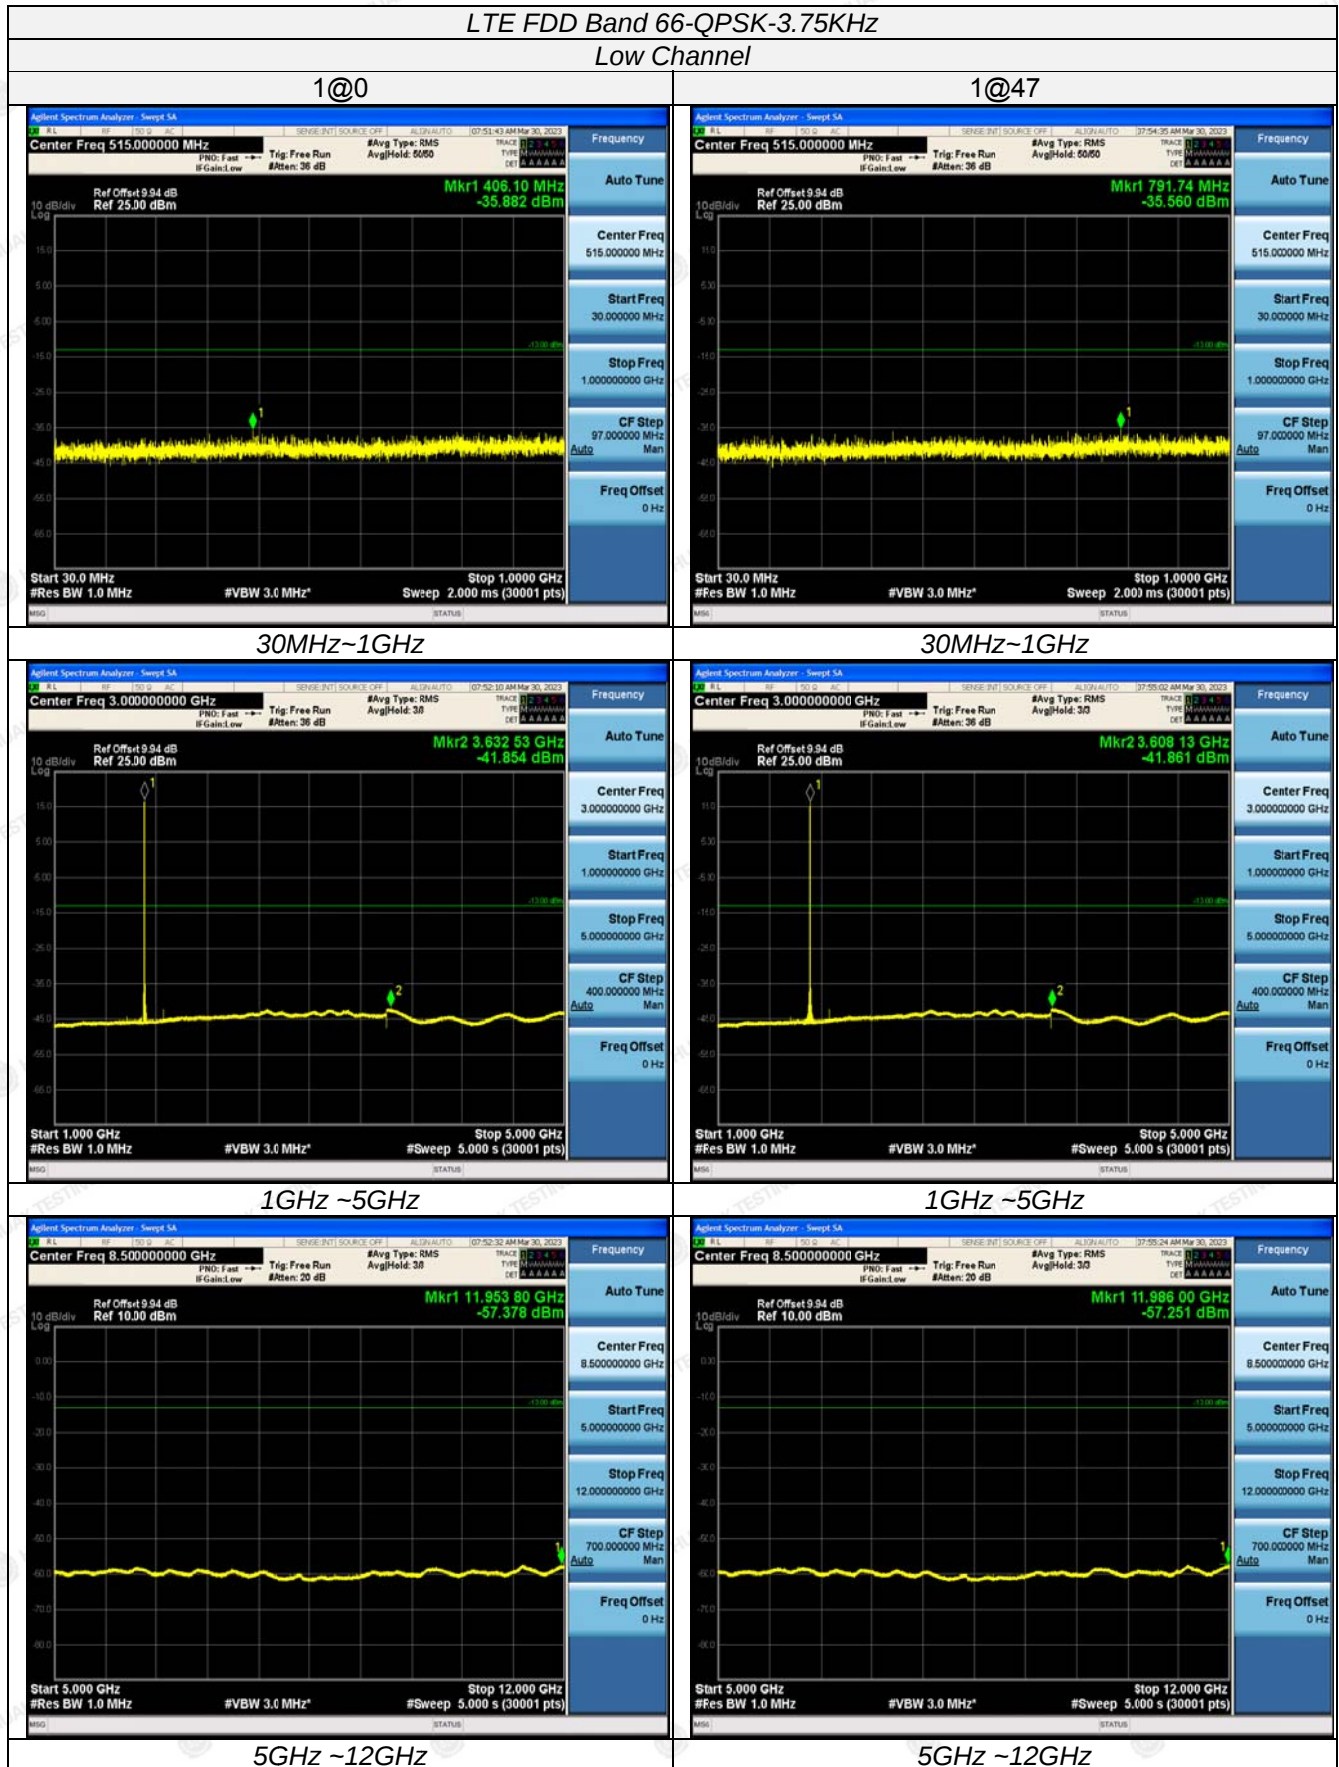

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

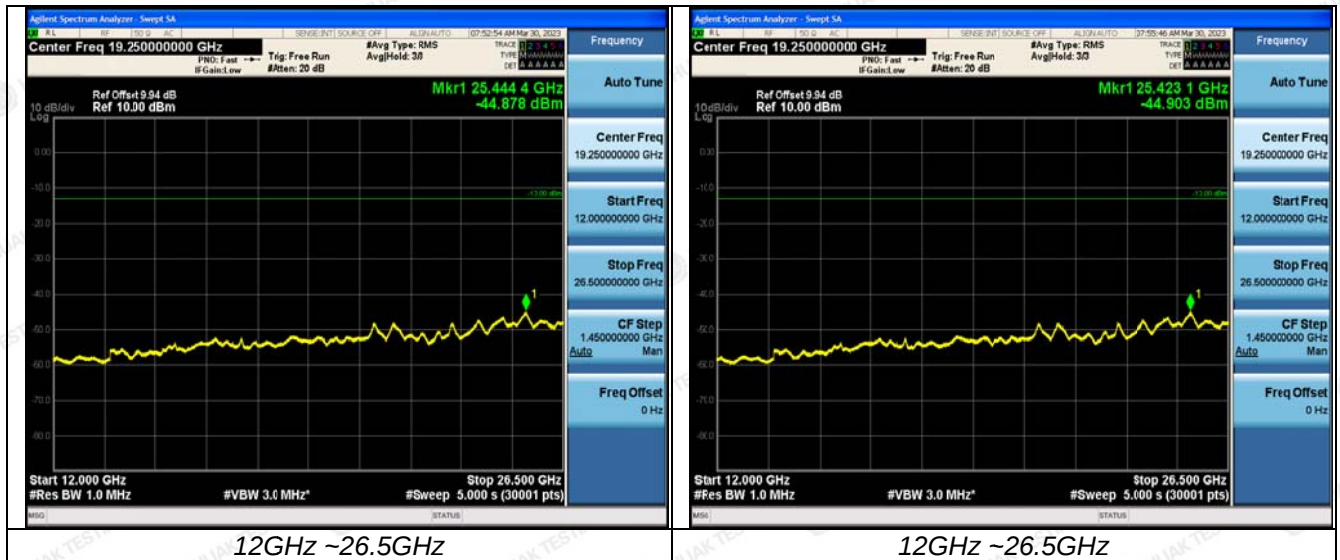


LTE FDD Band 66-QPSK-3.75KHz
Middle Channel

1@0

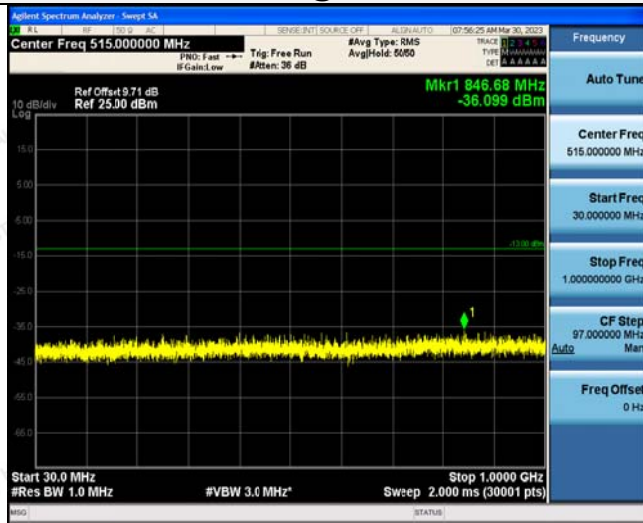

1@47

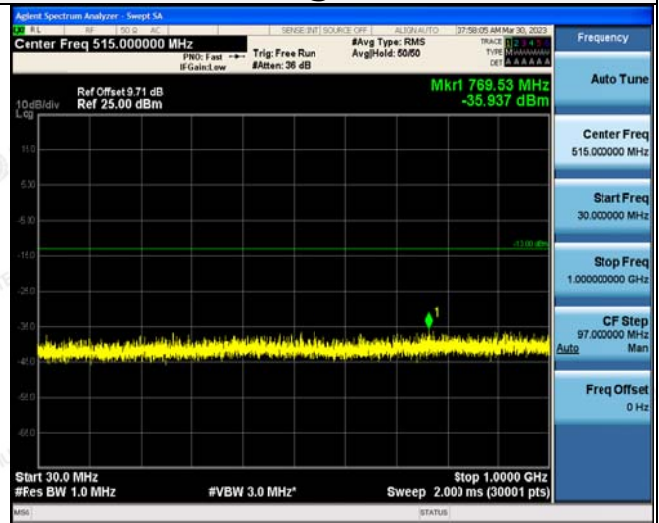

30MHz~1GHz



30MHz~1GHz



1GHz ~5GHz





1GHz ~5GHz



5GHz ~12GHz

5GHz ~12GHz

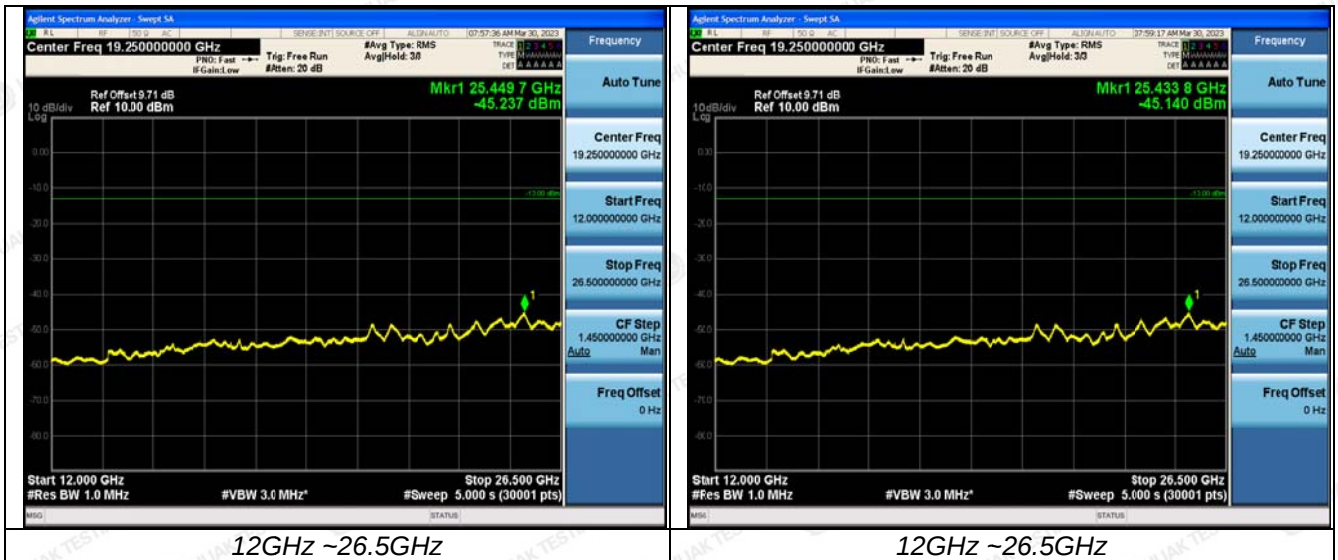


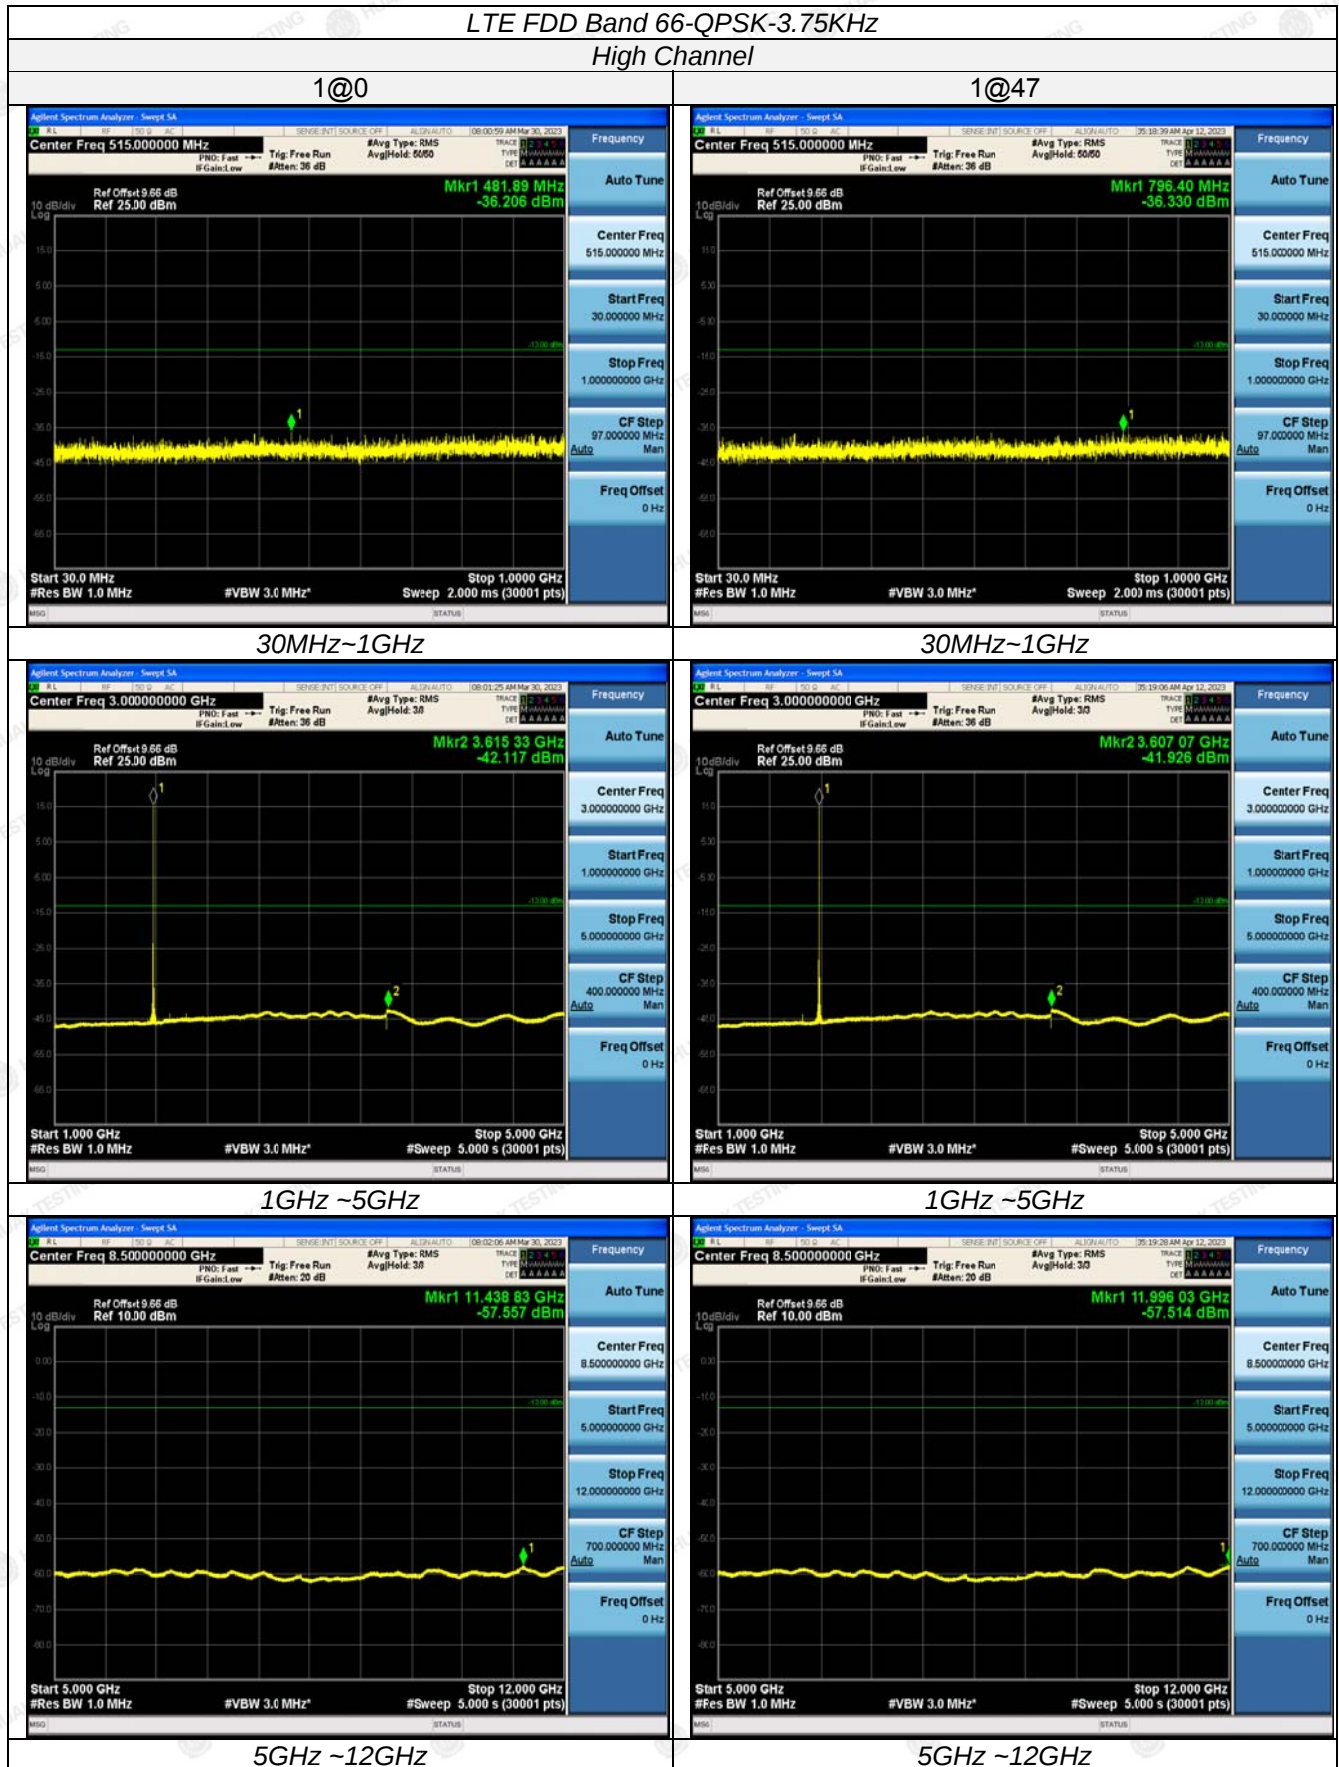


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

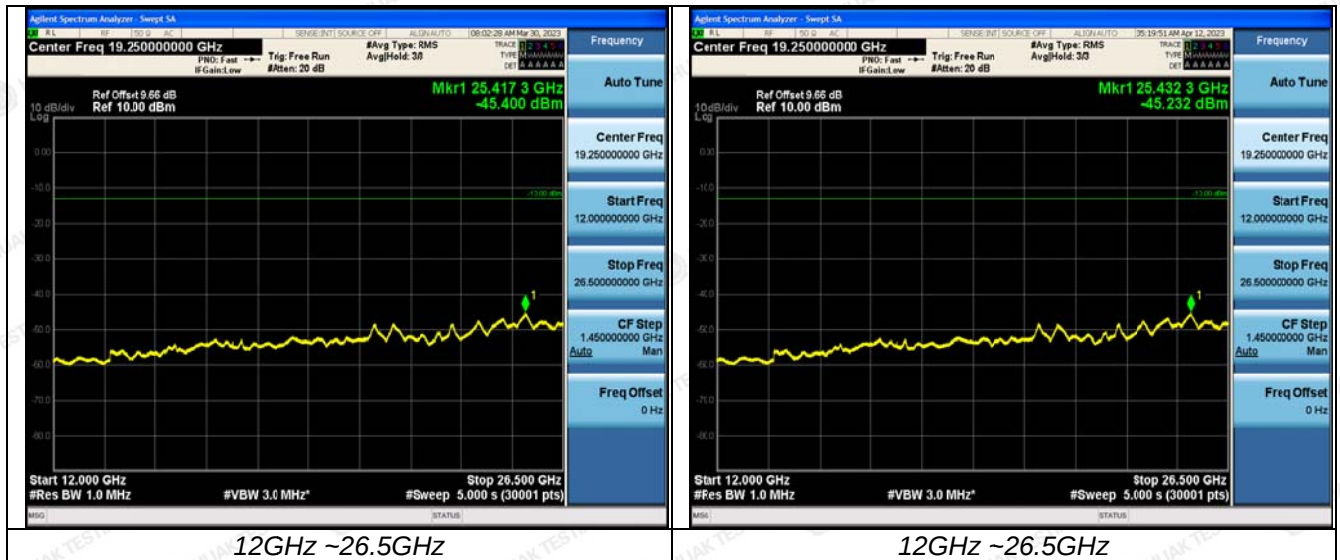


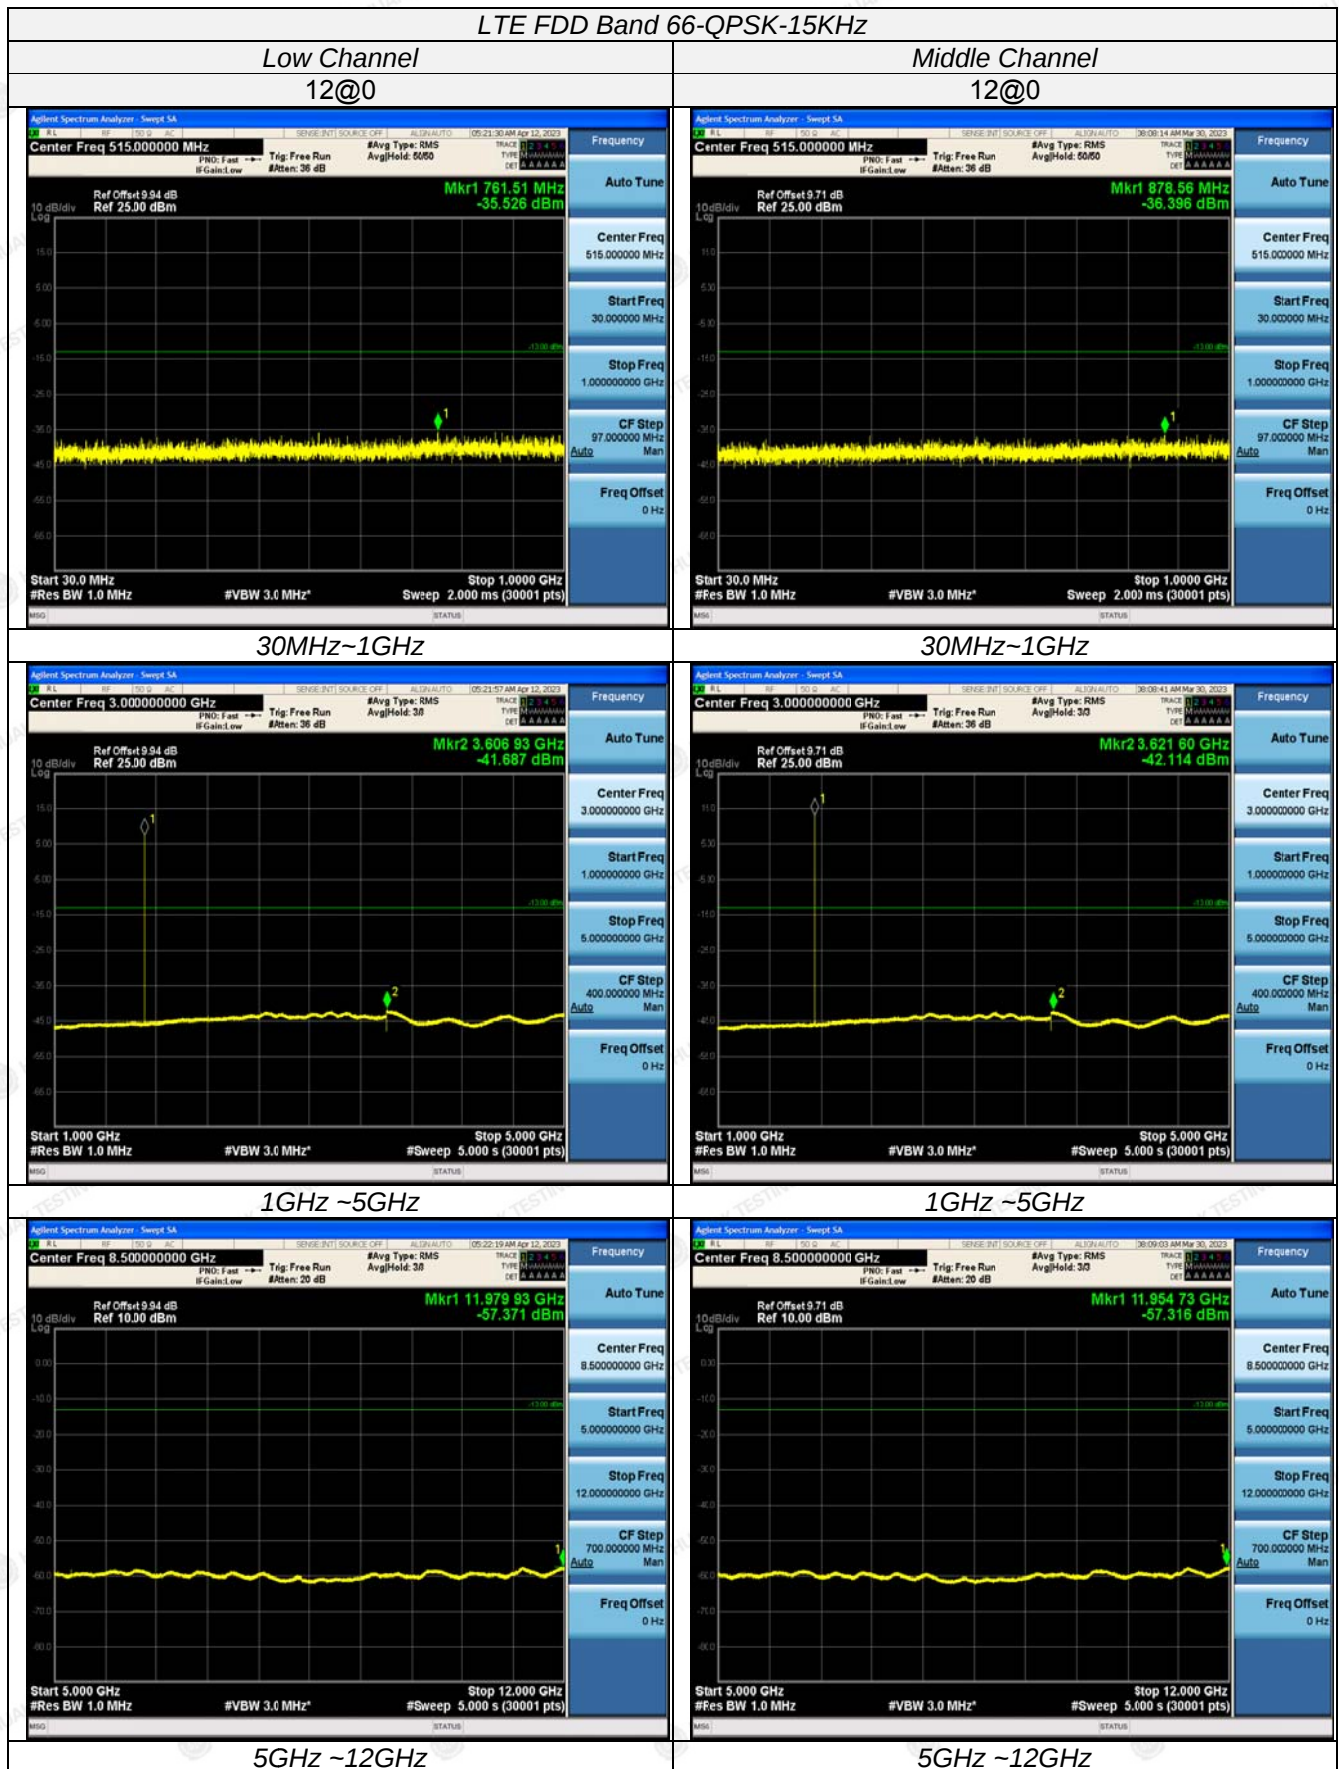

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

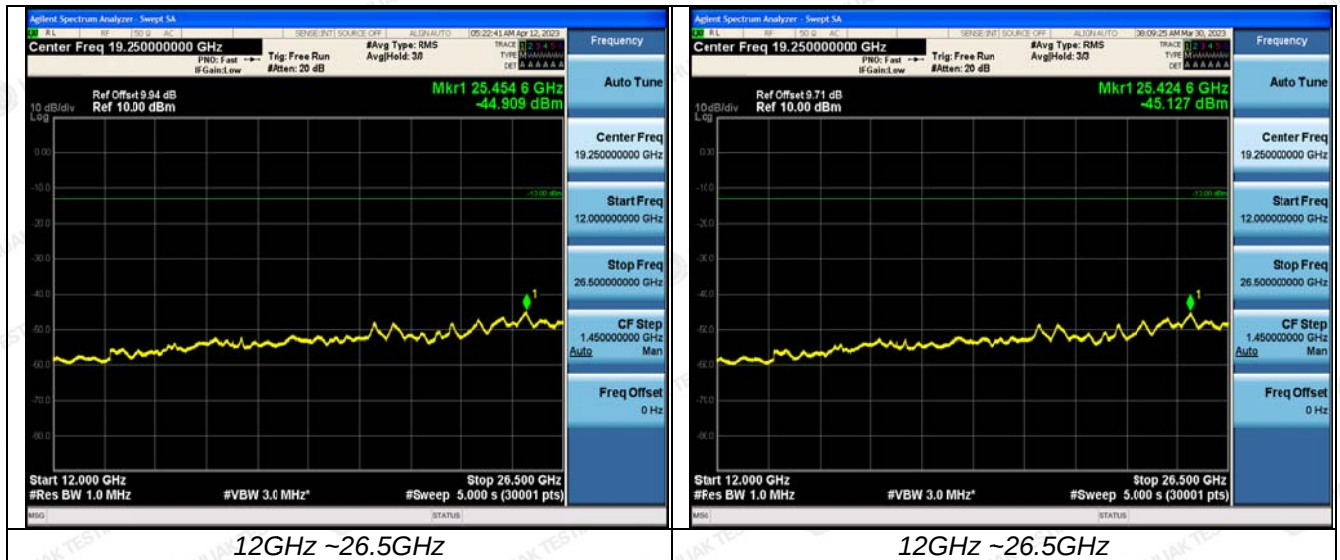




LTE FDD Band 66-QPSK-15KHz

High Channel

12@0

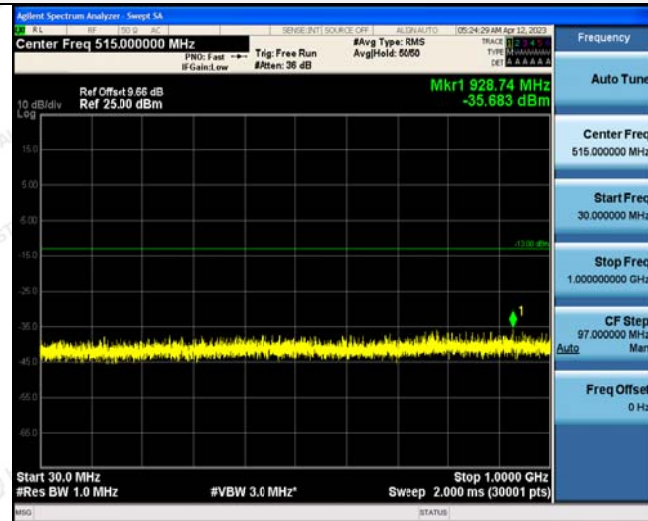

30MHz~1GHz



1GHz~5GHz



5GHz~12GHz



12GHz~26.5GHz

**Radiated Measurement:****Remark:**

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case for each Channel Bandwidth of LTE FDD Band 66.

2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$

3. We were not recorded other points as values lower than limits.

4. $Margin = Limit - EIRP$

LTE FDD Band 66-15KHz-BPSK-Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3420.2	-48.36	4.02	3	12.5	-39.88	-13.00	26.88	H
5130.3	-53.12	5.11	3	13.38	-44.85	-13.00	31.85	H
3420.2	-56.97	4.02	3	12.5	-48.49	-13.00	35.49	V
5130.3	-52.47	5.11	3	13.38	-44.2	-13.00	31.2	V

LTE FDD Band 66-15KHz-BPSK-Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3490.0	-44.48	4.02	3	12.45	-36.05	-13.00	23.05	H
5235.0	-48.69	5.11	3	13.38	-40.42	-13.00	27.42	H
3490.0	-50.07	4.02	3	12.45	-41.64	-13.00	28.64	V
5235.0	-48.86	5.11	3	13.38	-40.59	-13.00	27.59	V

LTE FDD Band 66-15KHz-BPSK-High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3559.8	-44.95	4.02	3	12.21	-36.76	-13.00	23.76	H
5339.7	-48.22	5.11	3	13.26	-40.07	-13.00	27.07	H
3559.8	-50.13	4.02	3	12.21	-41.94	-13.00	28.94	V
5339.7	-49.11	5.11	3	13.26	-40.96	-13.00	27.96	V

LTE FDD Band 66-15KHz-QPSK-Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3420.2	-48.86	4.02	3	12.5	-40.38	-13.00	27.38	H
5130.3	-52.61	5.11	3	13.38	-44.34	-13.00	31.34	H
3420.2	-54.18	4.02	3	12.5	-45.7	-13.00	32.7	V
5130.3	-50.25	5.11	3	13.38	-41.98	-13.00	28.98	V

LTE FDD Band 66-15KHz-QPSK-Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3490.0	-46.11	4.02	3	12.45	-37.68	-13.00	24.68	H
5235.0	-48.69	5.11	3	13.38	-40.42	-13.00	27.42	H
3490.0	-52.02	4.02	3	12.45	-43.59	-13.00	30.59	V
5235.0	-48.84	5.11	3	13.38	-40.57	-13.00	27.57	V



LTE FDD Band 66-15KHz-QPSK-High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3559.8	-41.46	4.02	3	12.21	-33.27	-13.00	20.27	H
5339.7	-46.82	5.11	3	13.26	-38.67	-13.00	25.67	H
3559.8	-49.35	4.02	3	12.21	-41.16	-13.00	28.16	V
5339.7	-50.03	5.11	3	13.26	-41.88	-13.00	28.88	V




3.6 Frequency Stability under Temperature & Voltage Variations

LIMIT

According to §27.54, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

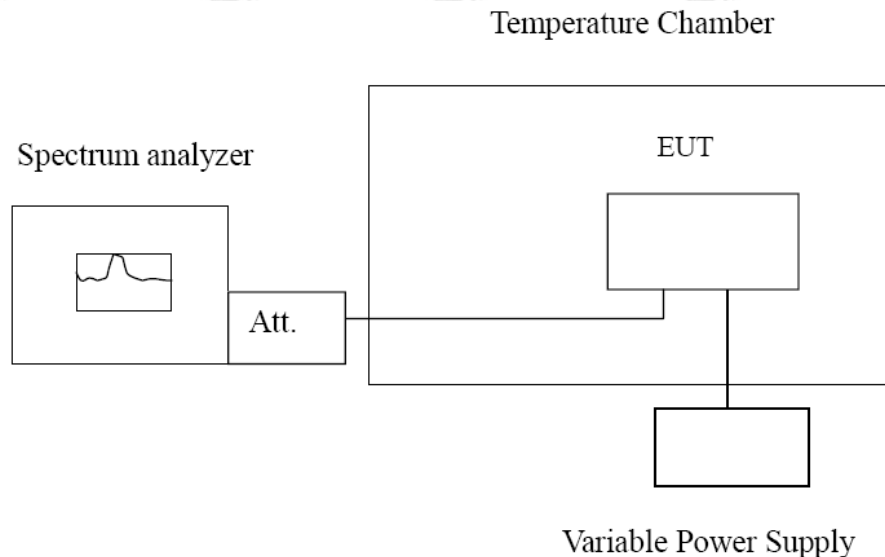

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D.

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 4, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

**TEST RESULTS**

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case.

LTE Band 66, 15KHz , BPSK (worst case of all bandwidths)



LTE FDD Band 66				
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Verdict
3.15	20	-43.13	-0.025221	PASS
3.70	20	-42.52	-0.024864	PASS
4.26	20	-47.41	-0.027724	PASS
3.70	-30	-46.00	-0.026899	PASS
3.70	-20	-44.84	-0.026221	PASS
3.70	-10	-39.61	-0.023162	PASS
3.70	0	-34.50	-0.019771	PASS
3.70	10	-36.67	-0.021014	PASS
3.70	20	-33.29	-0.019077	PASS
3.70	30	-29.28	-0.016779	PASS
3.70	40	-28.32	-0.016229	PASS
3.70	50	-30.39	-0.017415	PASS

LTE Band 66, 15KHz , QPSK (worst case of all bandwidths)

LTE FDD Band 66				
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Verdict
3.15	20	-32.31	-0.018894	PASS
3.70	20	-29.72	-0.017379	PASS
4.26	20	-32.40	-0.018946	PASS
3.70	-30	-29.14	-0.017040	PASS
3.70	-20	-34.22	-0.020011	PASS
3.70	-10	-32.97	-0.019280	PASS
3.70	0	-25.28	-0.014487	PASS
3.70	10	-27.28	-0.015633	PASS
3.70	20	-24.75	-0.014183	PASS
3.70	30	-22.58	-0.012940	PASS
3.70	40	-21.77	-0.012476	PASS
3.70	50	-23.74	-0.013605	PASS



4 Test Setup Photos of the EUT

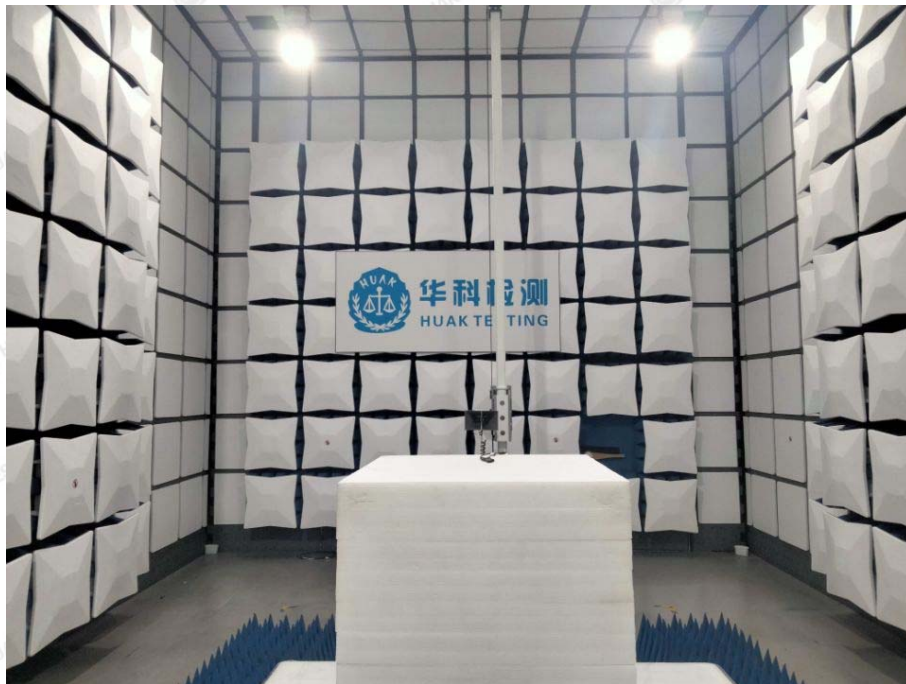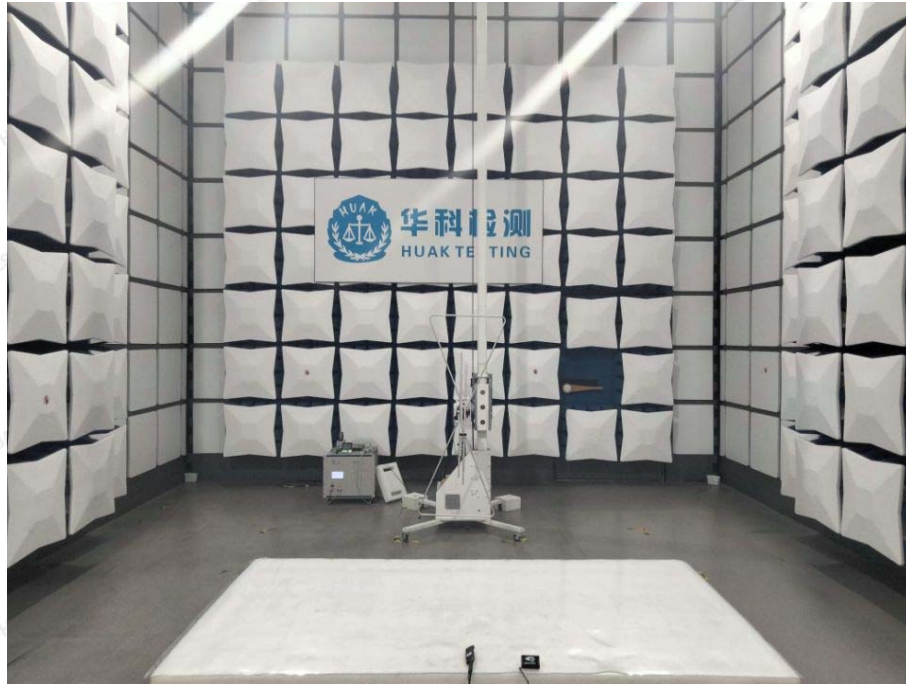

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



5 Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

.....End of Report.....

