



INFINITY IoT

Smart Watch



Package Contents

- Infinity Watch
- Global SIM card, already inside the device
- USB charging cable (for Infinity Watch)
- Wall Charger
- User Manual

Welcome

The device and all accessories included in this package have undergone significant software and mechanical testing to verify the quality of your device.

For any questions or concerns, please do not hesitate to contact the local store from which you purchased this product.

While this user manual pertains to both the and the Infinity Watch, you should consider only the information relevant to the device you purchased.

Table of Contents

Paragraph	Subject	Page
1	Product Overview	5
1.1	General Information	5
1.2	Main Features	6
1.3	Infinity Watch Illustration	7
1.4	Powering On	8
1.5	Powering Off	8
1.6	Charging	8
2	Hardware – Infinity Watch	9
3	Software	10
4	Before You Start	11
5	Device Operation	12
6	Emergency SOS Device	13
6.1	Medical Gateway Device	14
6.2	Assets Tracking	16
6.3	VoIP	18
6.4	Open Source and Build Your Own	19
6.5	Important Things	21

1. Product Overview

1.1 General Information

Congratulations! You are holding an Infinity IoT device, the all-in-one IoT device for multiple purposes.

The device is a stand-alone mobile phone equipped with GPS, Bluetooth, WIFI and the Android 4.4.4 operating system.

Whether you are looking for a device to use as an emergency SOS button, as a medical Bluetooth gateway, or even just to learn Android and Java language, the Watch will support you for every goal.

1.2 Main Features

- A button for short press or long press clicks
- 4G(LTE)/3G/2G connectivity, global SIM card included
- GPS chip
- Bluetooth 4.0 for external device connection
- WIFI for location and internet use
- Incoming/outgoing phone calls using VoIP
- Easy charging
- SensorHUB technology for movement detection
- IP67 waterproof

1.3 Infinity Watch Illustration



1.4 Powering On

You can turn on the device by connecting it to the charger (auto boot) or by pressing the power button (for Infinity Watch) for a few seconds.

1.5 Powering Off

To turn off the Infinity Watch, press and hold the power button for a few seconds. The watch will then shutdown.

1.6 Charging

To charge the Infinity Watch, press the watch into the charging tray until you hear it click, making sure that the metal bars are touching.

2. Hardware – Infinity Watch

Name	Parameter
The Chip	SC9820E by Unisoc
CPU	1.3GHz quad-core 64-bit ARM Cortex-A53
Modules	FPS GPS/Galileo/GLONASS with AGPS WIFI 802.11 b/g/n 2.4GHz, BLE 4.0
Memory & Storage	ROM: 4 GB, RAM: 512 MB, Storage: 2.56 GB
Cellular Bands	2G: 850/900/1800/1900 MHz 3G: 900/1900/2100 MHz 4G(LTE): B1/B2/B3/B4/B7/B17/B20
Battery	670mAh Lithium Ion 3.7V
Size & Weight	Size 3.3" X 4.9". Weight: 1.58 Ounce
Charging	5V DC
Sensors	G-Sensor, Drop, Gyroscope, Accelerometer, Vibration, SensorHUB, Heart Rate
Sound	Speaker and Microphone included
Screen	Size: TFT LCD 1.54", Resolution: 240X240

4. Software

Name	Parameter
Operating System	Android 4.4.4, API Level 19
Access Level	Root Access
Tracking System	The tracking system allows GPS/Wi-Fi location together with the SOS button to locate a person in danger. Clicking the button will initiate an alarm in the mobile app and start dialing the pre-set numbers.
Medical System	This device feature enables the connection to medical equipment for remote tele-medicine usage using Bluetooth. It supports the following tests: Blood pressure, heart rate, ECG, blood oxygen, glucose, HRV, temperature and fall detection.
VoIP	The VoIP app feature allows you to call any country in the world for a low cost.
Your APP	Install your own app onto the Infinity IoT!

5. Before You Start

Please read the following instructions prior to first use:

- Charge the battery at least 2 hours before initial use. The device will turn on automatically while charging.
- The device has IP67 water protection level, but it is always better to avoid any contact with water.
- Do not use any detergents to clean the device. Use only a dry cloth.
- Do not expose the device and/or the charger to high temperatures.
- The USB plug should only be connected to the wall charger supplied in the box or to any PC/Mac.
- If you notice any exposed wires, do not try to replace it yourself; you could be electrocuted. Instead, contact customer service immediately.
- The device has a built in SIM card that can work in 120 countries. You do not need to insert or change the SIM card.

6. Device Operation

Since the Infinity device is designed to use as a multipurpose IoT device, this manual will cover only the following five main features for which the device can be used:

- As an emergency SOS device
- As a medical gateway device
- As an asset tracking device
- As a VoIP calls device
- As an open-source device (build your own app!)

Your Infinity device has the pre-set configuration to work as one or more of the features mentioned above, depending on the settings configured for you when you purchased the device. Please contact your local provider for more information.

6.1 Emergency SOS Device

Green LED indicator

LED operation	Explanation
on for 3 seconds and then off for 3 seconds	2G/3G/4G/WIFI network is not found, the device is looking for network
on for 1 second and then off for 3 seconds	network is found, but server connection is off. Trying to connect to server....
indicator is off	the device operates normal when the green LED is off.
one short click on the middle SOS button	the LED will turn on for a moment. This indicator allows you to know the device is turned on.
on and off fast for 6 seconds	location is found and sent to the server

Download the Mobile App


First, download the mobile app from Google Play/Apple Store. Contact your local provider for guidance on how to download the app and to provide you with username & password access to control your Infinity device from your phone.

The Main Screen


On login page, you can choose the language of the app and insert the username and password. You will then be redirected to the main screen.

The emergency SOS app allows you to view multiple Infinity Boxes and Infinity Watches on the same map, locate them (using GPS and WiFi), show their location history, make phone calls, change the inner settings, set a safe zone to get alarms and navigate to the device in case of an emergency. All in one app.

List of your devices



Location on the map

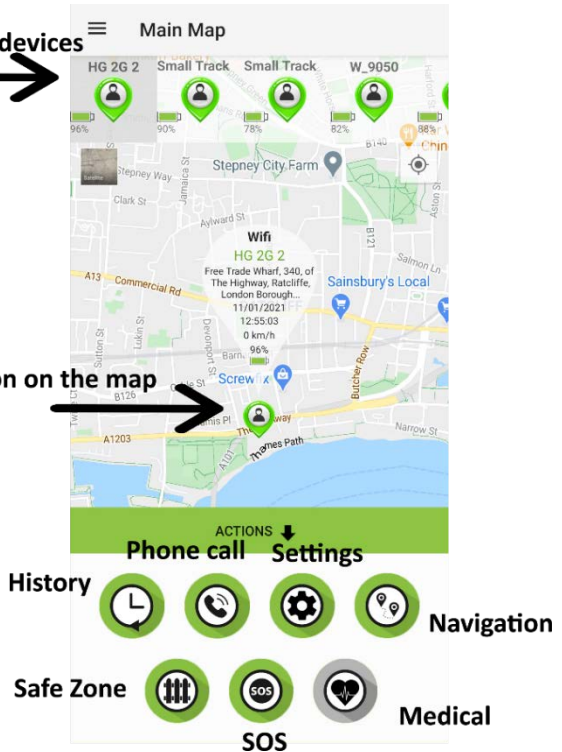

6.2 Medical Gateway Device

The Infinity device can work as a medical gateway, transferring all the data from nearby medical devices to your doctor for remote monitoring. If you purchased the Watch along with an external medical device, turn on the medical device to start the test.

The medical data is automatically transferred; you do not need to take any action. Your doctor is already receiving the data.

SOS Button

In case of an emergency, press and hold the SOS button (if you are using the Infinity Watch) for 3 seconds until you hear a signal tone and feel the device vibrate. This will send an alarm to the medical center.

Drop Detection

The device has drop detection in case a fall is detected.

Medical Devices

Our external medical devices database is expanding every day.

We support the following products:

- Contour ONE
 - Glucose measurement
- FORA TN'G BP
 - Blood Pressure
- VitalPatch from Vital-Connect
 - ECG
 - Heart Rate
 - Heart Rate Variability
 - Respiratory Rate
 - Body Temperature
 - Pedometer
- HeartBook by ECG
 - ECG
 - Heart Rate
 - Heart Rate Variability
 - Respiratory Rate
- Cosinuss ONE
 - Temperature
 - Heart Rate & Heart Rate Variability

6.3 Assets Tracking

Assets tracking on the device is done using a special app installed on the Infinity device together with the Bluetooth function. To use the assets feature, follow these steps:

1. Go to the Infinity IoT platform to map your assets.
2. Stick all the Bluetooth stickers (beacons) on your important items (suitcase, computer, bag, etc.).
3. Turn on the beacons.
4. Run a scan from the Infinity IoT platform.

After the scan

is done, the platform will show you all the beacons found in range.

#	MAC	Distance	Name	Battery	Image
5	C220308000014	0.26	02203080		
6	AC22030800103	1.60	02203080		
7	AC22030800104	2.25	02203080		
8	AC22030800105	2.89	02203080		
9	AC22030800106	3.56	02203080		
10	AC22030800107	16.13			

Items that we couldn't find....

#	MAC	Name	Image
1	AC22030800107	02203080	


6.4 VoIP

The VoIP (Voice Over IP) system allows you to receive and initiate phone calls using the internet of your SIM card. Every minute of a call uses 0.5 MB of data.

VoIP with the Infinity Watch

Making a Call

Using the mobile app or the online platform, you can set up to 3 contacts for speed dialing. Clicking the middle button (for three seconds) will initiate a phone call to the first contact. If the first contact does not pick up, the device will try the second contact and then the third contact. Click the middle button again to end the call.



(You may not have the exact same icons as the image above)

Receiving a Call

Contact your local provider if you did not receive the phone number of your Infinity Watch. When there is an incoming call, the Infinity Watch will ring. Press the screen to answer the phone call.

6.5 Open Source and Build Your Own



One of the greatest features of the Infinity device is that it can act as an IoT device for any use. In the Infinity IoT platform, you can find our Infinity SDK that will allow you to build your own app in Java or Kotlin and install the app onto the device.

Using the root access, you can control just about everything, such as the following:

- GPS
- WiFi
- BLE
- TTS
- Linux
- Sockets
- Music
- VoIP
- Button
- Heart Rate
- Vibration
- Green LED
- Drop Detection
- Smart Alexa/Google
- SensorHUB

Installing Apps

You can use ADB tools to install the APK file, or download a third-party software named "Vysor" that allows you to view the screen inside the Infinity Watch and control it with your keyboard like a normal Android phone. When using the software, the inside of the Infinity device will look like this:

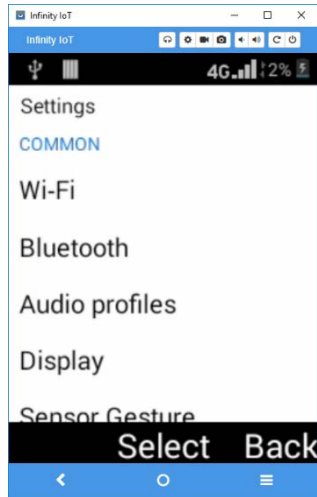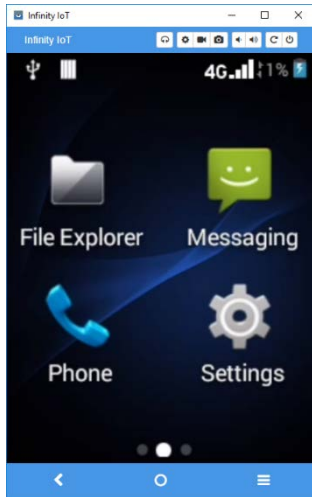

7. Important Things

- More features and apps will be added during the ongoing development of the Infinity Watch.
- Your SIM card has a limited amount of internet usage per month. Make sure you contact your local provider to check the amount remaining.
- Your VoIP package has a limited number of minutes for outgoing calls. Make sure you contact your local provider to check the amount remaining.
- The device is open for use in 120 countries worldwide. Check the website for the countries list.
- The mobile app needed to operate the Infinity device depends on the local provider you purchased the device from. For that reason, the app name does not appear in this user manual.



© All rights reserved to Infinity IoT ©

- The hardware and software of this product was designed and built by Foxi Finder Systems LTD •

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Specific Absorption Rate (SAR) information:

This Smart Watch meets the government's requirements for exposure to radio waves.

The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health.

SAR limits is used against the head or on the wrist. The SAR limit is 1.6 watts per kilogram averaged over 1 gram of tissue for use against the head and 4.0 watts per kilogram averaged over 10 grams of tissue for use on the wrist.

During testing, the device radios are set to their highest transmission levels and placed in positions that simulate use against the head, with 10mm separation, and on the wrist, with no separation. When placing the device near your face, keep at least 10mm of separation to ensure exposure levels remain at or below the as - tested levels.

next-to-mouth SAR: 0.32 W/Kg

Wrist SAR: 1.99 W/Kg

simultaneous SAR: 2.77W/Kg