





-26dB Bandwidth NVNT ac20 5600MHz Ant2

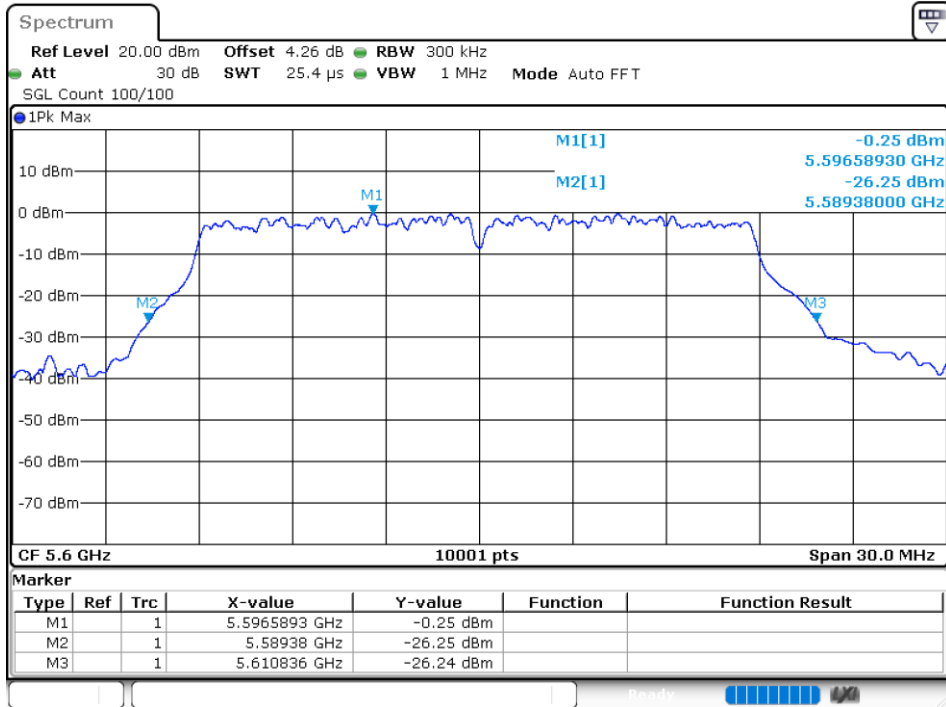



-26dB Bandwidth NVNT ac20 5700MHz Ant2

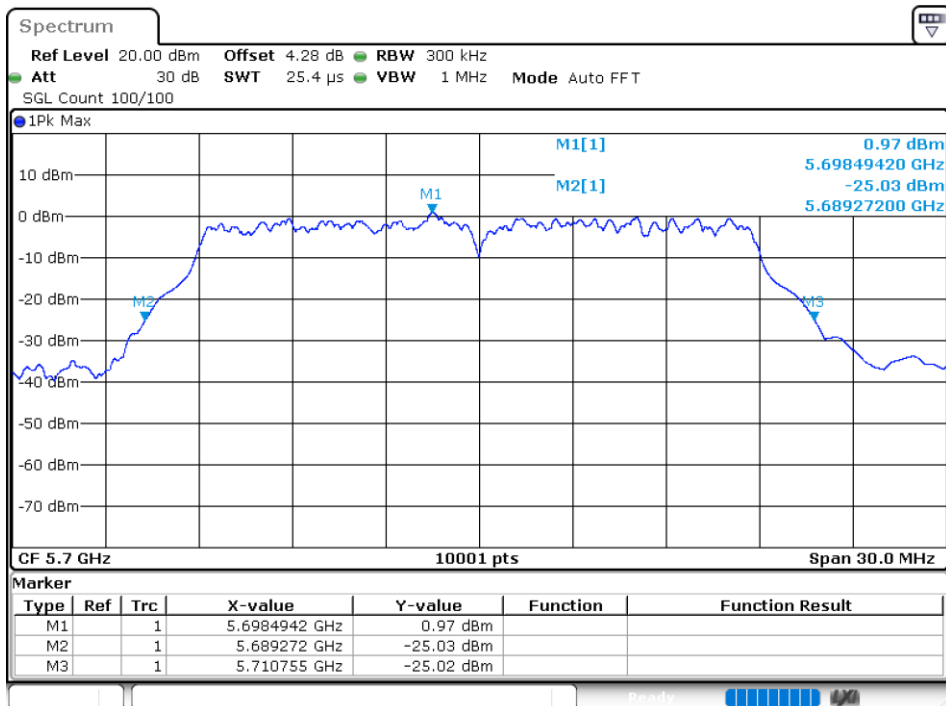

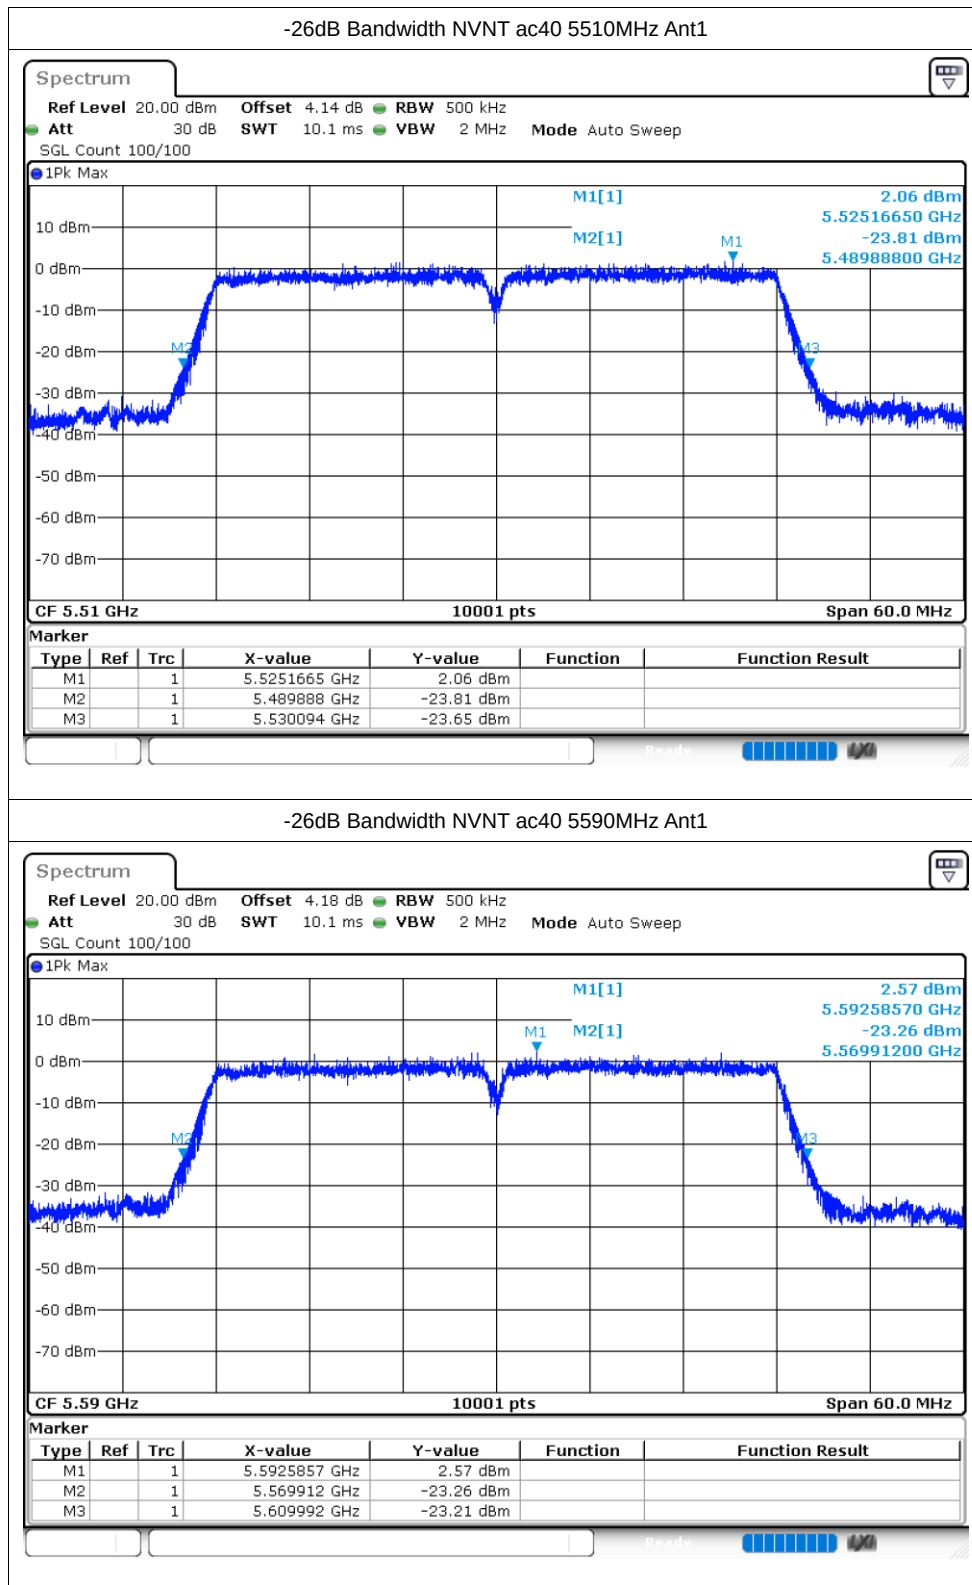


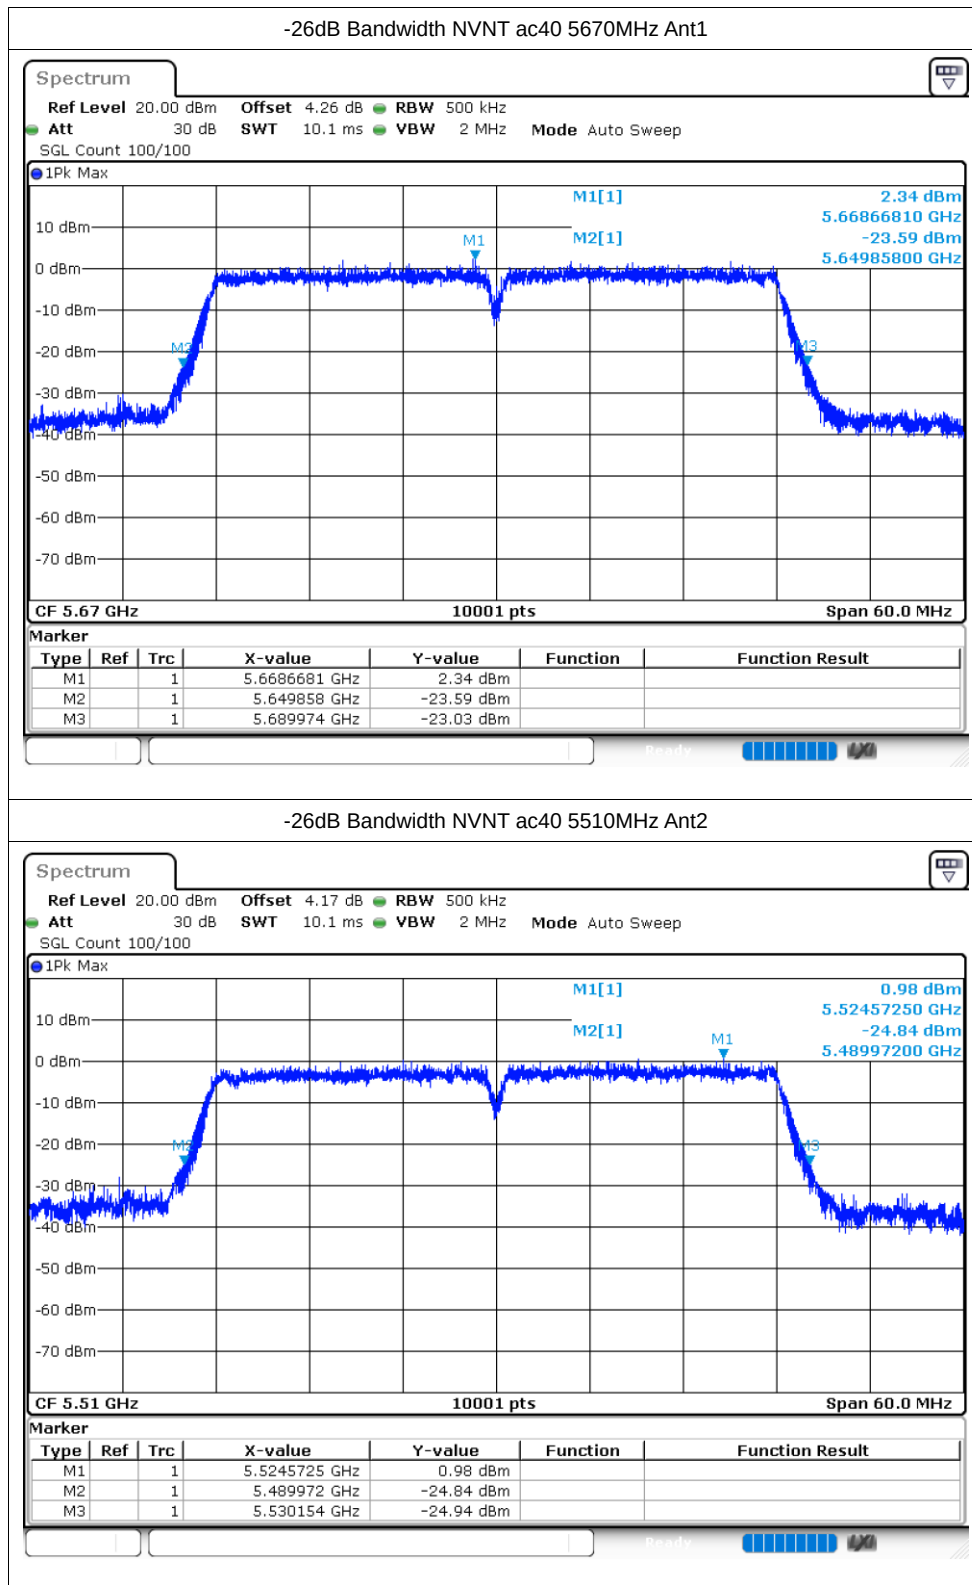

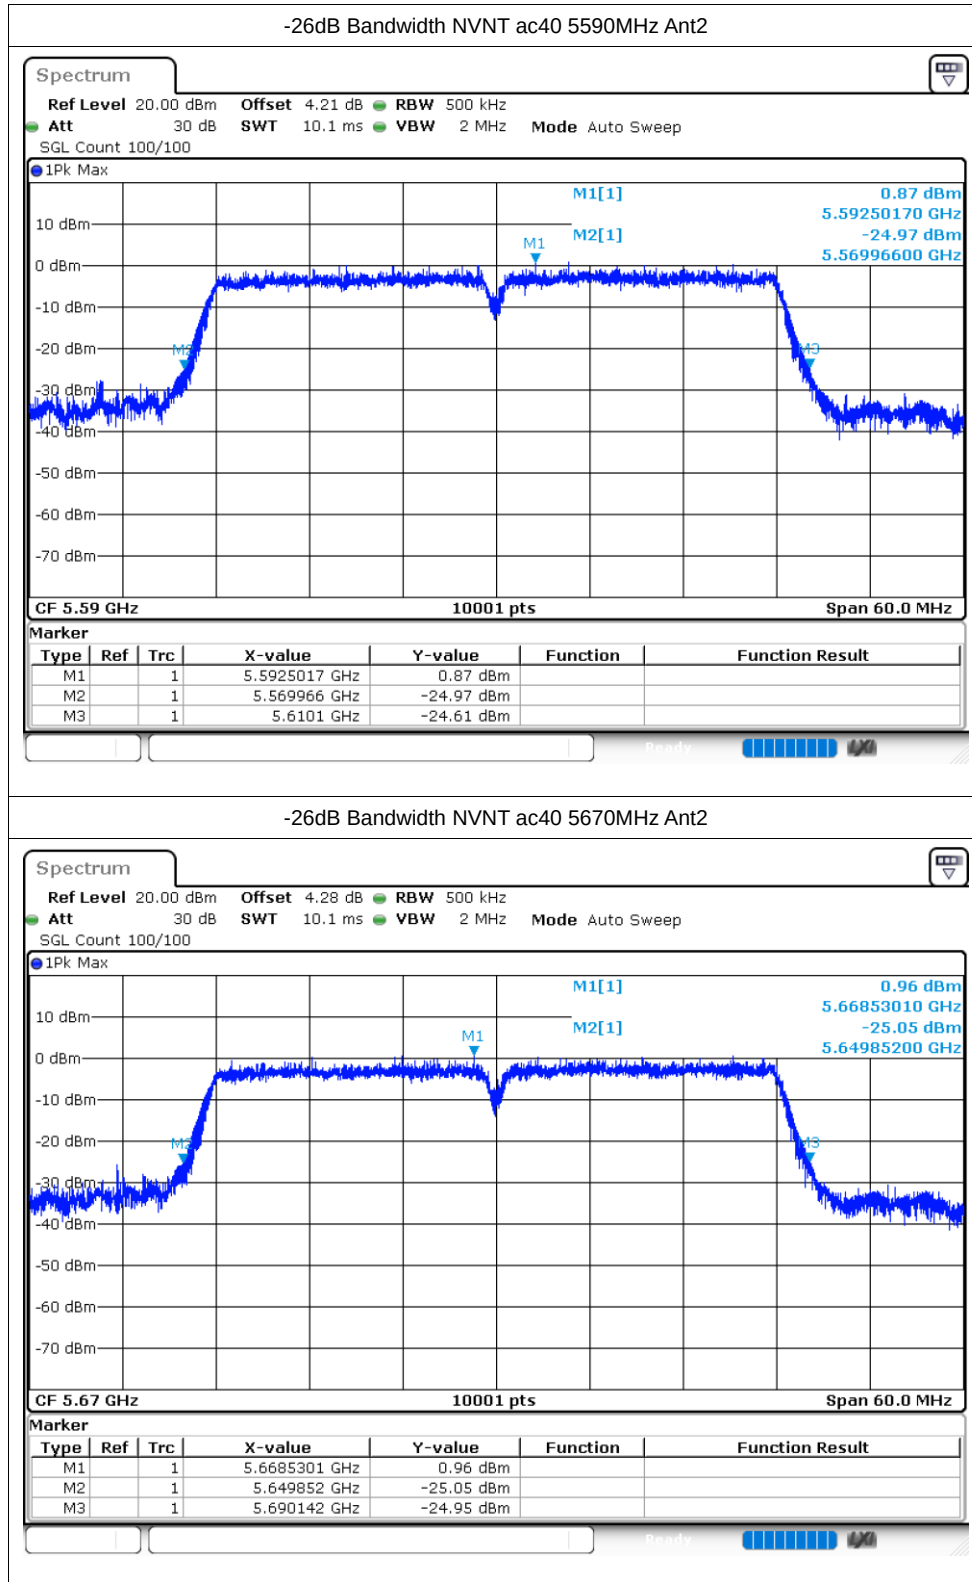


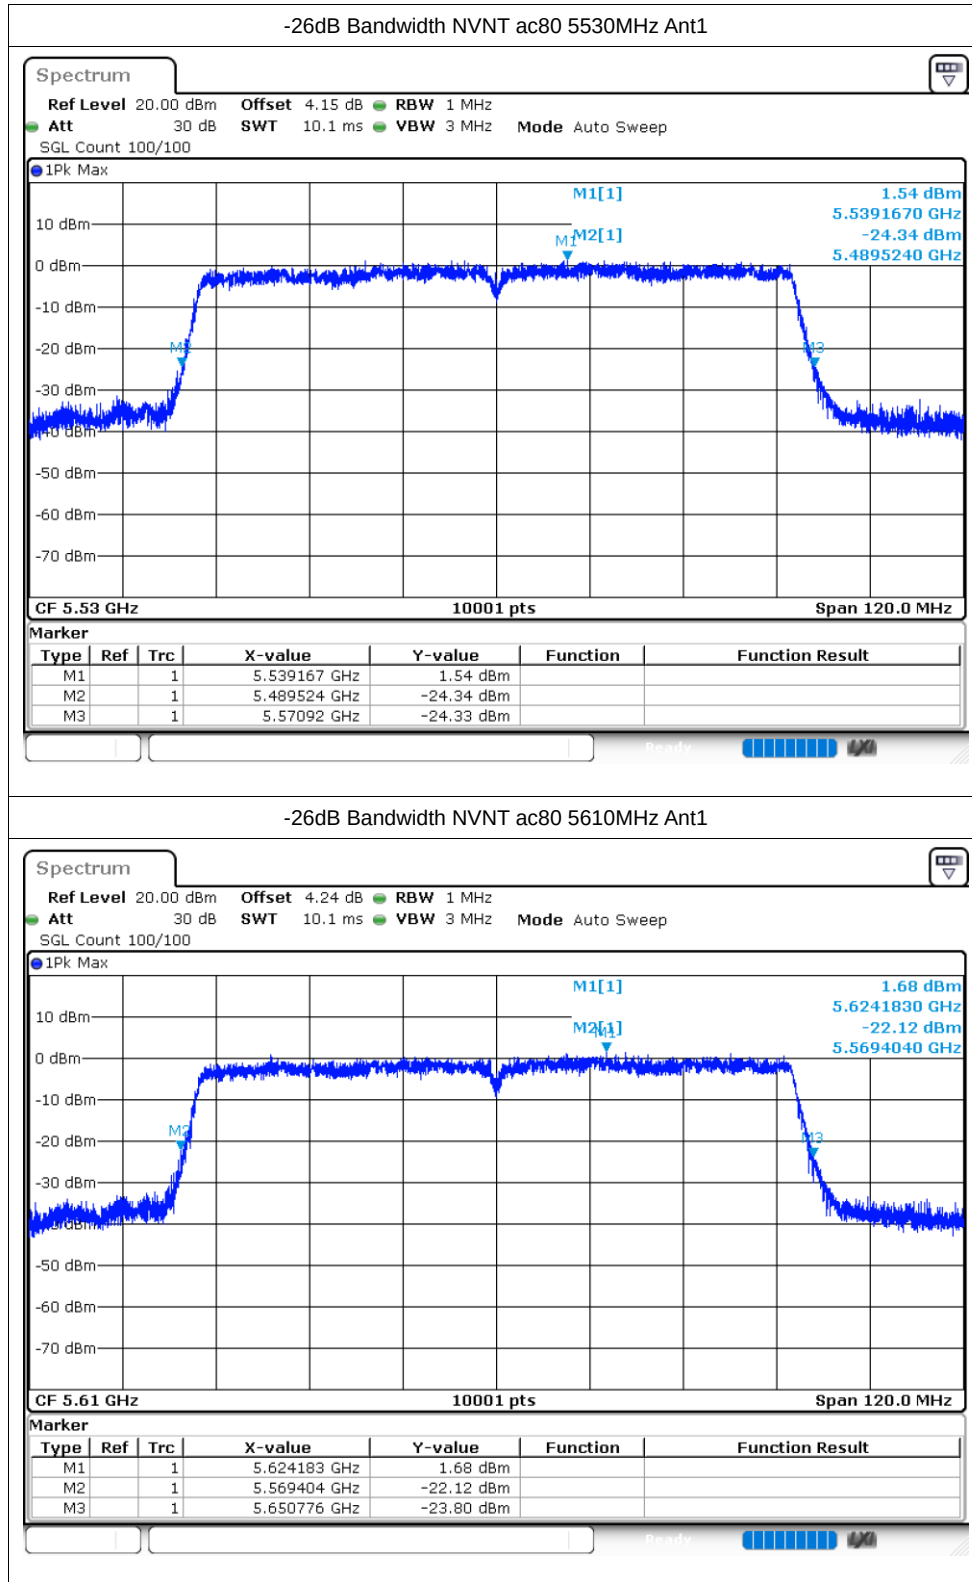



-26dB Bandwidth NVNT ac80 5530MHz Ant2

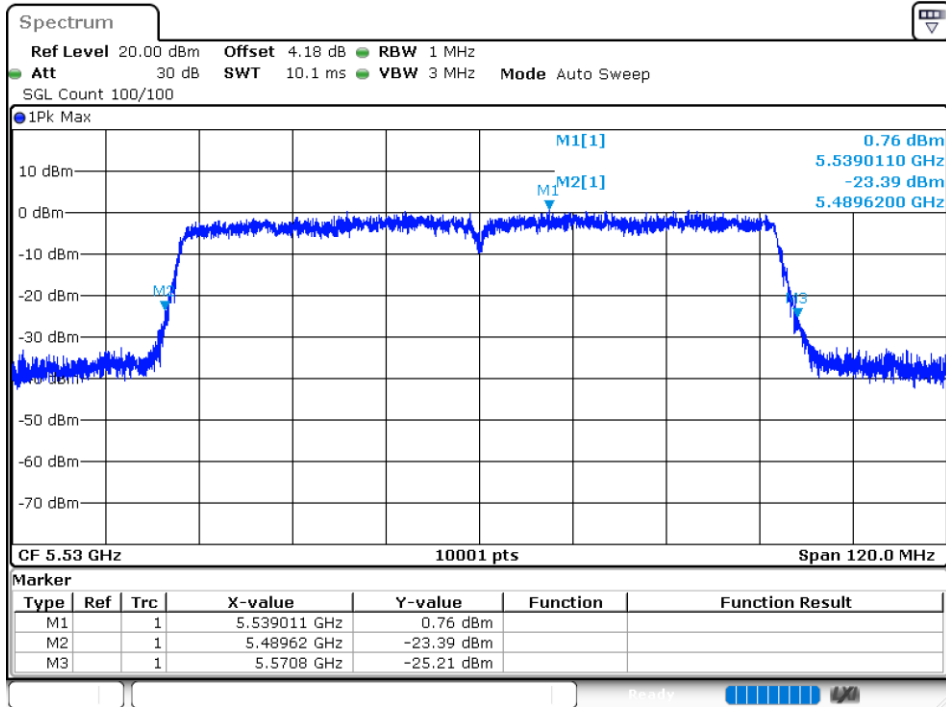



-26dB Bandwidth NVNT ac80 5610MHz Ant2

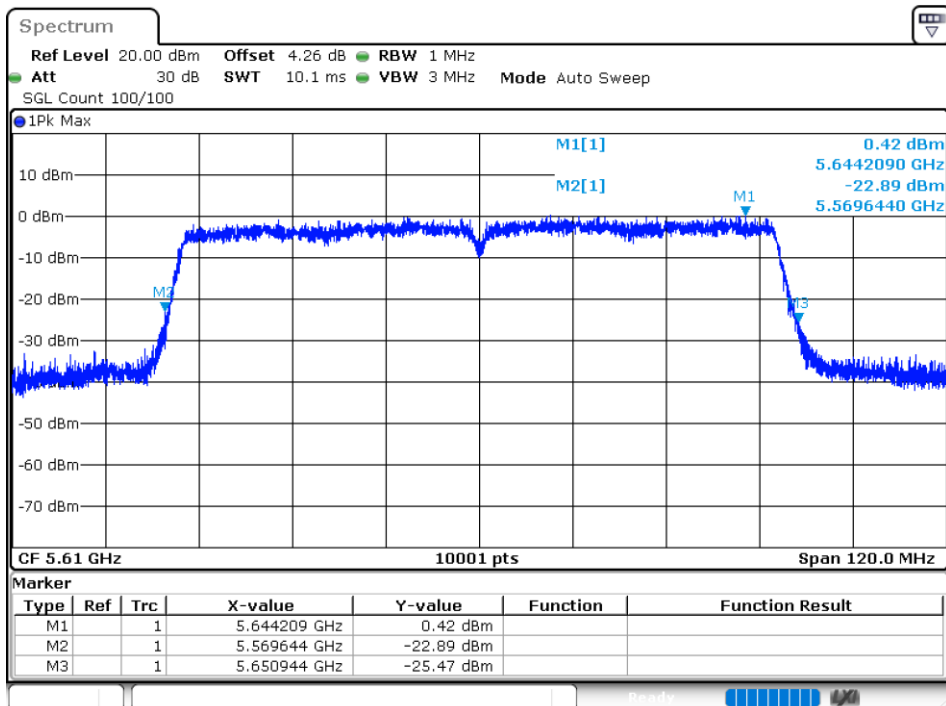


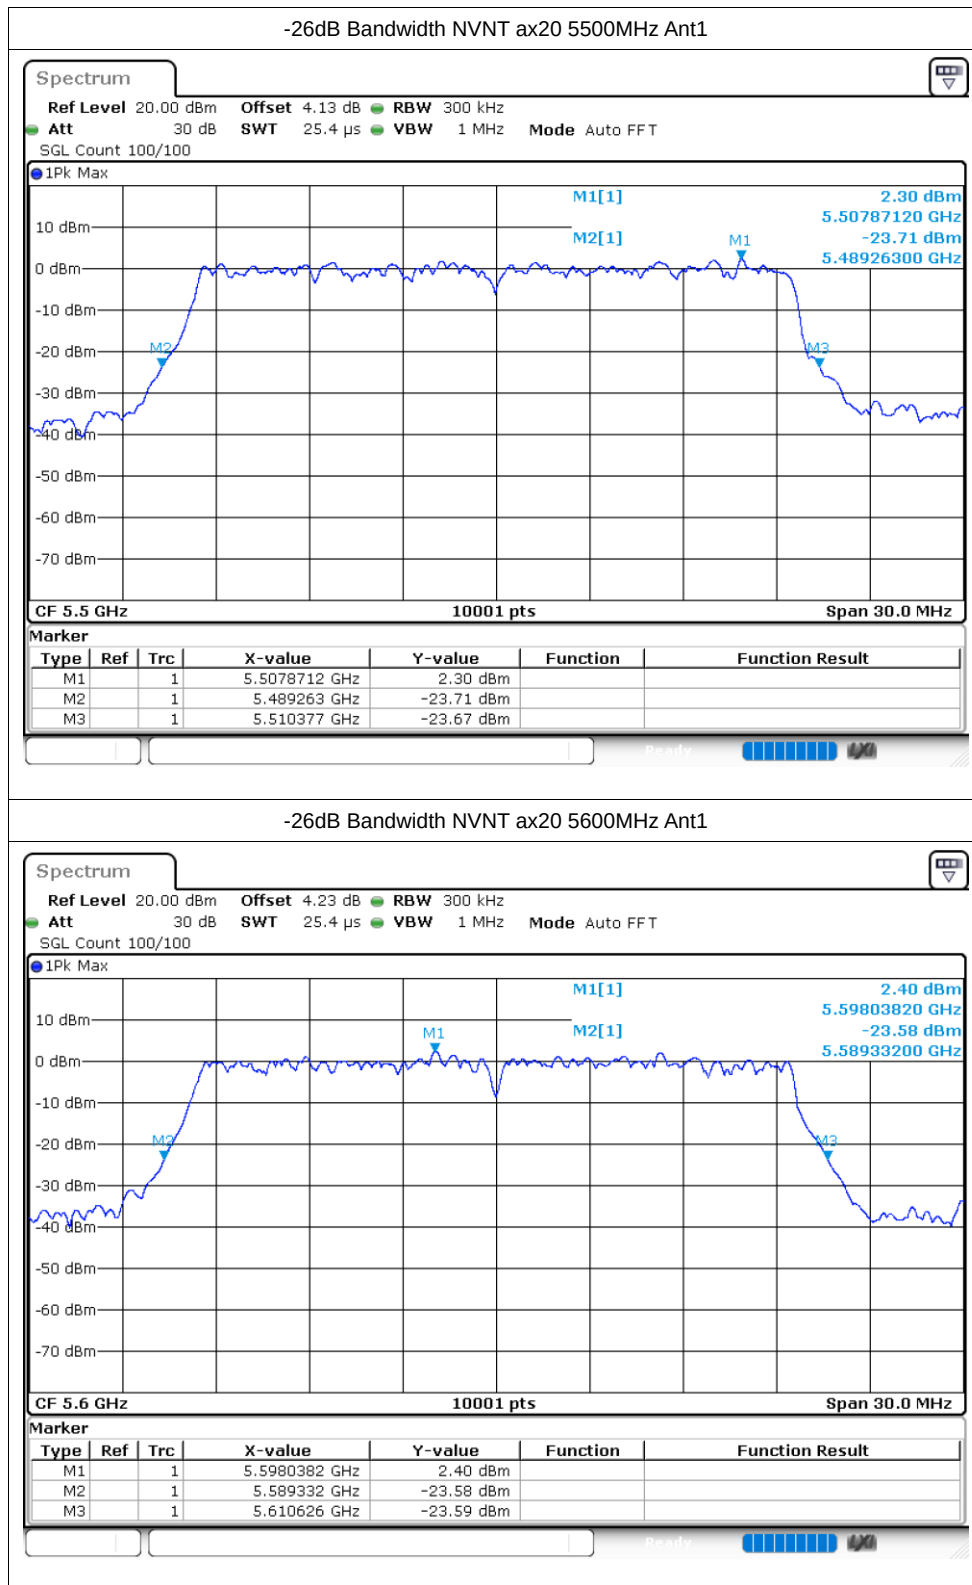


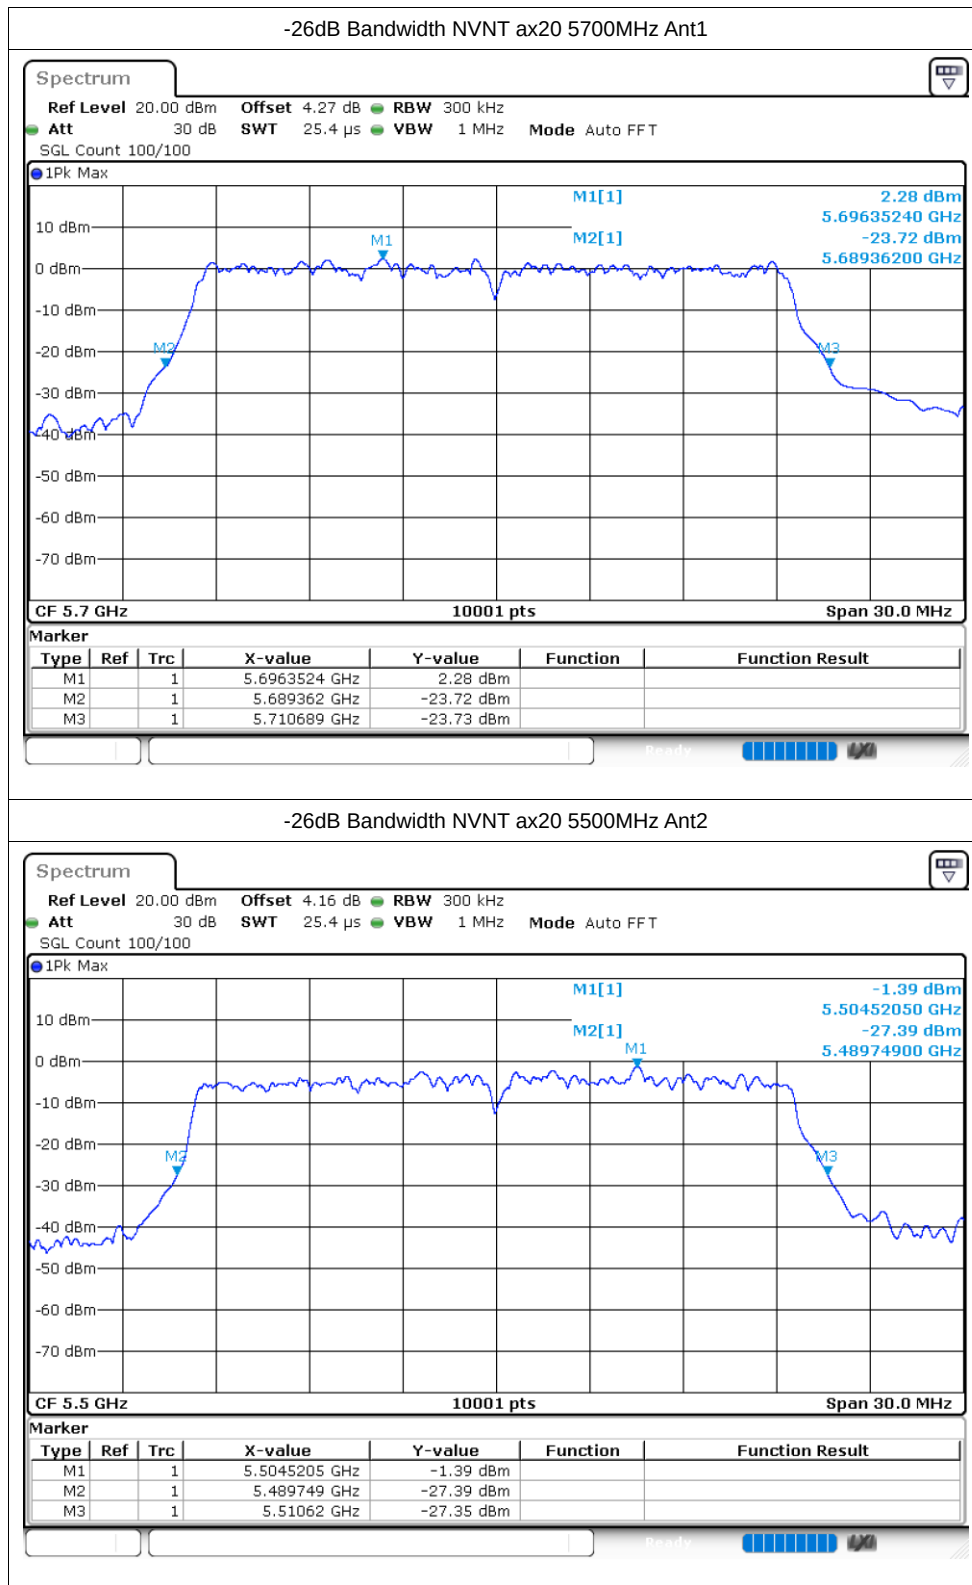


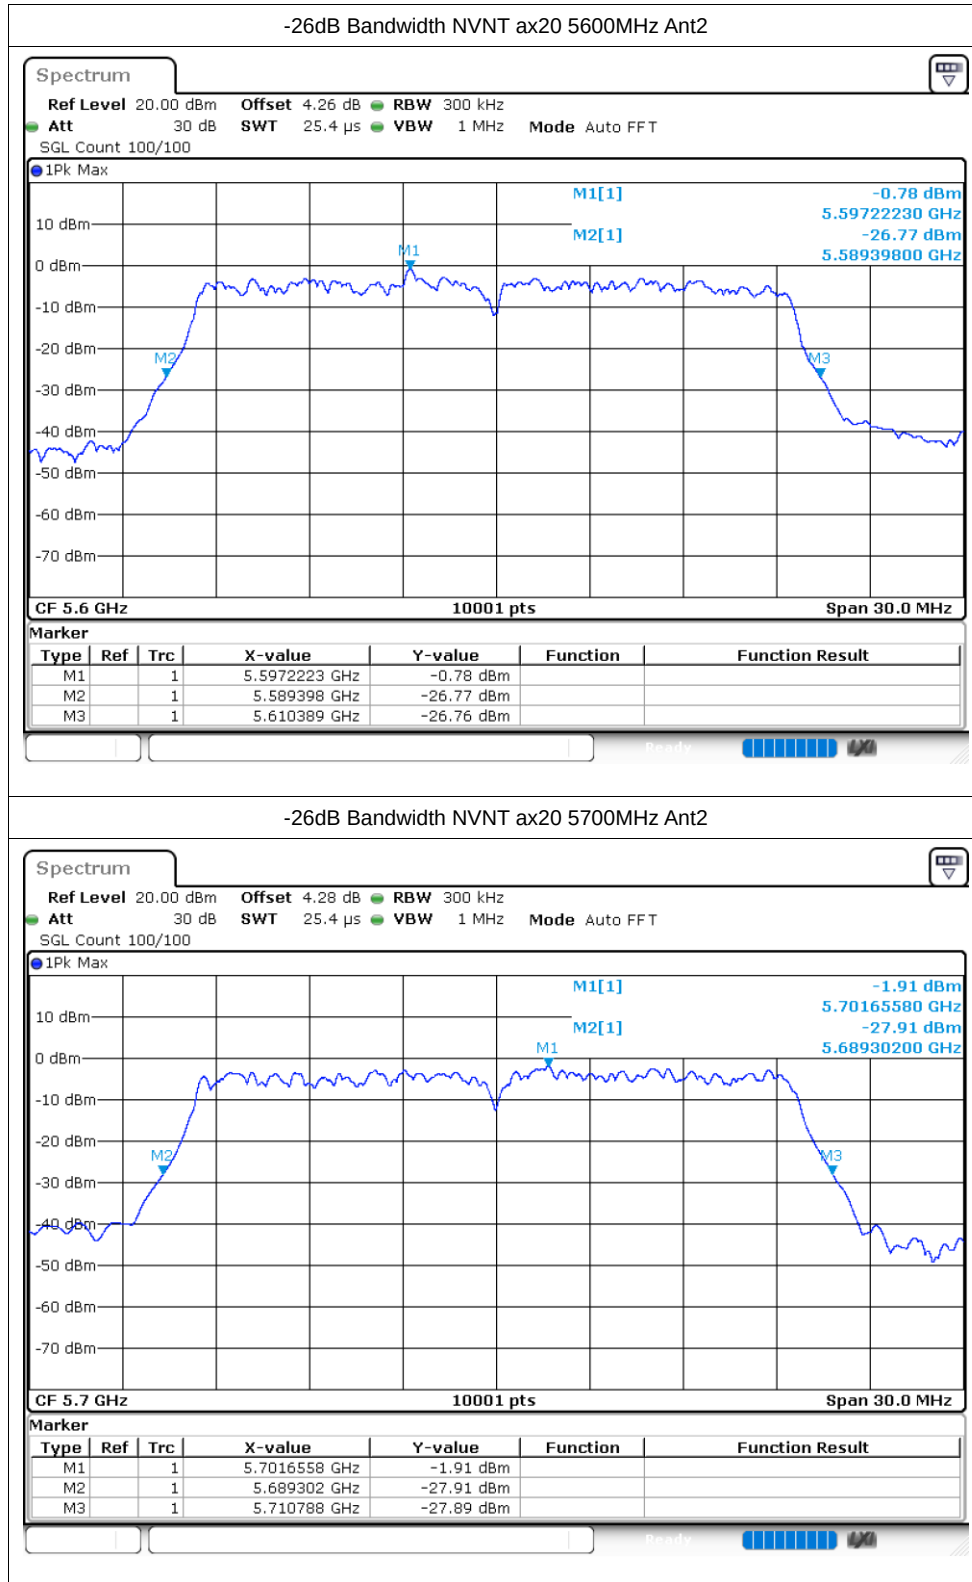


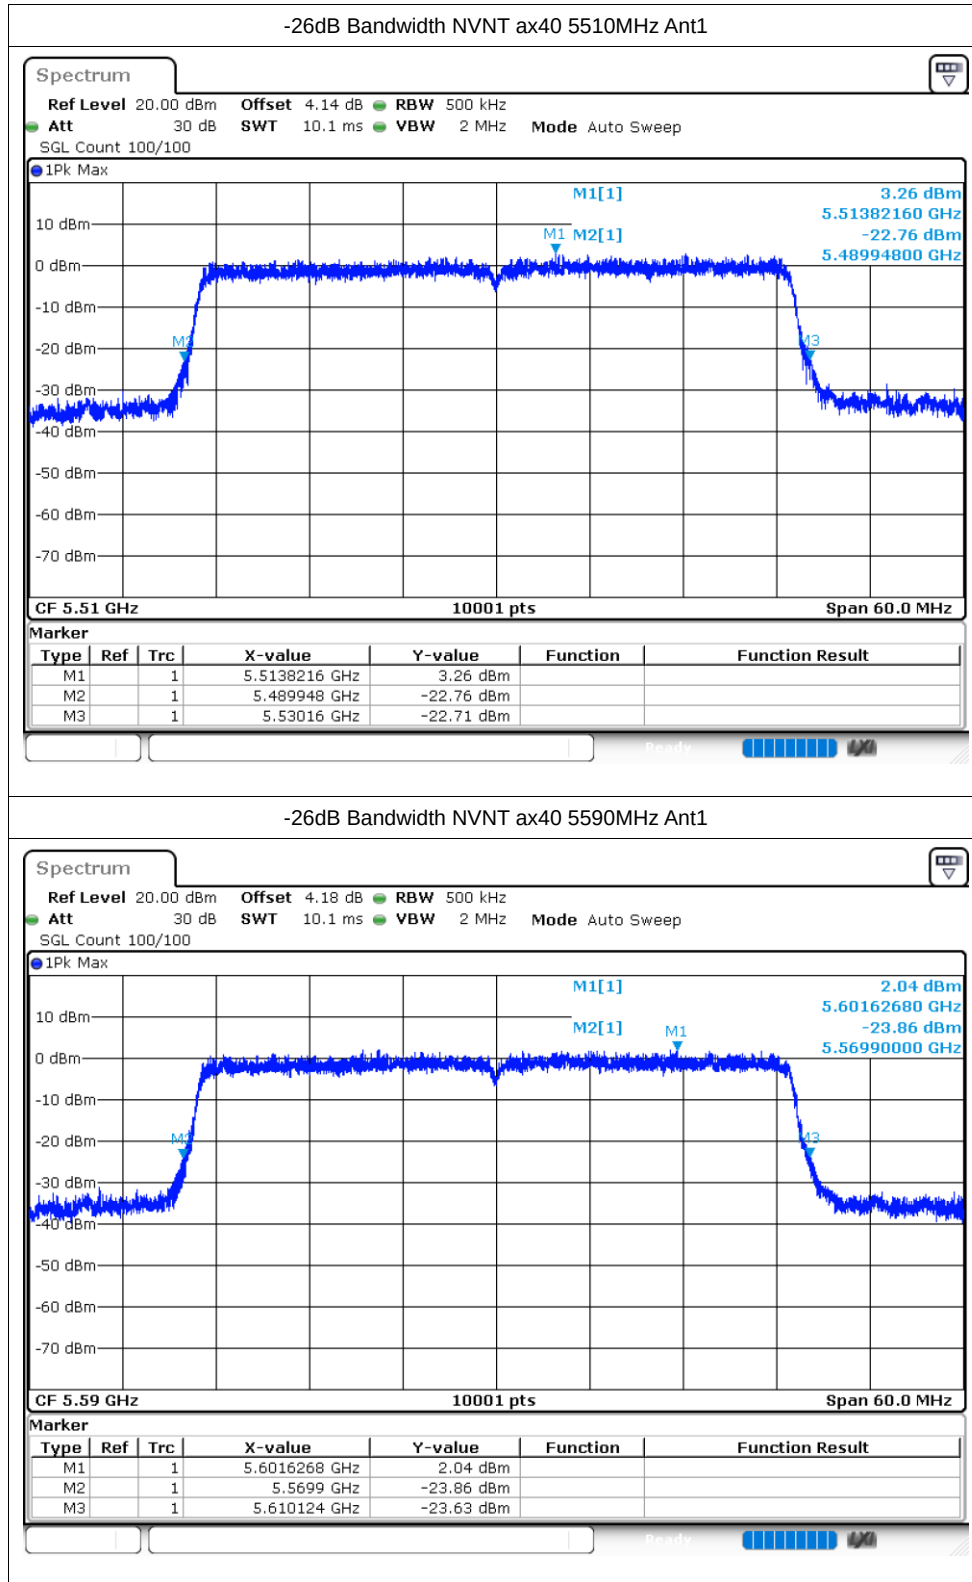

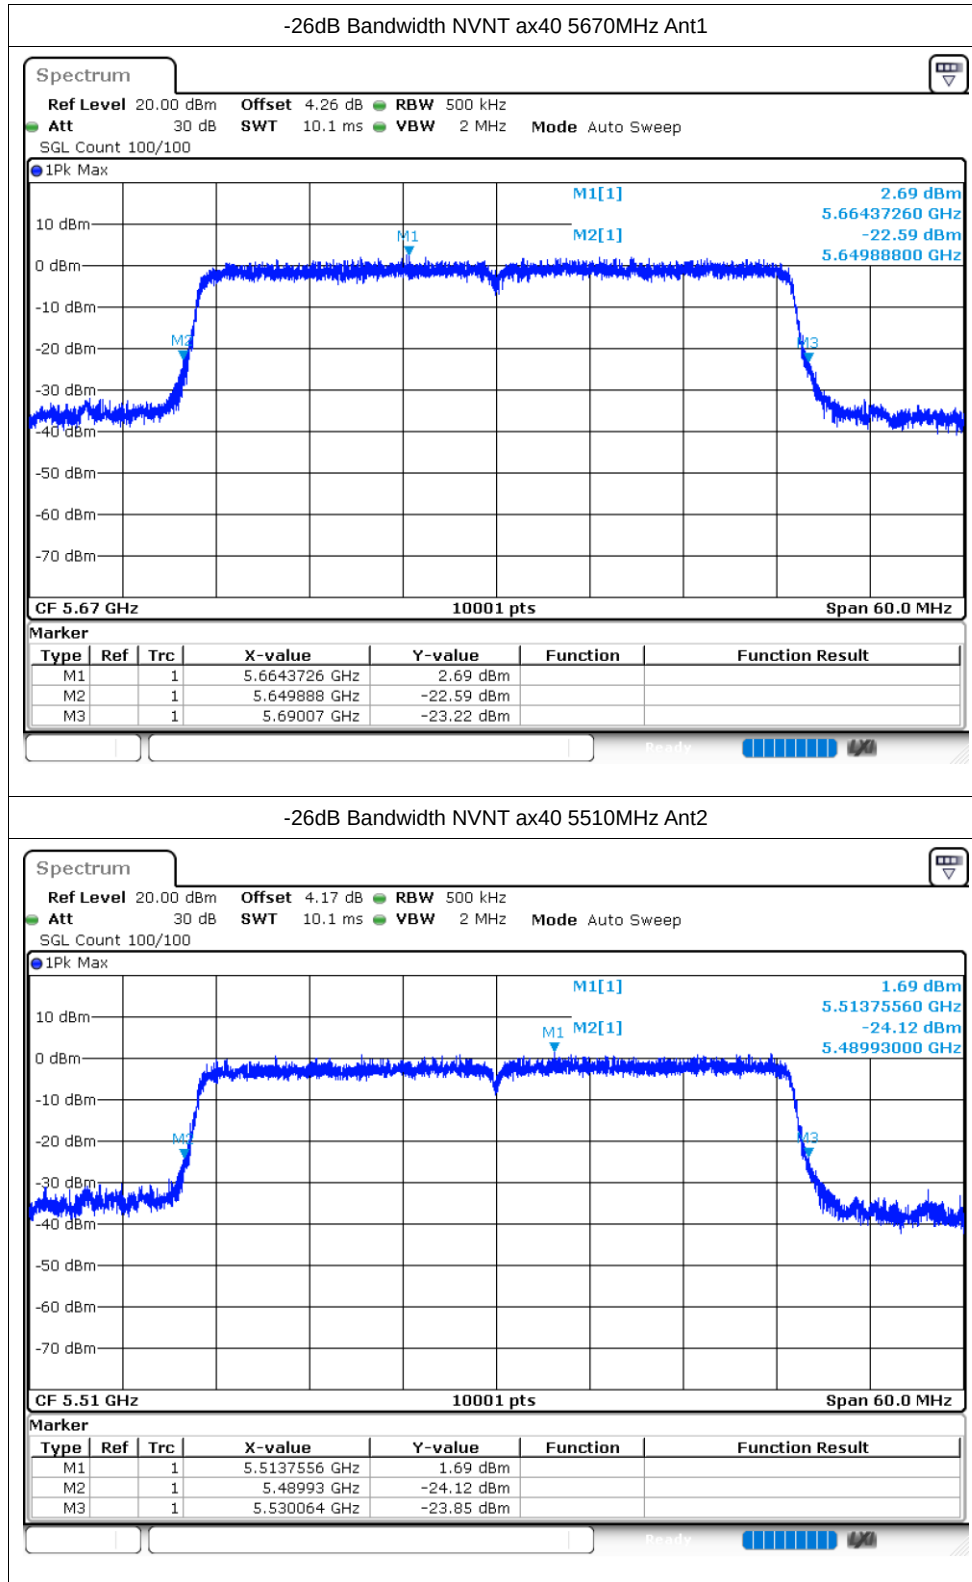

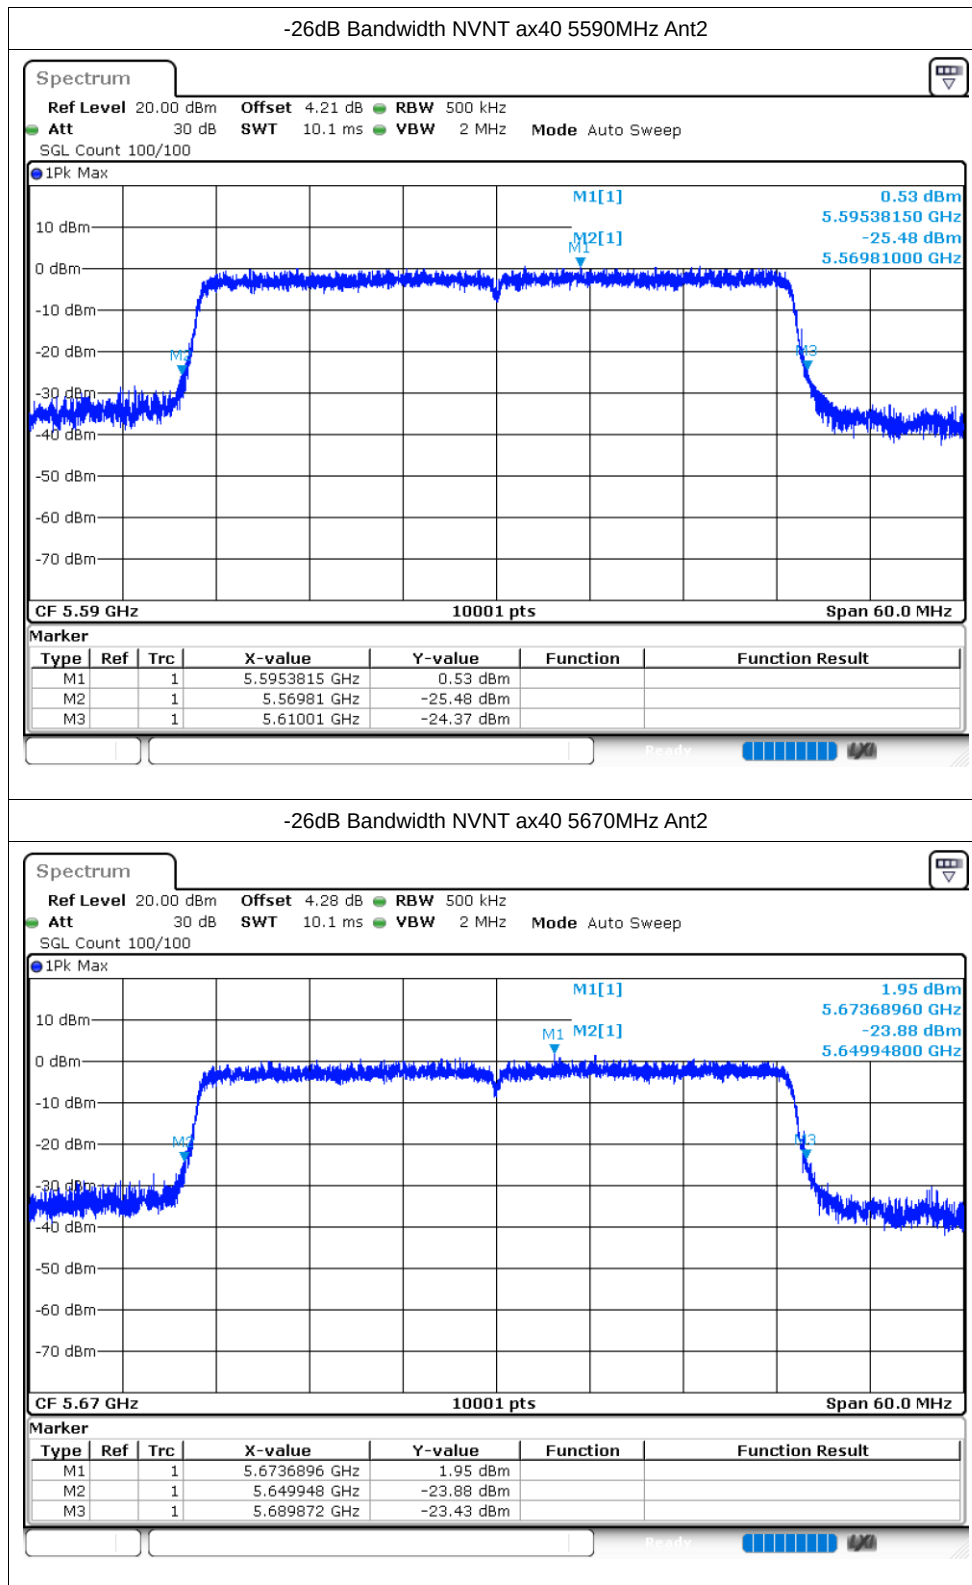

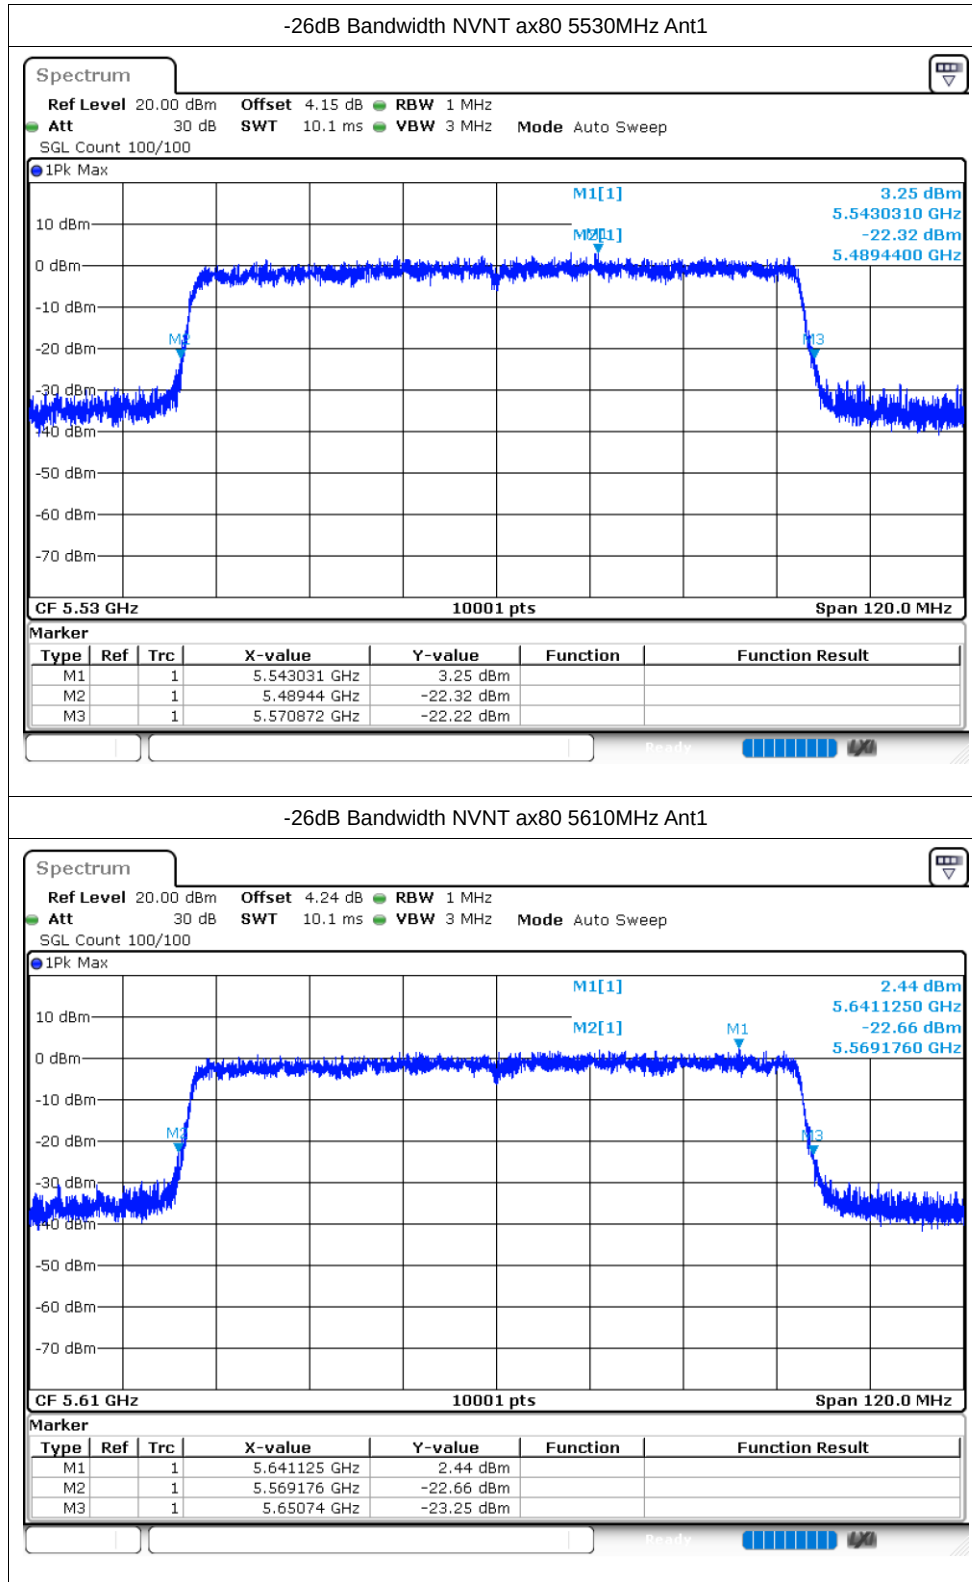

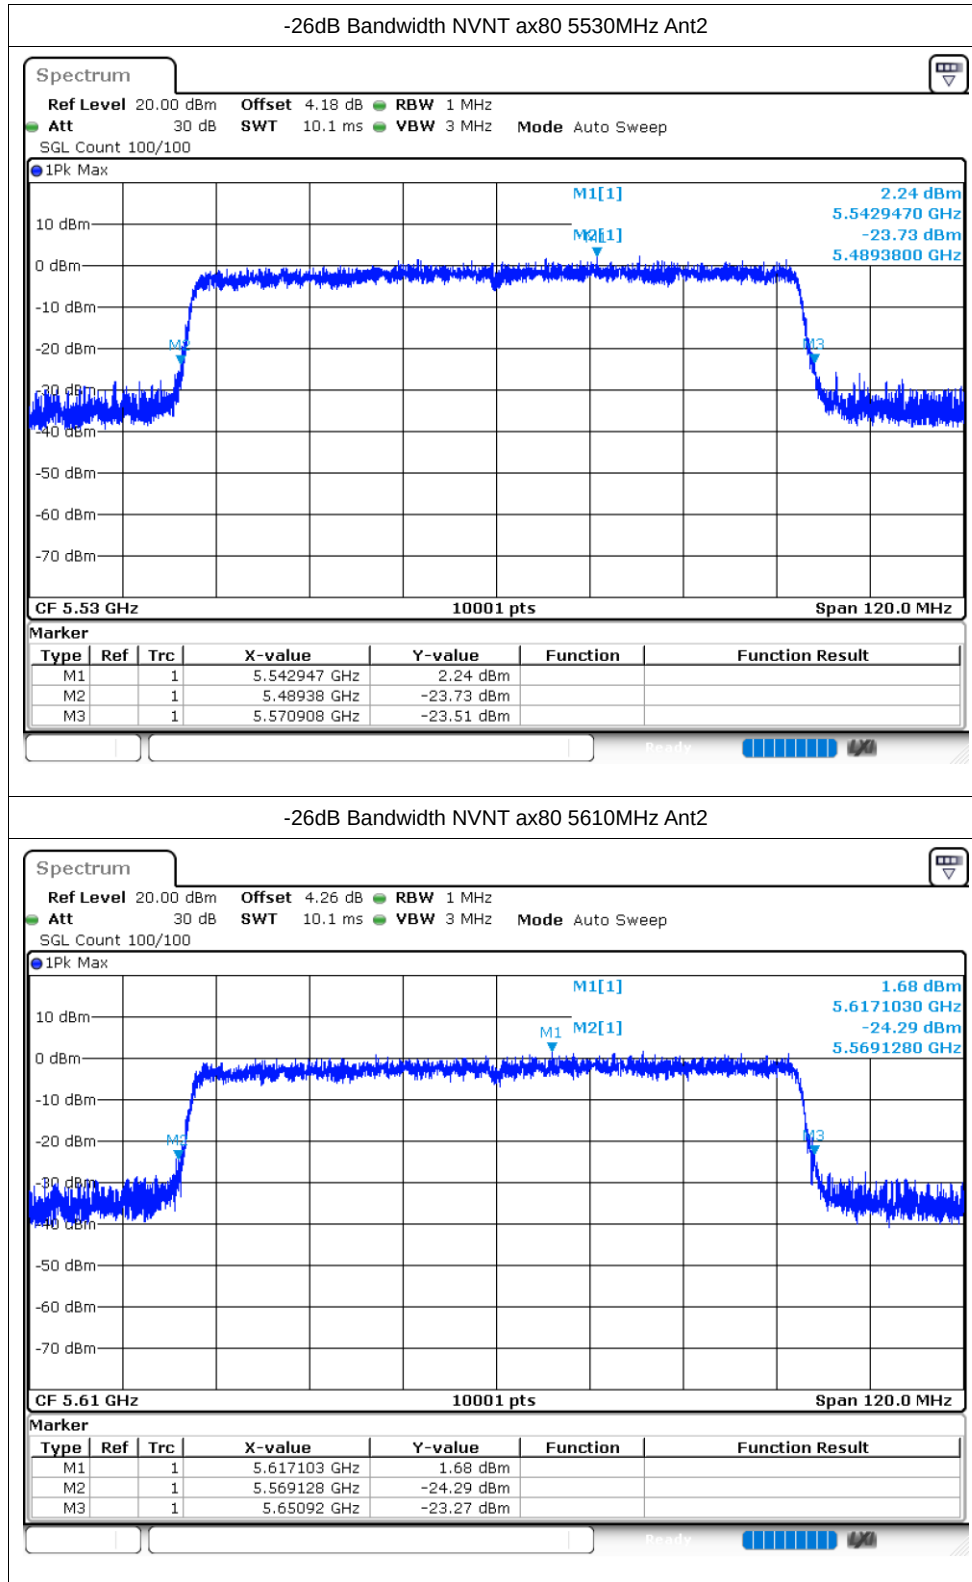


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5500	Ant1	16.642
NVNT	a	5600	Ant1	16.729
NVNT	a	5700	Ant1	16.522
NVNT	a	5500	Ant2	16.579
NVNT	a	5600	Ant2	16.486
NVNT	a	5700	Ant2	16.615
NVNT	n20	5500	Ant1	17.785
NVNT	n20	5600	Ant1	17.824
NVNT	n20	5700	Ant1	17.794
NVNT	n20	5500	Ant2	17.716
NVNT	n20	5600	Ant2	17.77
NVNT	n20	5700	Ant2	17.755
NVNT	n40	5510	Ant1	36.332
NVNT	n40	5590	Ant1	36.332
NVNT	n40	5670	Ant1	36.338
NVNT	n40	5510	Ant2	36.356
NVNT	n40	5590	Ant2	36.362
NVNT	n40	5670	Ant2	36.35
NVNT	ac20	5500	Ant1	18.007
NVNT	ac20	5600	Ant1	17.719
NVNT	ac20	5700	Ant1	17.8
NVNT	ac20	5500	Ant2	17.71
NVNT	ac20	5600	Ant2	17.86
NVNT	ac20	5700	Ant2	17.749
NVNT	ac40	5510	Ant1	36.53
NVNT	ac40	5590	Ant1	36.524
NVNT	ac40	5670	Ant1	36.536
NVNT	ac40	5510	Ant2	36.566
NVNT	ac40	5590	Ant2	36.572
NVNT	ac40	5670	Ant2	36.572
NVNT	ac80	5530	Ant1	75.76
NVNT	ac80	5610	Ant1	75.808
NVNT	ac80	5530	Ant2	75.748
NVNT	ac80	5610	Ant2	75.808
NVNT	ax20	5500	Ant1	19.006
NVNT	ax20	5600	Ant1	19.063
NVNT	ax20	5700	Ant1	19.009
NVNT	ax20	5500	Ant2	18.931
NVNT	ax20	5600	Ant2	19.03
NVNT	ax20	5700	Ant2	18.967
NVNT	ax40	5510	Ant1	37.592

NVNT	ax40	5590	Ant1	37.586
NVNT	ax40	5670	Ant1	37.592
NVNT	ax40	5510	Ant2	37.598
NVNT	ax40	5590	Ant2	37.604
NVNT	ax40	5670	Ant2	37.604
NVNT	ax80	5530	Ant1	76.996
NVNT	ax80	5610	Ant1	76.972
NVNT	ax80	5530	Ant2	76.96
NVNT	ax80	5610	Ant2	77.044

Test Graphs

OBW NVNT a 5500MHz Ant1

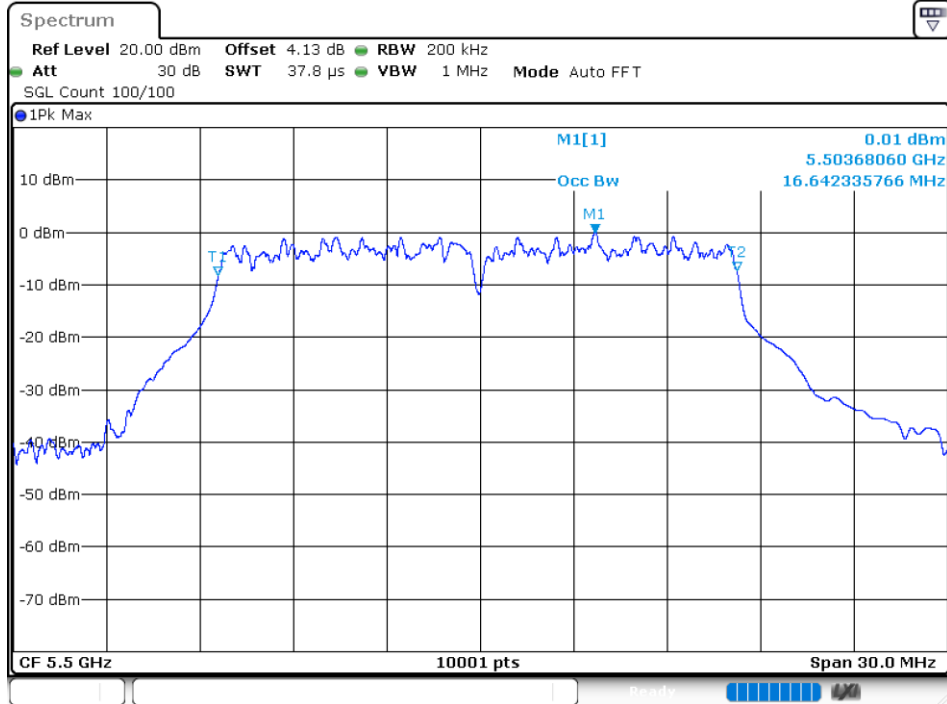

OBW NVNT a 5600MHz Ant1

