



12.6. APPENDIX F2: BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant2	-44.63	-30	Pass
NVNT	b	2462	Ant2	-52.37	-30	Pass
NVNT	g	2412	Ant2	-32.54	-30	Pass
NVNT	g	2462	Ant2	-39.83	-30	Pass
NVNT	n20	2412	Ant2	-31.22	-30	Pass
NVNT	n20	2462	Ant2	-40.45	-30	Pass
NVNT	n40	2422	Ant2	-31.6	-30	Pass
NVNT	n40	2452	Ant2	-34.49	-30	Pass
NVNT	ax20	2412	Ant2	-31.97	-30	Pass
NVNT	ax20	2462	Ant2	-43.6	-30	Pass





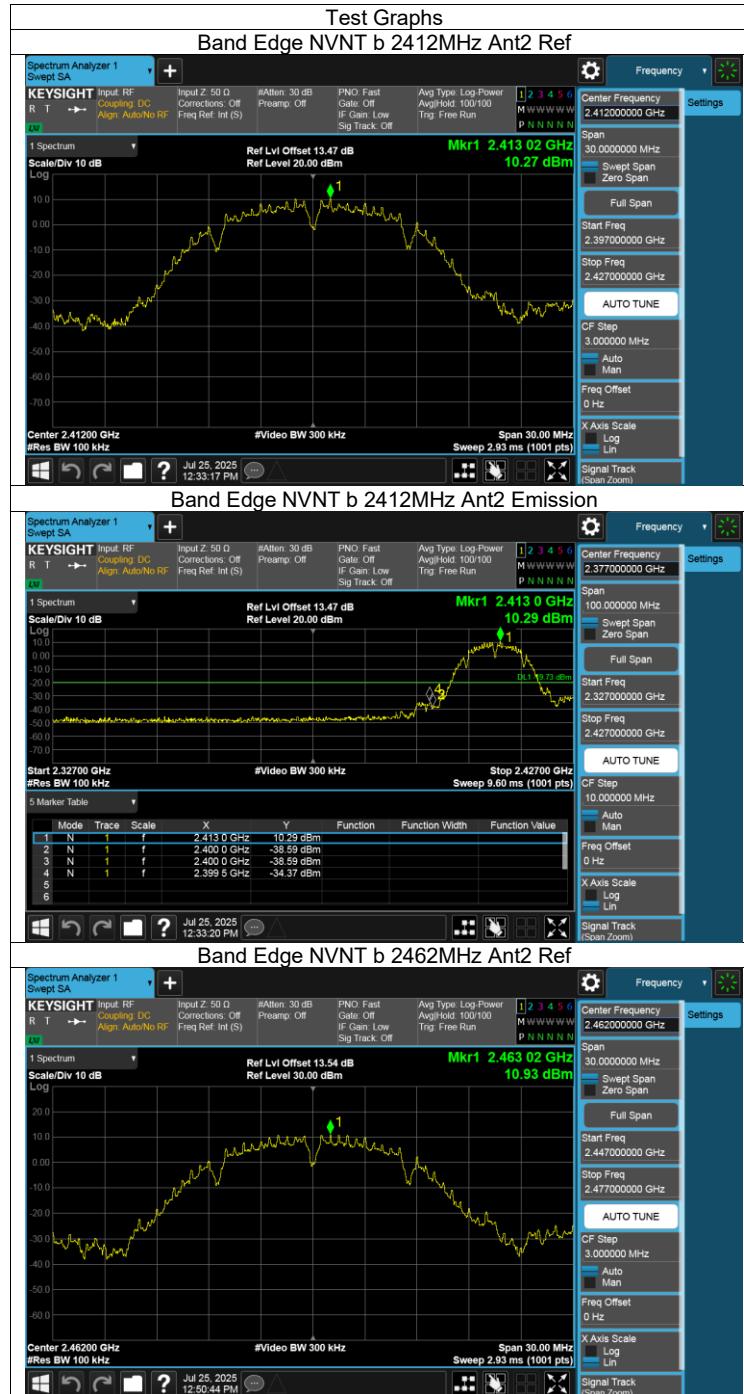

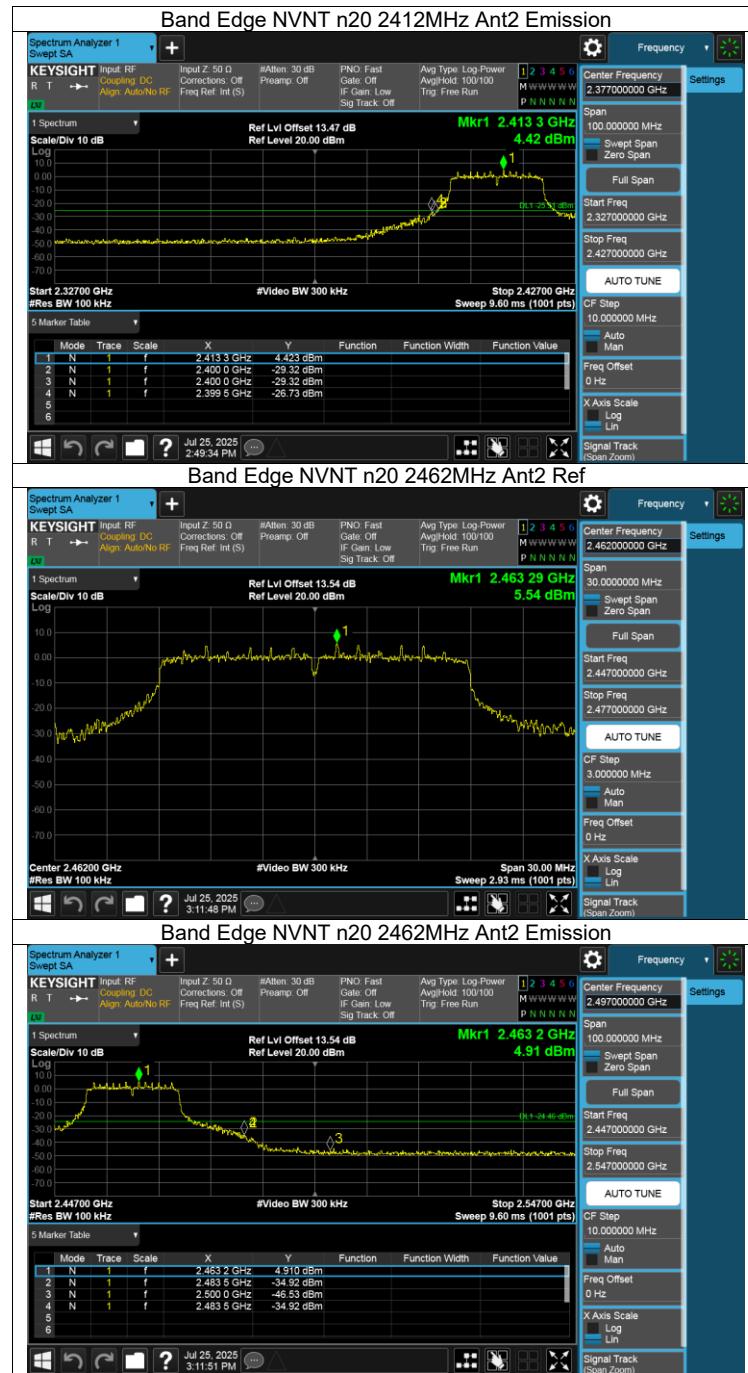







12.7. APPENDIX G2: CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant2	-48.22	-30	Pass
NVNT	b	2437	Ant2	-49.92	-30	Pass
NVNT	b	2462	Ant2	-50.64	-30	Pass
NVNT	g	2412	Ant2	-42.8	-30	Pass
NVNT	g	2437	Ant2	-43.03	-30	Pass
NVNT	g	2462	Ant2	-44.24	-30	Pass
NVNT	n20	2412	Ant2	-42.42	-30	Pass
NVNT	n20	2437	Ant2	-43.1	-30	Pass
NVNT	n20	2462	Ant2	-43.24	-30	Pass
NVNT	n40	2422	Ant2	-39.61	-30	Pass
NVNT	n40	2437	Ant2	-39.33	-30	Pass
NVNT	n40	2452	Ant2	-40.5	-30	Pass
NVNT	ax20	2412	Ant2	-48.96	-30	Pass
NVNT	ax20	2437	Ant2	-49.89	-30	Pass
NVNT	ax20	2462	Ant2	-40.42	-30	Pass

