



RF Conducted Spurious Emissions Graphs


GFSK/LCH



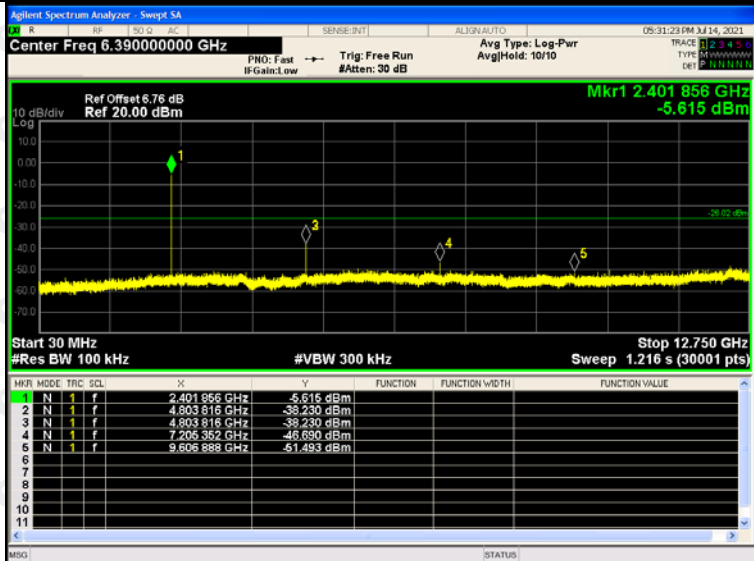


GFSK/MCH

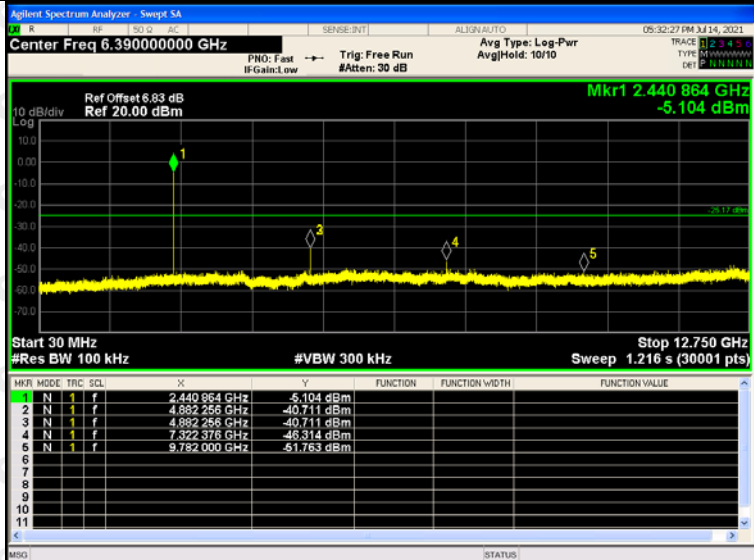


GFSK/HCH

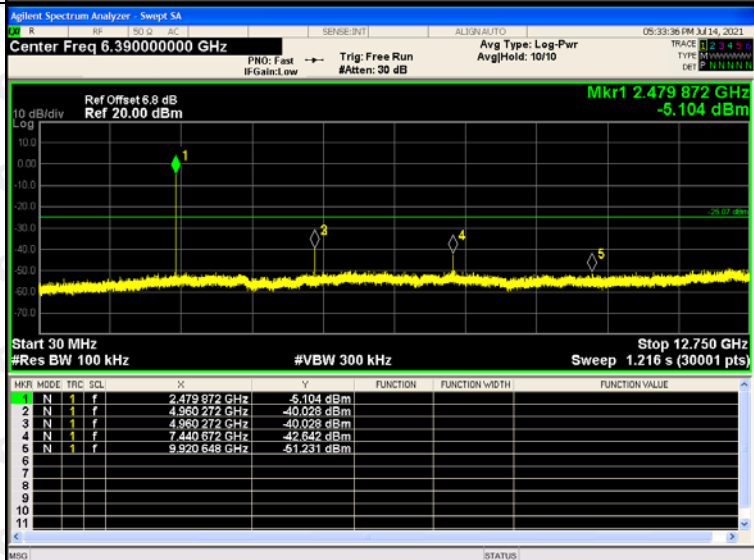


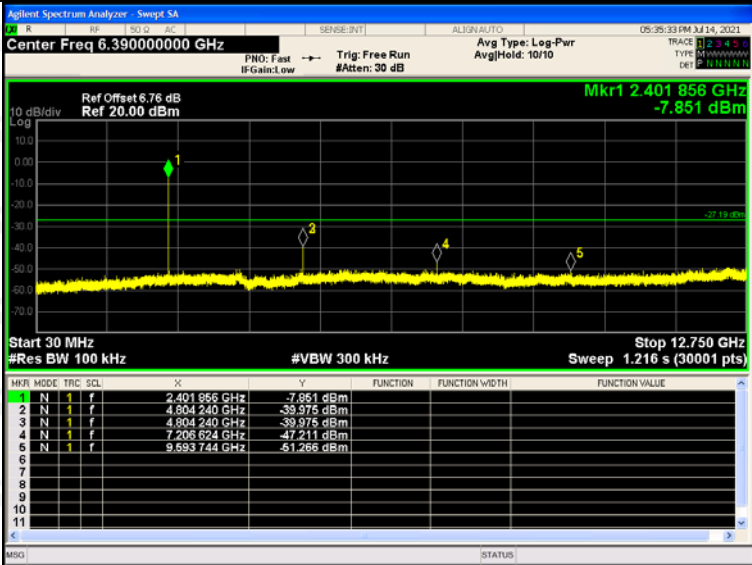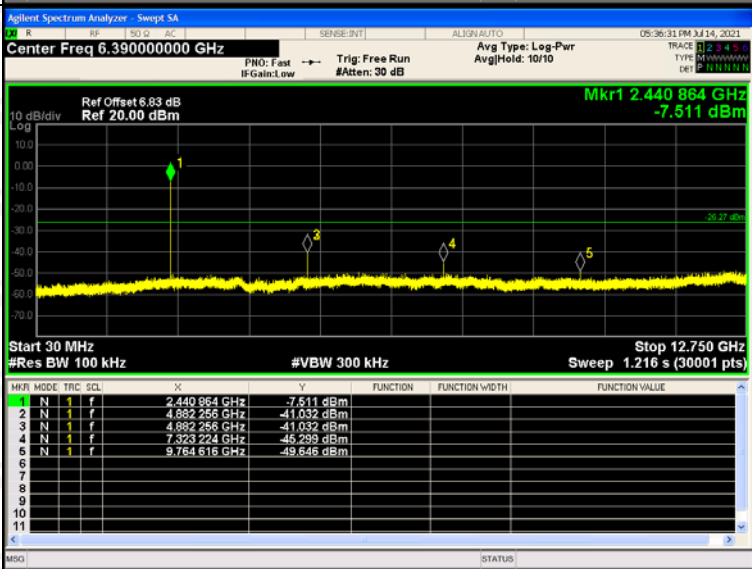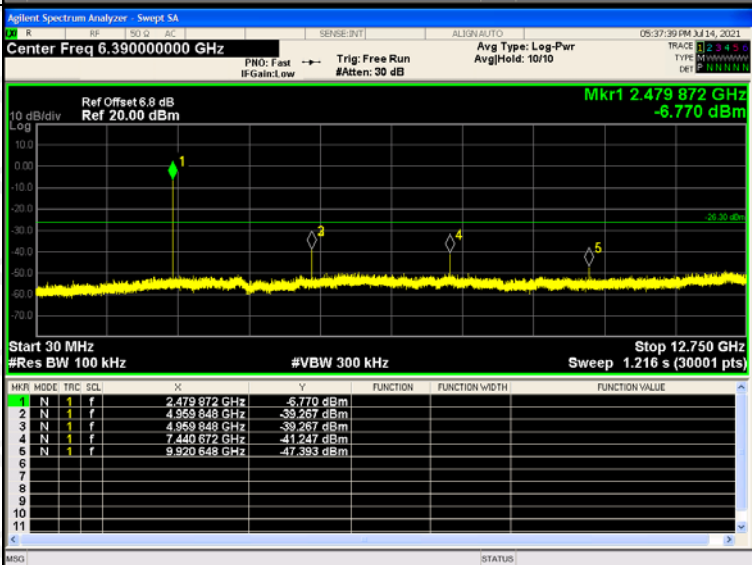$\pi/4$ DQPSK /LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 6.390000000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.401 856 GHz -7.851 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 856 GHz</td><td>-7.851 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>4.804 240 GHz</td><td>-39.975 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.804 240 GHz</td><td>-39.975 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.206 624 GHz</td><td>-47.211 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.593 744 GHz</td><td>-51.266 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 856 GHz	-7.851 dBm				2	N	1	f	4.804 240 GHz	-39.975 dBm				3	N	1	f	4.804 240 GHz	-39.975 dBm				4	N	1	f	7.206 624 GHz	-47.211 dBm				5	N	1	f	9.593 744 GHz	-51.266 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.401 856 GHz	-7.851 dBm																																																		
2	N	1	f	4.804 240 GHz	-39.975 dBm																																																		
3	N	1	f	4.804 240 GHz	-39.975 dBm																																																		
4	N	1	f	7.206 624 GHz	-47.211 dBm																																																		
5	N	1	f	9.593 744 GHz	-51.266 dBm																																																		
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 6.390000000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.440 864 GHz -7.511 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 864 GHz</td><td>-7.511 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>4.882 256 GHz</td><td>-41.032 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.882 256 GHz</td><td>-41.032 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.323 224 GHz</td><td>-45.299 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.764 616 GHz</td><td>-49.646 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 864 GHz	-7.511 dBm				2	N	1	f	4.882 256 GHz	-41.032 dBm				3	N	1	f	4.882 256 GHz	-41.032 dBm				4	N	1	f	7.323 224 GHz	-45.299 dBm				5	N	1	f	9.764 616 GHz	-49.646 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.440 864 GHz	-7.511 dBm																																																		
2	N	1	f	4.882 256 GHz	-41.032 dBm																																																		
3	N	1	f	4.882 256 GHz	-41.032 dBm																																																		
4	N	1	f	7.323 224 GHz	-45.299 dBm																																																		
5	N	1	f	9.764 616 GHz	-49.646 dBm																																																		
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 6.390000000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.479 872 GHz -6.770 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 872 GHz</td><td>-6.770 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>4.959 848 GHz</td><td>-39.267 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.959 848 GHz</td><td>-39.267 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.440 672 GHz</td><td>-41.247 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.920 648 GHz</td><td>-47.393 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 872 GHz	-6.770 dBm				2	N	1	f	4.959 848 GHz	-39.267 dBm				3	N	1	f	4.959 848 GHz	-39.267 dBm				4	N	1	f	7.440 672 GHz	-41.247 dBm				5	N	1	f	9.920 648 GHz	-47.393 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.479 872 GHz	-6.770 dBm																																																		
2	N	1	f	4.959 848 GHz	-39.267 dBm																																																		
3	N	1	f	4.959 848 GHz	-39.267 dBm																																																		
4	N	1	f	7.440 672 GHz	-41.247 dBm																																																		
5	N	1	f	9.920 648 GHz	-47.393 dBm																																																		


8DPSK /LCH

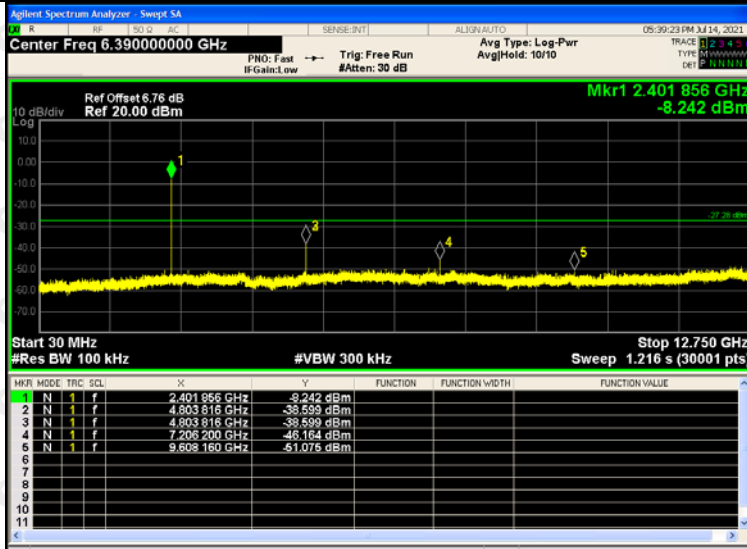

8DPSK /MCH

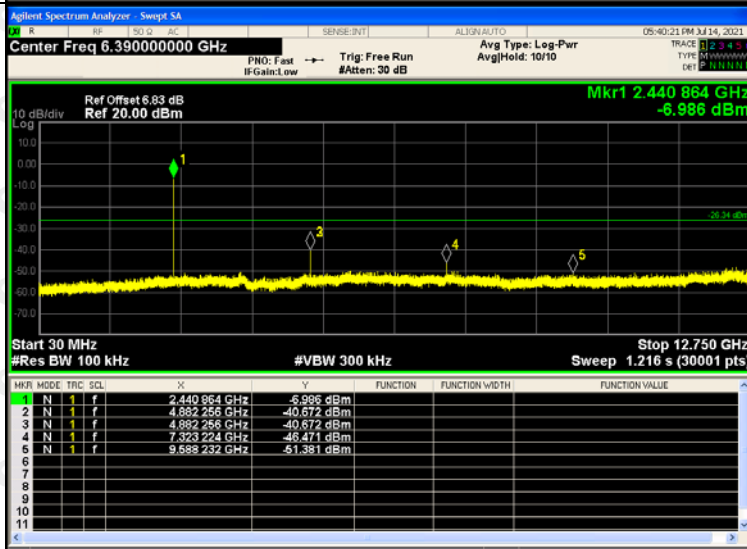


8DPSK/HCH

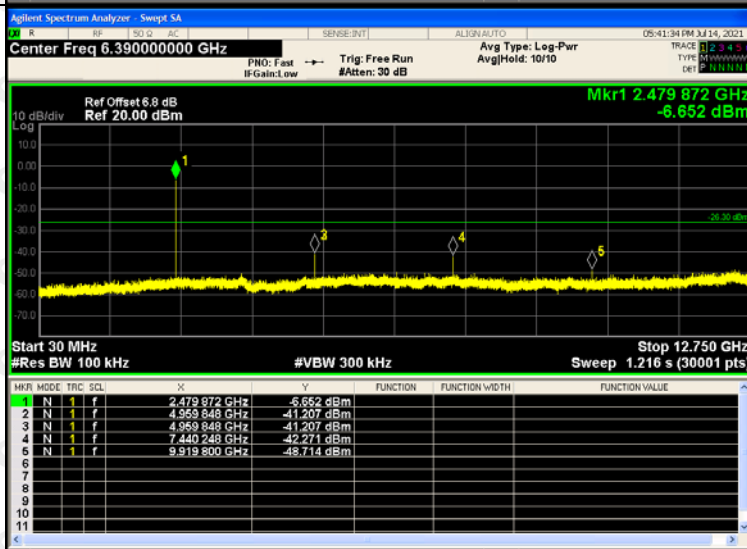

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

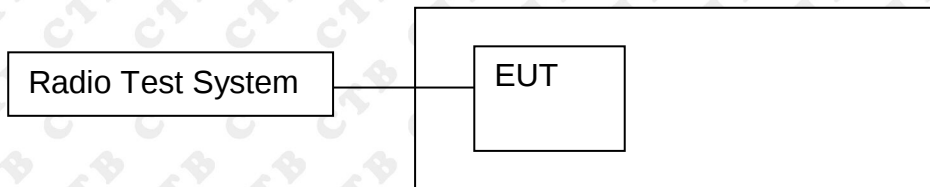

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


9.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 8MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
EDR mode (GFSK)	LCH	-5.073	PASS
	MCH	-4.262	PASS
	HCH	-4.212	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	-2.666	PASS
	MCH	-1.779	PASS
	HCH	-2.069	PASS
EDR mode (8DPSK)	LCH	-2.155	PASS
	MCH	-1.313	PASS
	HCH	-1.81	PASS

Test Graph:

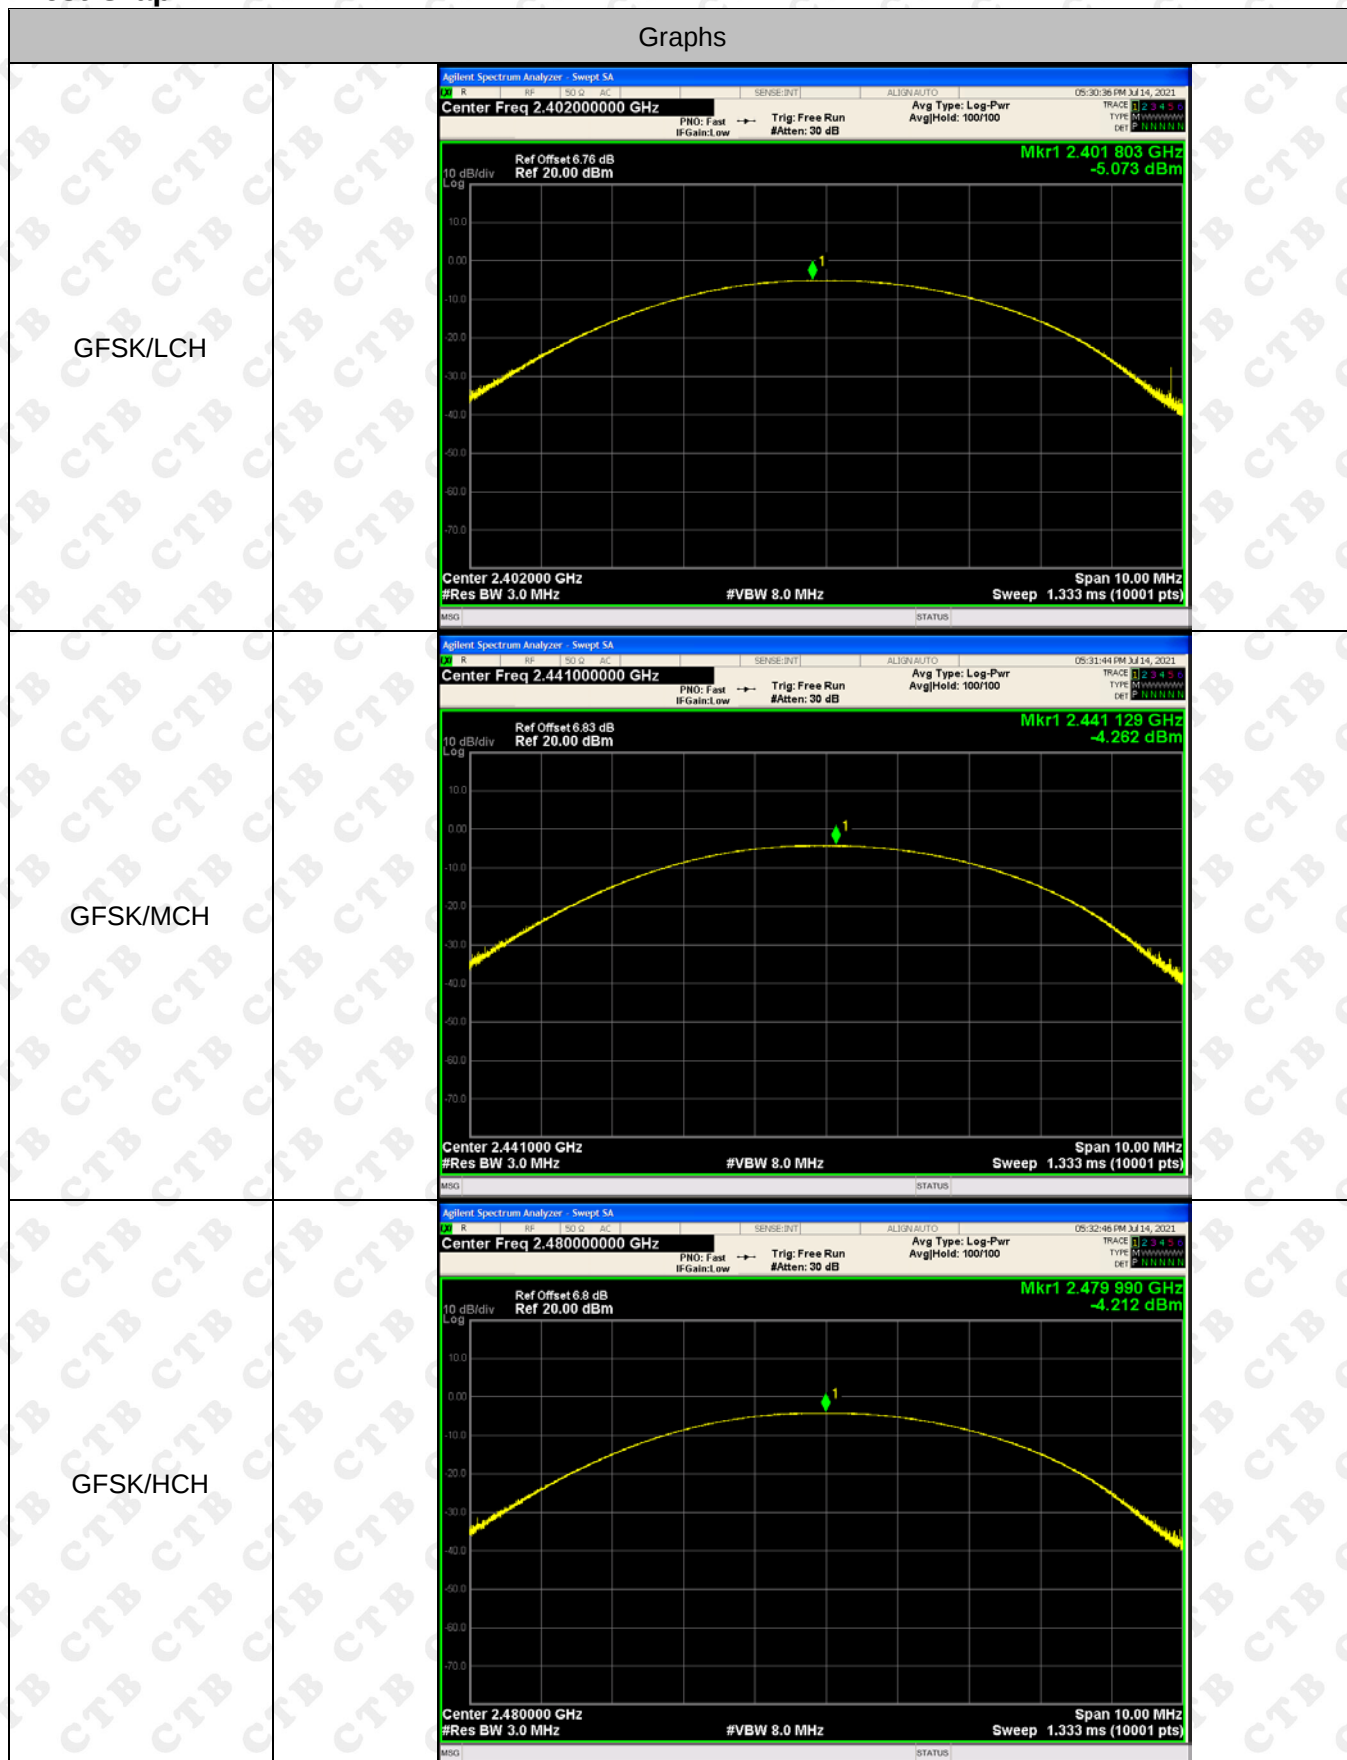


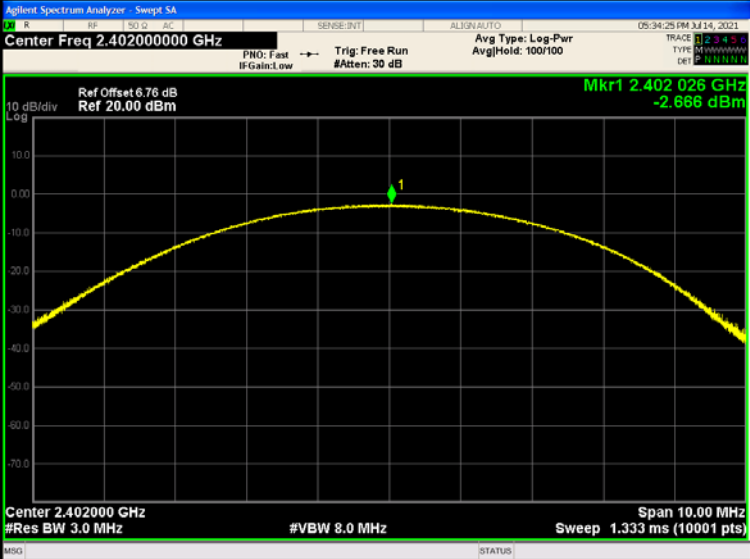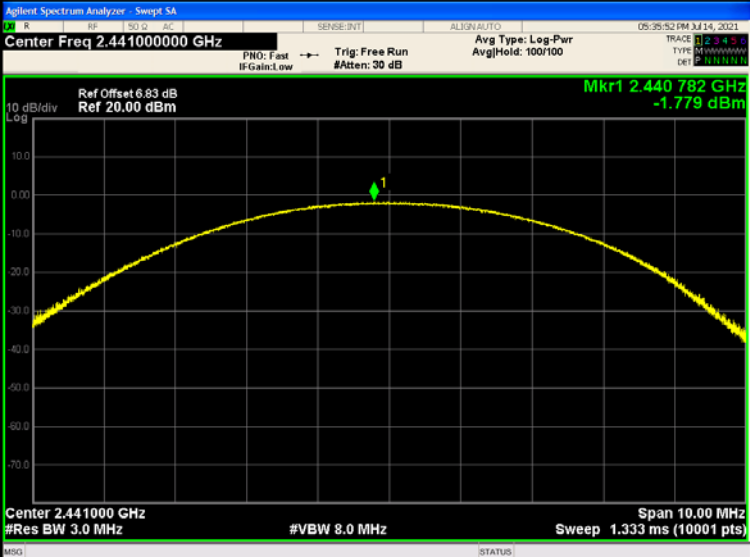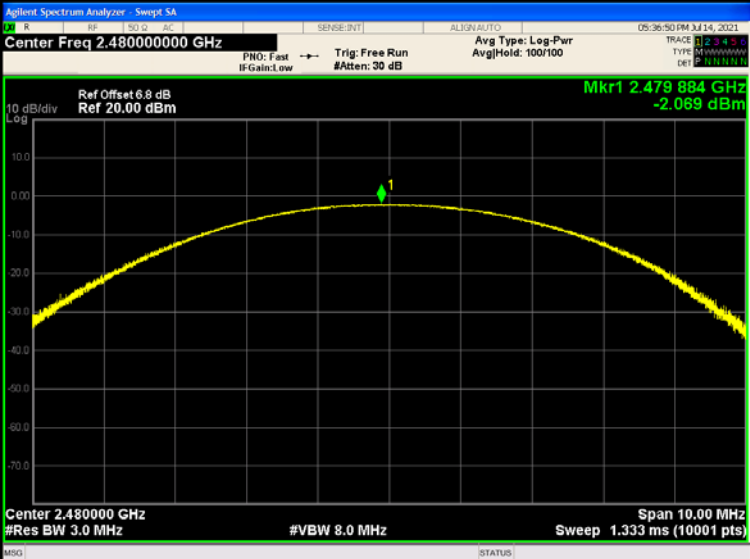$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.402 026 GHz -2.686 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.333 ms (10001 pts)
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.440 782 GHz -1.779 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.333 ms (10001 pts)
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.479 884 GHz -2.089 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.333 ms (10001 pts)

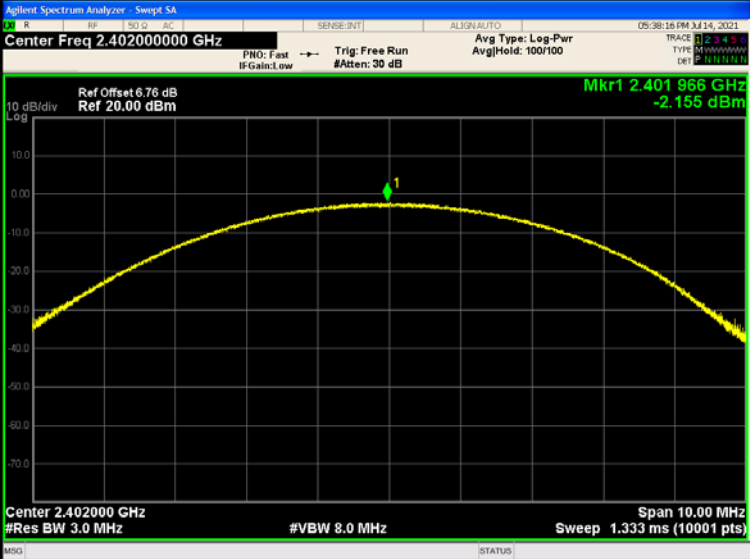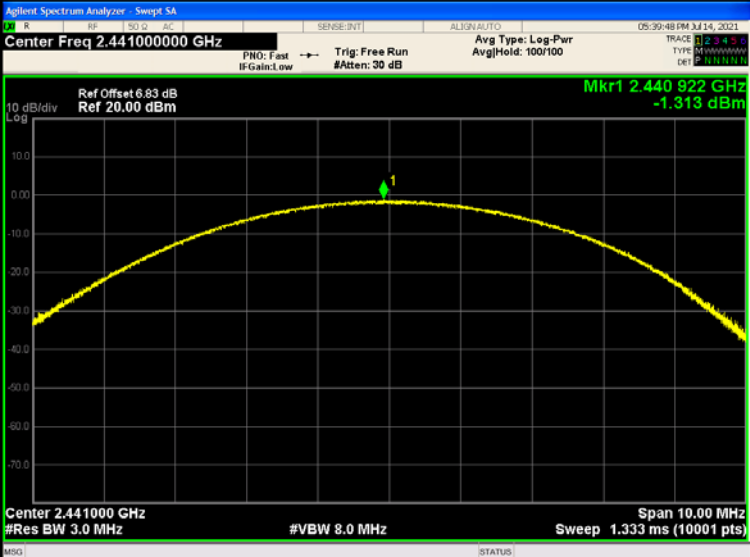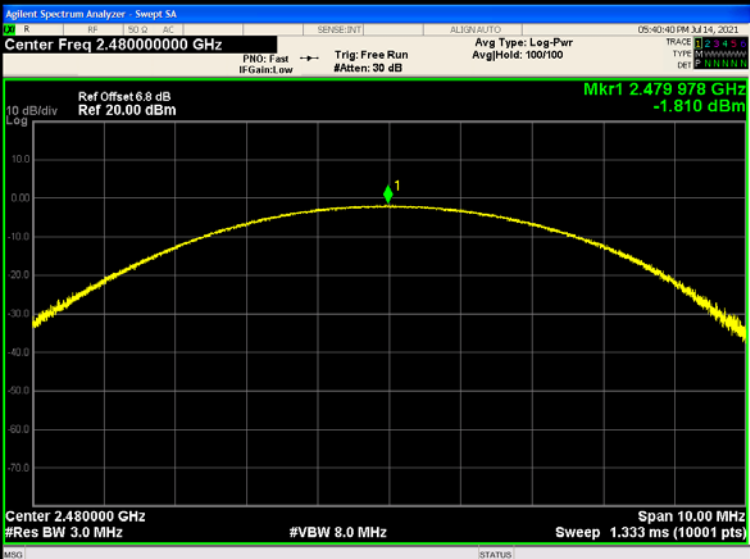8DPSK/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.401 966 GHz -2.155 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.333 ms (10001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.440 922 GHz -1.313 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.333 ms (10001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.479 978 GHz -1.810 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.333 ms (10001 pts)

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

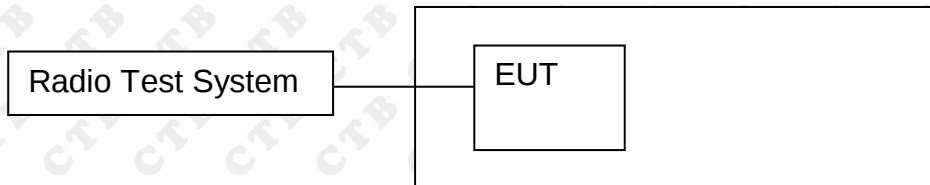

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure



1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result




Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	1.019	PASS
	Mid channel	1.019	PASS
	High channel	0.959	PASS
$\pi/4$ DQPSK	Low channel	1.365	PASS
	Mid channel	1.367	PASS
	High channel	1.378	PASS
8DPSK	Low channel	1.349	PASS
	Mid channel	1.348	PASS
	High channel	1.358	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

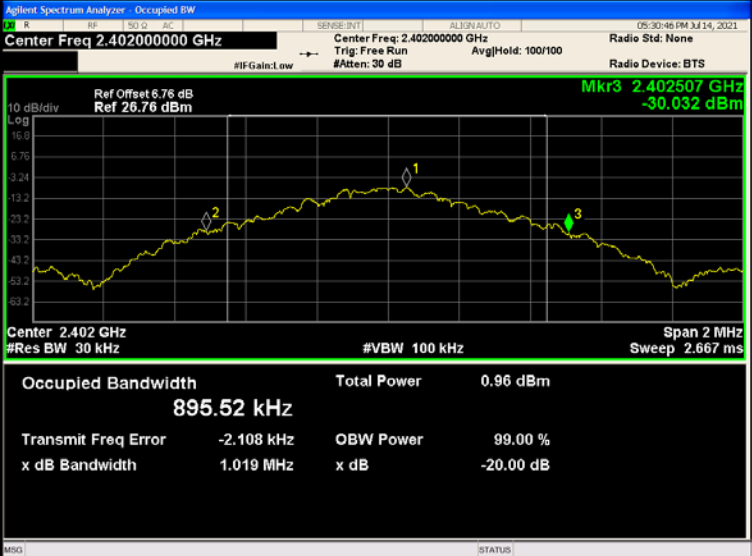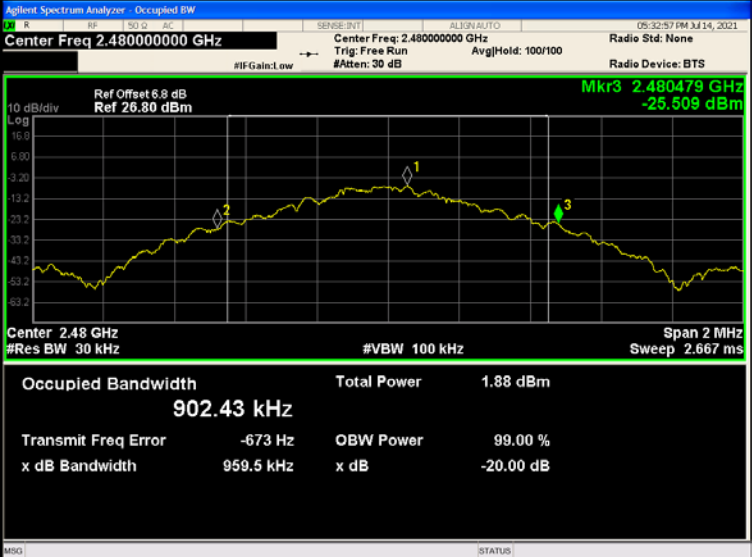
GFSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Ref Offset: 6.76 dB Ref: 26.76 dBm Occupied Bandwidth: 895.52 kHz Total Power: 0.96 dBm Transmit Freq Error: -2.108 kHz x dB Bandwidth: 1.019 MHz
GFSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.44100000 GHz Ref Offset: 6.83 dB Ref: 26.83 dBm Occupied Bandwidth: 898.29 kHz Total Power: 1.77 dBm Transmit Freq Error: -1.951 kHz x dB Bandwidth: 1.019 MHz
GFSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.48000000 GHz Ref Offset: 6.8 dB Ref: 26.80 dBm Occupied Bandwidth: 902.43 kHz Total Power: 1.88 dBm Transmit Freq Error: -673 Hz x dB Bandwidth: 959.5 kHz

$\pi/4$-DQPSK Low channel		
$\pi/4$-DQPSK Mid channel		
$\pi/4$-DQPSK High channel		

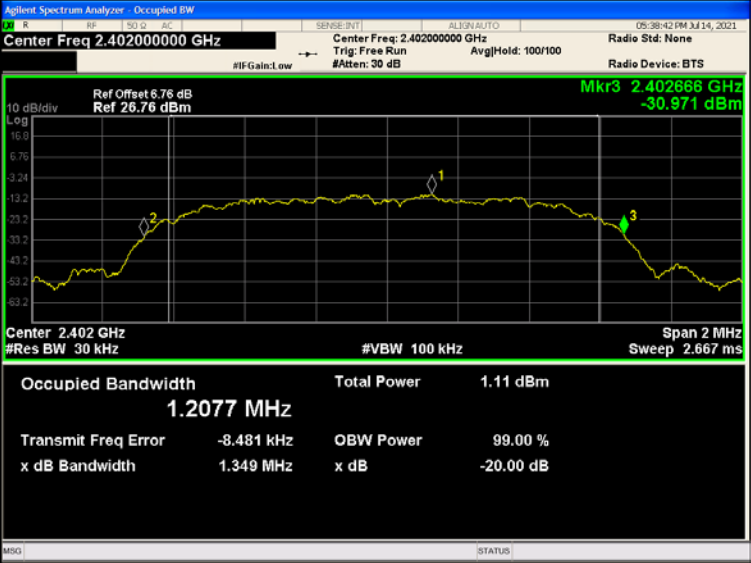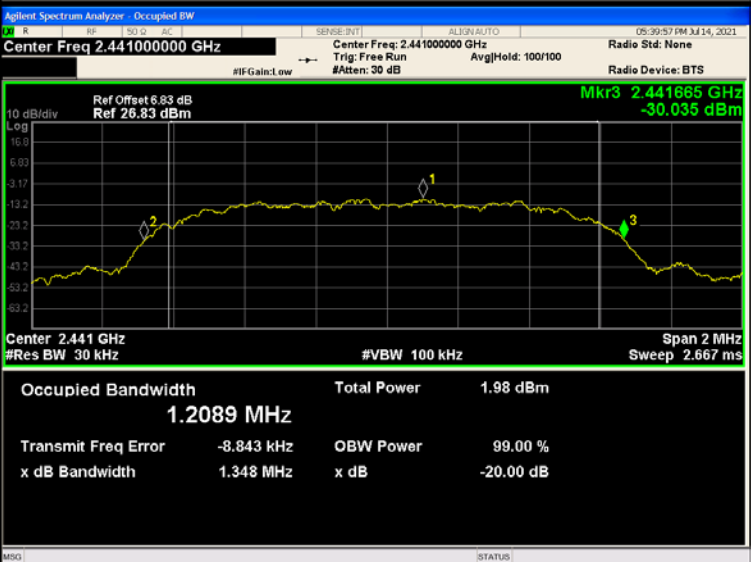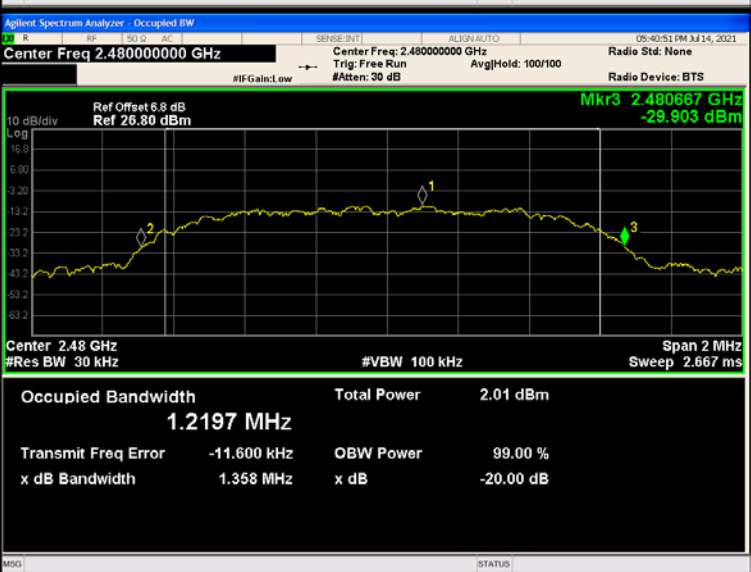8DPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Ref Offset 6.76 dB Ref 26.76 dBm Mkr3 2.402666 GHz -30.971 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 2.667 ms Occupied Bandwidth 1.2077 MHz Total Power 1.11 dBm Transmit Freq Error -8.481 kHz OBW Power 99.00 % x dB Bandwidth 1.349 MHz x dB -20.00 dB Radio Device: BTS
8DPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 6.83 dB Ref 26.83 dBm Mkr3 2.441665 GHz -30.035 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 2.667 ms Occupied Bandwidth 1.2089 MHz Total Power 1.98 dBm Transmit Freq Error -8.843 kHz OBW Power 99.00 % x dB Bandwidth 1.348 MHz x dB -20.00 dB Radio Device: BTS
8DPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 6.8 dB Ref 26.80 dBm Mkr3 2.480667 GHz -29.903 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 2.667 ms Occupied Bandwidth 1.2197 MHz Total Power 2.01 dBm Transmit Freq Error -11.600 kHz OBW Power 99.00 % x dB Bandwidth 1.358 MHz x dB -20.00 dB Radio Device: BTS

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

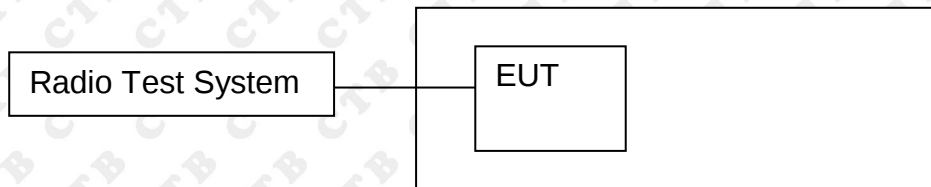

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	0.999	PASS
GFSK	MCH	0.999	PASS
GFSK	HCH	1.002	PASS
$\pi/4$ DQPSK	LCH	0.999	PASS
$\pi/4$ DQPSK	MCH	1.002	PASS
$\pi/4$ DQPSK	HCH	0.999	PASS
8DPSK	LCH	0.999	PASS
8DPSK	MCH	0.999	PASS
8DPSK	HCH	0.999	PASS


Test Graph



$\pi/4$ DQPSK/LCH

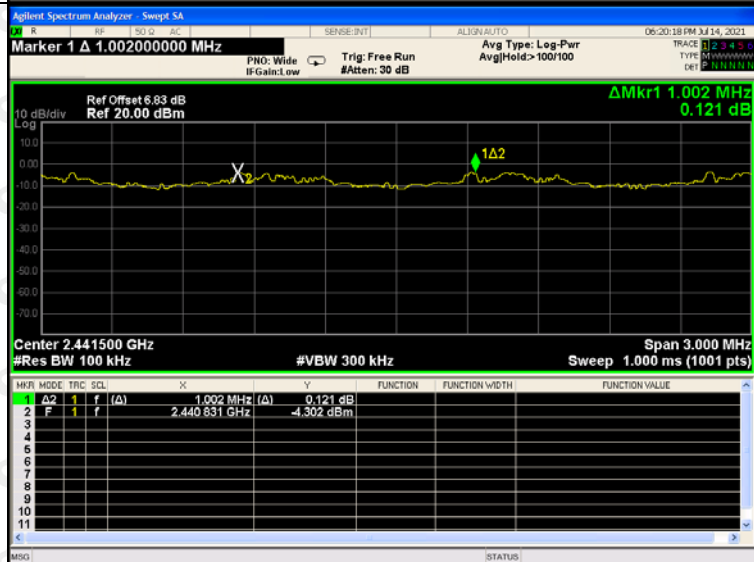 $\pi/4$ DQPSK/MCH

 $\pi/4$ DQPSK/HCH

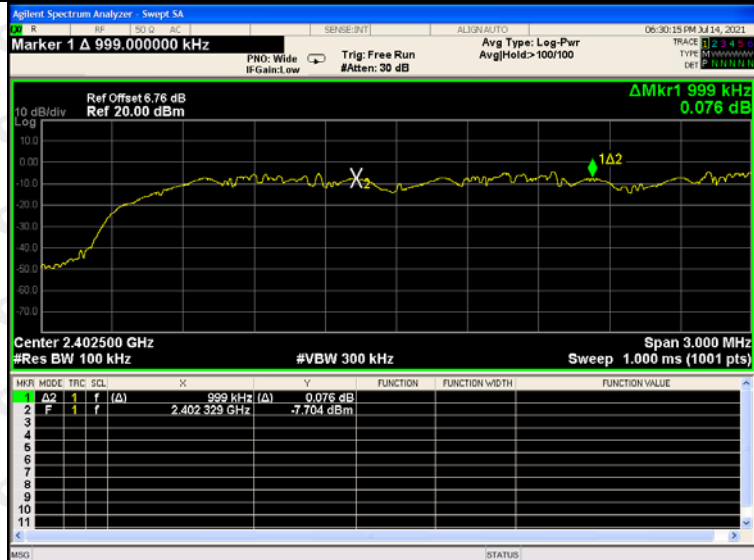
8DPSK/LCH



8DPSK/MCH




8DPSK/HCH



12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

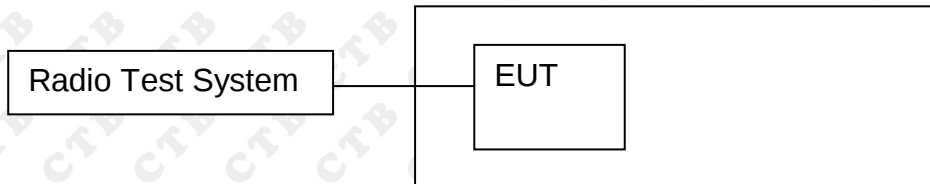

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;



12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS


Test Graph

Graphs

GFSK/Hop

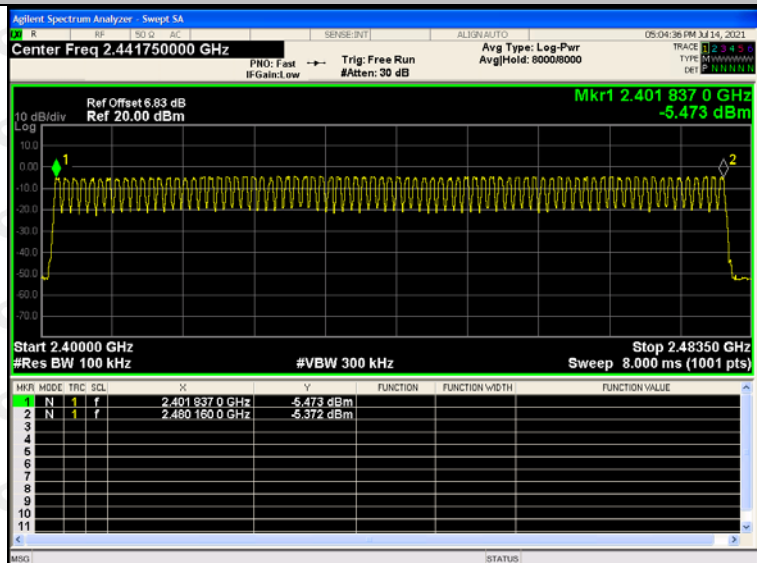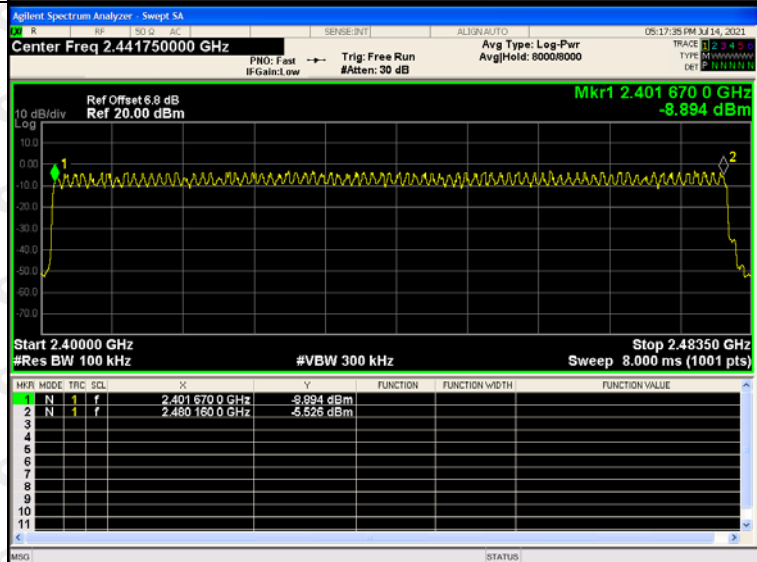
 $\pi/4$ DQPSK/Hop

8DPSK/Hop

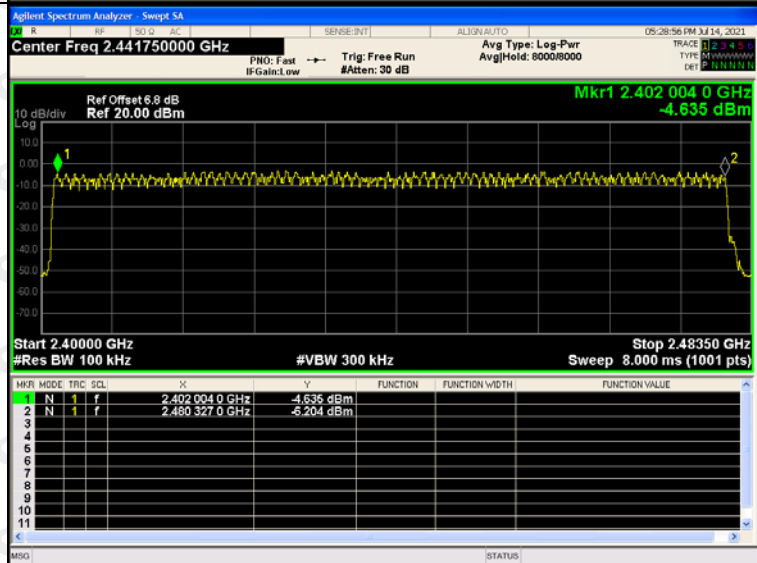

13. DWELL TIME

13.1 Block Diagram Of Test Setup

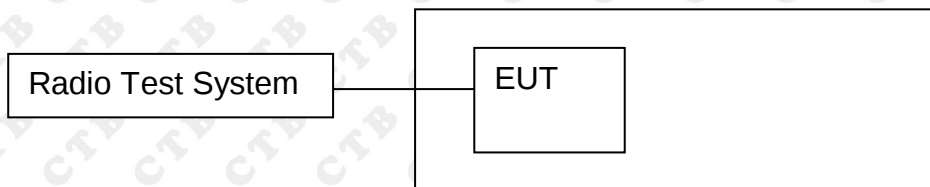

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.383	122.56	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.383	122.56	400	PASS
	DH3	LCH	1.643	262.88	400	PASS
	DH3	MCH	1.643	262.88	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.894	308.693	400	PASS
	DH5	MCH	2.894	308.693	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6 \times 0.4 \times 79 \times \text{MkrDelta}$ ms

DH3: $1600/79/4 \times 0.4 \times 79 \times \text{MkrDelta}$ ms


DH1: $1600/79/2 \times 0.4 \times 79 \times \text{MkrDelta}$ ms

Remark: Mkr Delta is once pulse time.


Test Graph




GFSK_DH3/LCH

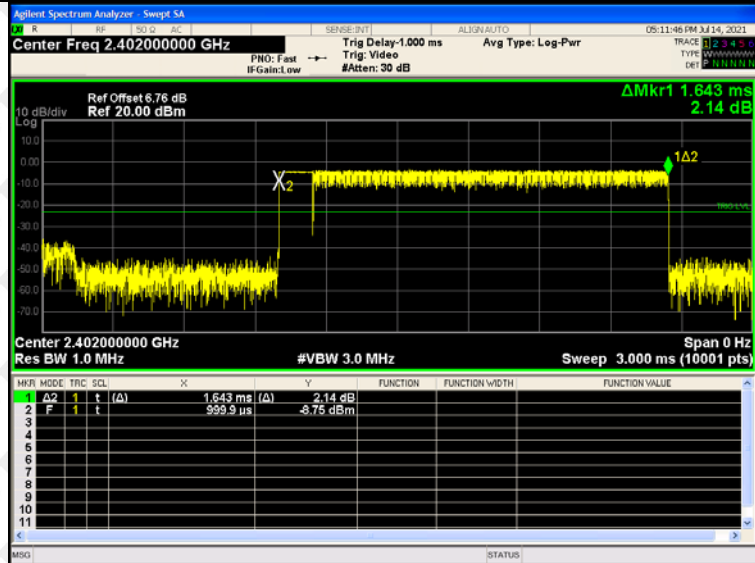


GFSK_DH3/MCH

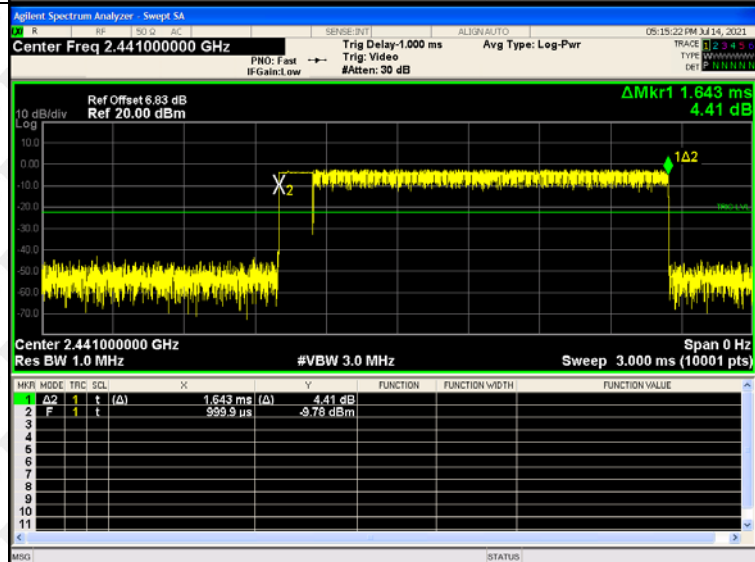


GFSK_DH3/HCH

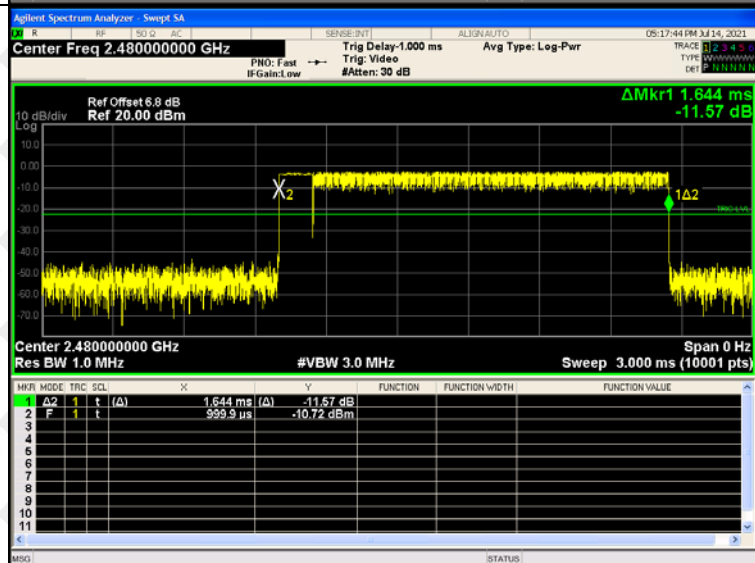


GFSK_DH5/LCH

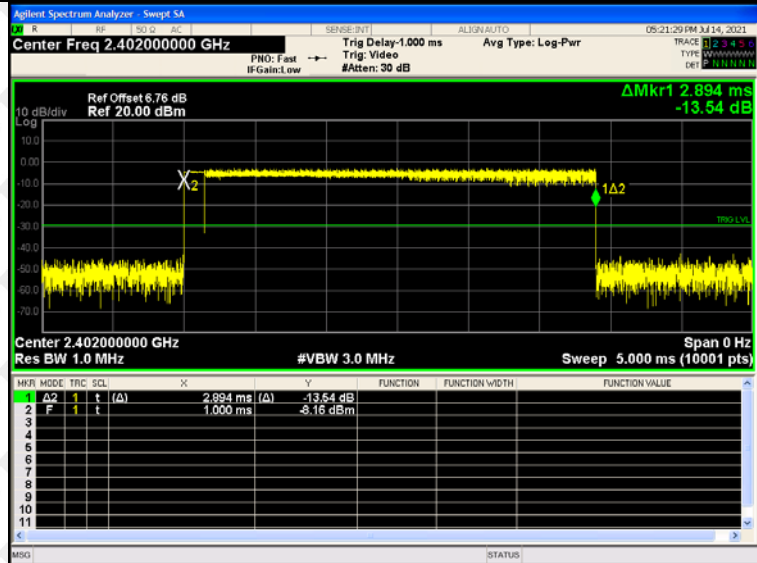

GFSK_DH5/MCH

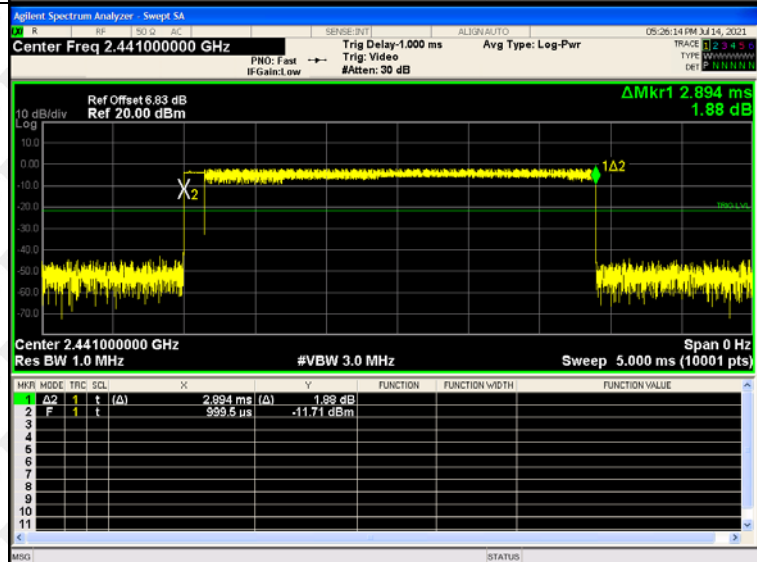

GFSK_DH5/HCH

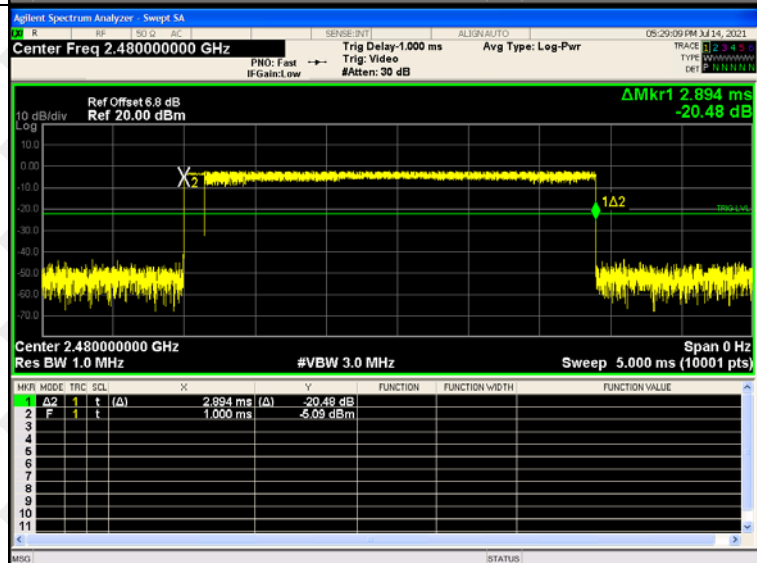

14. PSEUDORANDOM FREQUENCY


14.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

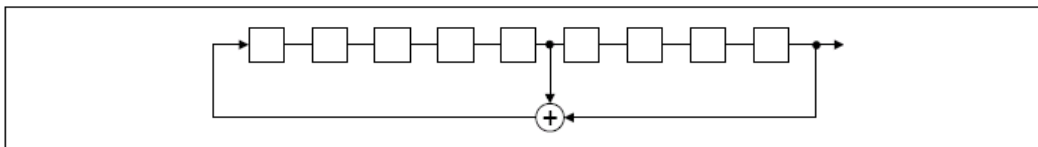

An example of Pseudorandom Frequency Hopping Sequence as follow:

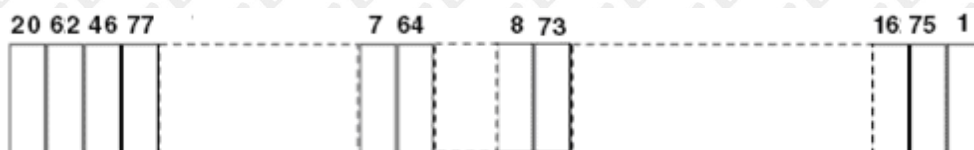

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal Antenna. The best case gain of the antenna is 1dBi.

16. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2



17. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted emissions



***** END OF REPORT *****