


AppendixA: 20dB Emission Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	2408	0.542	2407.720	2408.262	---	---
TX	Ant1	2440	0.546	2439.720	2440.266	---	---
TX	Ant1	2475	0.542	2474.720	2475.262	---	---

Test Graphs

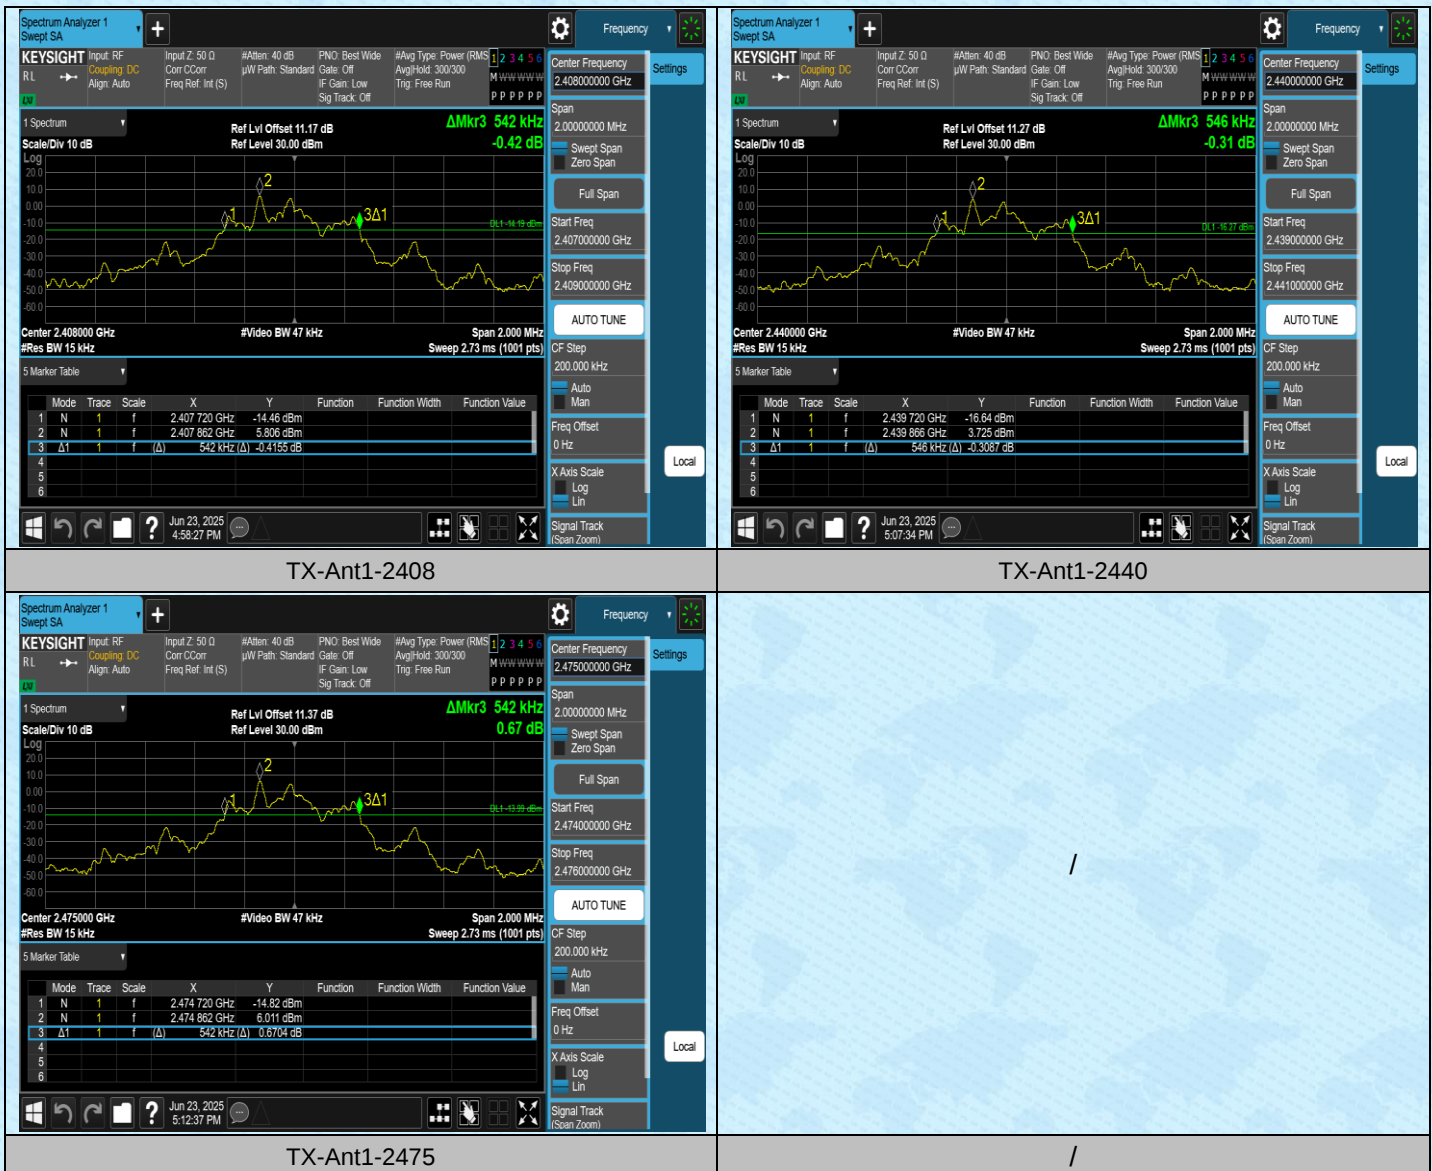


AppendixB: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	2408	0.54309	2407.7115	2408.2545	---	---
TX	Ant1	2440	0.54181	2439.7170	2440.2588	---	---
TX	Ant1	2475	0.54101	2474.7134	2475.2544	---	---

Test Graphs

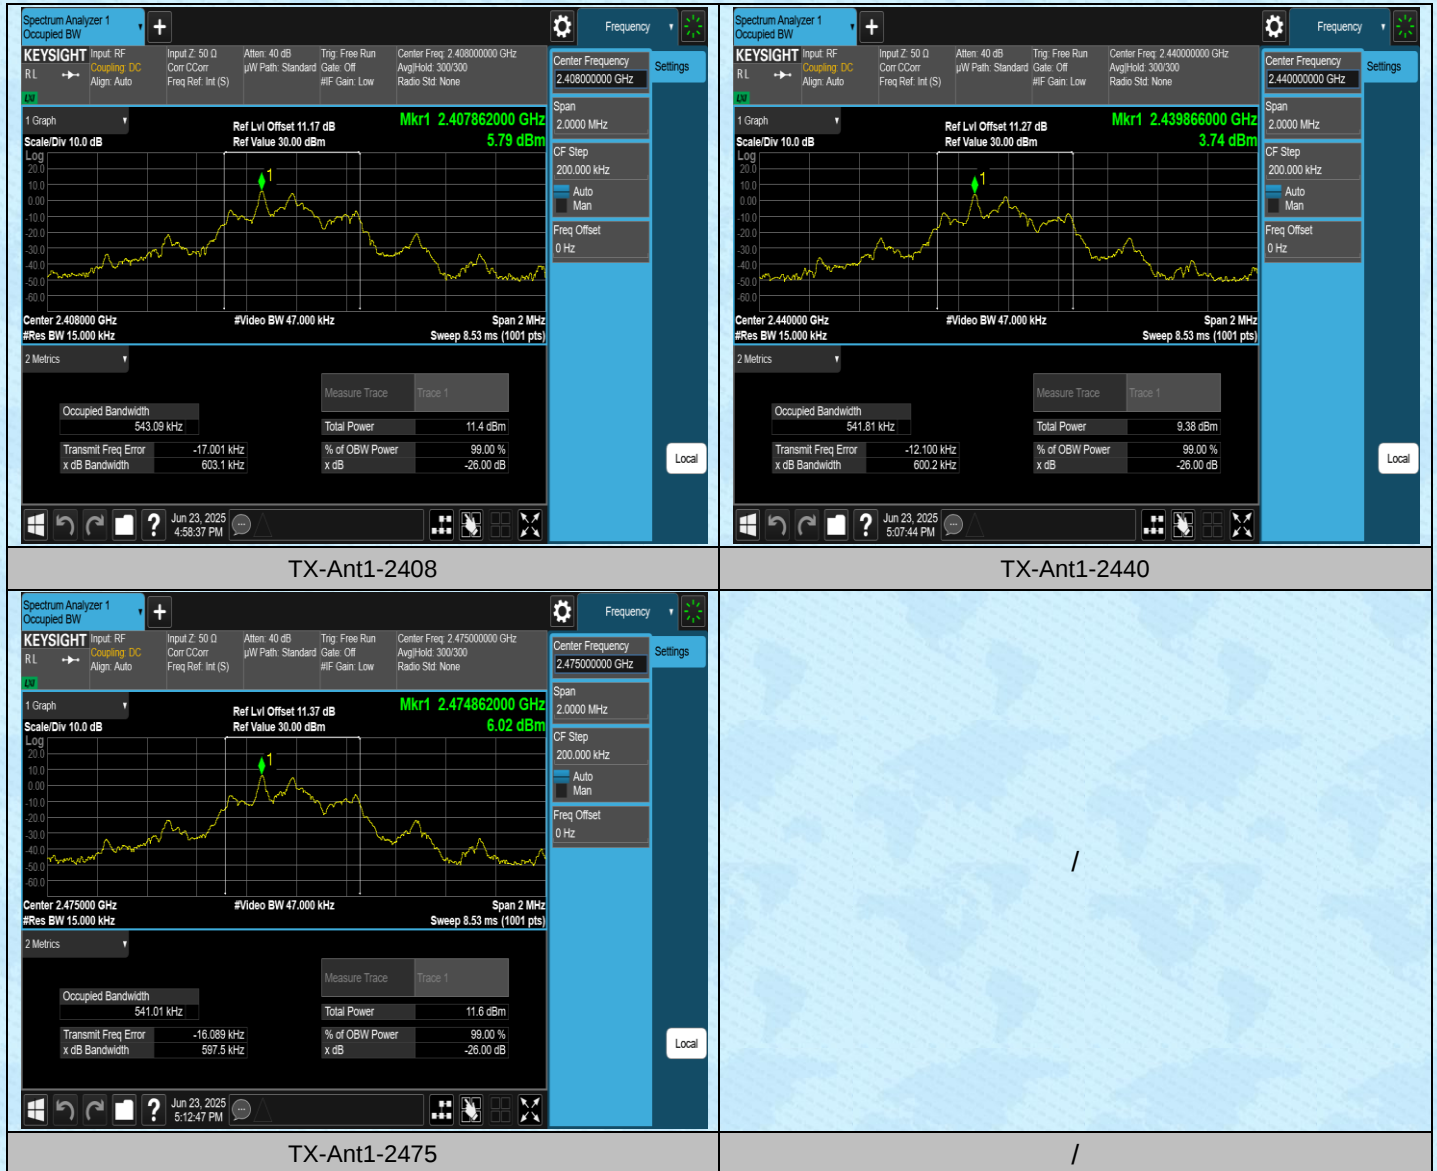


AppendixC: Maximum conducted output power

Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	2408	5.79	≤20.97	PASS
TX	Ant1	2440	3.78	≤20.97	PASS
TX	Ant1	2475	6.04	≤20.97	PASS

Test Graphs

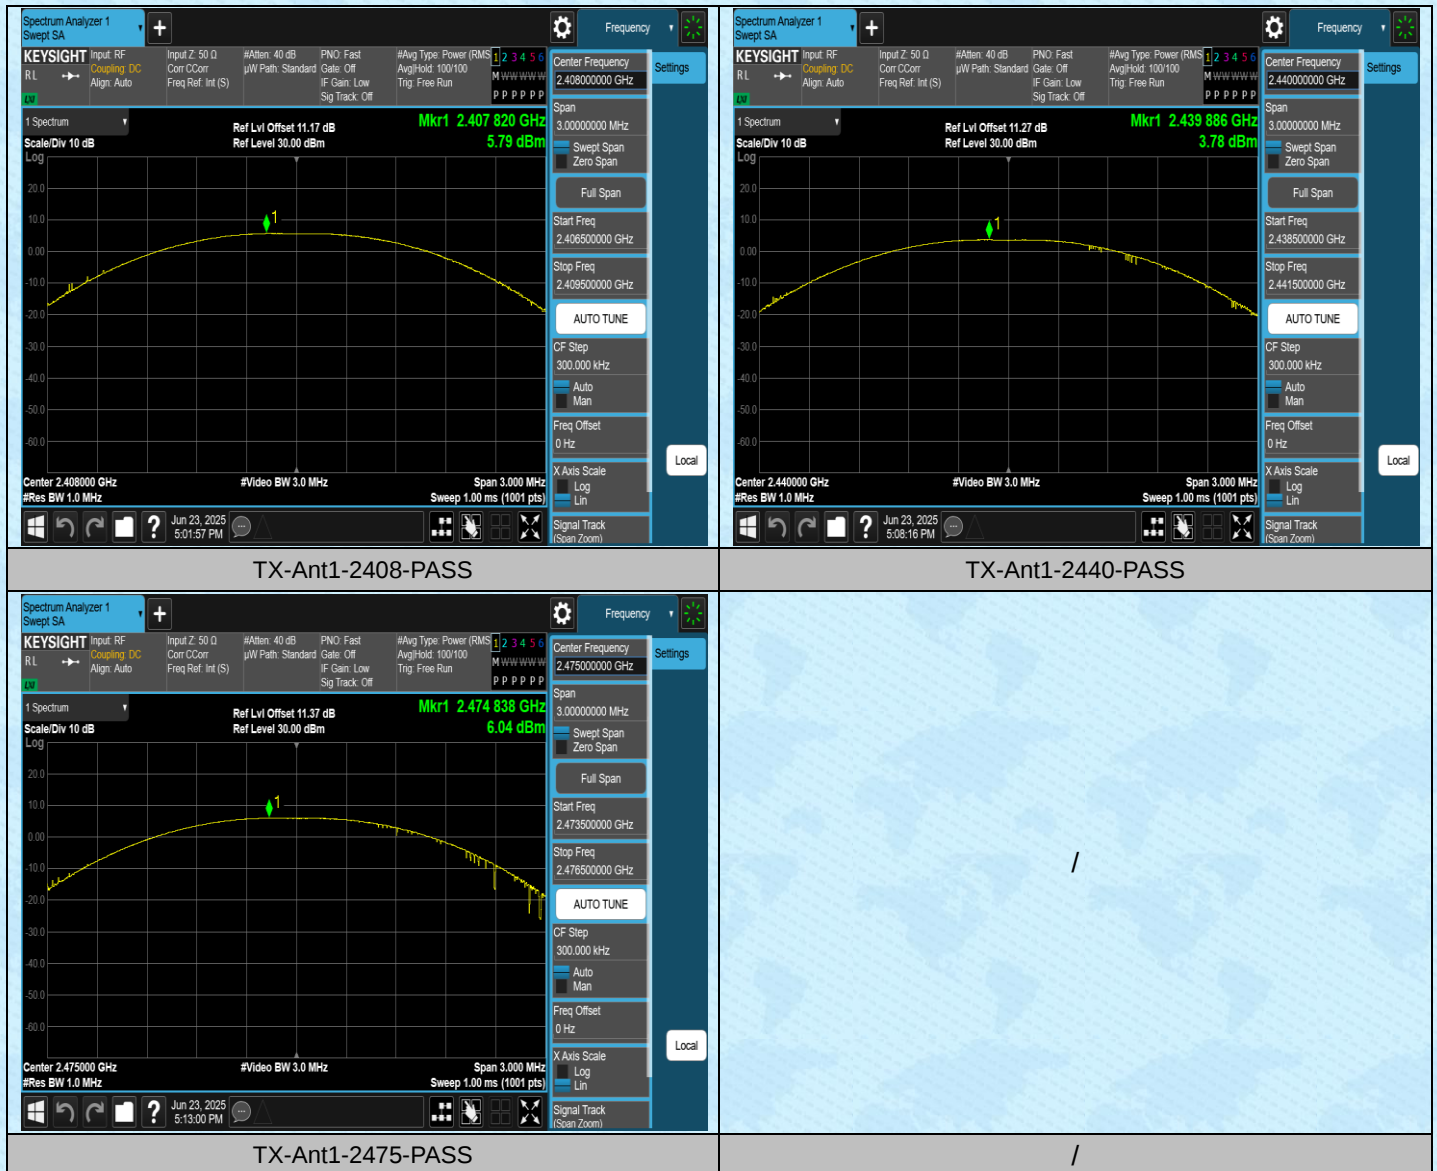


AppendixD: Carrier frequency separation

Test Result

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
TX	Ant1	Hop_2408	3.997	0.542	PASS
TX	Ant1	Hop_2440	4.004	0.546	PASS
TX	Ant1	Hop_2475	10.985	0.542	PASS

Test Graphs

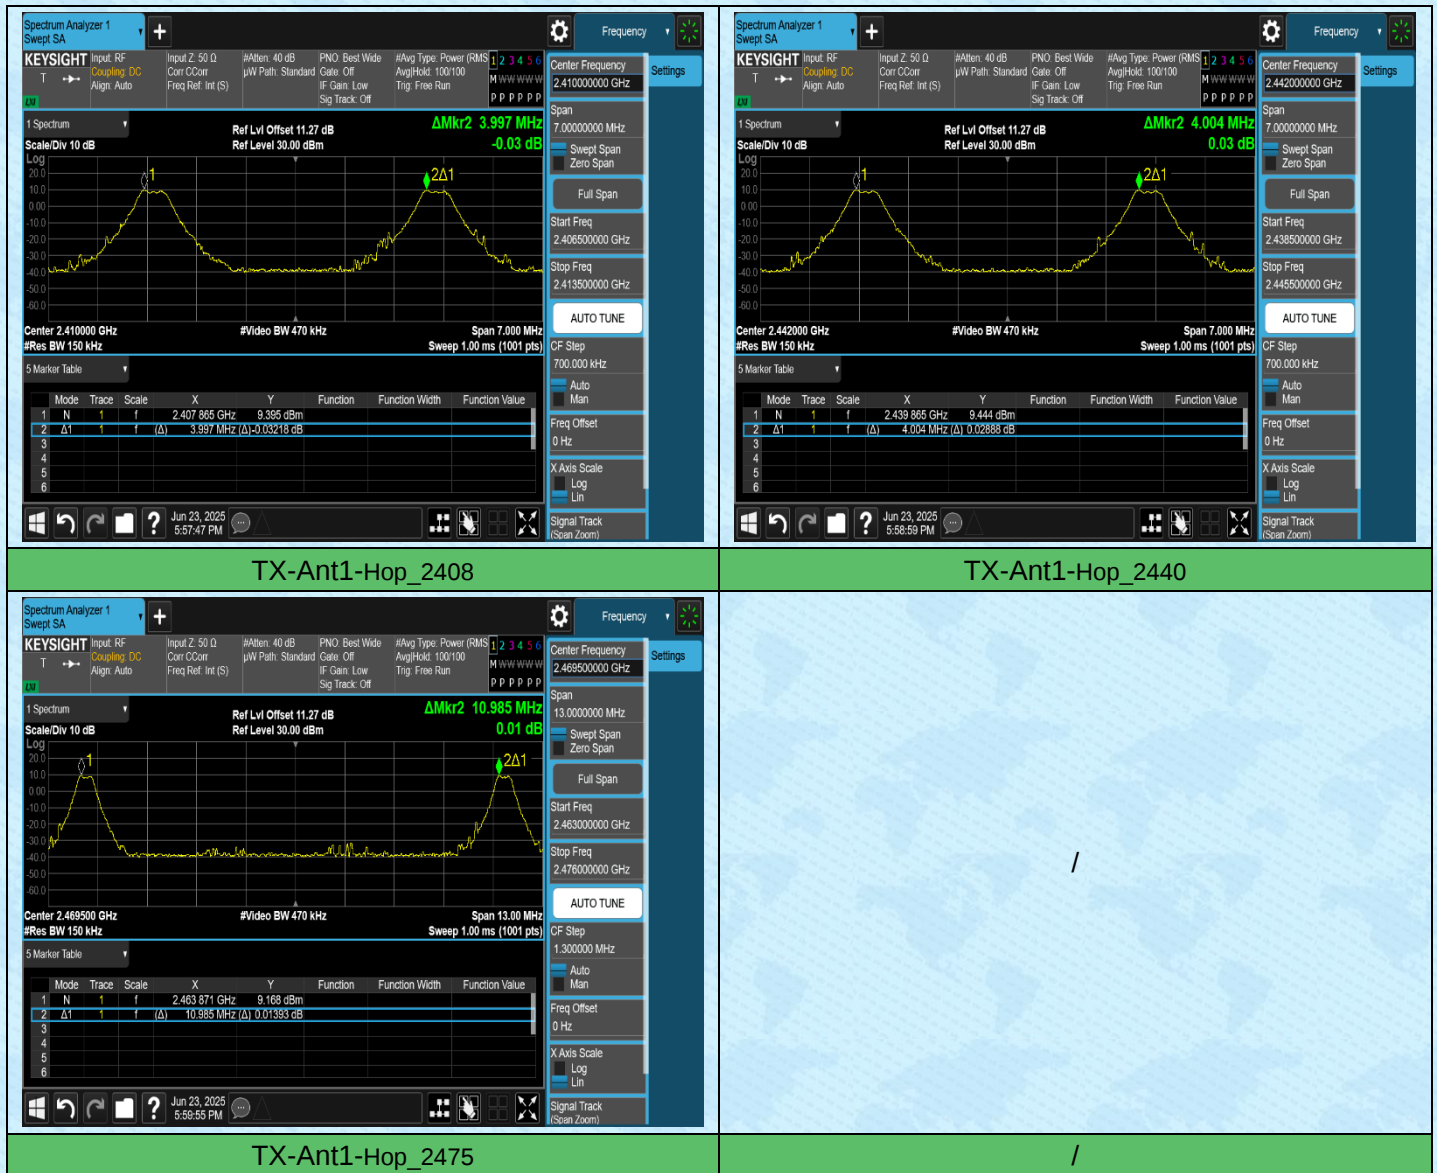


AppendixE: Time of occupancy

Test Result

Test Mode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[ms]	Limit[ms]	Verdict
TX	Ant1	Hop_2408	0.7726	125	96.575	≤400	PASS
TX	Ant1	Hop_2440	0.7688	125	96.100	≤400	PASS
TX	Ant1	Hop_2475	0.7713	125	96.4125	≤400	PASS

Test Graphs

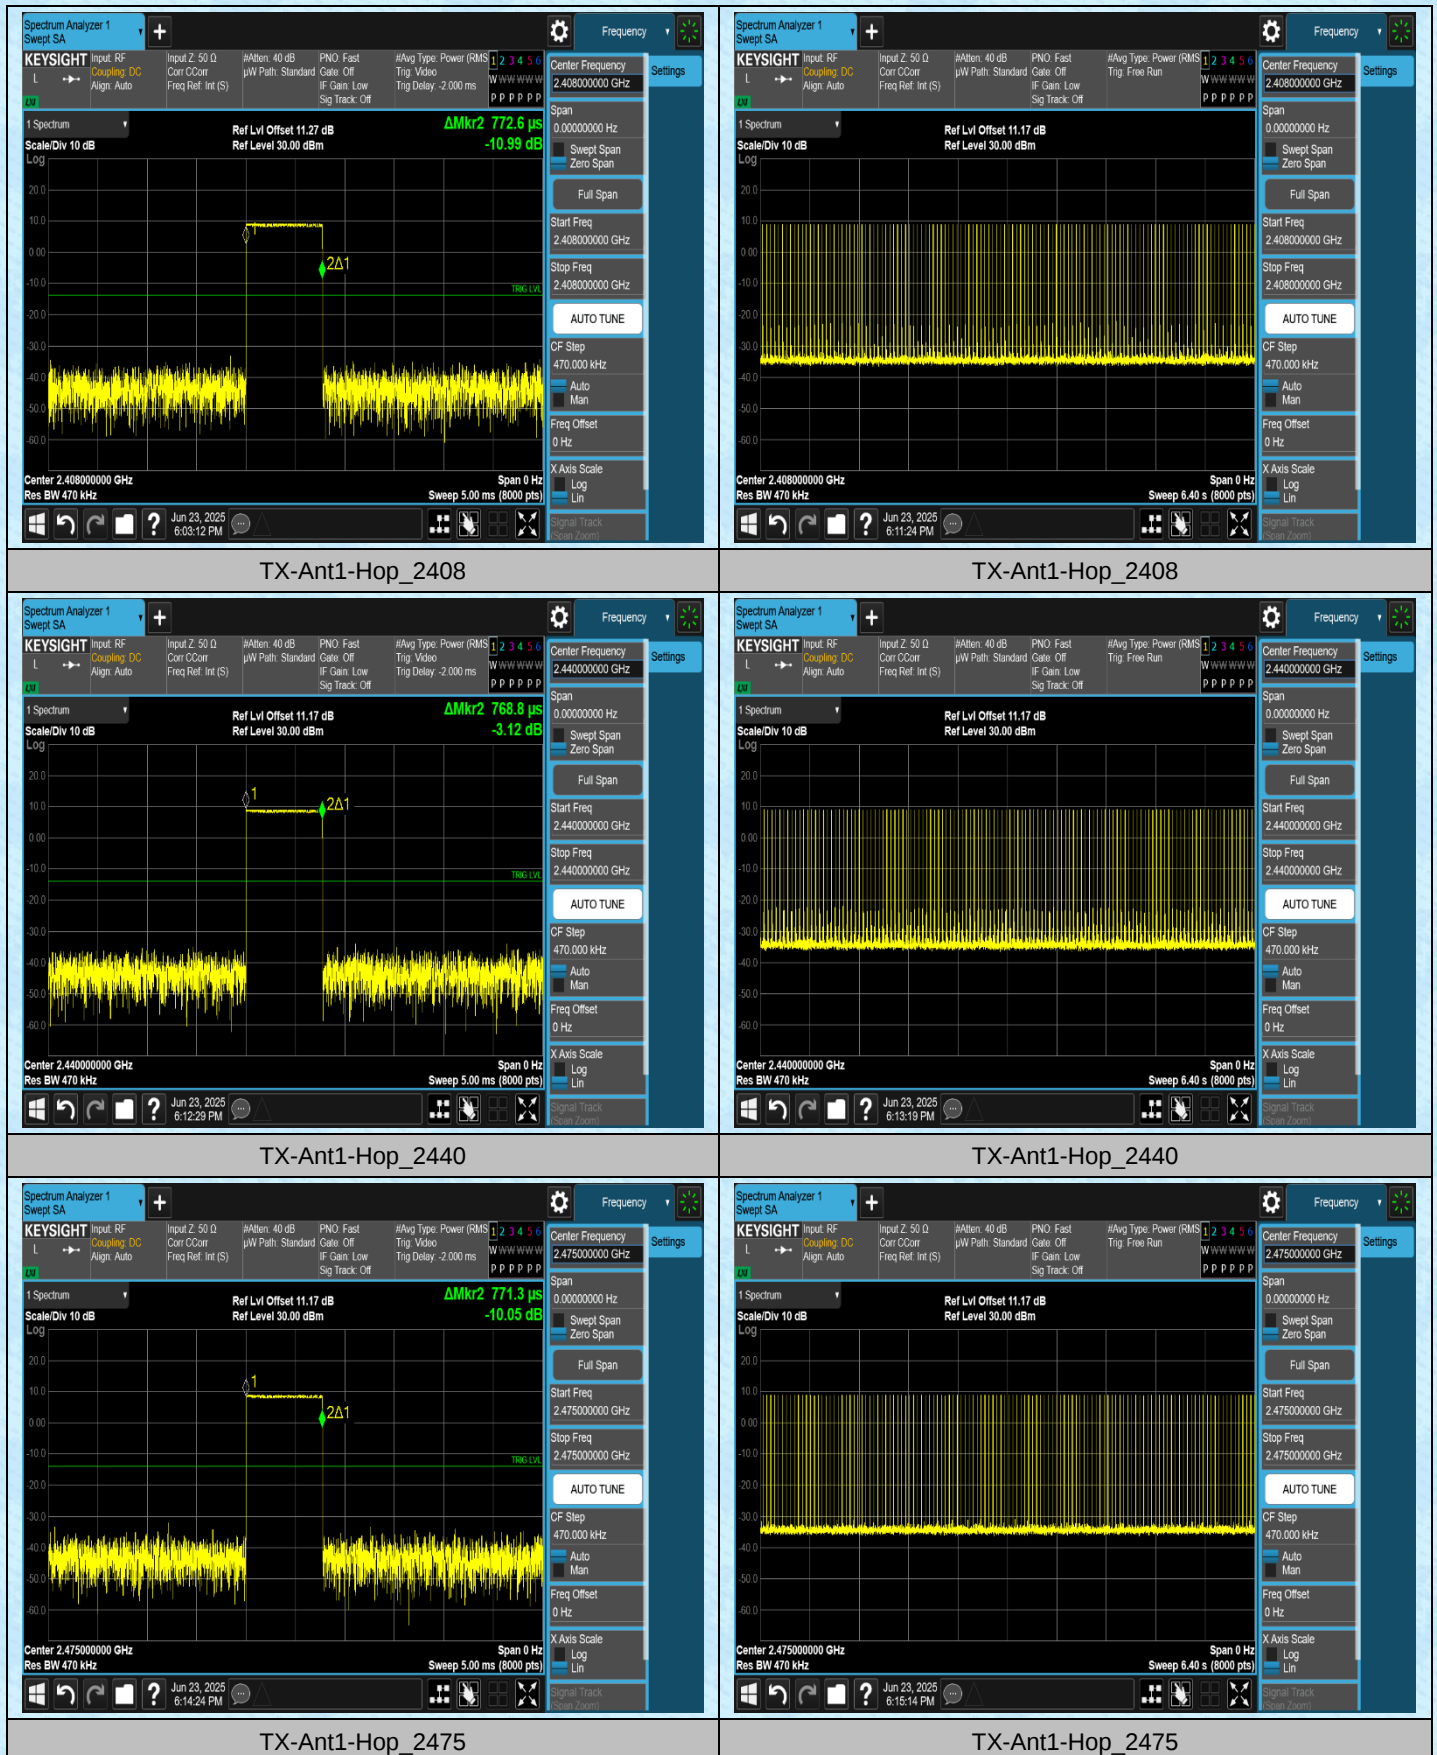


AppendixF: Number of hopping channels

Test Result

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
TX	Ant1	Hop	16	≥15	PASS

Test Graphs

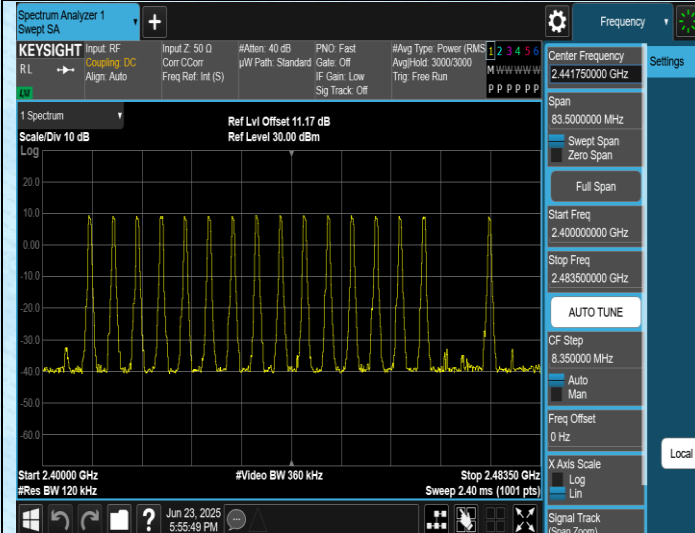
	/
TX-Ant1-Hop-PASS	/

AppendixG:Band edge measurements

Test Result

Test Mode	Antenna	Channel	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	Low	2408	5.82	-46.05	≤-14.18	PASS
TX	Ant1	High	2475	5.97	-46.77	≤-14.03	PASS
TX	Ant1	Low	Hop_2408	8.94	-48.58	≤-11.06	PASS
TX	Ant1	High	Hop_2475	8.85	-48.65	≤-11.15	PASS

Test Graphs

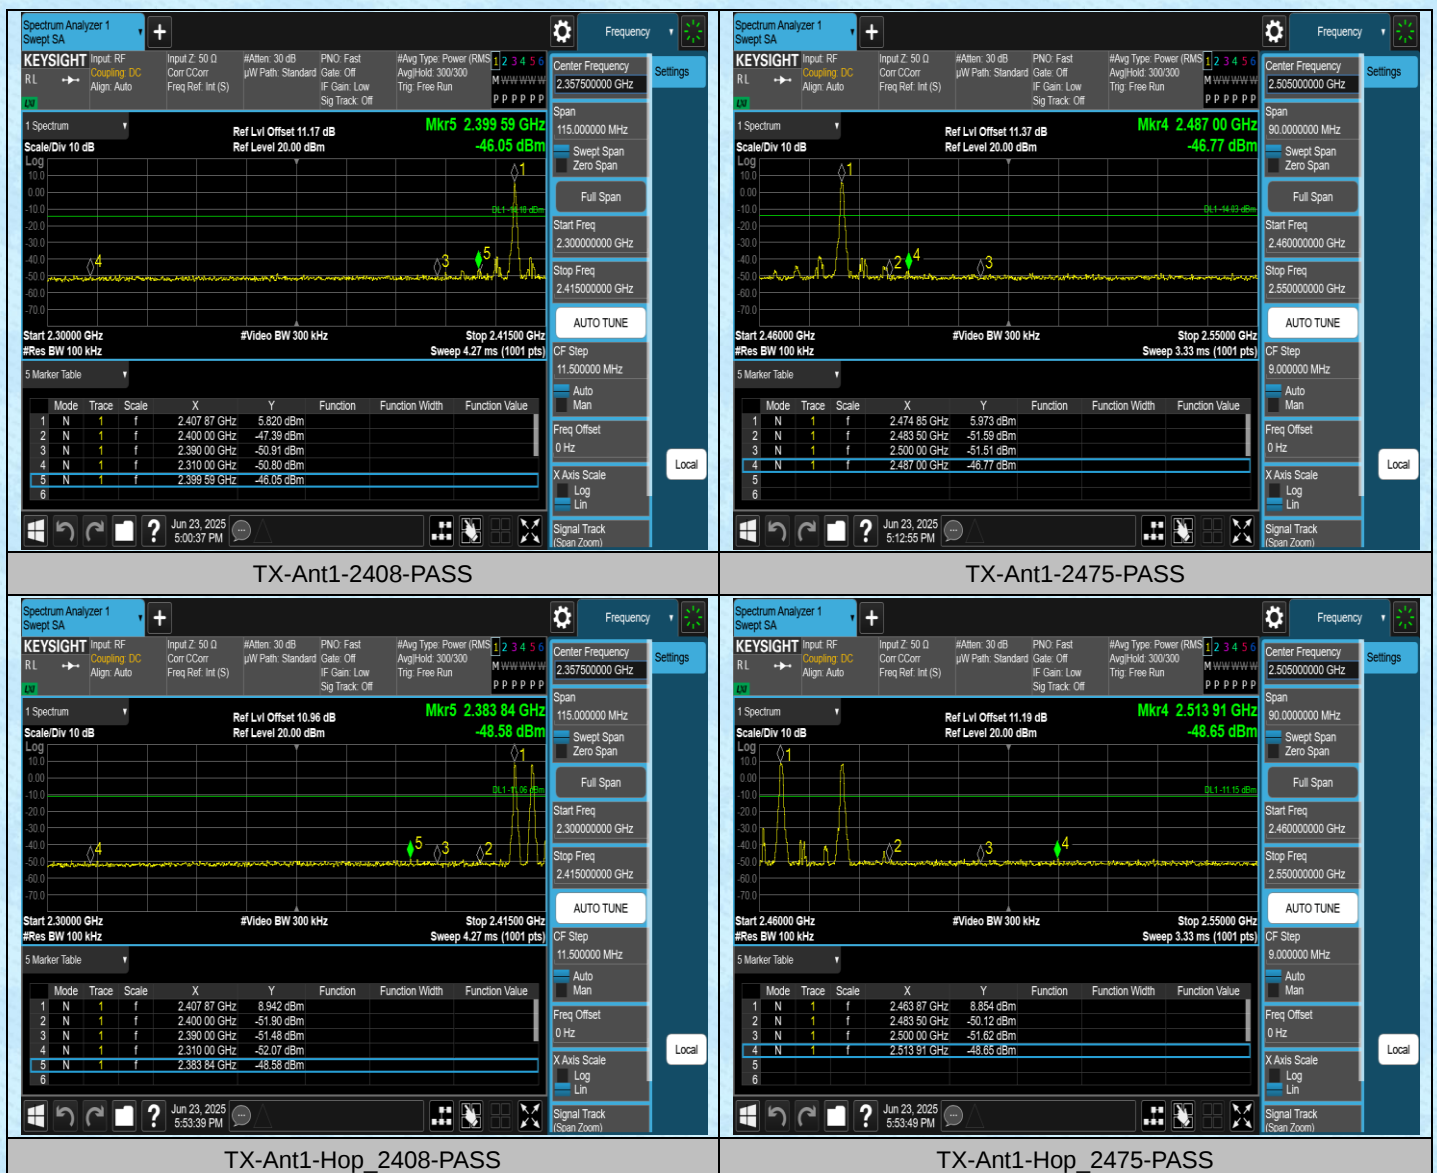



AppendixH:Conducted Spurious Emission

Test Result

Test Mode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	2408	0~Reference	5.80	5.80	---	PASS
TX	Ant1	2408	30~1000	5.80	-57.23	≤-14.2	PASS
TX	Ant1	2408	1000~26500	5.80	-37.53	≤-14.2	PASS
TX	Ant1	2440	0~Reference	3.72	3.72	---	PASS
TX	Ant1	2440	30~1000	3.72	-59.66	≤-16.28	PASS
TX	Ant1	2440	1000~26500	3.72	-29.99	≤-16.28	PASS
TX	Ant1	2475	0~Reference	5.96	5.96	---	PASS
TX	Ant1	2475	30~1000	5.96	-55.87	≤-14.04	PASS
TX	Ant1	2475	1000~26500	5.96	-36.16	≤-14.04	PASS

Test Graphs

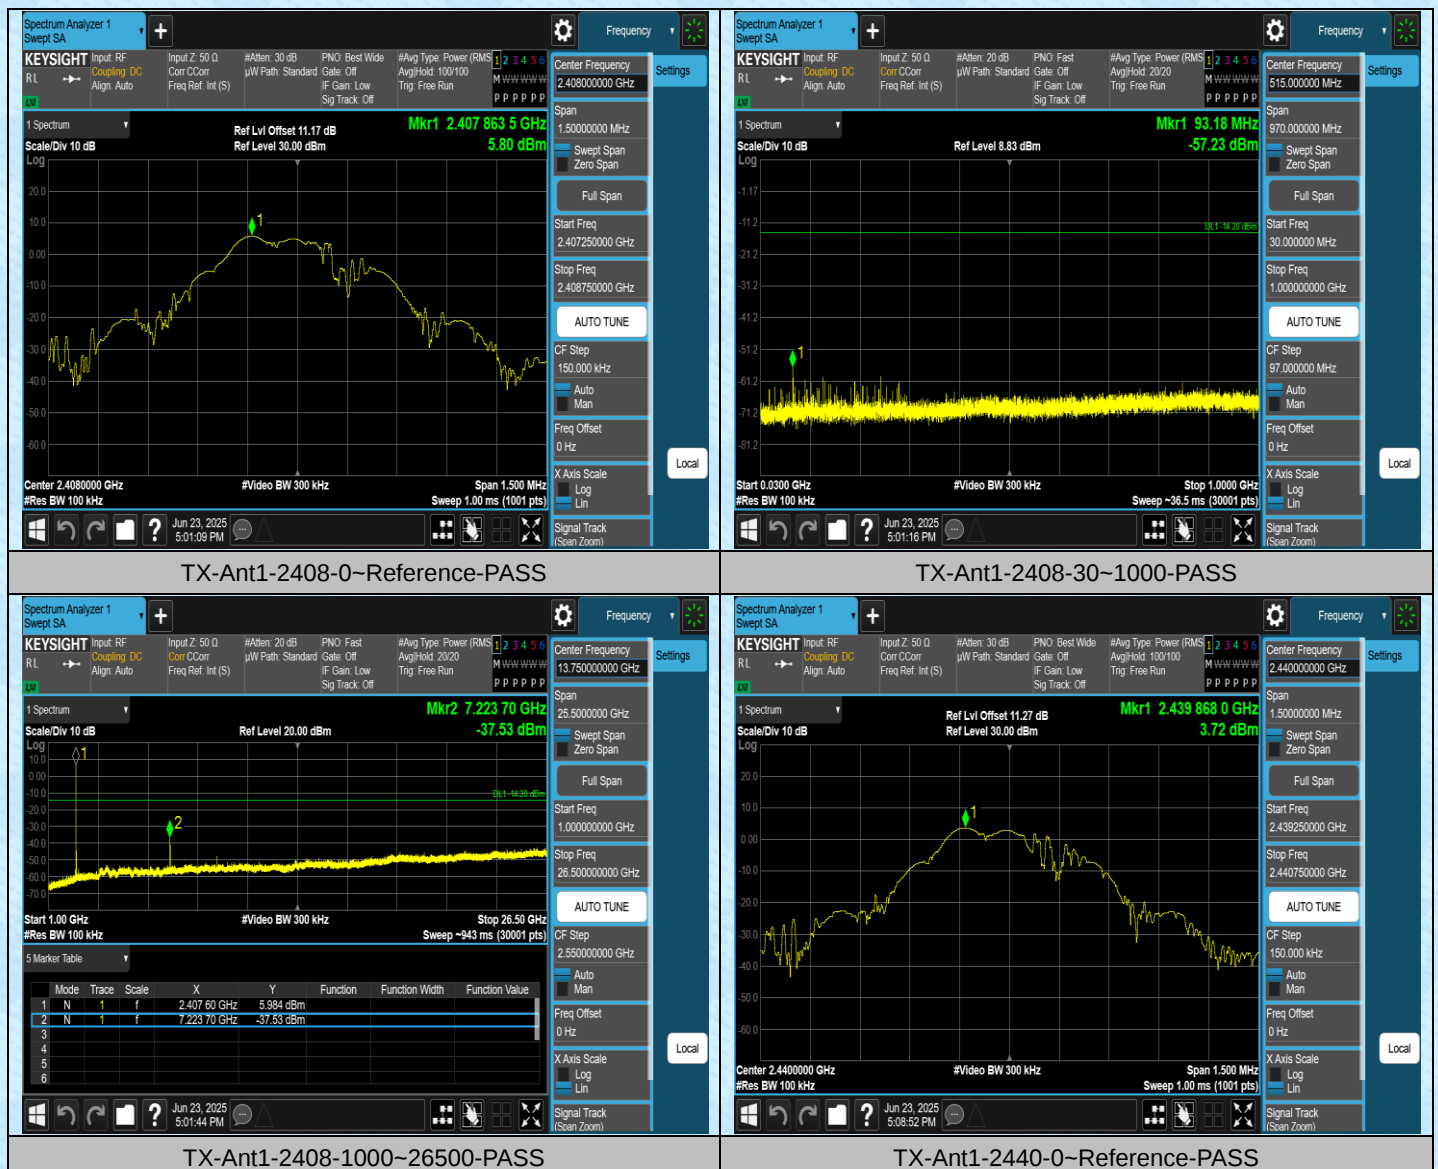


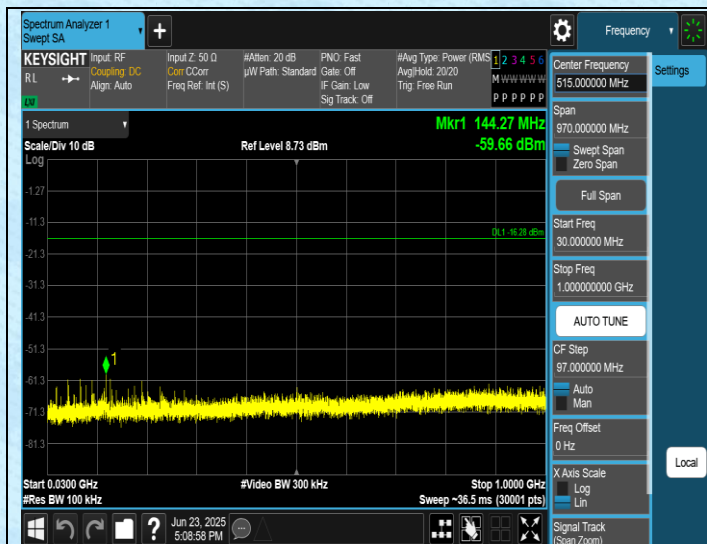

TX-Ant1-2440-30~1000-PASS



TX-Ant1-2440-1000~26500-PASS

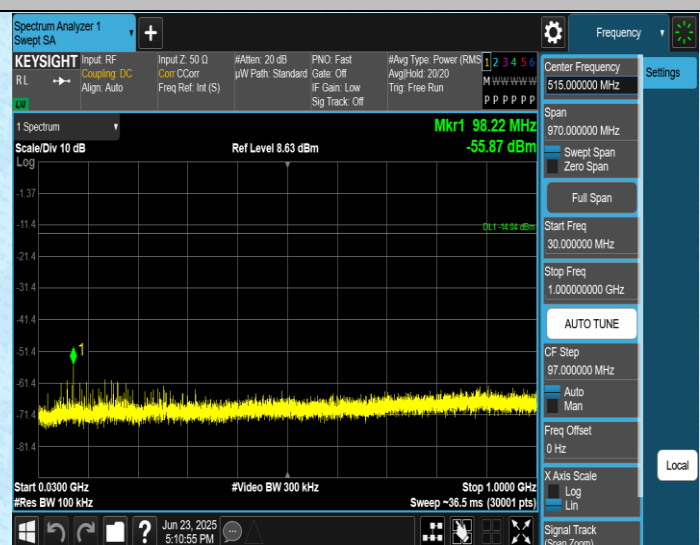

TX-Ant1-2475-0~Reference-PASS



TX-Ant1-2475-30~1000-PASS



TX-Ant1-2475-1000~26500-PASS


/

AppendixI: Duty Cycle

Test Result

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
TX	Ant1	2408	0.76	3.28	23.17	---	---
TX	Ant1	2440	0.76	3.30	23.03	---	---
TX	Ant1	2475	0.76	3.28	23.17	---	---

Test Graphs

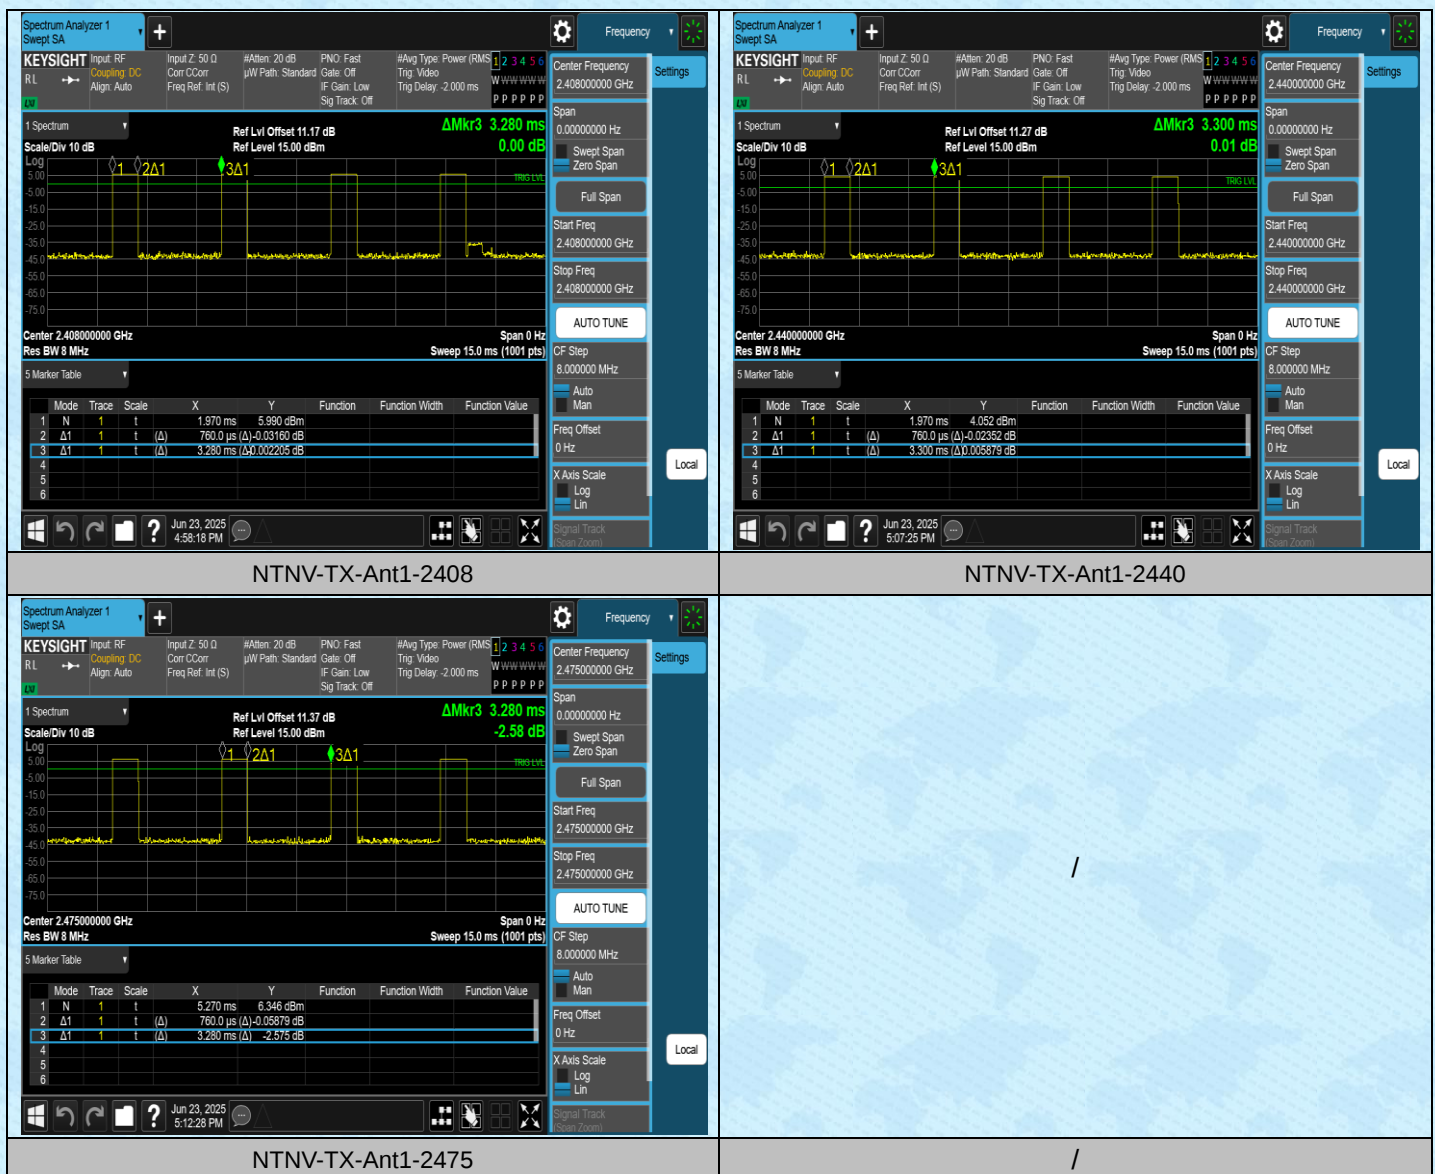

---End---