


AppendixA: 20dB Emission Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	2408	0.574	2407.726	2408.300	---	---
TX	Ant1	2440	0.584	2439.716	2440.300	---	---
TX	Ant1	2475	0.570	2474.732	2475.302	---	---

Test Graphs

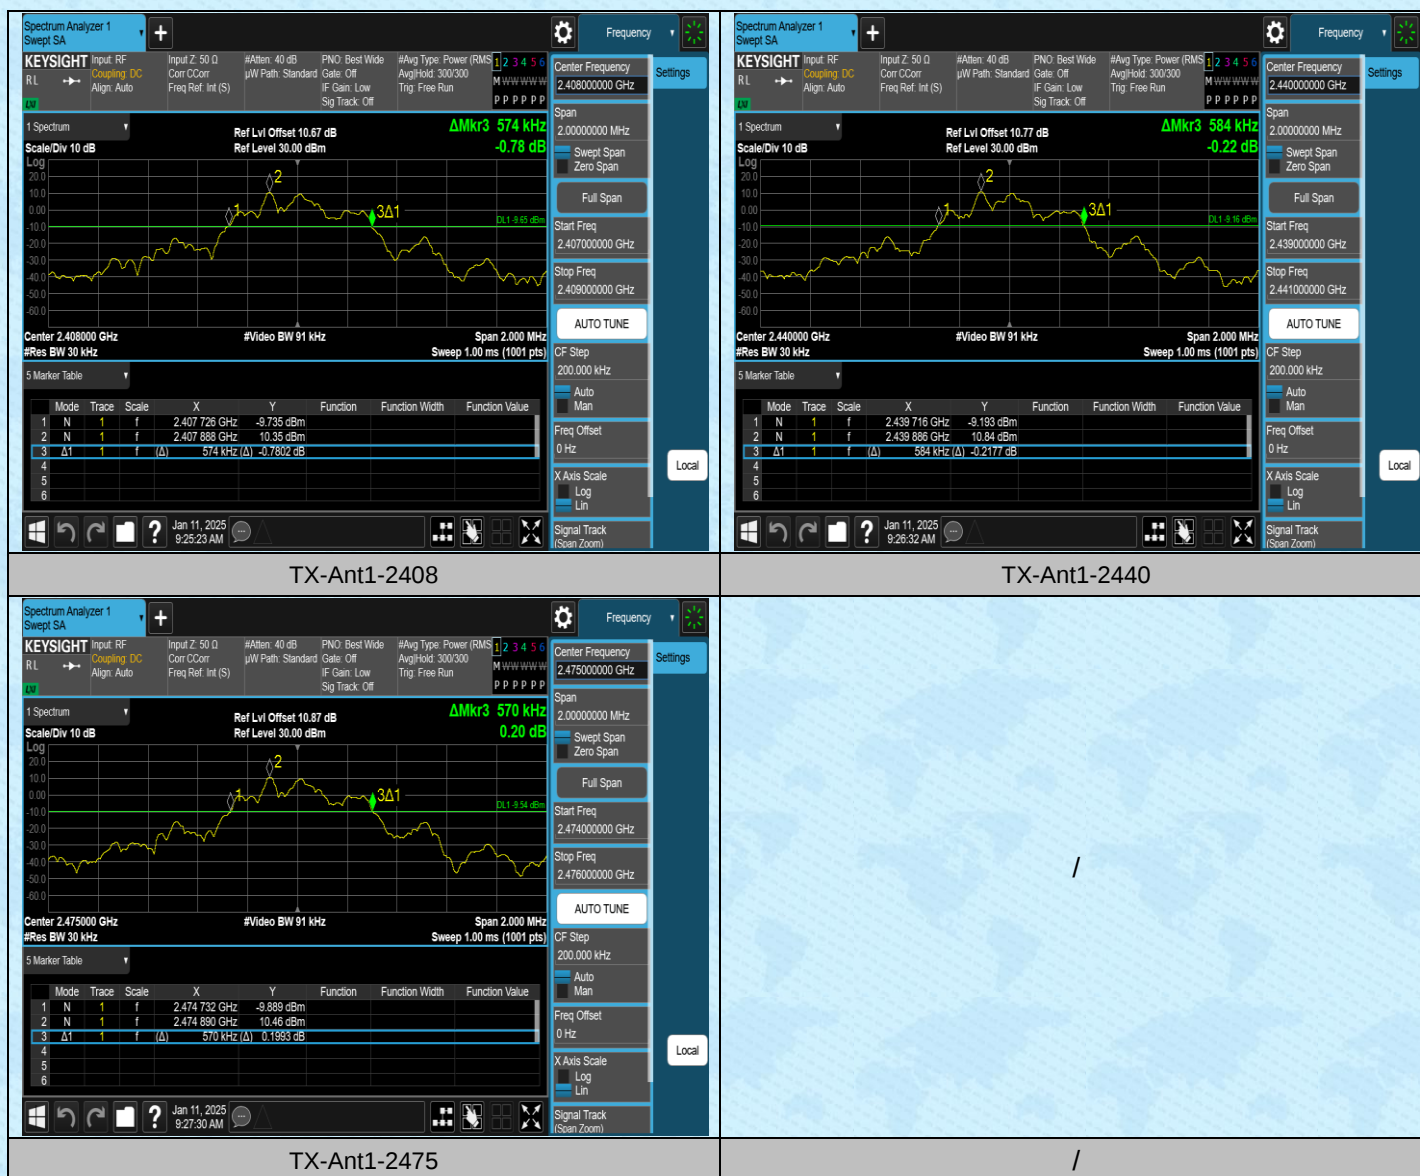

AppendixB: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	2408	0.55520	2407.7312	2408.2864	---	---
TX	Ant1	2440	0.55673	2439.7291	2440.2859	---	---
TX	Ant1	2475	0.55534	2474.7353	2475.2907	---	---

Test Graphs




AppendixC: Maximum conducted output power

Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	2408	10.34	≤20.97	PASS
TX	Ant1	2440	10.79	≤20.97	PASS
TX	Ant1	2475	10.43	≤20.97	PASS

Test Graphs

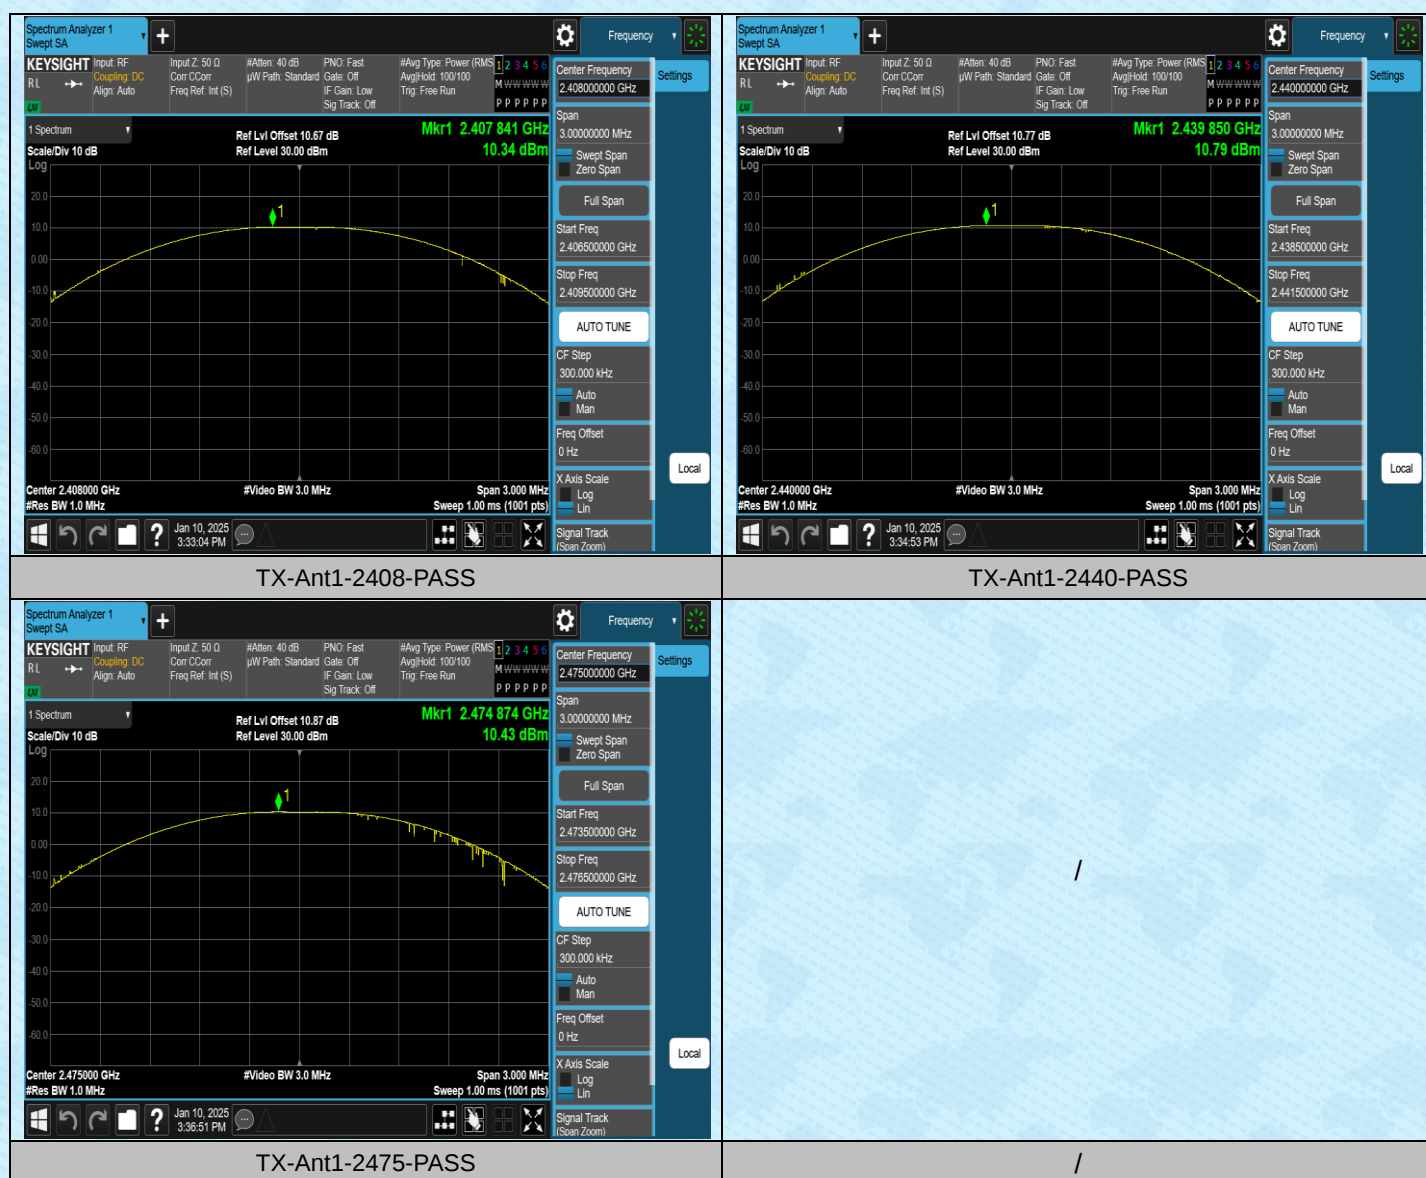


AppendixD: Carrier frequency separation

Test Result

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
TX	Ant1	Hop_2408	4.000	0.574	PASS
TX	Ant1	Hop_2440	4.250	0.584	PASS
TX	Ant1	Hop_2475	11.008	0.570	PASS

Test Graphs

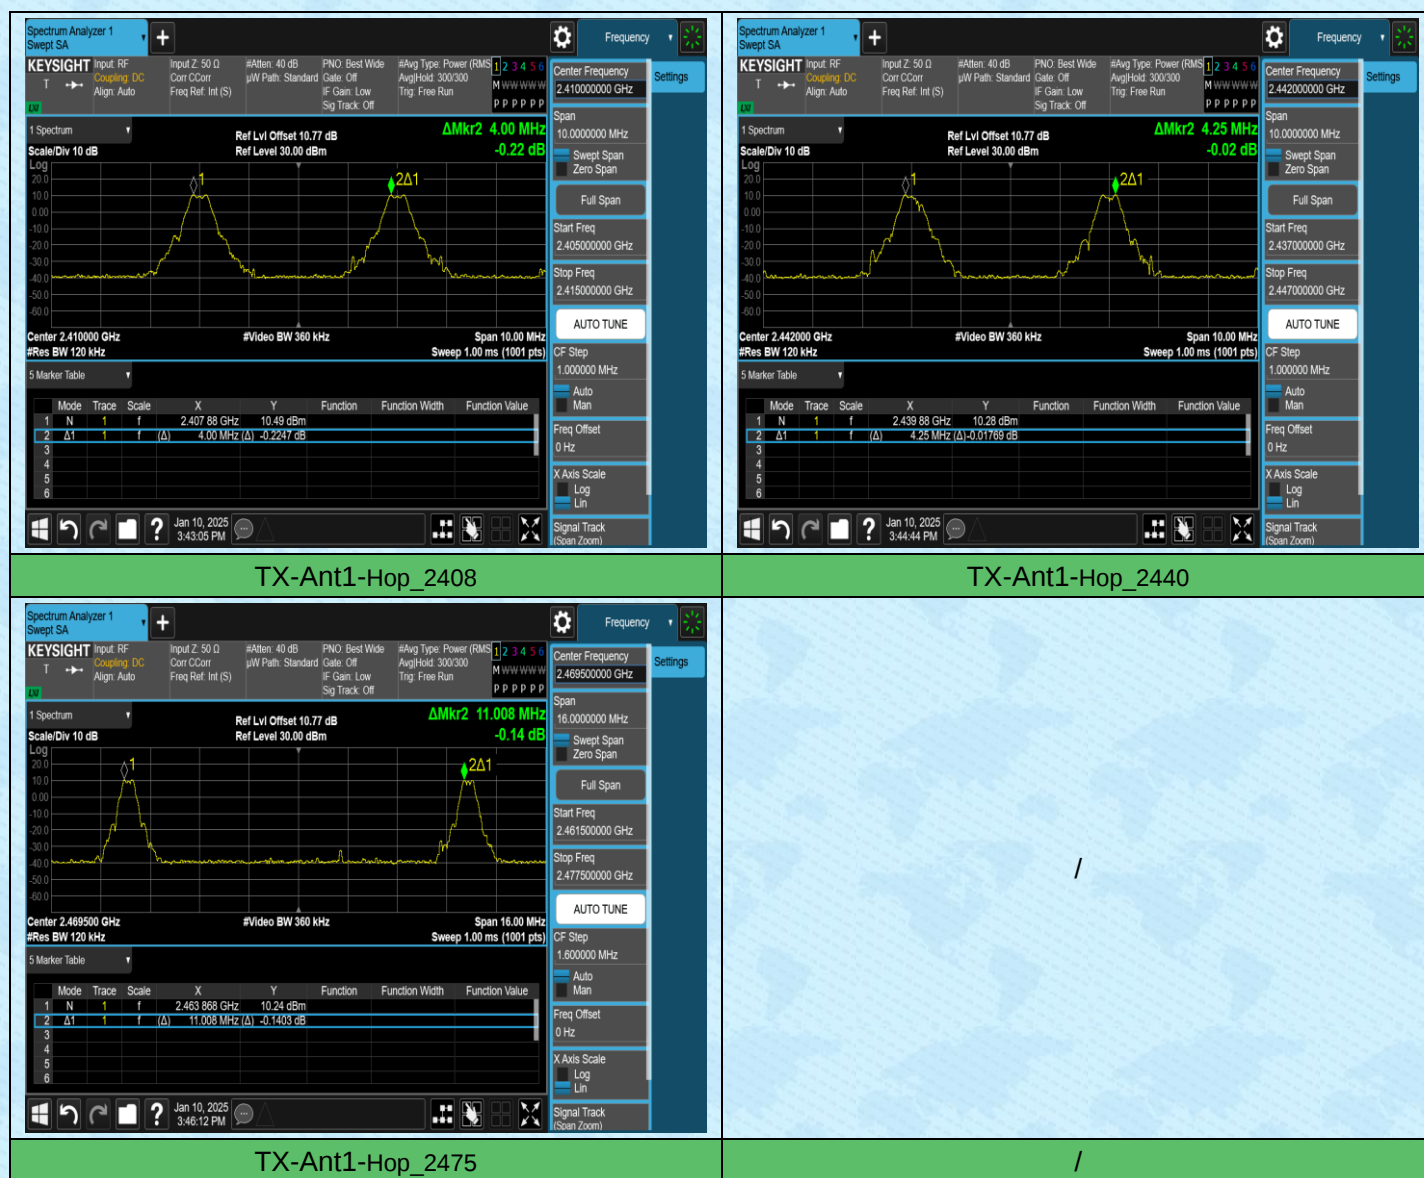


AppendixE: Time of occupancy

Test Result

Test Mode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[ms]	Limit[ms]	Verdict
TX	Ant1	Hop_2408	0.772	8	6.176	≤400	PASS
TX	Ant1	Hop_2440	0.772	9	6.948	≤400	PASS
TX	Ant1	Hop_2475	0.772	8	6.176	≤400	PASS

Test Graphs

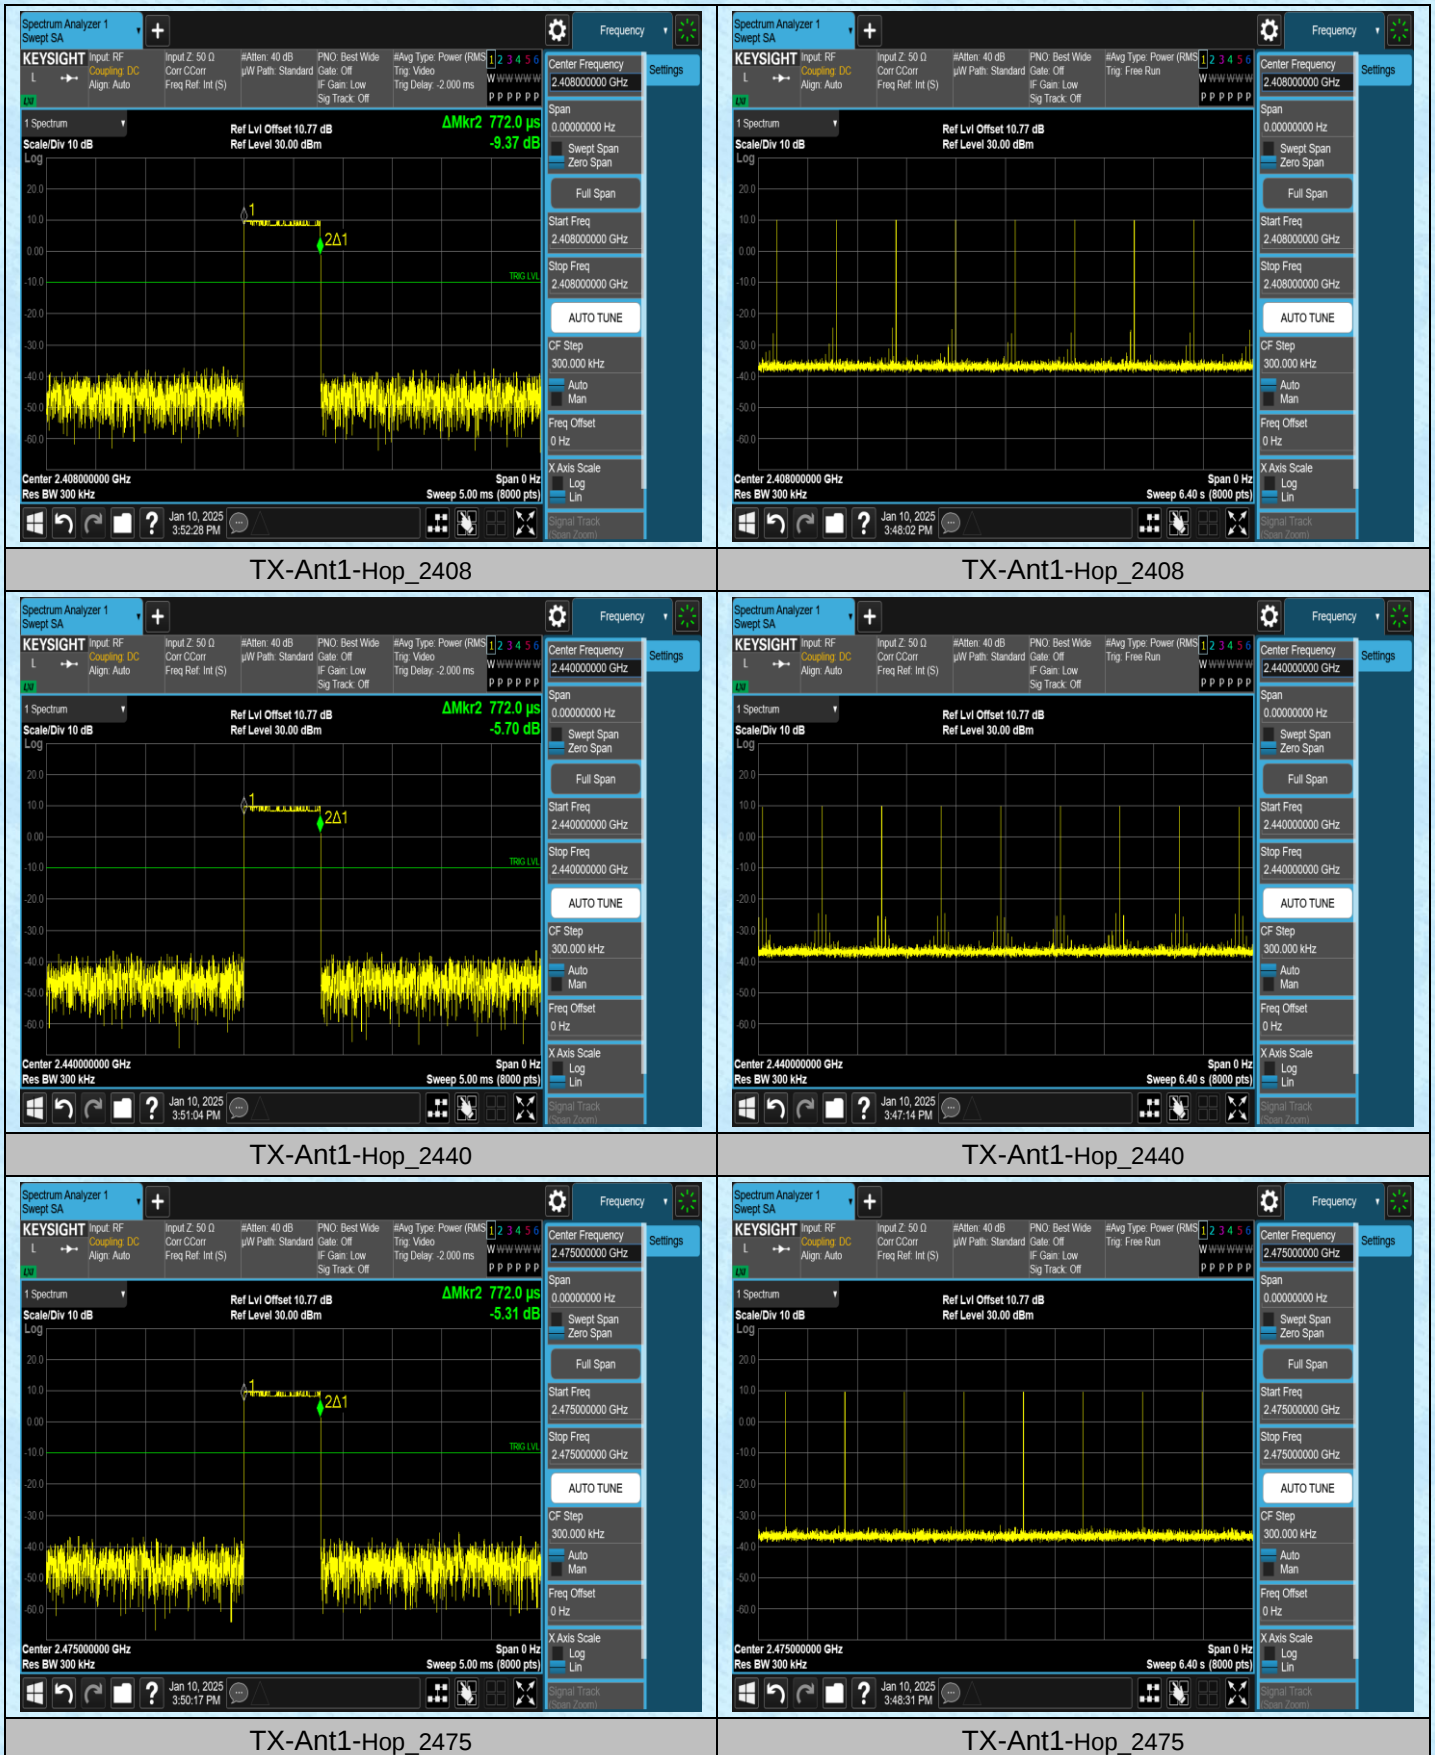

AppendixF: Number of hopping channels

Test Result

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
TX	Ant1	Hop	16	≥15	PASS

Test Graphs




AppendixG:Band edge measurements

Test Result

Test Mode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	Low	2408	10.00	-39.95	≤-10	PASS
TX	Ant1	High	2475	10.03	-43.24	≤-9.97	PASS
TX	Ant1	Low	Hop_2408	9.68	-49.15	≤-10.32	PASS
TX	Ant1	High	Hop_2475	9.23	-48.78	≤-10.77	PASS

Test Graphs

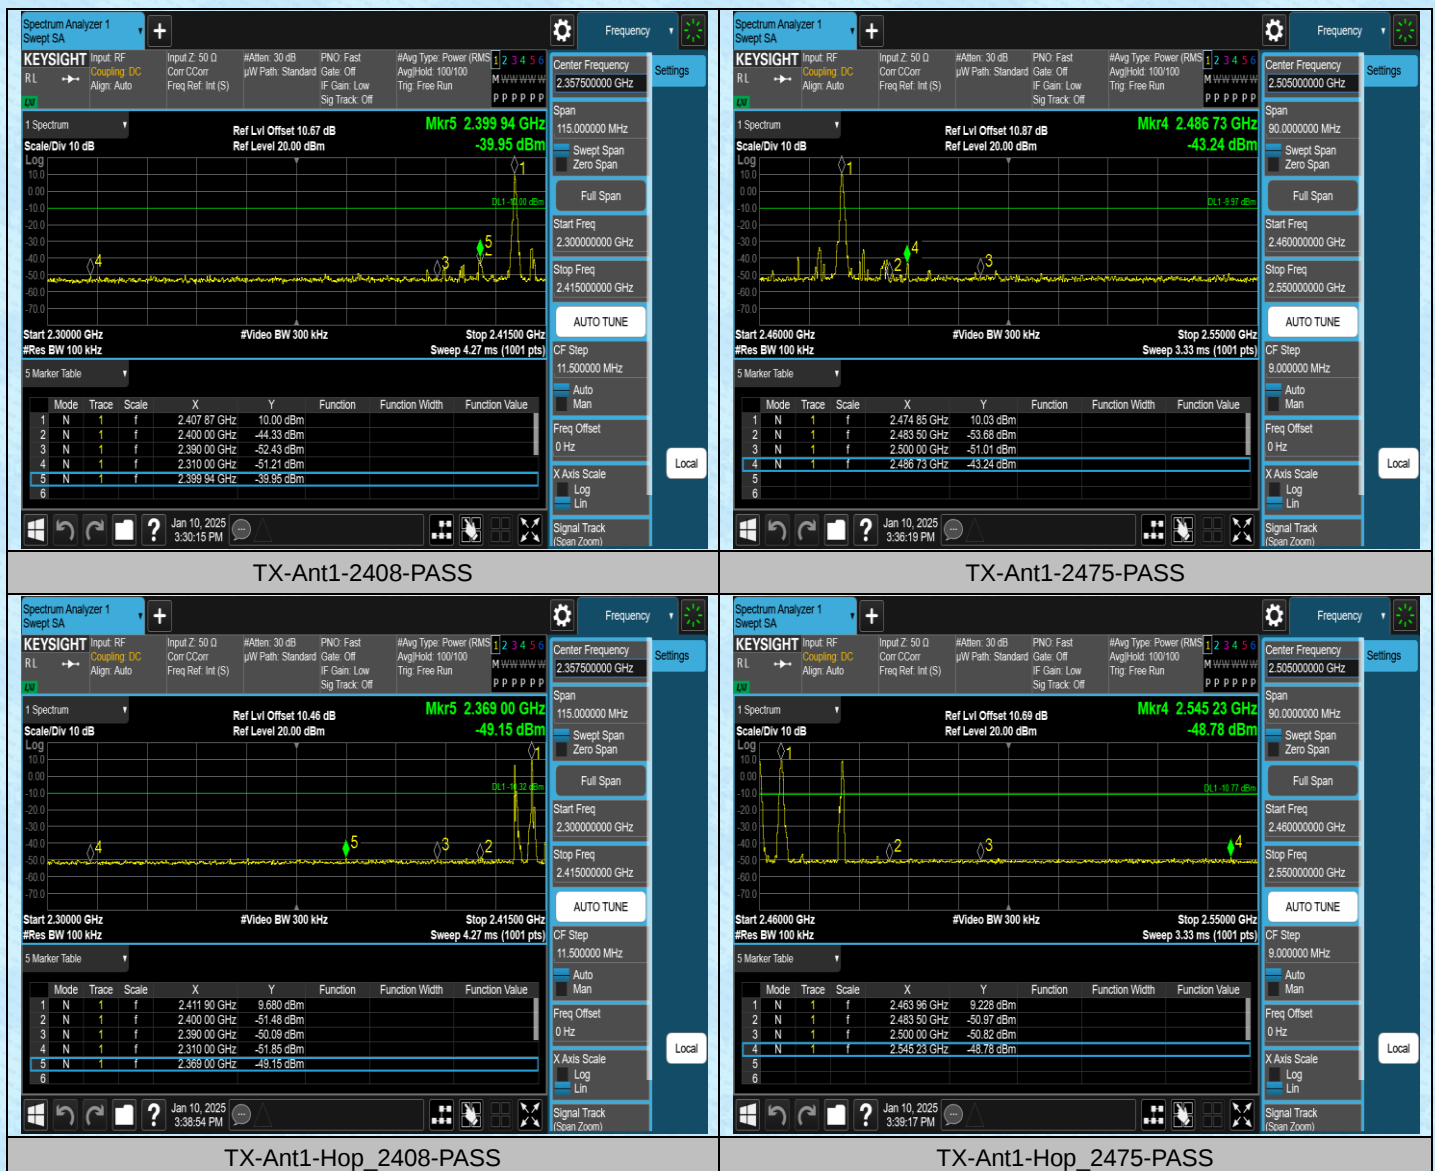


AppendixH:Conducted Spurious Emission

Test Result

Test Mode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	2408	0~Reference	9.92	9.92	---	PASS
TX	Ant1	2408	30~1000	9.92	-62.07	≤-10.08	PASS
TX	Ant1	2408	1000~26500	9.92	-49.69	≤-10.08	PASS
TX	Ant1	2440	0~Reference	10.53	10.53	---	PASS
TX	Ant1	2440	30~1000	10.53	-62.18	≤-9.47	PASS
TX	Ant1	2440	1000~26500	10.53	-46.31	≤-9.47	PASS
TX	Ant1	2475	0~Reference	10.04	10.04	---	PASS
TX	Ant1	2475	30~1000	10.04	-62.1	≤-9.96	PASS
TX	Ant1	2475	1000~26500	10.04	-45.24	≤-9.96	PASS

Test Graphs



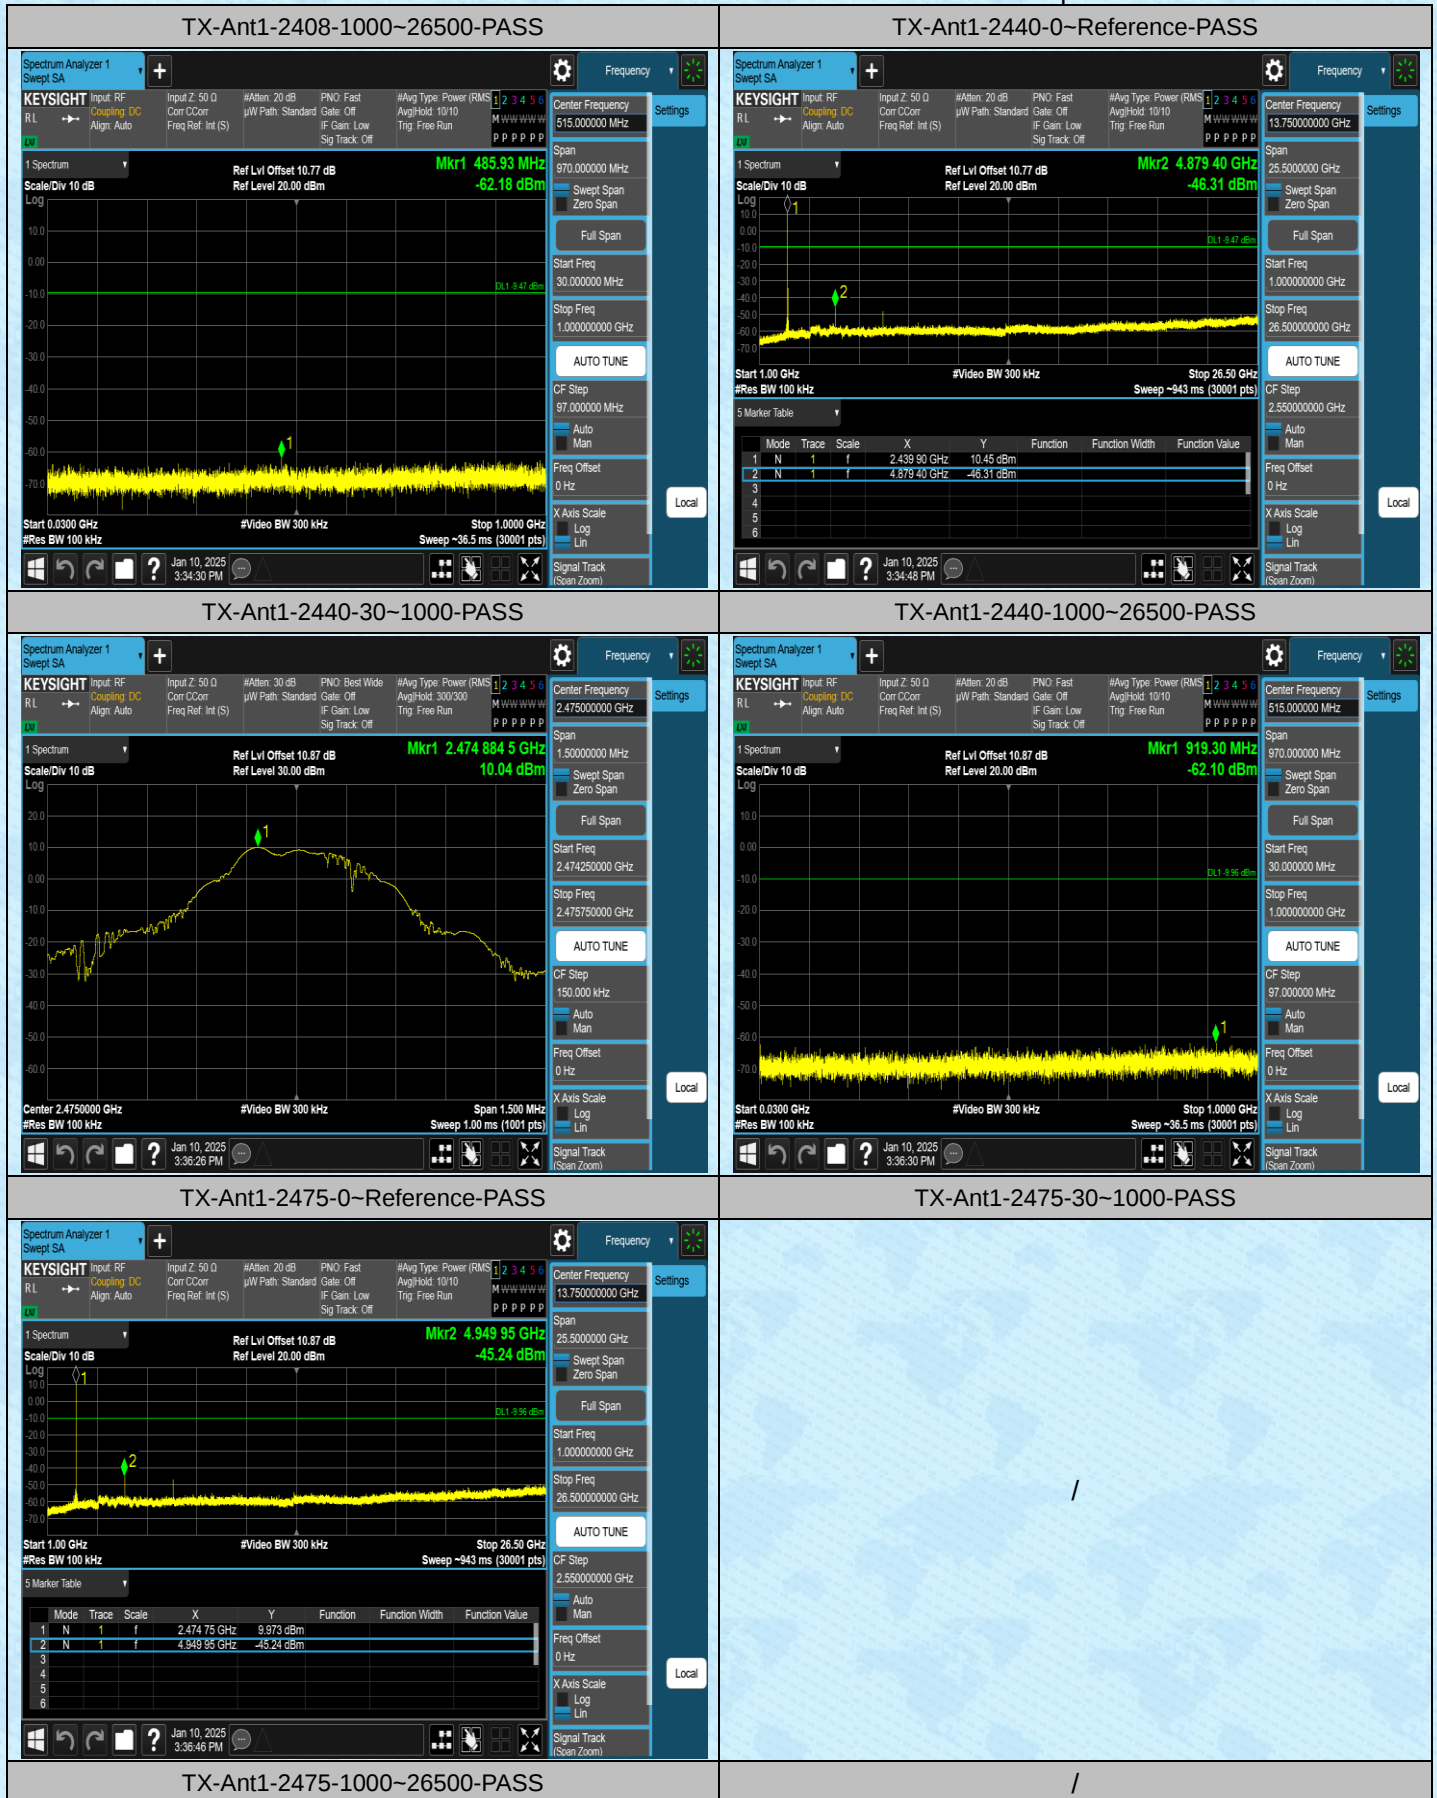


AppendixI: Duty Cycle

Test Result

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
TX	Ant1	2408	0.77	3.30	23.33	---	---
TX	Ant1	2440	0.77	3.29	23.40	---	---
TX	Ant1	2475	0.77	3.30	23.33	---	---

Test Graphs

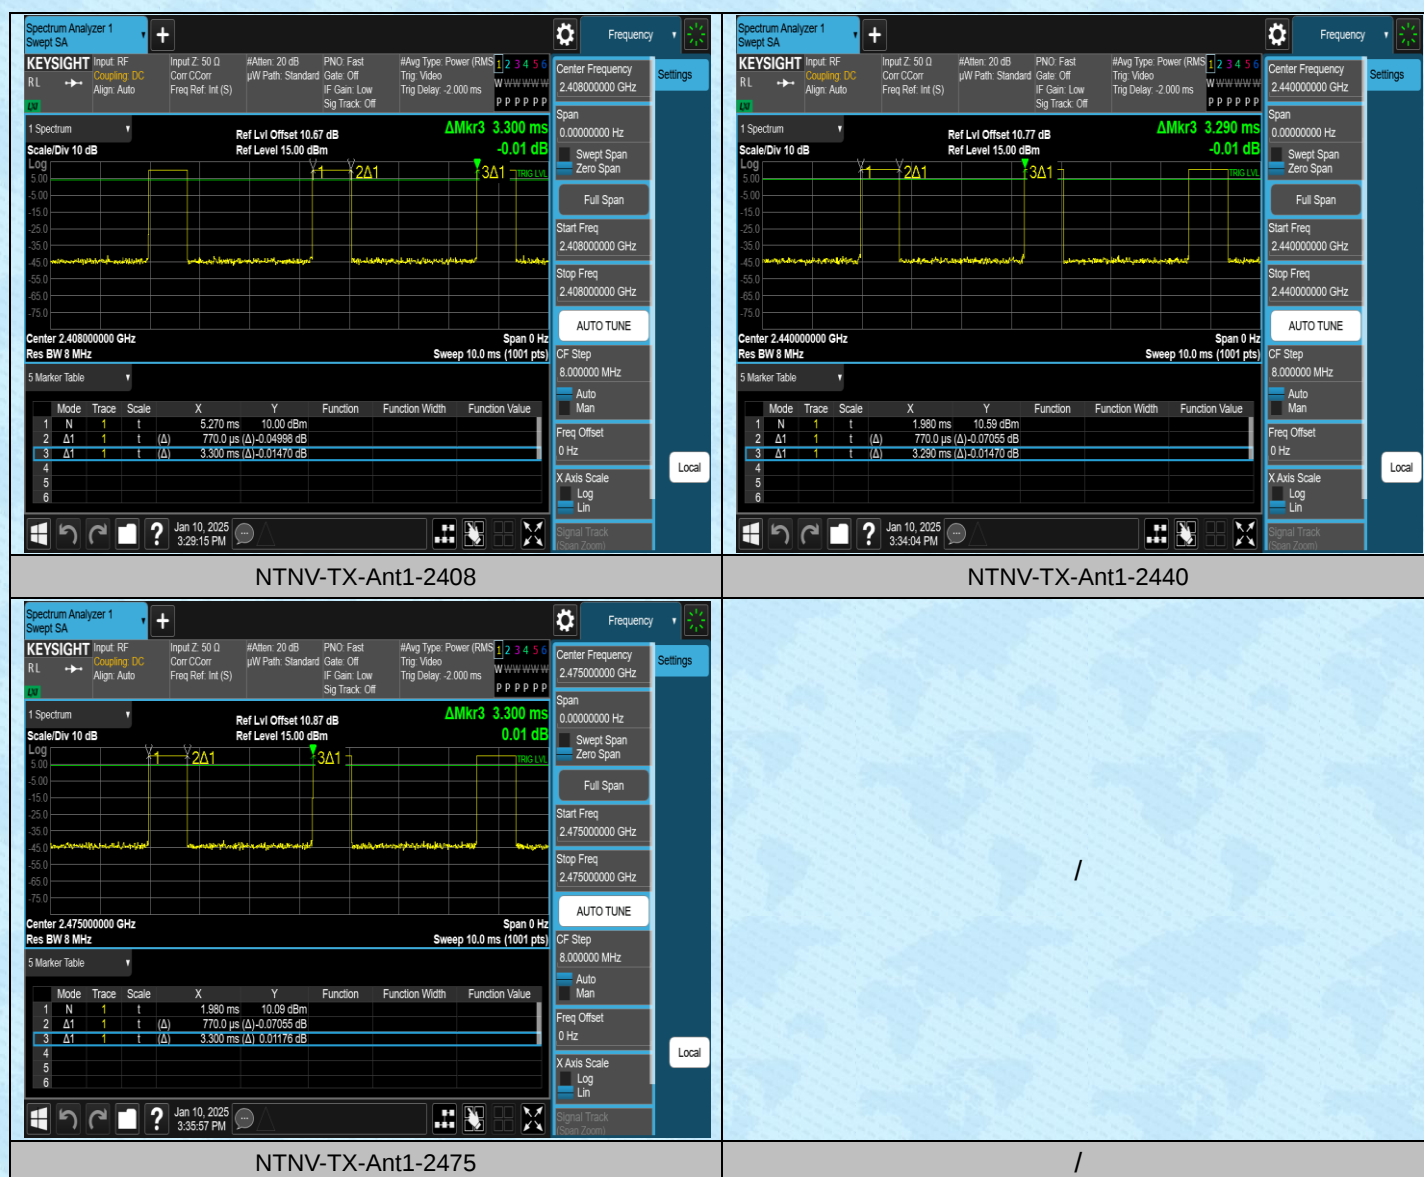

---End---