

Produkte
Products

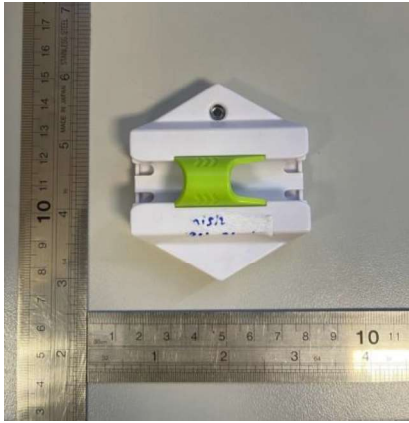
Prüfbericht-Nr.: <i>Test Report No.:</i>	CN212Y6A 001	Auftrags-Nr.: <i>Order No.:</i>	158049748	Seite 1 von 15 <i>Page 1 of 15</i>	
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	22.06.2021		
Auftraggeber: <i>Client:</i>	Ravensburger Verlag GmbH Robert-Bosch Str. 1, 88214 Ravensburg, Germany				
Prüfgegenstand: <i>Test item:</i>	Short Range Device - Radio Toy Transmitter (2.4GHz)				
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	Electronic parts GT-E Finish/910311 FCC ID: 2A2XI311 IC ID: 27849-311 PMN: Finish HVIN: 311				
Auftrags-Inhalt: <i>Order content:</i>	FCC Certification and ISED Certification				
Prüfgrundlage: <i>Test specification:</i>	FCC Part 15 Subpart C, ANSI C63.10-2013 RSS-210 Issue 10, RSS-Gen Issue 5				
Wareneingangsdatum: <i>Date of receipt:</i>	02.12.2021				
Prüfmuster-Nr.: <i>Test sample No.:</i>	A003175930-002				
Prüfzeitraum: <i>Testing period:</i>	10.12.2021				
Ort der Prüfung: <i>Place of testing:</i>	Hong Kong				
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland Hong Kong Ltd.				
Prüfergebnis*: <i>Test result*:</i>	Pass				
geprüft von / tested by:		kontrolliert von / reviewed by:			
 21.04.2022 Felicia Chan / Assistant Engineer		 21.04.2022 Sharon Li / Unit Senior Manager			
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>
Sonstiges / Other:					
Zustand des Prüfgegenstandes bei Anlieferung: Prüfmuster vollständig und unbeschädigt <i>Condition of the test item at delivery:</i> Test item complete and undamaged					
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested					
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents	4
Independent Operation Modes	4
Related Submittal(s) Grants	4
Remark	4
Test Set-up and Operation Mode	5
Principle of Configuration Selection	5
Test Operation and Test Software	5
Special Accessories and Auxiliary Equipment	5
Test Methodology	6
Radiated Emission	6
Field Strength Calculation	6
Test Setup Diagram	7
Test Facility	8
Test Laboratory Information	8
List of Test and Measurement Instruments	9
Measurement Uncertainty	10
Results FCC Part 15 – Subpart C / RSS-210 Issue 10	11
FCC 15.203 – Antenna Requirement 1	Pass 11
FCC 15.204 – Antenna Requirement 2	Pass 11
RSS-Gen 6.3 – External Control	Pass 11
RSS-Gen 8.3 – Antenna Requirement	Pass 11
FCC 15.207/ RSS-Gen 8.8 – Conducted Emission on AC Mains	N/A 11
Subclause 15.215 (c) – 20 dB Bandwidth	Pass 12
RSS-Gen 6.6 – Occupied Bandwidth	Pass 12
Subclause 15.249(a)/RSS-210 B.10(a) – Field Strength of Fundamental and Harmonics	Pass 13
Subclause 15.249(d), 15.205/RSS-210 B.10(b) – Out Of Band Radiated Emission	Pass 15

Appendix 1 – Test protocols	5 pages
Appendix 2 – Test setup	3 pages
Appendix 3 – EUT External Photos	2 pages
Appendix 4 – EUT Internal Photos	3 pages
Appendix 5 – RF exposure information.....	2 pages

Product information

Manufacturers declarations

	Transmitter
Operating frequency range	2402 - 2471MHz
Type of modulation	GFSK
Number of channels	6
Type of antenna	Fixed Integral wire antenna
Antenna gain	2 dBi
Power level	fix
Connection to public utility power line	No
Nominal voltage	3.0 VDC

Product function and intended use

The equipment under test (EUT) is a radio control toy transmitter operating at 2.4GHz. It is powered by battery only.

Submitted documents

Nil

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- Test mode samples with maximum RF output power and duty cycle and capable to transmit continuously at the lowest, middle and highest frequency channels is provided by the applicant for the testing.

Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- None

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360 °, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.


FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.


Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

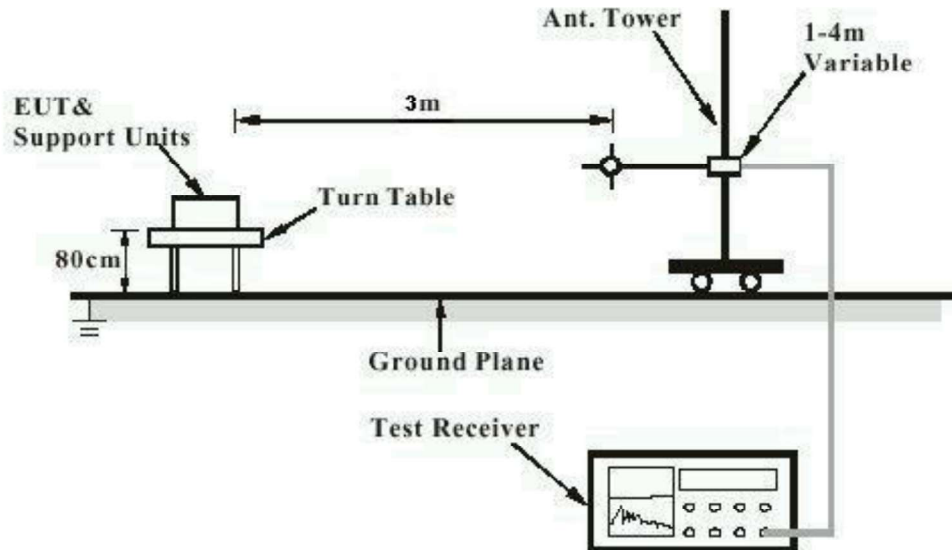

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

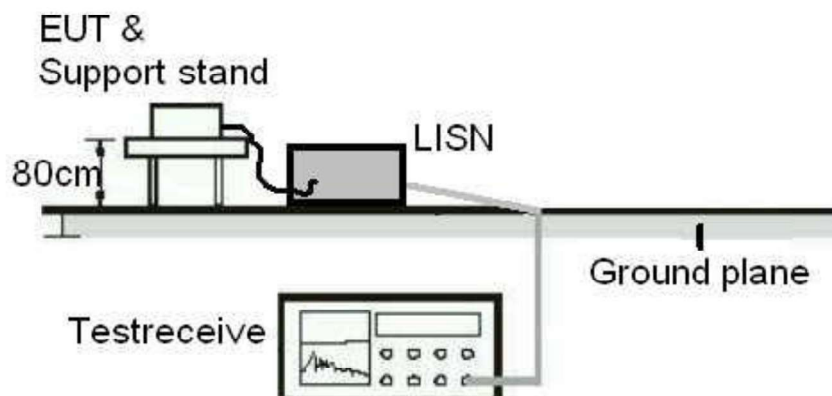

Test Facility

Test Laboratory Information

TÜV Rheinland Hong Kong Ltd.

Address: 3-4/F, Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong

Tel.: +852 2192 1000

Fax: +852 2192 1001

Email service-gc@tuv.com

The test facility is recognized or accredited by the following organizations:

FCC

Test Firm Registration Number : 371735

ISED

Test Site Registration Number : 26152

List of Test and Measurement Instruments

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	5-Mar-21	5-Mar-22
Multi-functional Anechoic Chamber	Albatross	Nil	4-Jan-21	4-Jan-22
Test Receiver	R & S	ESW44	20-Sep-21	20-Sep-22
Active Loop Antenna	EMCO	6502	3-Nov-20	3-Nov-22
Bi-conical Antenna	R & S	HK116	15-Sep-20	15-Sep-22
Log Periodic Antenna	R & S	HL223	15-Sep-20	15-Sep-22
Standard Gain Horn	ETS-Lindgren	3160-07	24-Nov-20	24-Nov-22
Standard Gain Horn	ETS-Lindgren	3160-08	24-Nov-20	24-Nov-22
Standard Gain Horn	ETS-Lindgren	3160-10	30-Oct-20	30-Oct-22
Double-Ridged Waveguide Horn	EMCO	3116	30-Oct-20	30-Oct-22
Double-Ridged Waveguide Horn	EMCO	3117	11-Nov-20	11-Nov-22
Coaxial cable	Harbour	SF118/11n/11n/1 2000.0	3-Aug-20	3-Aug-22
High Frequency Cable	Pasternack	PE3VNA4001-3M	29-Jan-21	29-Jan-23
Microwave amplifier 0.5-26.5GHz, 25dB gain	COM-POWER Corporation	PAM-118A	5-Mar-21	5-Mar-22
Preamplifier 18GHz to 40GHz with cable (EMC656)	A.H. Systems, Inc.	PAM-1840VH	29-Jan-21	29-Jan-22
High Pass Filter (cutoff freq. = 1000MHz)	Trilithic	23042	29-Oct-21	29-Oct-23

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Signal and Spectrum Analyzer	R & S	FSV40	29-Nov-21	29-Nov-22

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is $\pm 2.42\text{dB}$.

The estimated combined standard uncertainty for radiated emissions measurements is $\pm 4.81\text{dB}$ (9kHz to 30MHz) and $\pm 4.62\text{dB}$ (30MHz to 200MHz) and $\pm 5.67\text{dB}$ (200MHz to 1000MHz) and is $\pm 5.07\text{dB}$ (1GHz to 8.2GHz) and $\pm 4.58\text{dB}$ (8.2GHz to 12.4GHz) and $\pm 4.78\text{dB}$ (12.4GHz to 18GHz)

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C / RSS-210 Issue 10

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results:	a) Antenna type:	Fixed Integral wire antenna
	b) Manufacturer and model no:	N/A
	c) Peak Gain:	2 dBi
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2		Pass
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results:	Only one integral antenna can be used.	
Verdict:	Pass	

RSS-Gen 6.3 – External Control		Pass
IC Requirement: The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the limits prescribed in the applicable RSS.		
Results:	The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.	
Verdict:	Pass	

RSS-Gen 8.3 – Antenna Requirement		Pass
IC Requirement: When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.		
Results:	a) Antenna type:	Fixed Integral wire antenna
	b) Manufacturer	N/A
	c) Model no	N/A
	d) Gain with reference to an isotropic radiator:	2 dBi
Verdict:	Pass	

FCC 15.207/ RSS-Gen 8.8 – Conducted Emission on AC Mains		N/A
There is no AC power input or output ports on the EUT.		

Subclause 15.215 (c) – 20 dB Bandwidth				Pass
Test Specification : ANSI C63.10 – 2013 Test date : 27.08.2021 Mode of operation : Tx mode Port of testing : Antenna port Supply voltage : 3.0 VDC Temperature : 23°C Humidity : 50%				
Requirement: The intentional radiators must be designed to ensure that the 20dB bandwidth of the emission, is contained within the frequency band designated in the rule section under which the equipment is operated.				
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.				
Frequency (MHz)	20 dB left (MHz)	Limit (MHz)	20 dB right (MHz)	Limit (MHz)
2402	2401.354	> 2400	2402.867	< 2483.5
2470	2469.312	> 2400	2470.861	< 2483.5
2471	2470.303	> 2400	2471.946	< 2483.5

RSS-Gen 6.6 – Occupied Bandwidth				Pass
FCC/ IC Requirement : N/A				
Test Specification : RSS-Gen Test date : 27.08.2021 Mode of operation : Tx mode Port of testing : Antenna port Supply voltage : 3.0 VDC Temperature : 25°C Humidity : 55%				
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.				
Frequency (MHz)	Left (MHz)	Right (MHz)	99% bandwidth (MHz)	
2402	2401.427	2402.693	1.27	
2470	2469.356	2470.832	1.48	
2471	2470.354	2471.830	1.48	

Subclause 15.249(a)/RSS-210 B.10(a) – Field Strength of Fundamental and Harmonics Pass		
Test Specification : ANSI C63.10 – 2013 Test date : 29.06.2021 Mode of operation : Tx mode Port of testing : Enclosure Frequency range : 9kHz – 25GHz Supply voltage : 3.0 VDC Temperature : 24°C Humidity : 52%		
Requirement: The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following limit.		
Results: PASS.		
Fundamental Frequency 2402MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2402.041	72.3	114.0 / PK
2402.032	48.6	94.0 / AV
Fundamental Frequency 2402MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2402.025	88.6	114.0 / PK
2402.025	64.6	94.0 / AV
Harmonics 2402MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4804.064	46.1	74.0 / PK
4804.064	29.1	54.0 / AV
7206.064	46.1	74.0 / PK
7206.064	29.7	54.0 / AV
Harmonics 2402MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4804.067	59.1	74.0 / PK
4804.067	36.4	54.0 / AV
7209.092	49.6	74.0 / PK
7209.092	31.3	54.0 / AV
Fundamental Frequency 2470MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2470.032	75.2	114.0 / PK
2470.032	51.5	94.0 / AV
Fundamental Frequency 2470MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2470.021	88.4	114.0 / PK
2470.021	64.5	94.0 / AV

Harmonics 2470MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4940.064	47.5	74.0 / PK	4940.064	29.9	54.0 / AV
4940.064	29.9	54.0 / AV	7410.096	43.3	74.0 / PK
7410.096	43.3	74.0 / PK	7410.096	28.8	54.0 / AV
7410.096	28.8	54.0 / AV	Harmonics 2470MHz		
Harmonics 2470MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4940.064	59.8	74.0 / PK	4940.064	37.1	54.0 / AV
4940.064	37.1	54.0 / AV	7410.087	47.4	74.0 / PK
7410.087	47.4	74.0 / PK	7410.087	30.3	54.0 / AV
7410.087	30.3	54.0 / AV	Fundamental Frequency 2471MHz		
Fundamental Frequency 2471MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2471.032	74.4	114.0 / PK	2471.032	50.8	94.0 / AV
2471.032	50.8	94.0 / AV	Fundamental Frequency 2471MHz		
Fundamental Frequency 2471MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2471.032	87.3	114.0 / PK	2471.032	63.4	94.0 / AV
2471.032	63.4	94.0 / AV	Harmonics 2471MHz		
Harmonics 2471MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4942.032	46.1	74.0 / PK	4942.032	29.3	54.0 / AV
4942.032	29.3	54.0 / AV	7413.048	43.6	74.0 / PK
7413.048	43.6	74.0 / PK	7413.048	29.1	54.0 / AV
7413.048	29.1	54.0 / AV	Harmonics 2471MHz		
Harmonics 2471MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4942.032	59.4	74.0 / PK	4942.032	36.8	54.0 / AV
4942.032	36.8	54.0 / AV	7413.048	47.5	74.0 / PK
7413.048	47.5	74.0 / PK	7413.048	30.5	54.0 / AV
7413.048	30.5	54.0 / AV			

Subclause 15.249(d), 15.205/RSS-210 B.10(b) – Out Of Band Radiated Emission			Pass
Test Specification : ANSI C63.10 – 2013 Test date : 29.06.2021 Mode of operation : Tx mode Port of testing : Enclosure Frequency range : 9kHz – 25GHz Supply voltage : 3.0 VDC Temperature : 24°C Humidity : 55%			
Requirement:		Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.	
Results:		All three transmit frequency modes comply with the field strength limit of section 15.209. There is no spurious found below 30MHz.	
Tx frequency 2402MHz Vertical Polarization			
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2400.000	45.5	74.0 / PK	
2400.000	25.5	54.0 / AV	
Tx frequency 2402MHz Horizontal Polarization			
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2400.000	65.5	74.0 / PK	
2400.000	28.2	54.0 / AV	
Tx frequency 2470MHz Vertical Polarization			
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
No peak found	---	74.0 / PK	
No peak found	---	54.0 / AV	
Tx frequency 2470MHz Horizontal Polarization			
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
No peak found	---	74.0 / PK	
No peak found	---	54.0 / AV	
Tx frequency 2471MHz Vertical Polarization			
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2483.500	39.2	74.0 / PK	
2483.500	25.8	54.0 / AV	
Tx frequency 2471MHz Horizontal Polarization			
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2483.500	55.8	74.0 / PK	
2483.500	25.6	54.0 / AV	