

Shenzhen Xinghe Radio Wave Technology Co., Ltd.

A401F Area, Junxiangda Warehouse, No. 9 Junxiangda, Tong'an Road, Nanlian Community, Nantou Street, Nanshan District, Shenzhen City , China


Product specification

Quick Reference Date

	In-mold antenna	
Frequenc Range	2400 ~ 2500GHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	10.23 %	
Gain (dBi)	2.83(Avg Gain XZ-plane)	
Maximum Power (dBm)	1.7 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Input Impendence(ohm)	50	
Polarization Type	Vertical & Horizontal	
V. S .W. R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & In-mold antenna

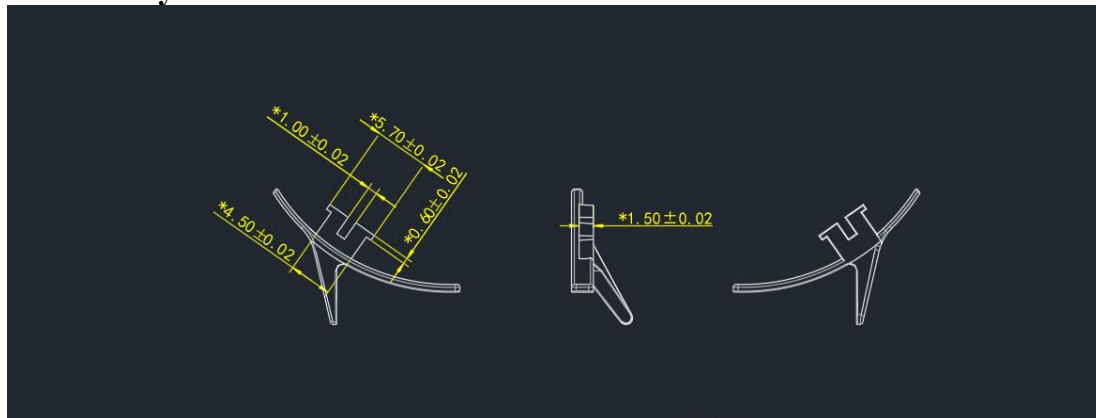

Antenna Gain



Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	-2.94	-4.85	2.83	-4.6	-2.3	-4	10.23%


Return Loss




The Environment of Antenna Radiation Pattern

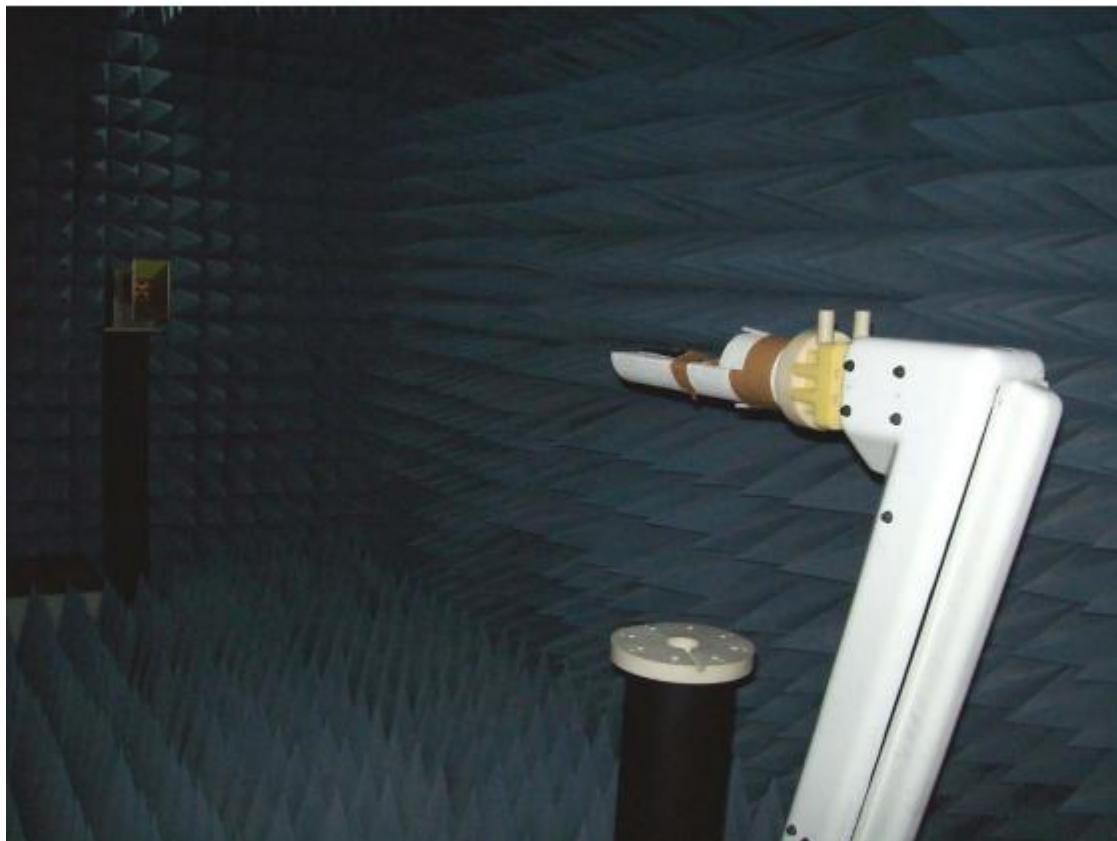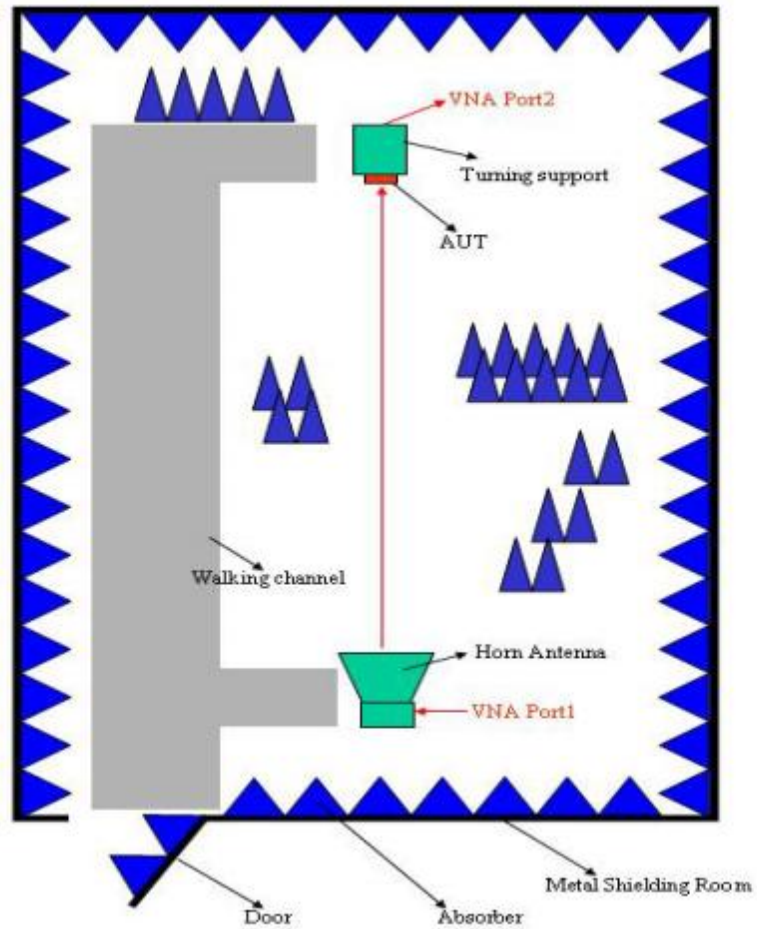


3D radiation pattern diagram

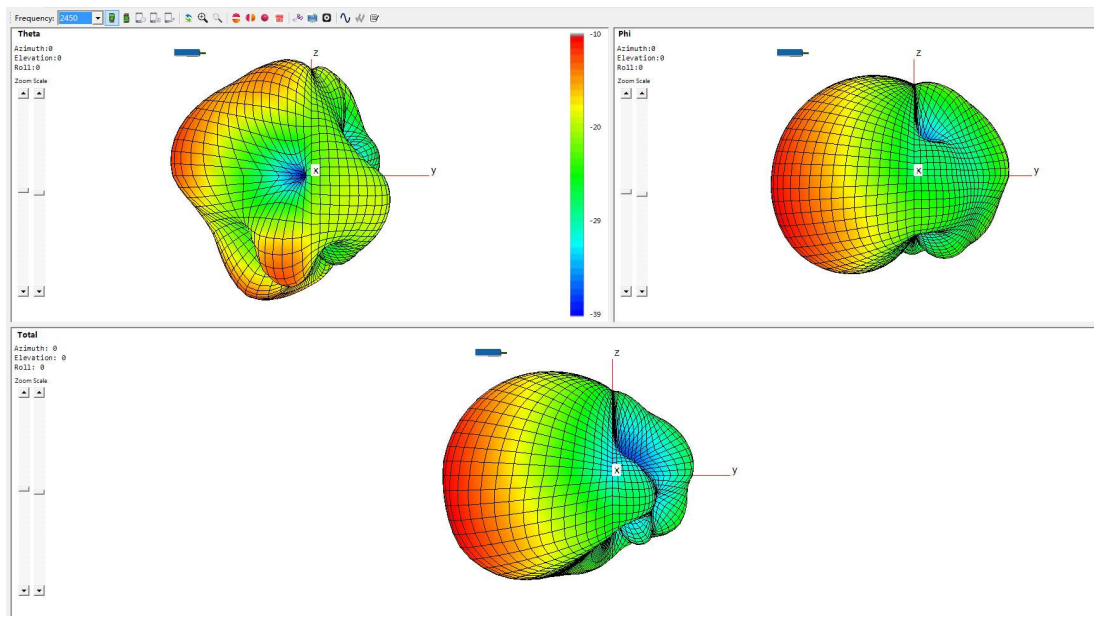

XY-plane

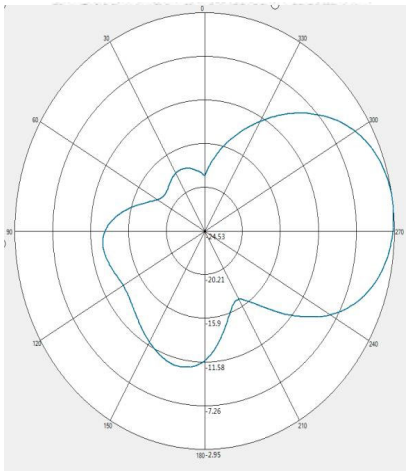

XZ-plane

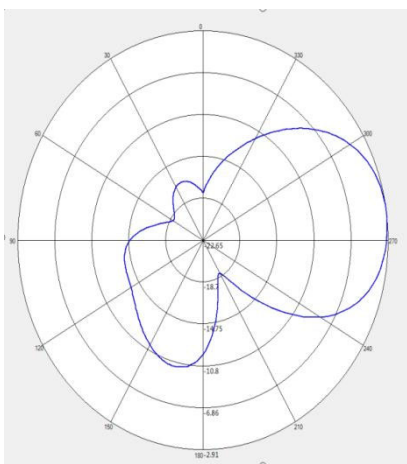

YZ-plane

