



User manual

Product features

 Bluetooth control

 Complete range of CCT/RGB+W strip available

 1-100% stepless dimming


 Time switch

 Remote controllable after connect to internet

Parameters

Model No.	Color	Input voltage	Power
SCBMC6-12	CCT	DC 5V	Max.5W
SCBMC6-14	RGB+W	DC 5V	Max.5W

Wiring diagram

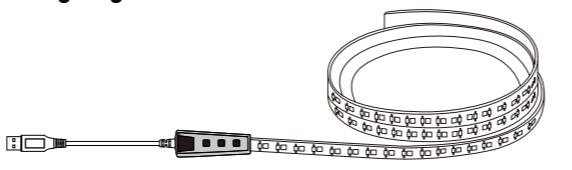

Installation

1. Use the power adapter with DC5V of output voltage only.
 2. Install the controller correctly, use 3M tape to fix it.
 3. Please unfold the LED strip to avoid the overheating issues. Please connect the cables of LED strip with the right position on the controller. Test the APP to check if it can control the LED strip correctly. If everything goes well, go to next step.
 4. Check and ensure the power supply, controller and LED strip are connected correctly.

Attenions

1. Do not put any metal around the controller, which could block Bluetooth signal.
 2. Ensure the power supply and controller are connected correctly.
 3. The power supply output voltage should be same as LED strip working voltage.
 4. Do not cover anything on the surface of power supply, controller and LED strip.
 5. Ensure the connection is correct before powering.

Download APP

1: Search the APP- "SMART LIFE" from Apple store or Google Play.

 ANDROID
  iOS

2: Scan the QR code from the label or user manual.




The APP compatible with Android 5.0 and iOS 10.0 or higher version.

 Android 5.0
  iOS 10.0


Log in / Register an account

Open the APP- "Smart Life", sign up for a new account or log in with an existing account.


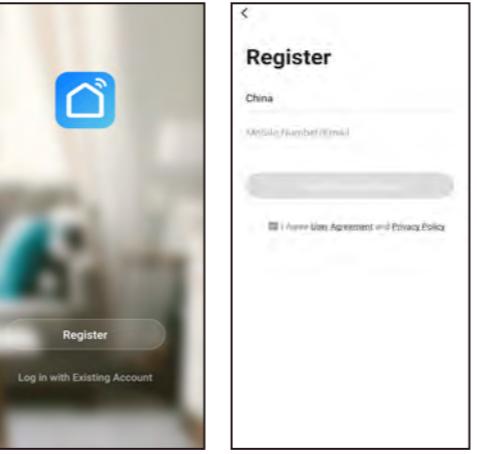



APP connection

1. Preparation jobs: Power on the LED strip and enter the home of APP.
 2. Connect the controller:
 Solution 1) : After powering on the strip, turn on and off 3 times, the strip will go into a status of quick flashing. Find the "+" (in the corresponding room of the APP) to add devices. If your mobile have already turned on bluetooth before connecting the LED strip, then no need to turn on bluetooth again, the APP will connect to the LED strip automatically. If your mobile didn't turn on bluetooth before connecting the LED strip, the APP will pop up an interface with tips to ask you to turn on bluetooth. Then please choose "Allow", then the bluetooth function of your mobile will be turned on. After that, the APP will pop up tips with info of the LED strips. Will go into an interface of bluetooth device, choose you will need to await for your mobile to pairing with the controller at this step. Choose "Done" when it shows "Added successfully", then go into operation modes.

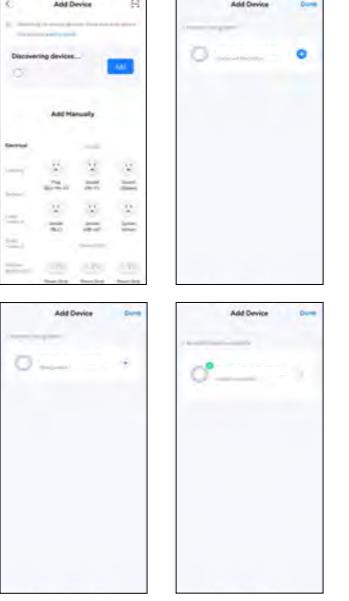


Interface introduction

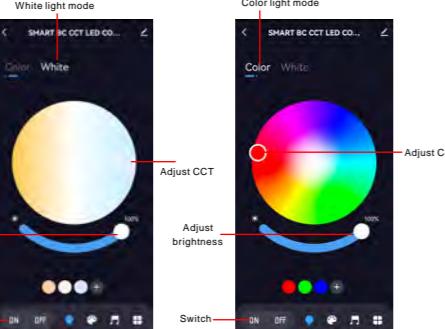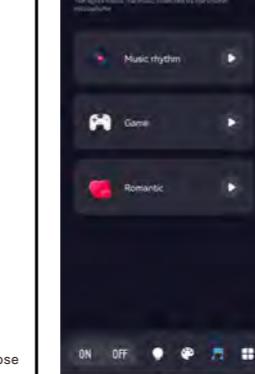1. You can adjust the brightness and CCT under white light mode.
 2. Under color light mode, you could change to any RGB mixed color and adjust the brightness and saturation.

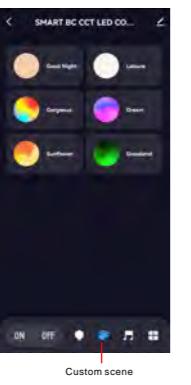

3. Scene: 1) Recommended scene: various modes available for options, you can choose your preferable modes freely.


Custom scene

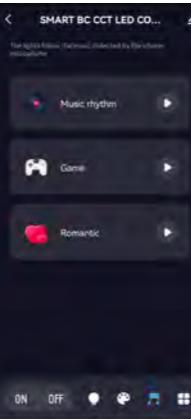4. Music modes



※ The APP interface, please subject to the latest version.

Music+IR remote controller manual



Product introduction:
 8-key infrared remote control can remotely realize the functions of dimming, color adjustment, mode, and music.5 modes of remote control music directly as external microphone.

Remote control operation introduction:
 When using, first remove the tail PVC sheet. When the controller is under the pairing process, the remote controller can't work.

Function Name	Function Description
	Press once, light on
	Press once, light off
	Press once the light will be at a given brightness and color temperature. Brightness is 5%, color temperature is 0%.
	Press once, it will be white light 100% brightness
	Short press, every time the brightness will increase 20% brightness, from 1%-20%-40%-60%-80%-100% brightness adjustment. Long press, stepless adjusting from current brightness.
	Short press, every time the brightness will decrease 20% brightness, from 1%-20%-40%-60%-80%-100% brightness adjustment. Long press, stepless adjusting from current brightness.
	Every press will change to a scene. The default scenes are good night, work / read / leisure / soft / routious / colorful / multicolored
	1. Every shortly press will change a color, the order is red, orange, yellow, green, cyan, blue, purple 2. Long press is color stepless adjustment. "H" value. Regulating rule is 0-360-0-360. 3. For single CCT and CCT version light, this button is ineffective.

Warning:
 Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:
 This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Statement:
 This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 —Reorient or relocate the receiving antenna.
 —Increase the separation between the equipment and receiver.
 —Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 —Consult the dealer or an experienced radio/TV technician for help.