


User Manual

PERSONAL MONITOR AMPLIFIER

DM30

Thank you for selecting the DM30 personal monitor amplifier! Please take the time to read this manual carefully to get the most out of the unit. We recommend that you keep the manual at hand for future reference.

FRONT PANEL

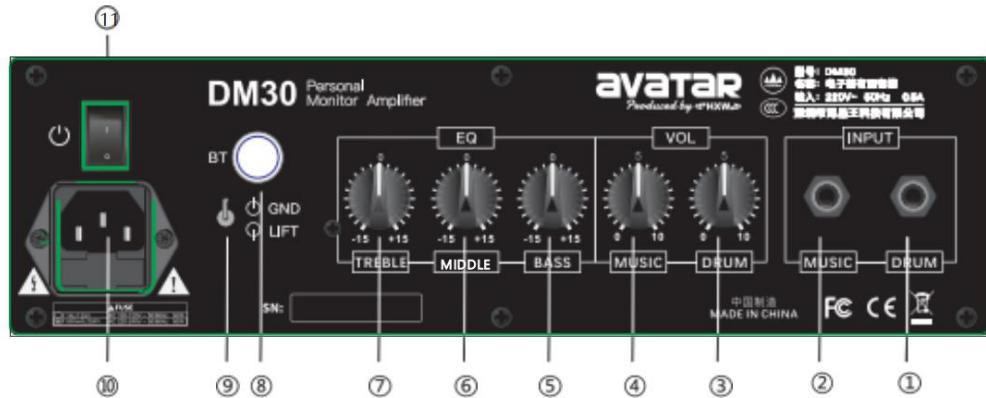

1. DRUM INPUT

Connect your device such as electric drum, keyboard etc. to this input.

2. MUSIC INPUT

Connect your another device such as electric drum, keyboard etc. Phones to this input.

3. DRUM VOL

This knob adjusts the volume of channel one.

4. MUSIC VOL

This knob adjusts the volume of channel two.

5. BASS

Adjust the amount of low frequency level.

6. MIDDLE

Adjust the amount of MID frequency level.

7. TREBLE

Adjust the amount of high frequency level.

8. BLUETOOTH

Click to open the Bluetooth function of -- LED rapid shine; search equipment name: DRUM AMP; LED bright, and a tinkling, the pairing is successful; click switch to start playing music (to support playback device) the indicator light flashes slowly, and then click the switch can pause -- LED bright; press 3 seconds off Bluetooth; when playing music can adjust EQ the knob to change the music high / medium / low frequency;

9. GND&LIFT

This switch is used to control the on-off of AC ground wire and DC ground wire, so as to eliminate the grounding noise and suppress the electrical interference.

10. AC INLET SOCKET

Connect the included AC power cable to this inlet.

11. POWER SWITCH

Switch ON/OFF the machine.

WARNING! -IMPORTANT SAFETY INSTRUCTIONS BEFORE CONNECTING, READ INSTRUCTIONS

- 1 . Use only the supplied power supply or power cord . If you are not sure of the type of power available , consult your dealer or local power company.
- 2 . Never break off the ground pin on the power supply cord .
- 3 . Never attempt to by- pass the fuses or fit ones of the incorrect value .
- 4 . Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous voltage points or other risks . Refer all servicing to qualified service personnel .
- 5 . Refer all servicing to qualified service personnel .
Servicing is required when the apparatus has been damaged in any way, such as when the power supply cord or plug is damaged , liquid has been spilled or objects have fallen into the apparatus , the apparatus has been exposed to rain or moisture , does not operate normally or has been dropped .
- 6 . Do not defeat the safety purpose of the polarized or grounding-type plug . A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong . The wide blade or the third prong is provided for safety. If the provided plug does not fit into your outlet , consult an electrician for replacement of the obsolete outlet .
- 7 . Do not allow liquids of any kinds water, soft , drinks , etc . to penetrate the unit .
Never place objects filled with liquids , such as vases or glasses on the DM30 this can cause electric shock .
Do not place naked flame sources , such as lighted candles , on the DM30 as this can cause fire .
- 8 . The power supply cord should be unplugged when the unit is to be unused for long periods of time .
- 9 . Protect the power cord from being walked on or pinched , particularly at plugs , convenience receptacles and at the point where they exit from the apparatus .

*Follow all instructions and heed all warnings
KEEP THESE INSTRUCTIONS!*

SPECIFICATION

Power Output: 25W RMS

Power Consumption: 30W

Impendence

DRUM: 68k ohm

MUSIC: 68k ohm

Input sensitivity

DRUM: -27dB

MUSIC: -25dB

EQ

BASS: +/- 15dB@60Hz

MIDDLE: +/- 15dB@1.5kHz

TREBLE: +/- 15dB@10kHz

BT: Bluetooth V5.0 , Stereo input

Speaker: 8 inch woof + 2 inch tweeter)

Dimensions: 402mm*367mm*370mm (L*W*H)

Net Weight: 6.2KG

Gross Weight: 7.5KG

FCC Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: Changes or modifications not expressly approved by the party responsible for Compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help important announcement .

Radiation Exposure Statement

To comply with FCC RF exposure compliance requirements, this grant is applicable to only mobile configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.