


1. Duty Cycle


1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
GFSK	SISO	2402	0.384	0.625	61.44	2.12	0.03
		2440	0.384	0.625	61.44	2.12	0.00
		2480	0.384	0.625	61.44	2.12	0.03


1.2 Test Graph

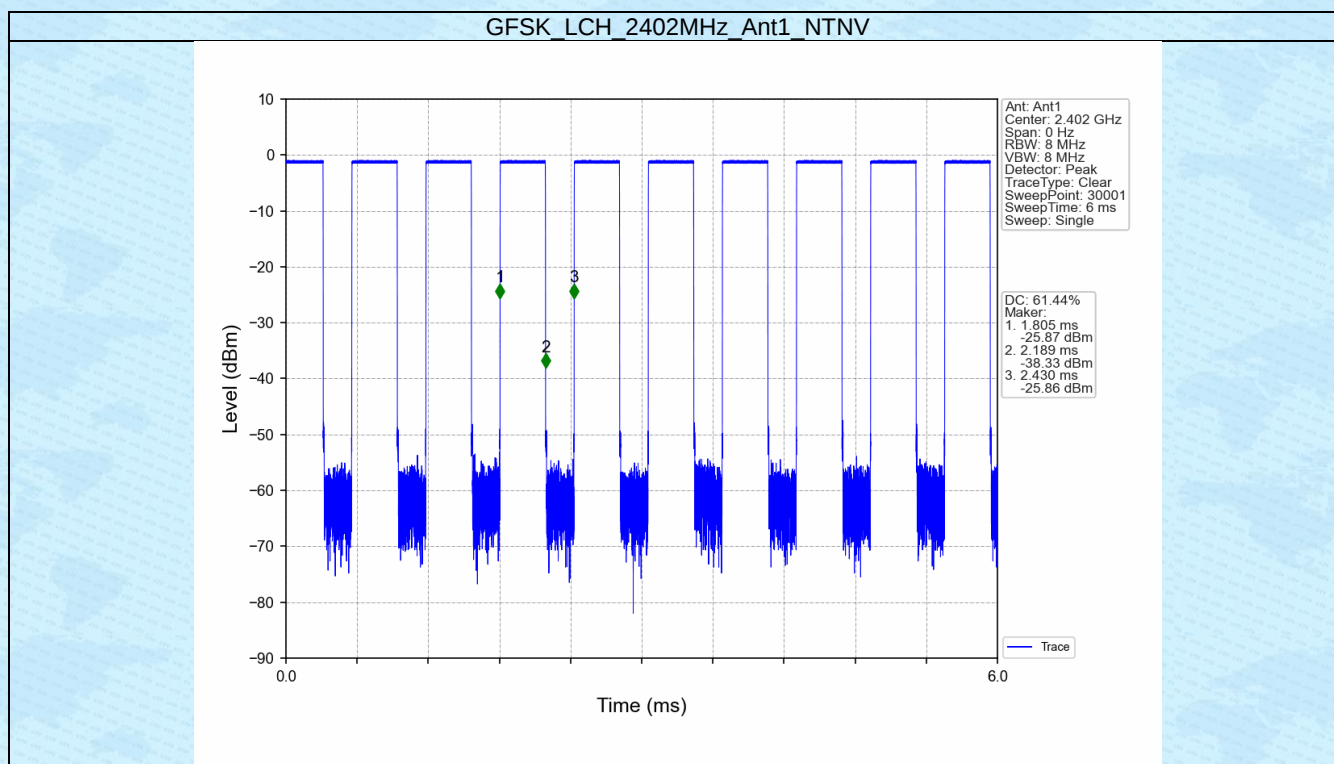

GFSK MCH 2440MHz Ant1 NTN

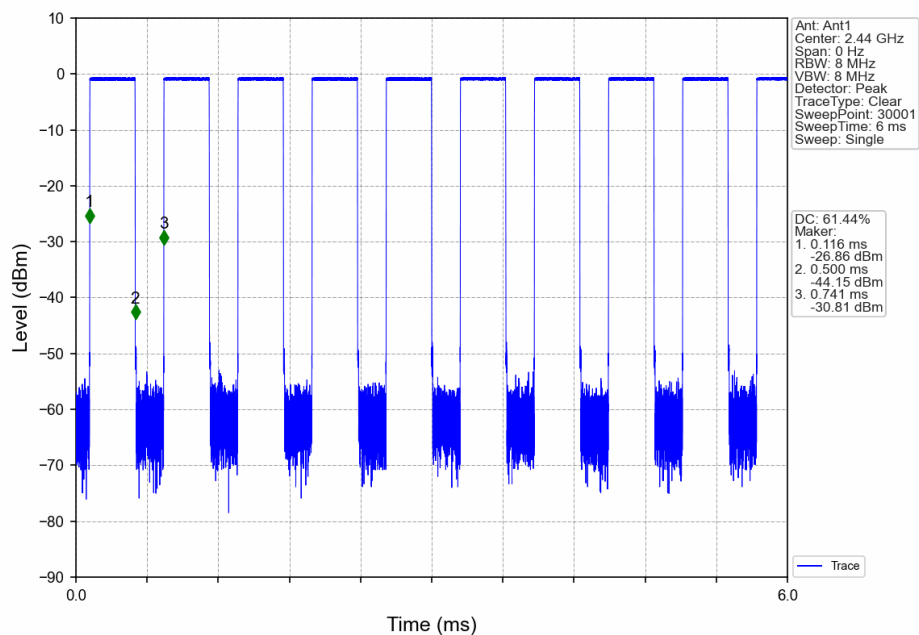

GFSK_HCH_2480MHz_Ant1 NTN

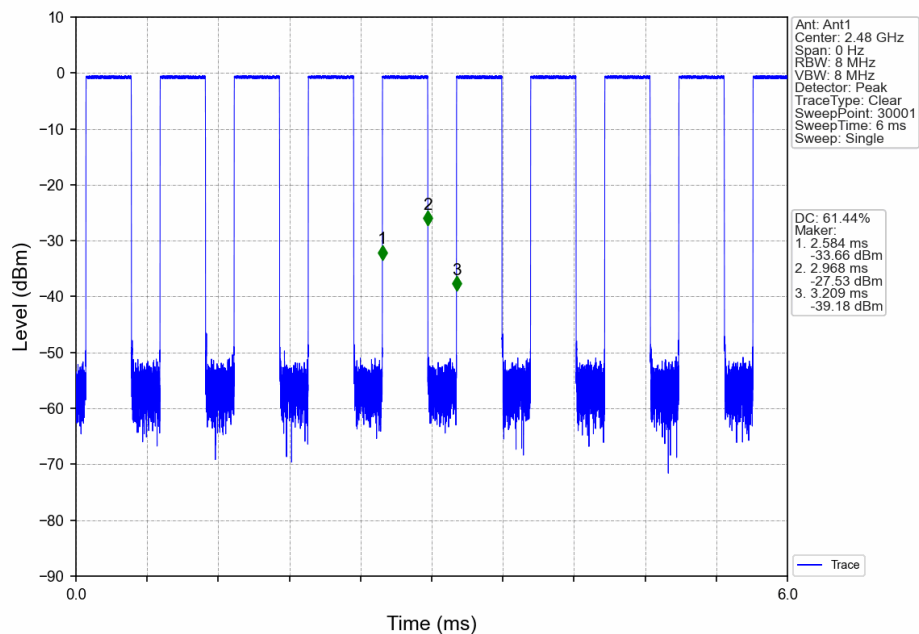


2. Bandwidth

2.1 OBW


2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
GFSK	SISO	2402	1	1.075	Pass
		2440	1	1.073	Pass
		2480	1	1.072	Pass


2.1.2 Test Graph

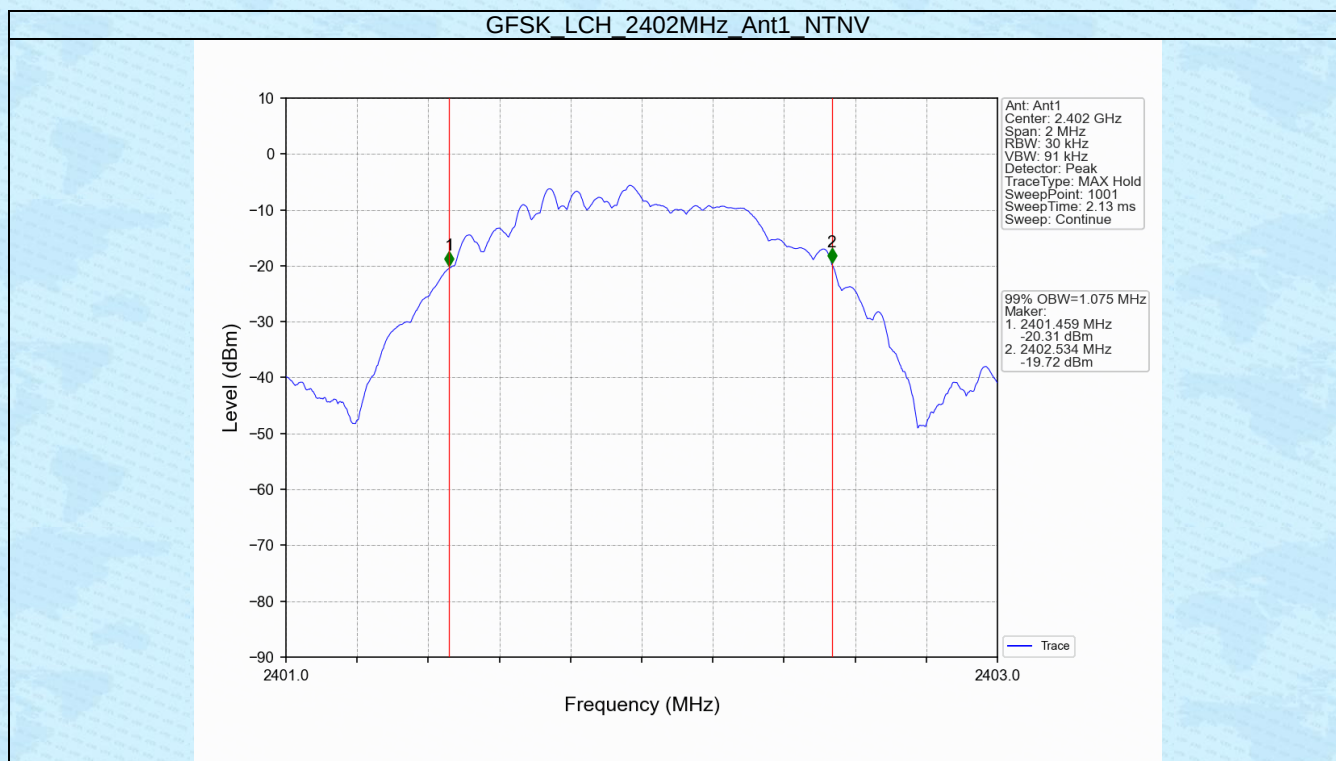

GFSK MCH 2440MHz Ant1 NTN

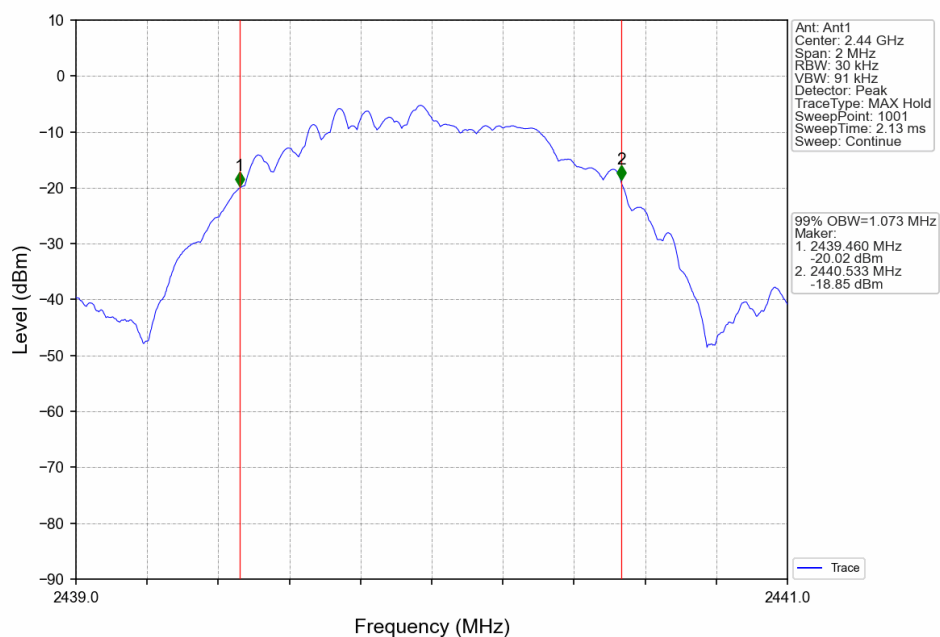

GFSK_HCH_2480MHz_Ant1_NTN

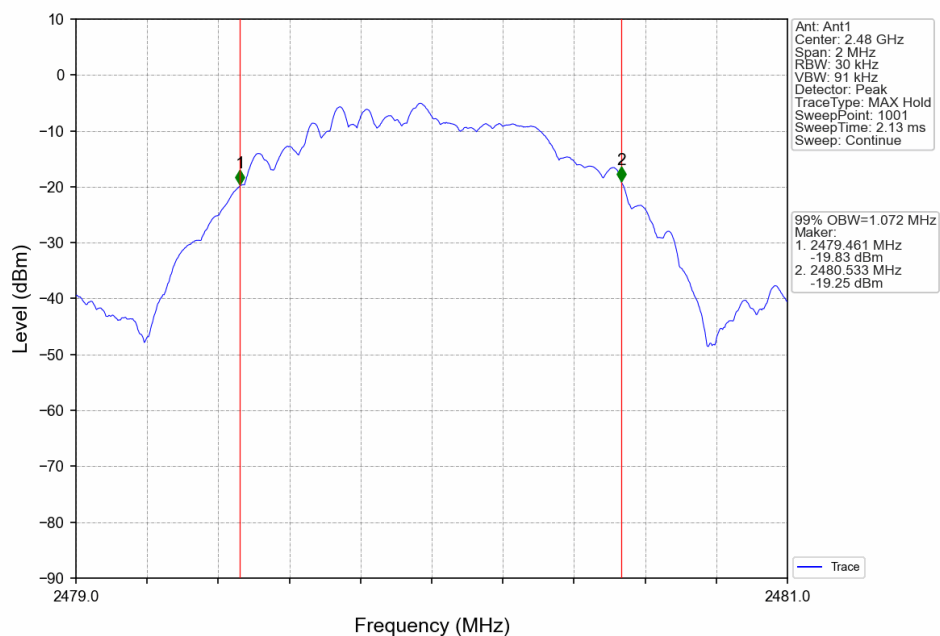


2.2 6dB BW


2.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
GFSK	SISO	2402	1	0.709	≥ 0.5	Pass
		2440	1	0.704	≥ 0.5	Pass
		2480	1	0.702	≥ 0.5	Pass


2.2.2 Test Graph

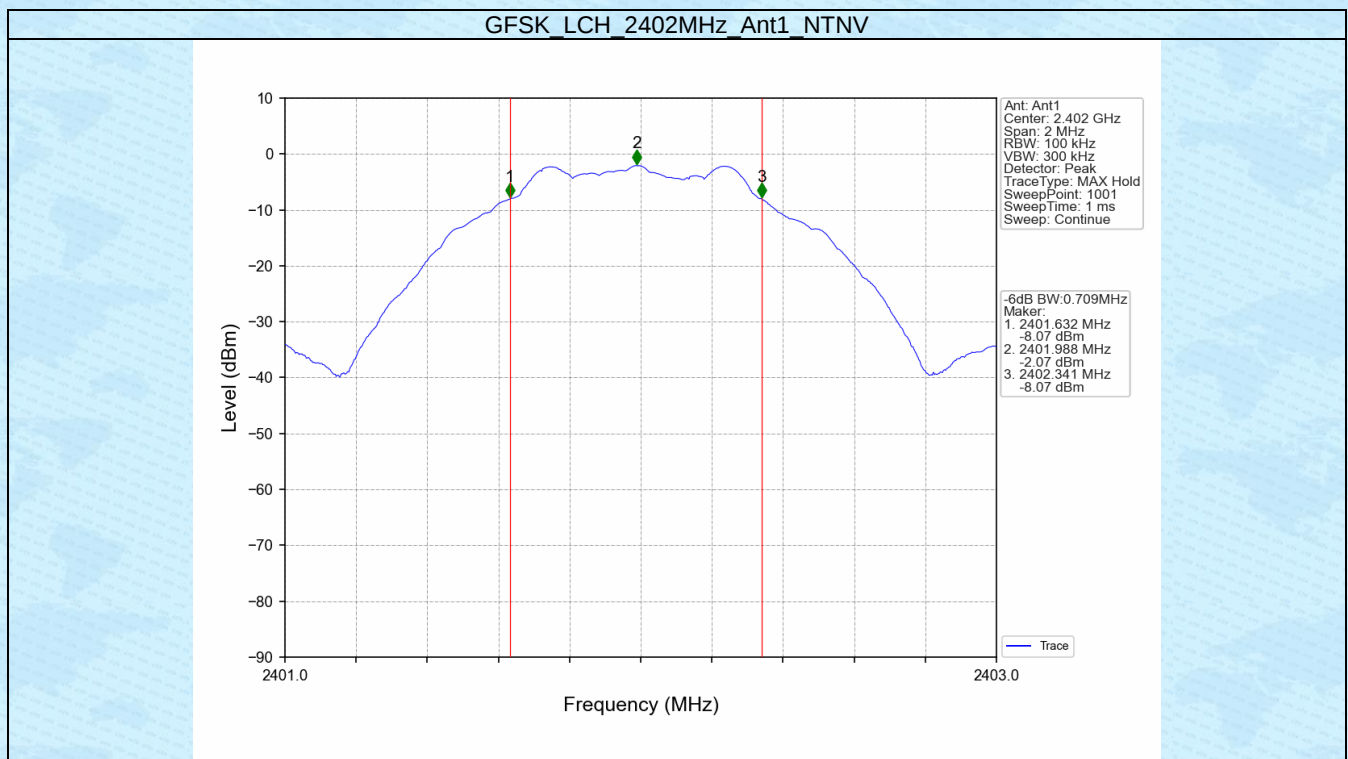

GFSK MCH 2440MHz Ant1 NTN

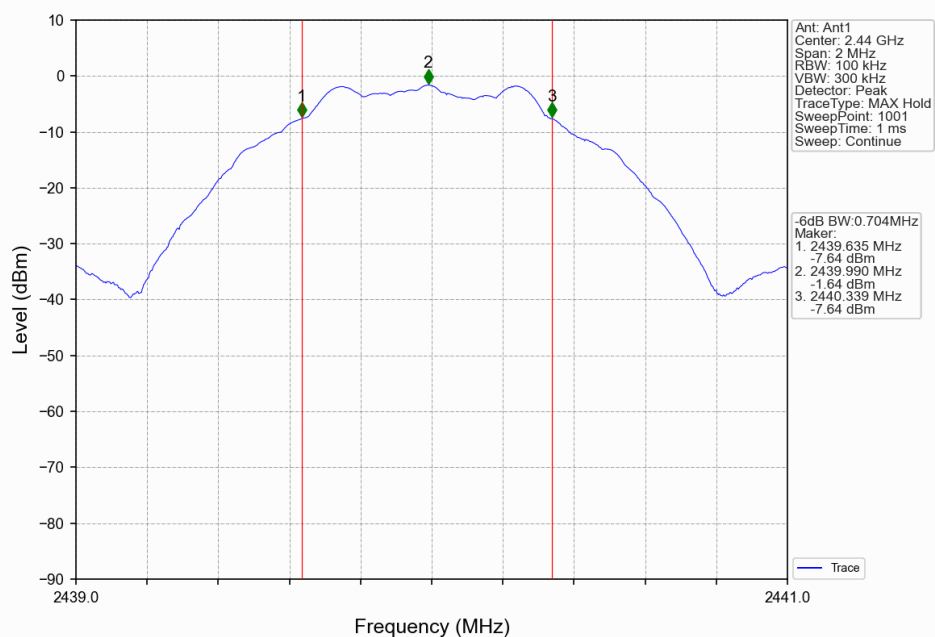

GFSK_HCH_2480MHz_Ant1_NTN

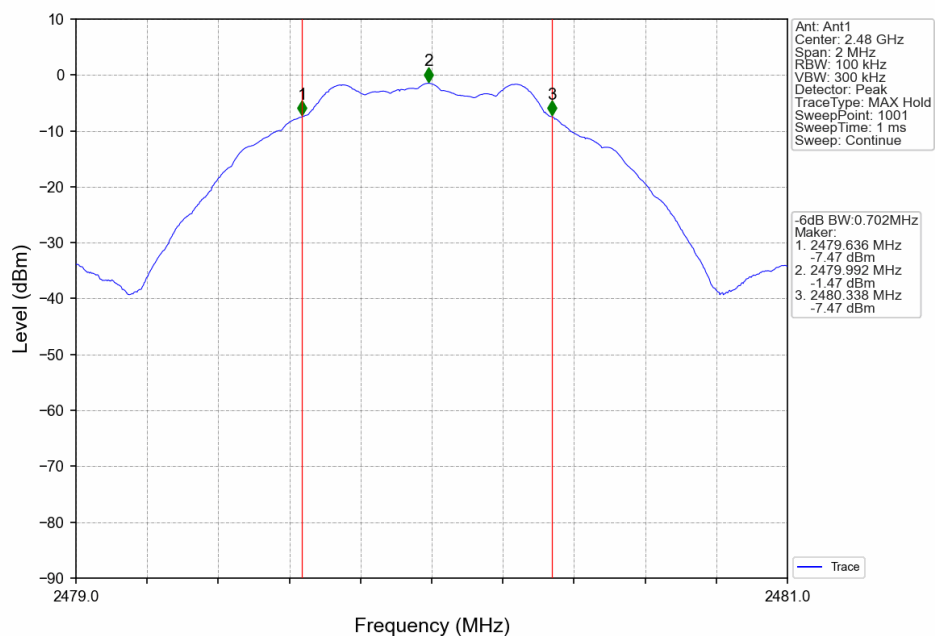


3. Maximum Conducted Output Power

3.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
GFSK	SISO	2402	-1.14	<=30	Pass
		2440	-0.75	<=30	Pass
		2480	-0.60	<=30	Pass

Note1: Antenna Gain: Ant1: 2.71dBi;


3.2 Test Graph

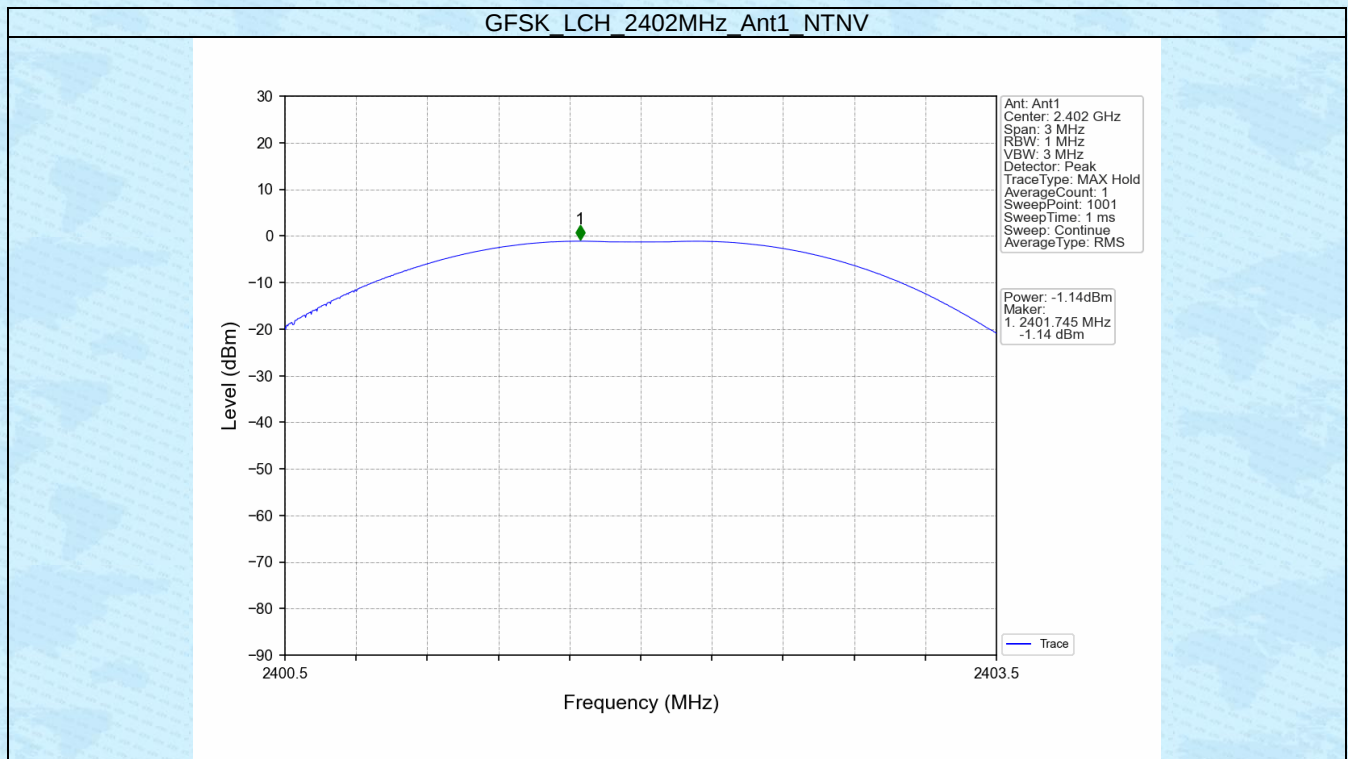

GFSK MCH 2440MHz Ant1 NTN

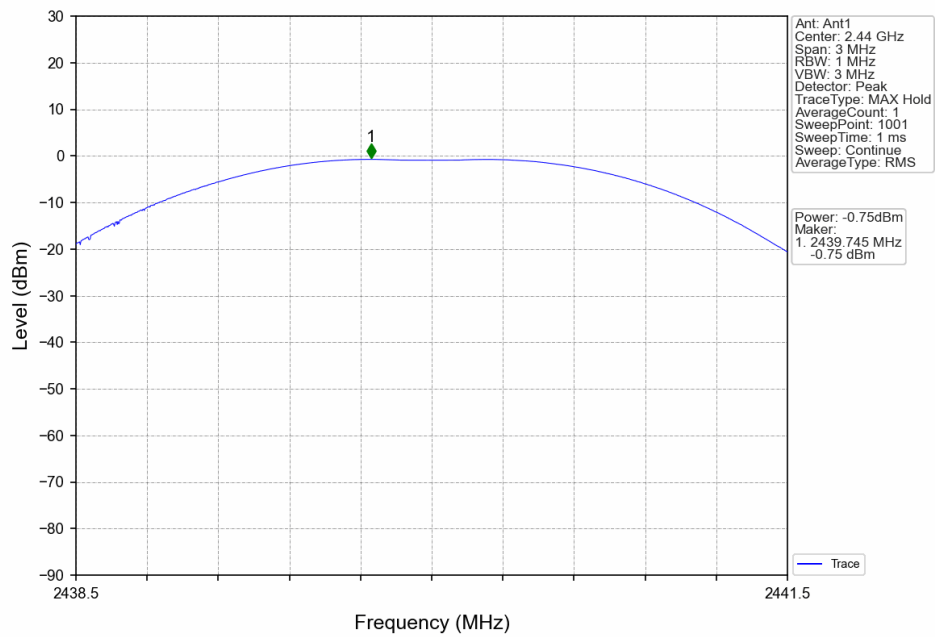

GFSK_HCH_2480MHz_Ant1_NTN

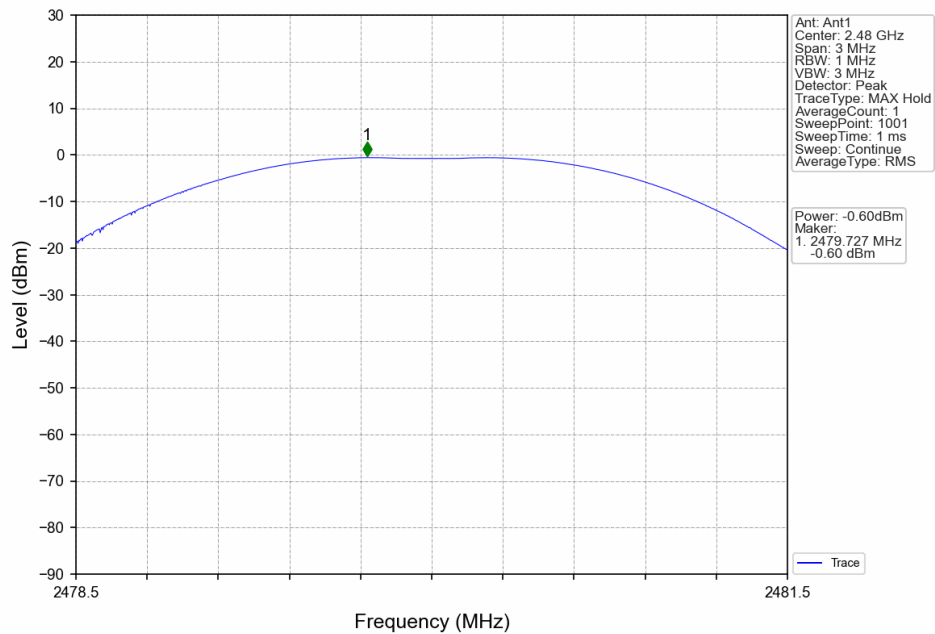


4. Maximum Power Spectral Density

4.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
GFSK	SISO	2402	-16.09	<=8	Pass
		2440	-15.72	<=8	Pass
		2480	-15.57	<=8	Pass

Note1: Antenna Gain: Ant1: 2.71dBi;


4.2 Test Graph

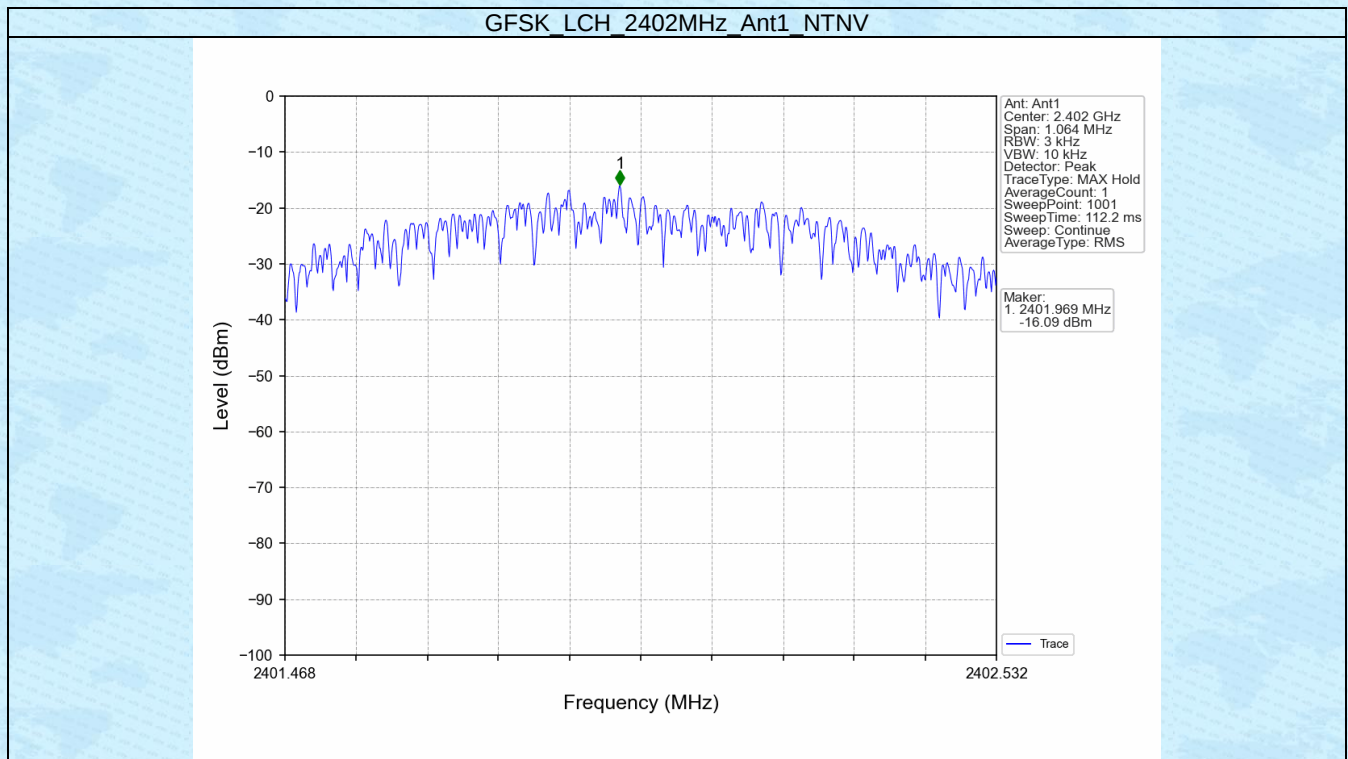

GFSK MCH 2440MHz Ant1 NTN

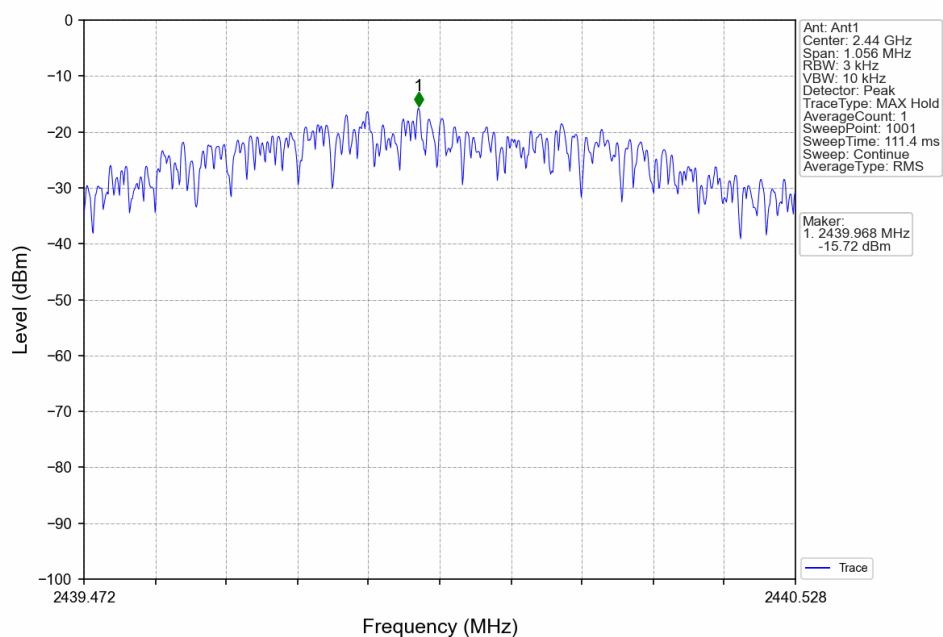

GFSK_HCH_2480MHz_Ant1 NTN

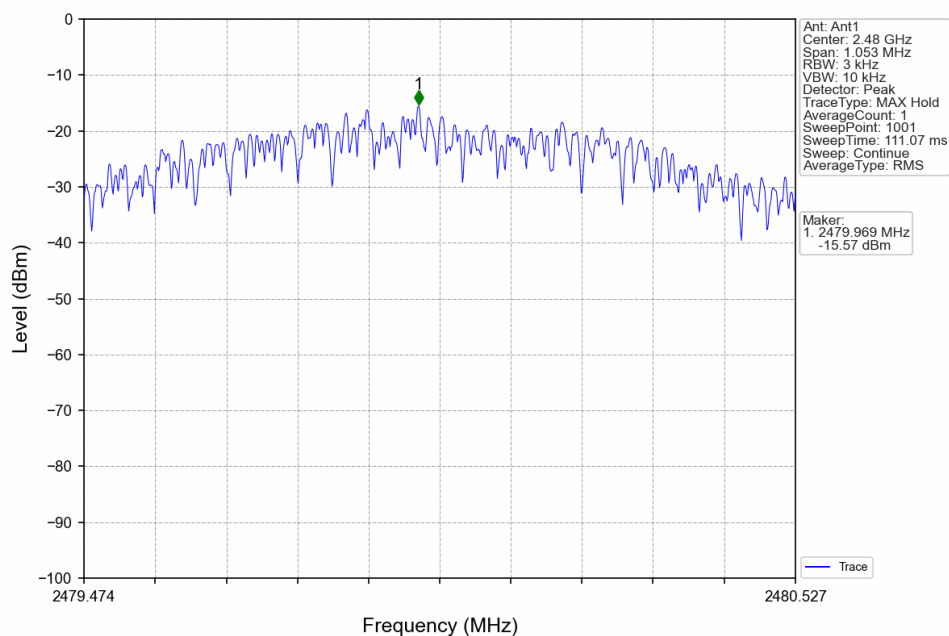

5. Unwanted Emissions InStandard Non-restricted Frequency Bands

5.1 Ref


5.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
GFSK	SISO	2402	1	-2.04
		2440	1	-1.63
		2480	1	-1.47


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

Note2: RBW = 1MHz was used during the pre-test. The final test will be performed at RBW=100kHz while the margin is less than 3dB.


5.1.2 Test Graph

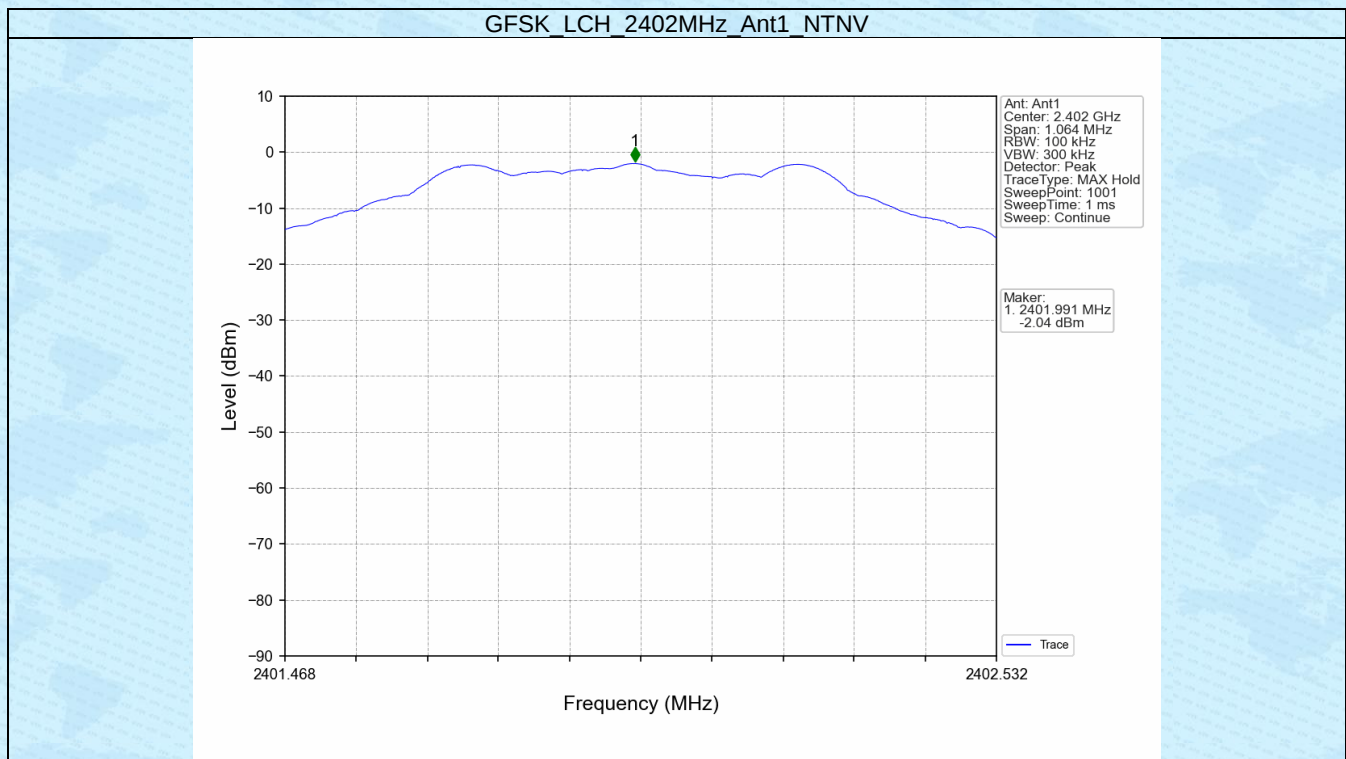

GFSK MCH 2440MHz Ant1 NTN

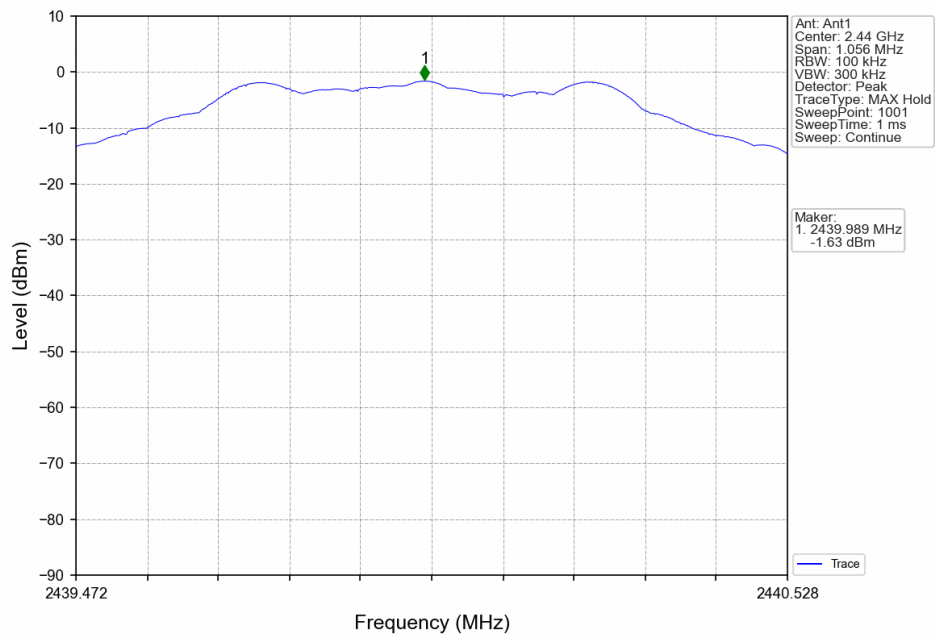

GFSK_HCH_2480MHz_Ant1 NTN

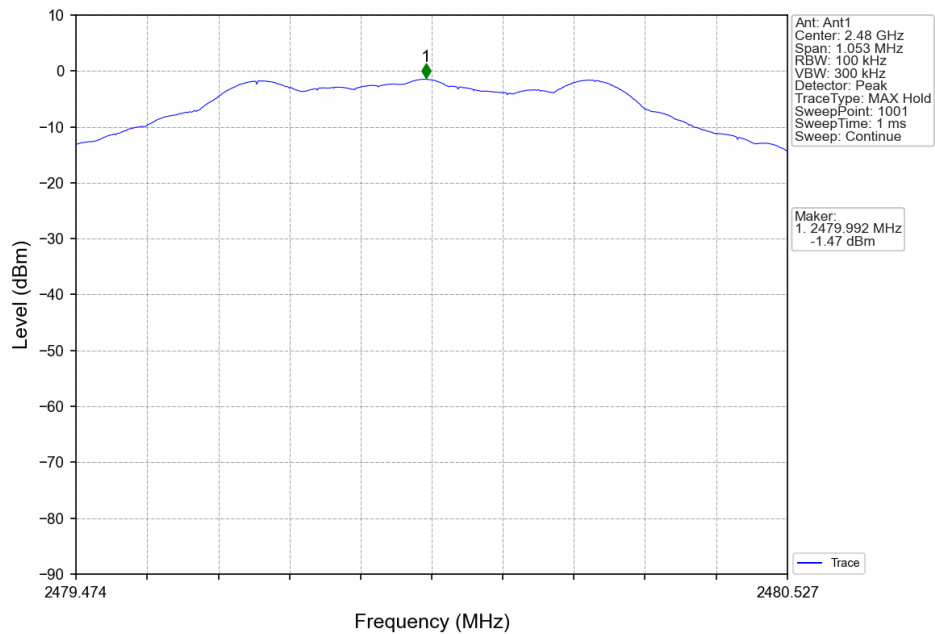

5.2 CSE


5.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	1	-1.47	-21.47	Pass
		2440	1	-1.47	-21.47	Pass
		2480	1	-1.47	-21.47	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

Note2: RBW = 1MHz was used during the pre-test. The final test will be performed at RBW=100kHz while the margin is less than 3dB.


5.2.2 Test Graph

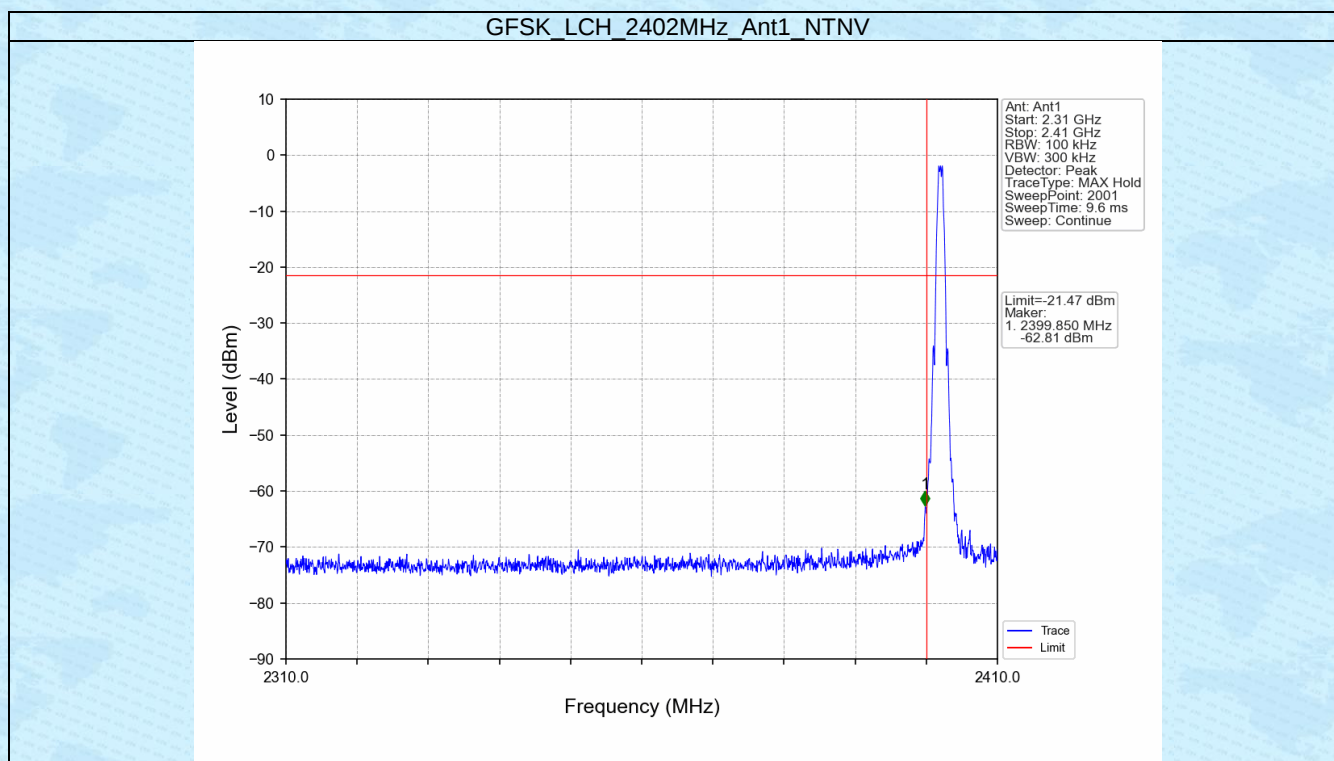


GFSK LCH 2402MHz Ant1 NTN

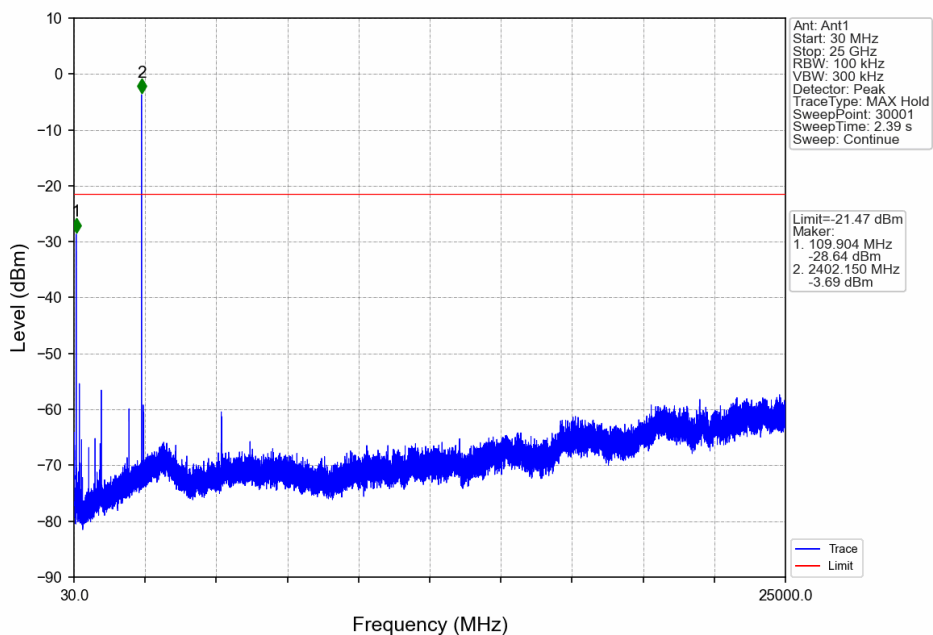


GFSK_MCH_2440MHz_Ant1_NTN

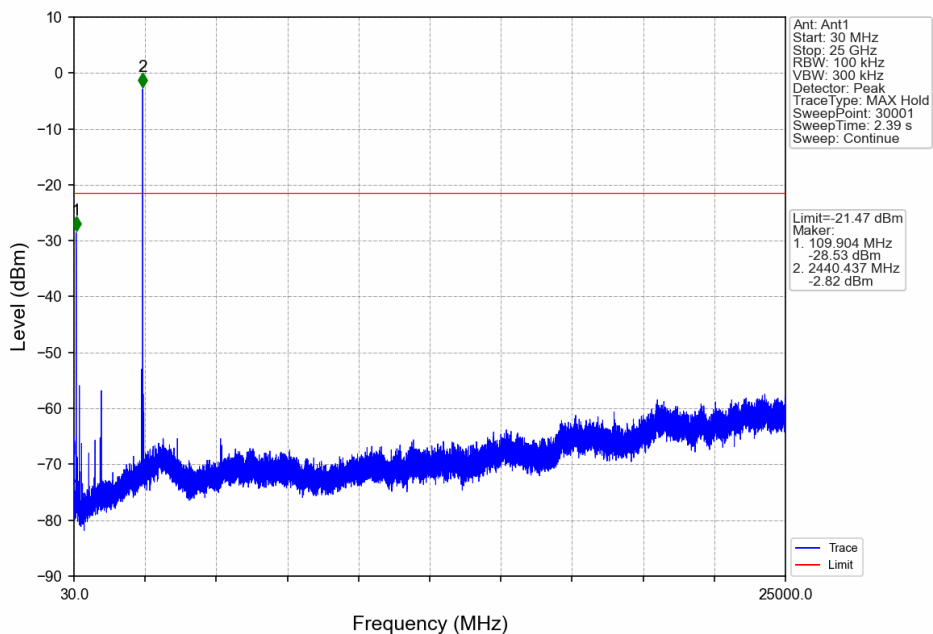

1M HCH 2480MHz Ant1 NTN

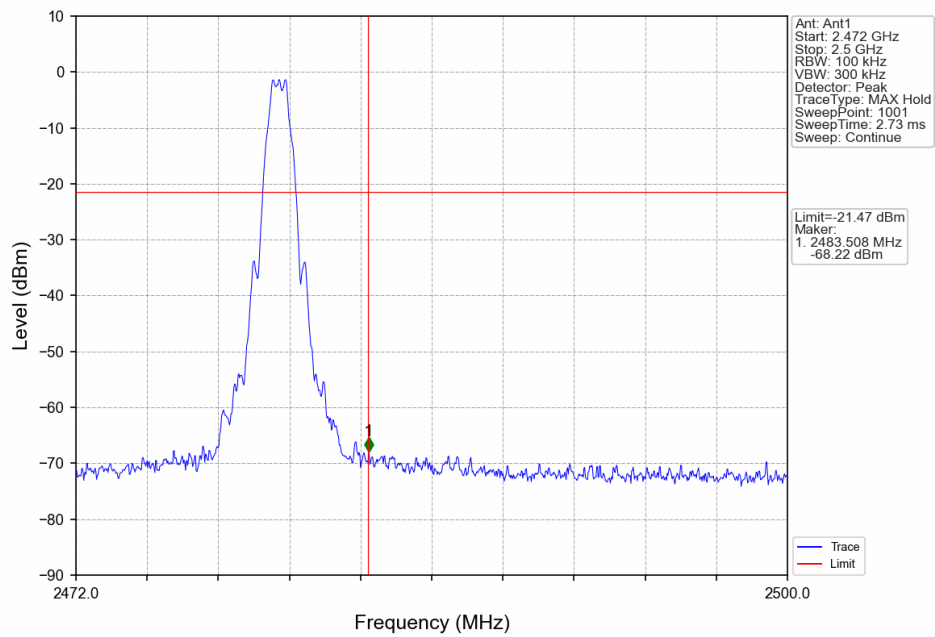

1M_HCH_2480MHz_Ant1_NTNV

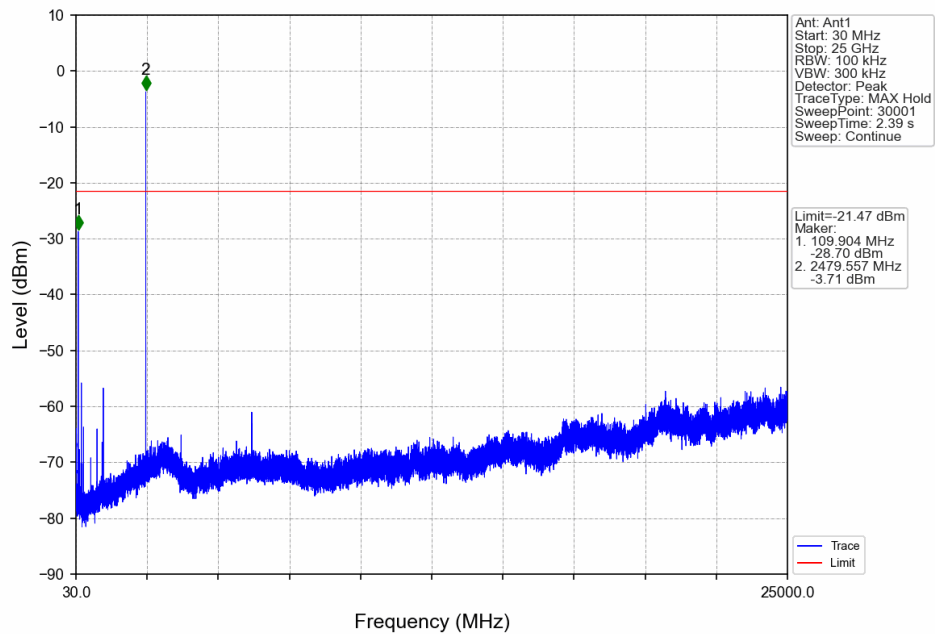

-----End-----