



FCC RF Test Report

APPLICANT : GigaDevice Semiconductor Inc.
EQUIPMENT : 2.4 GHz Wi-Fi 6 (802.11 ax) and
Bluetooth 5 (LE) module
BRAND NAME : GigaDevice
MODEL NAME : GD32VW553_MD1
FCC ID : 2A3BS-GD32VW553MD1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jul. 04, 2023 ~ Aug. 03, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sportun International Inc. (Kunshan)
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	19
3.3 Power Spectral Density Measurement	20
3.4 Conducted Band Edges and Spurious Emission Measurement	27
3.5 Radiated Band Edges and Spurious Emission Measurement	36
3.6 AC Conducted Emission Measurement.....	40
3.7 Antenna Requirements	42
4 LIST OF MEASURING EQUIPMENT.....	43
5 MEASUREMENT UNCERTAINTY	44
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION AND PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 7.73 dB at 191.990 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.01 dB at 0.168 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

GigaDevice Semiconductor Inc.

Building No. 8, IC Park, No. 9 Fenghao East Road, Haidian District, Beijing 100094, China

1.2 Manufacturer

GigaDevice Semiconductor Inc.

Building No. 8, IC Park, No. 9 Fenghao East Road, Haidian District, Beijing 100094, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4 GHz Wi-Fi 6 (802.11 ax) and Bluetooth 5 (LE) module
Brand Name	GigaDevice
Model Name	GD32VW553_MD1
FCC ID	2A3BS-GD32VW553MD1
HW Version	GD32VW553_MD1_1V0
SW Version	image-all-rf-test-230627.bin
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth LE 1Mbps:8.33 dBm (0.0068 W) Bluetooth LE 2Mbps:8.32 dBm (0.0068 W) Bluetooth LE 125Kbps:8.06 dBm (0.0064 W) Bluetooth LE 500Kbps:8.17 dBm (0.0066 W)
99% Occupied Bandwidth	Bluetooth LE 1Mbps:1.017MHz Bluetooth LE 2Mbps:2.042MHz
Antenna Type / Gain	PCB Antenna type with gain 2.1 dBi
Type of Modulation	Bluetooth LE : GFSK

Note: For Bluetooth LE 125Kbps & 500Kbps & 1Mbps & 2Mbps mode, the whole testing has assessed only BLE 1Mbps & 2Mbps mode by referring to their higher conducted power

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sportun International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sportun International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sportun Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
AC Conducted Emission	Mode 1: BLE TX + Charging from Notebook

2.3 Connection Diagram of Test System


< AC Conducted Emission >

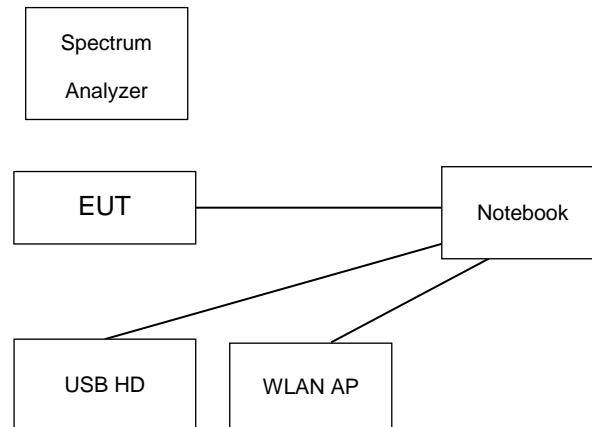

This example is connection diagram of EUT test configurations.

. For detail, please refer to test mode configuration and setup photographs for each test item.

< Radiated Emission >



This example is connection diagram of EUT test configurations.

. For detail, please refer to test mode configuration and setup photographs for each test item.



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	Hard DISK	WD	C6B	N/A	N/A	N/A
4.	Spectrum Analyzer	R&S	FSP40	N/A	N/A	Unshielded,1.8m
5.	Test Jig	N/A	N/A	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to BLE function continuous transmit.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.8 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.8 + 10 = 15.8 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

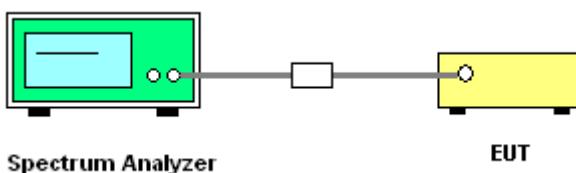


3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

Bluetooth LE 1Mbps


6 dB Bandwidth Plot on Channel 00

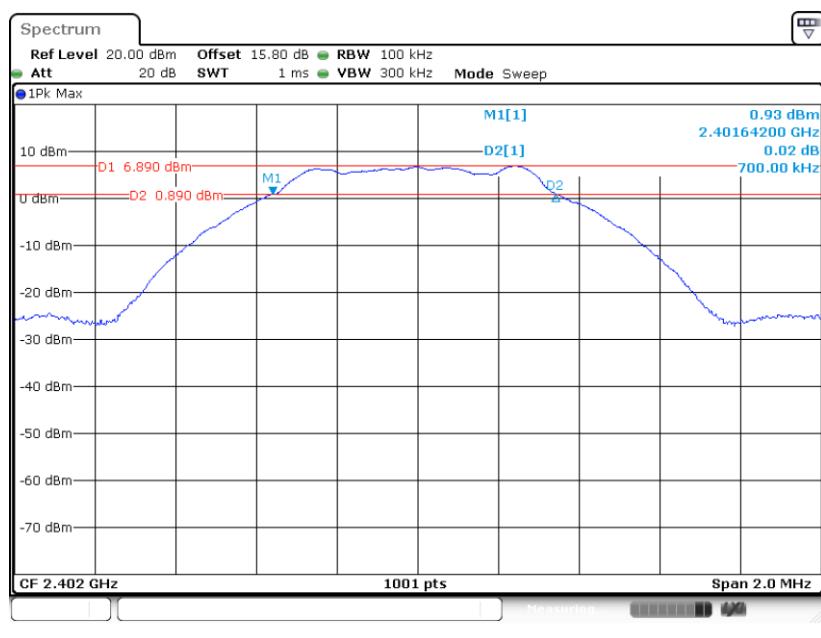

6 dB Bandwidth Plot on Channel 19

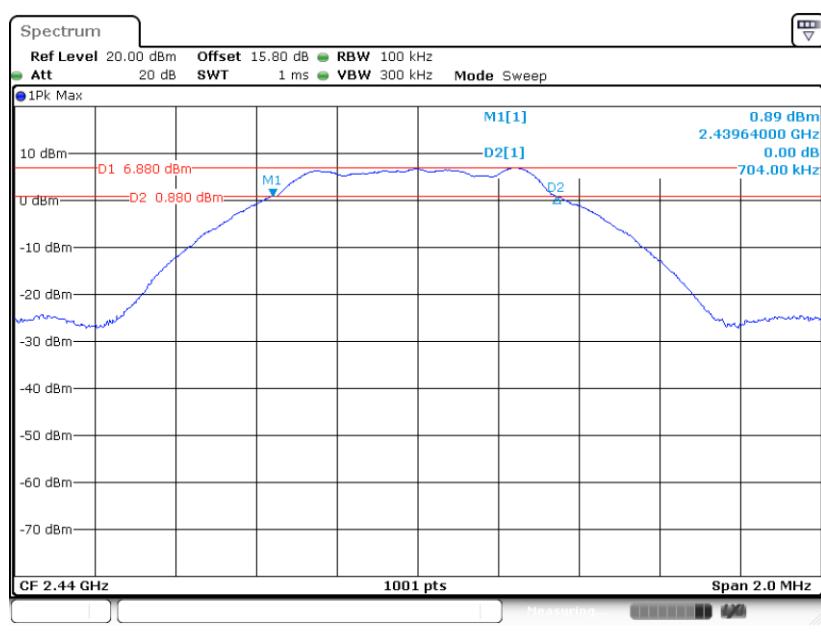


6 dB Bandwidth Plot on Channel 39

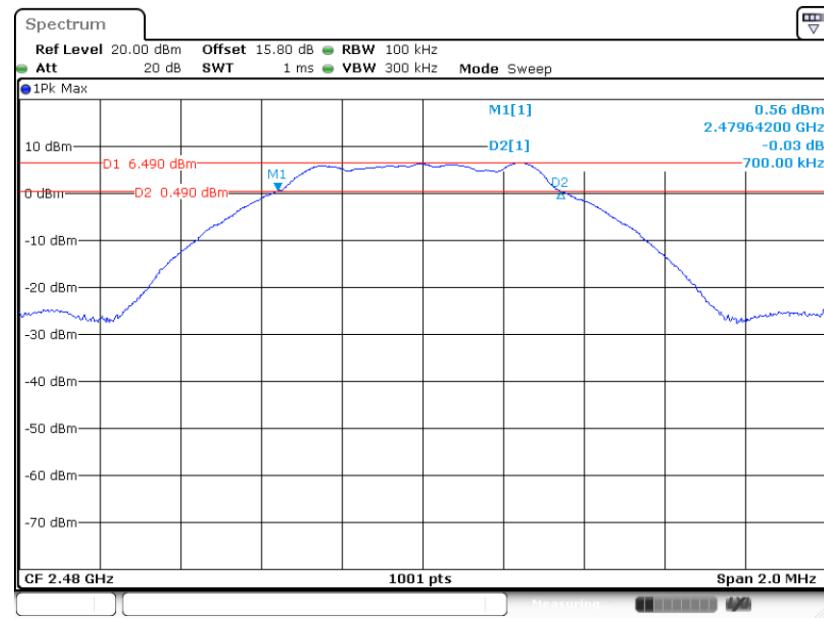


Bluetooth LE 2Mbps


6 dB Bandwidth Plot on Channel 00

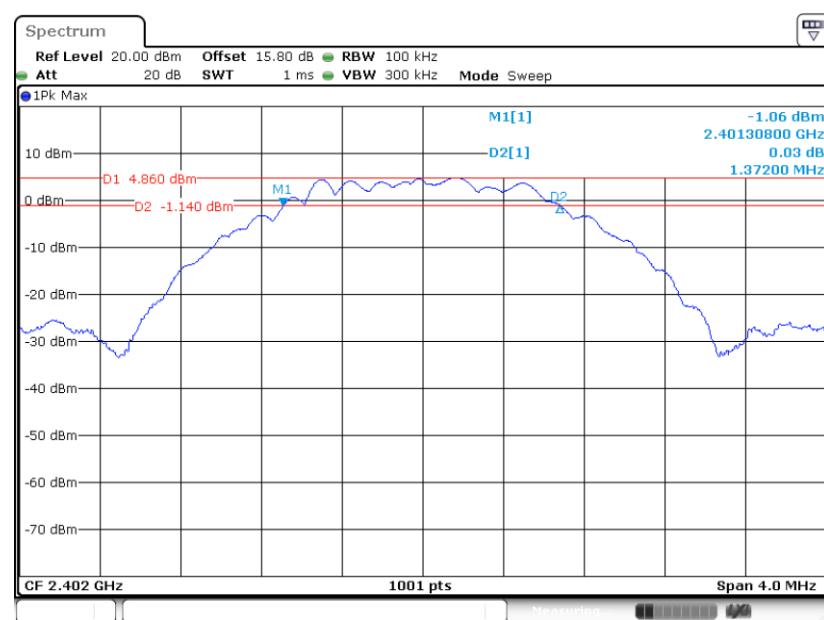

6 dB Bandwidth Plot on Channel 19

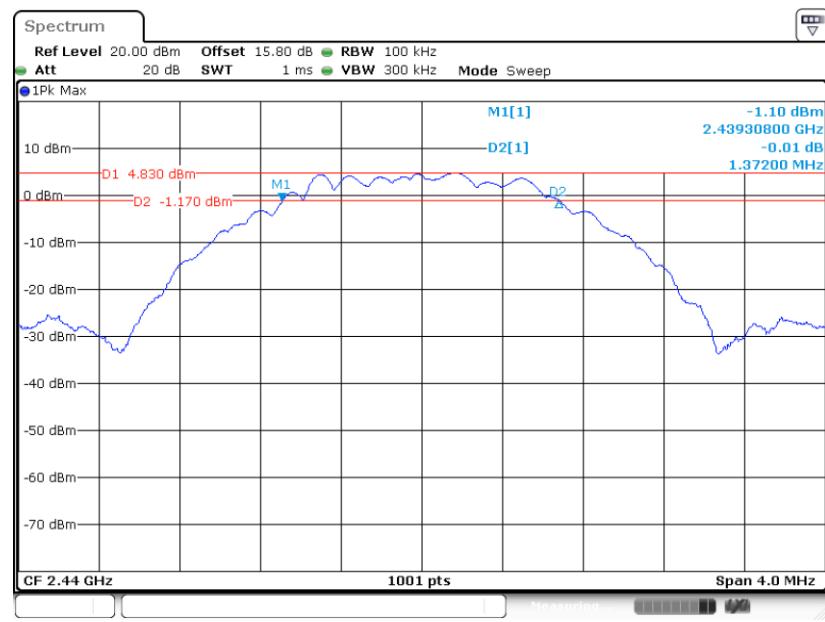

6 dB Bandwidth Plot on Channel 39

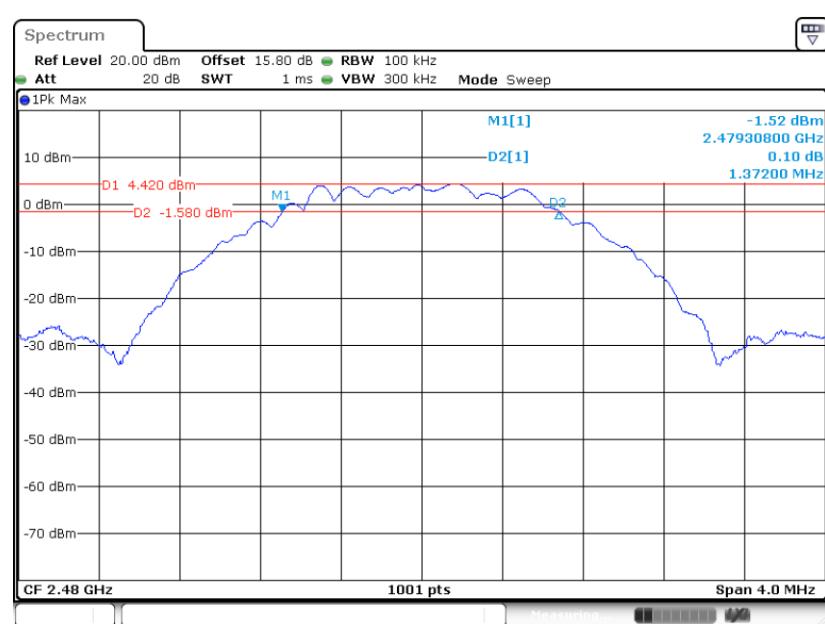


3.1.6 Test Result of 99% Occupied Bandwidth


Please refer to Appendix A.

Bluetooth LE 1Mbps


99% Occupied Bandwidth Plot on Channel 00

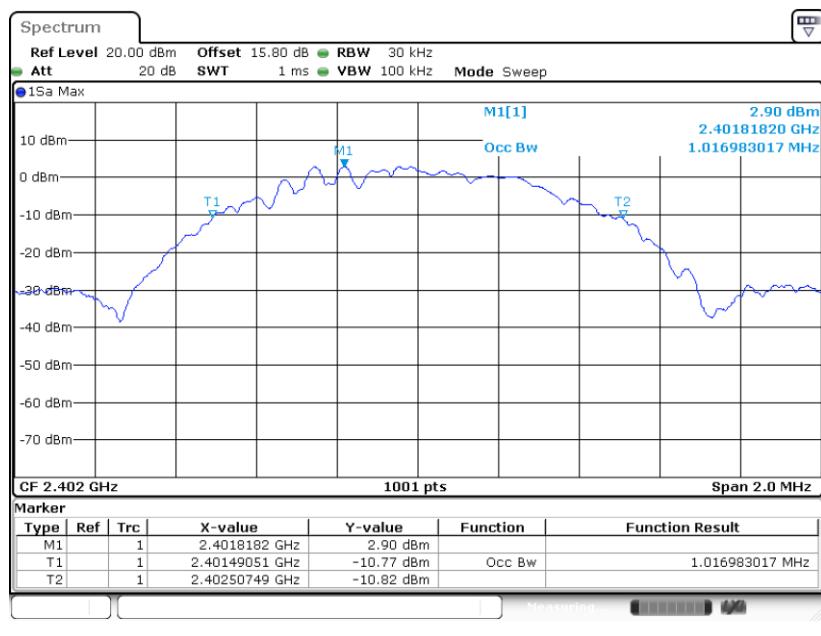

99% Occupied Bandwidth Plot on Channel 19

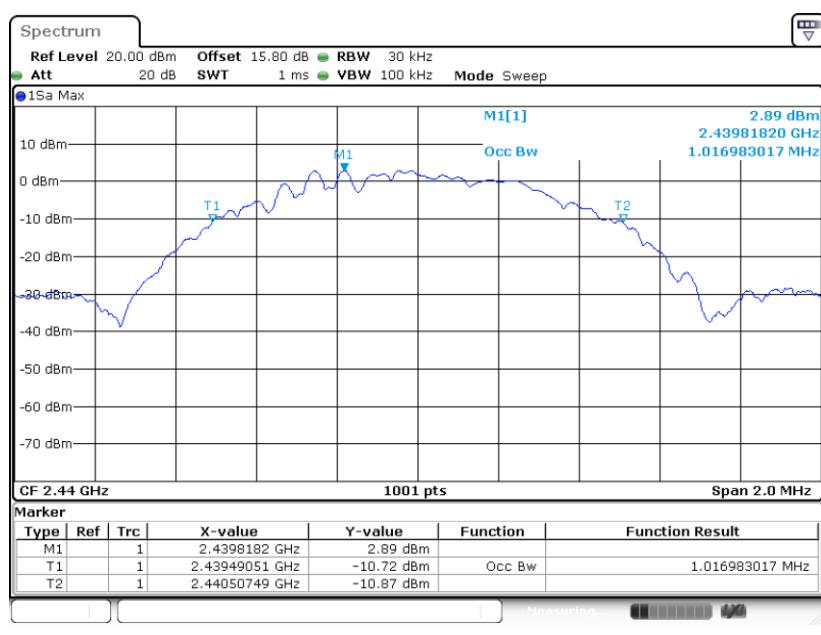


99% Occupied Bandwidth Plot on Channel 39

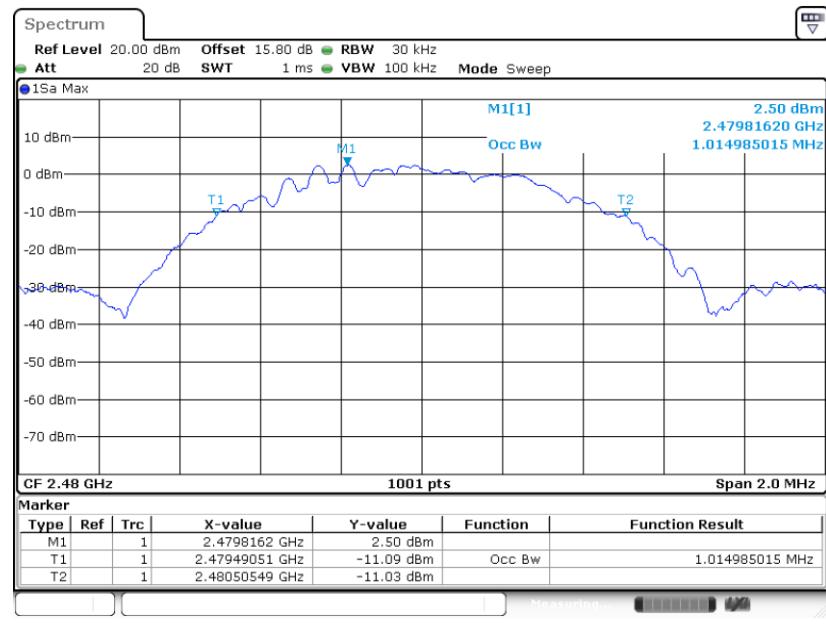


Bluetooth LE 2Mbps


99% Occupied Bandwidth Plot on Channel 00

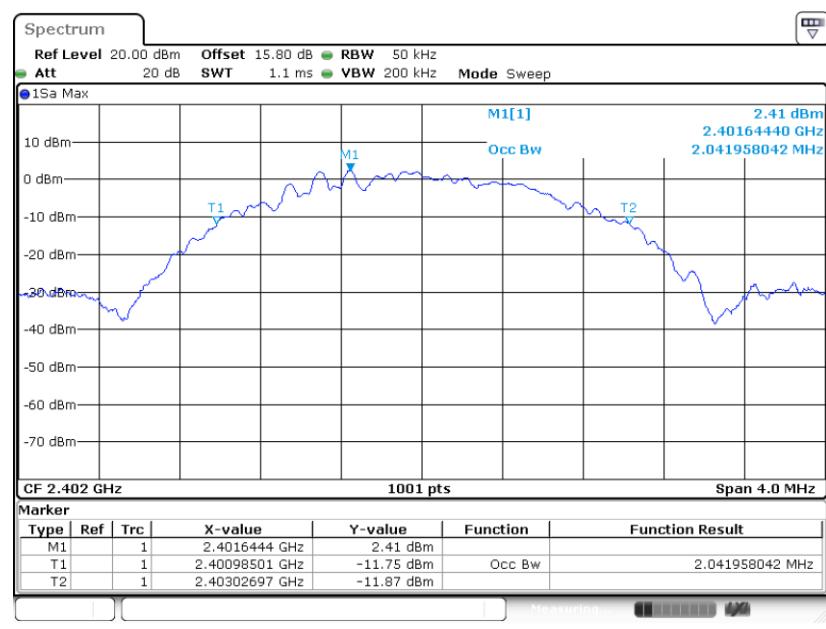

99% Occupied Bandwidth Plot on Channel 19

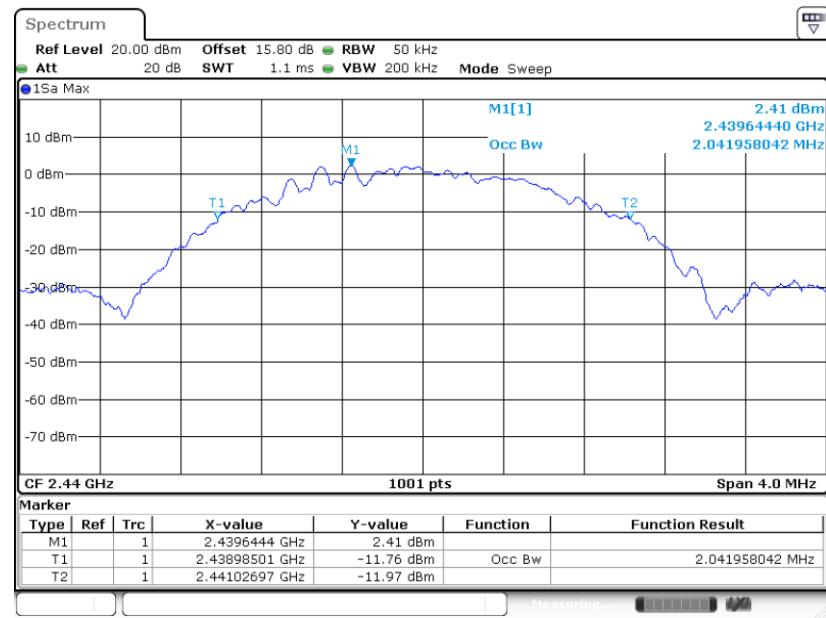

99% Occupied Bandwidth Plot on Channel 39

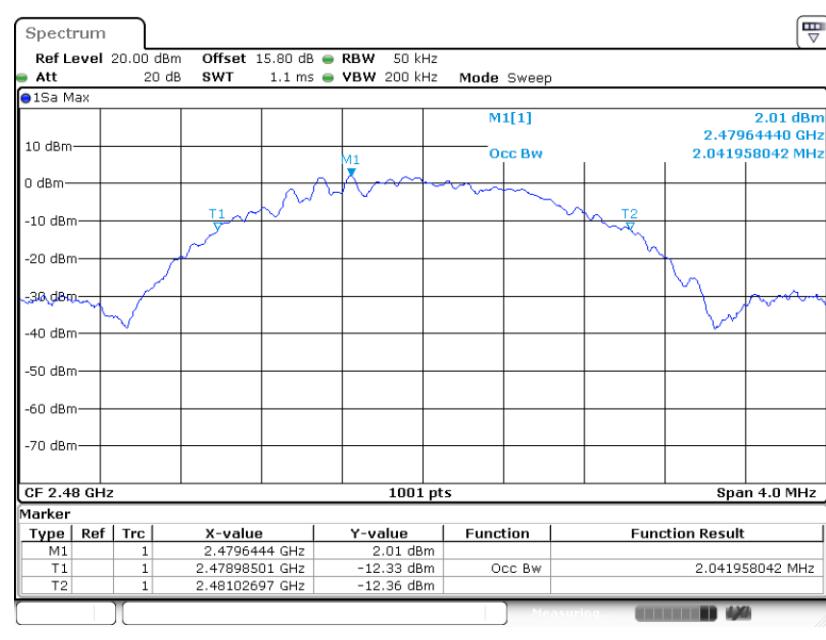

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

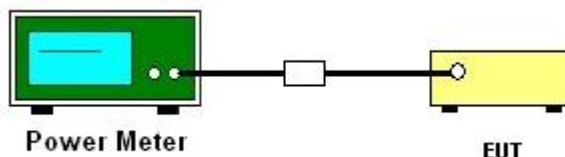

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

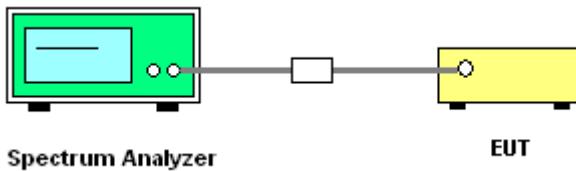

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

Bluetooth LE 1Mbps

PSD 100kHz Plot on Channel 00

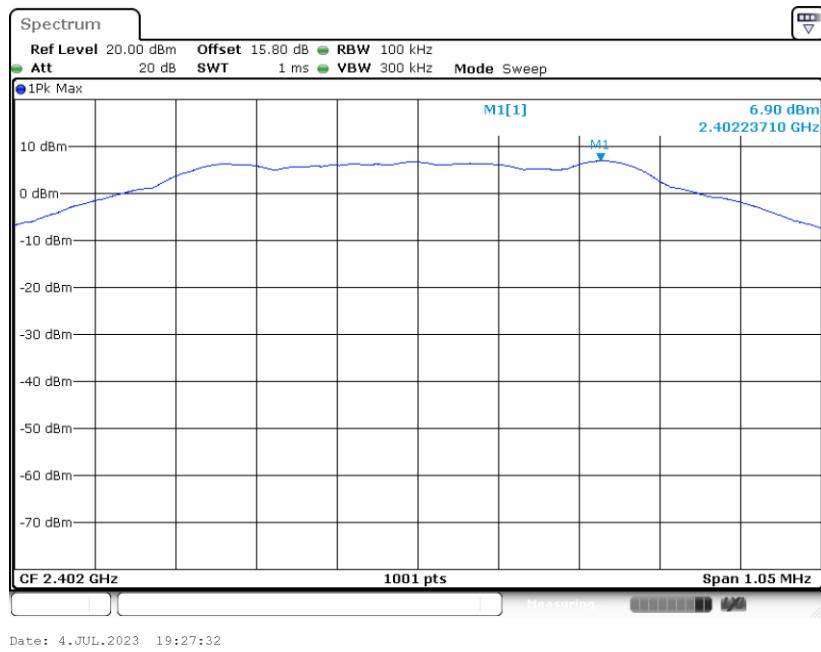


PSD 100kHz Plot on Channel 19

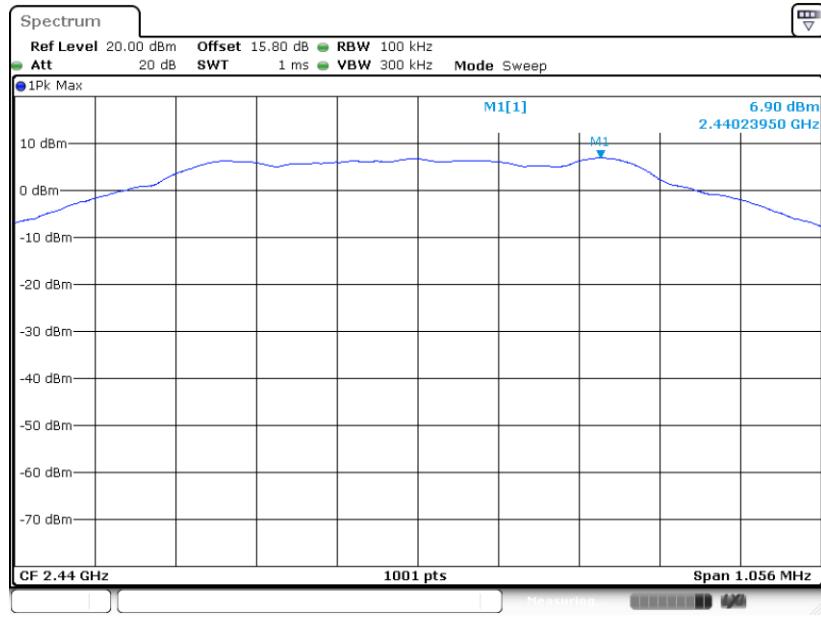




PSD 100kHz Plot on Channel 39

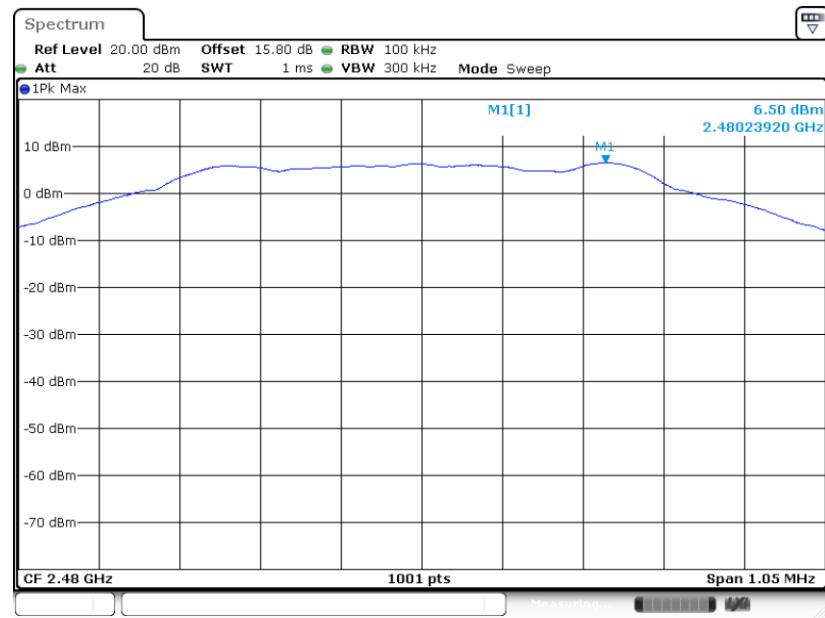


Bluetooth LE 2Mbps

PSD 100kHz Plot on Channel 00

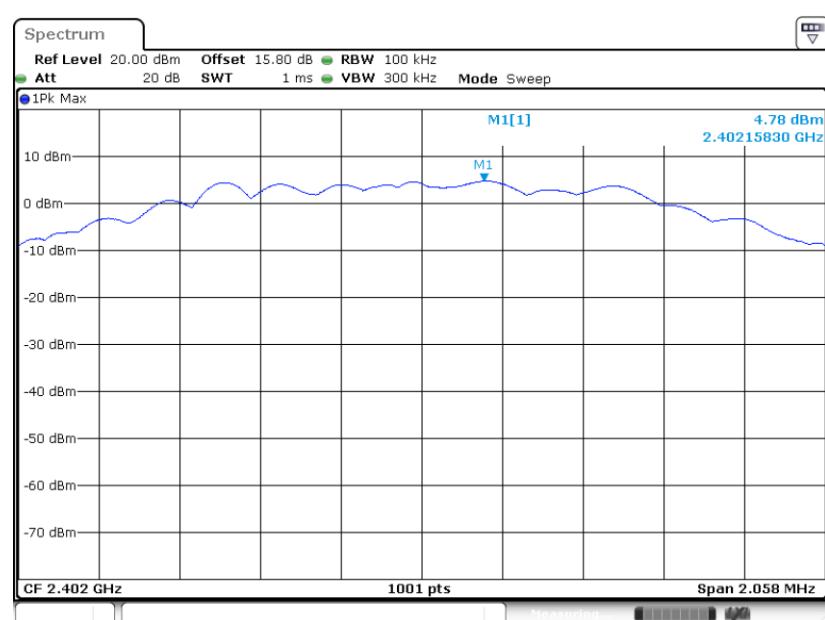




PSD 100kHz Plot on Channel 19

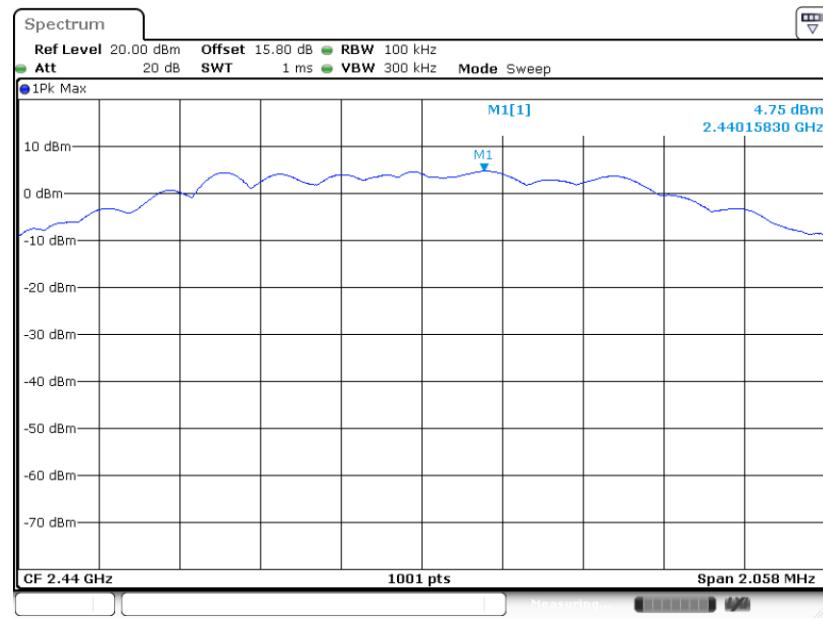


PSD 100kHz Plot on Channel 39

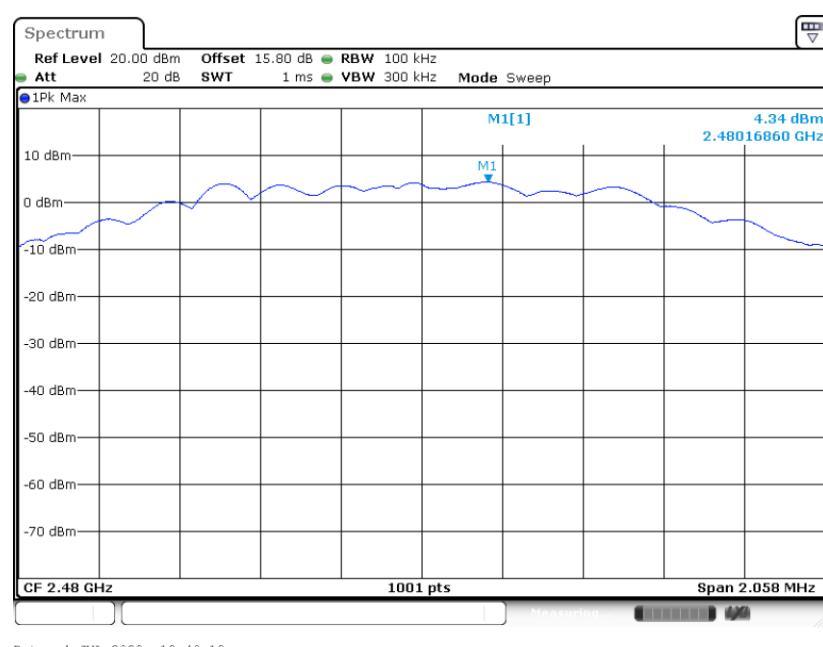


3.3.7 Test Result of Power Spectral Density Plots (3kHz)

Bluetooth LE 1Mbps

PSD 3kHz Plot on Channel 00

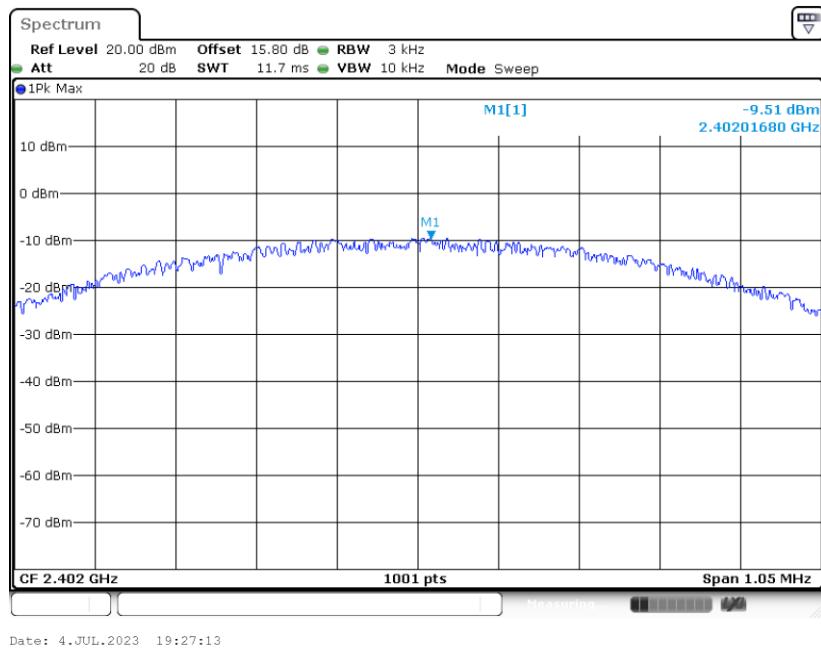


PSD 3kHz Plot on Channel 19

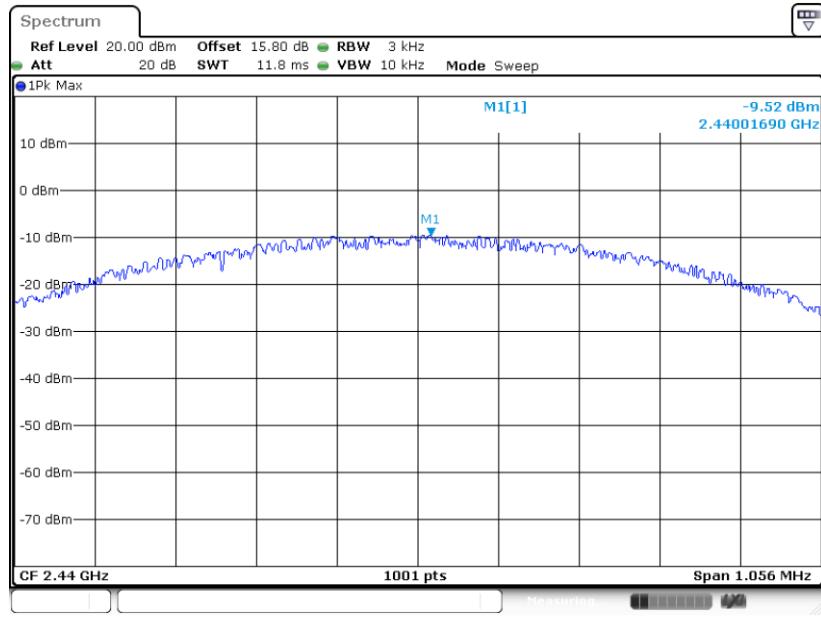




PSD 3kHz Plot on Channel 39

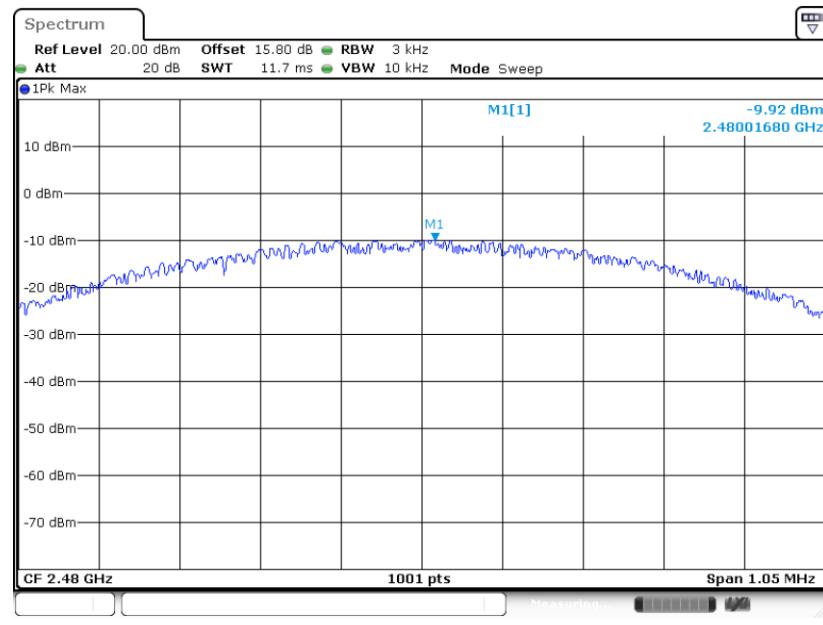


Bluetooth LE 2Mbps

PSD 3kHz Plot on Channel 00

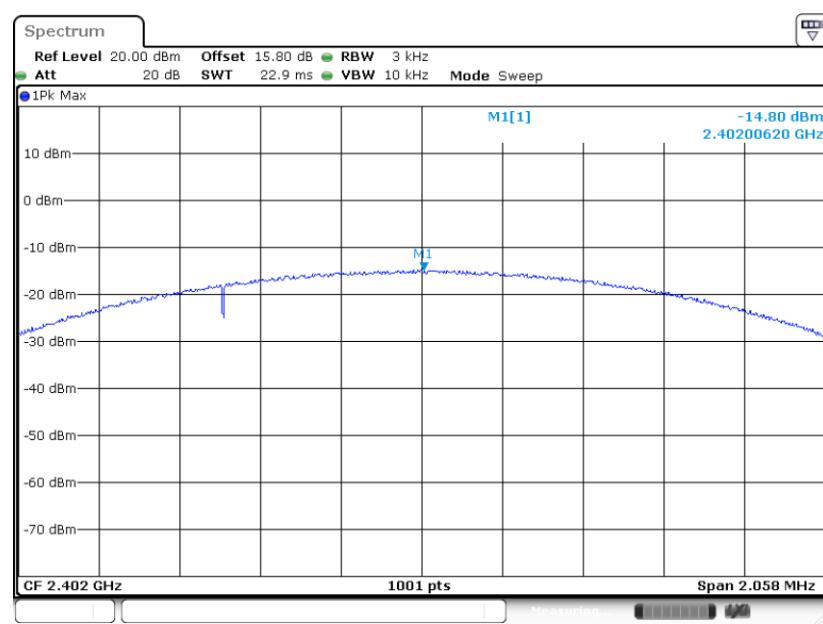




PSD 3kHz Plot on Channel 19

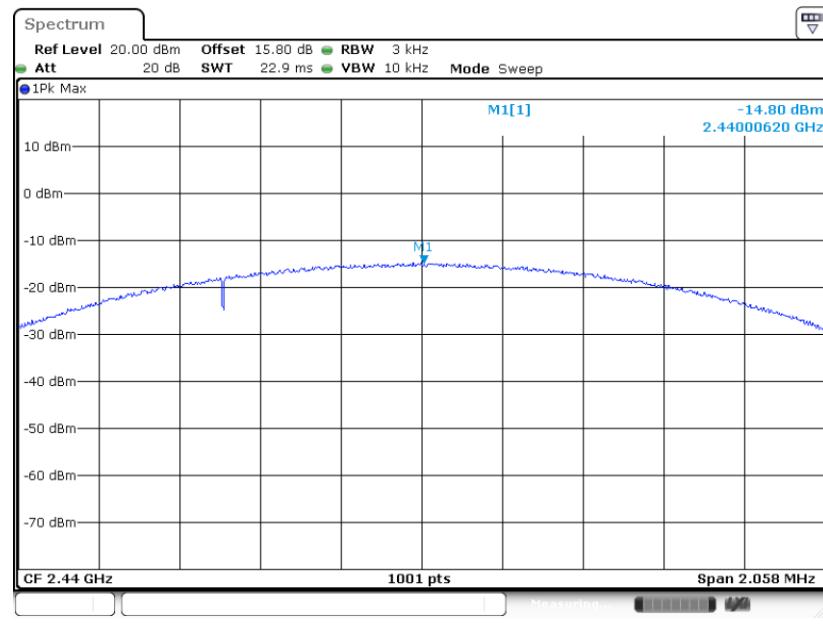

PSD 3kHz Plot on Channel 39

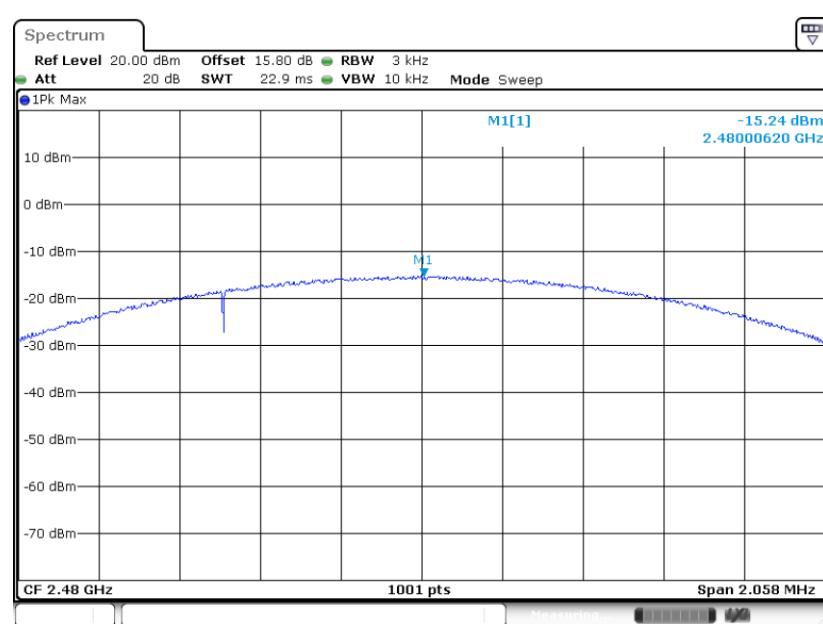

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

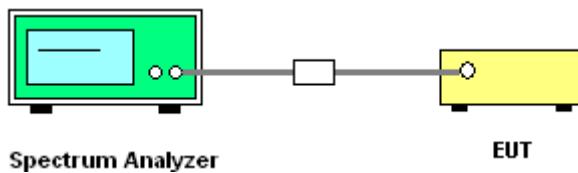


3.4.5 Test Result of Conducted Band Edges Plots

Bluetooth LE 1Mbps

Low Band Edge Plot on Channel 00

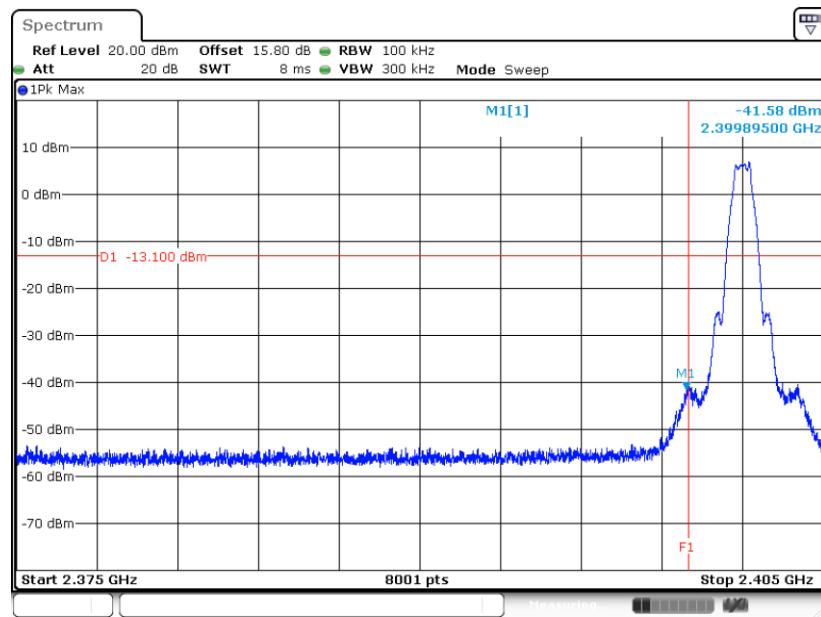


High Band Edge Plot on Channel 39

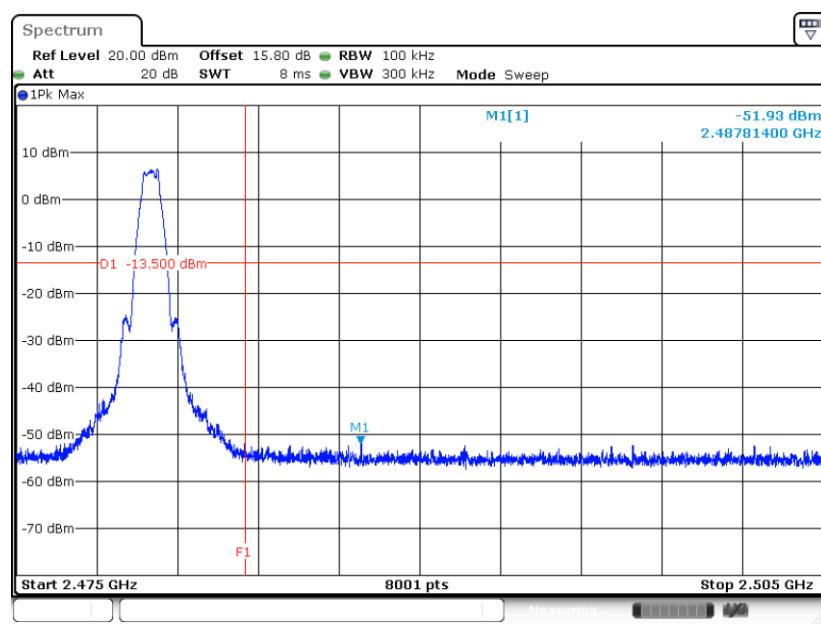


Bluetooth LE 2Mbps

Low Band Edge Plot on Channel 00

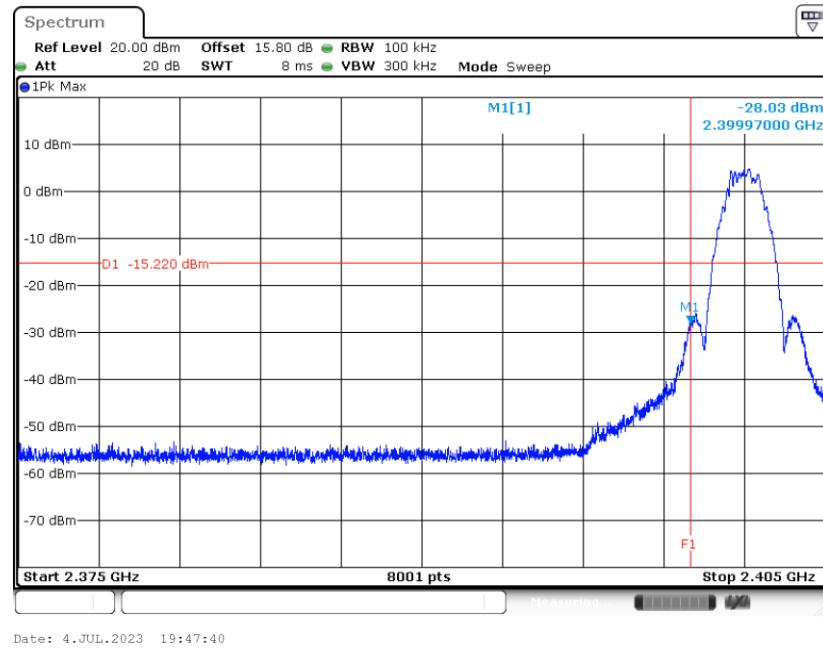

High Band Edge Plot on Channel 39

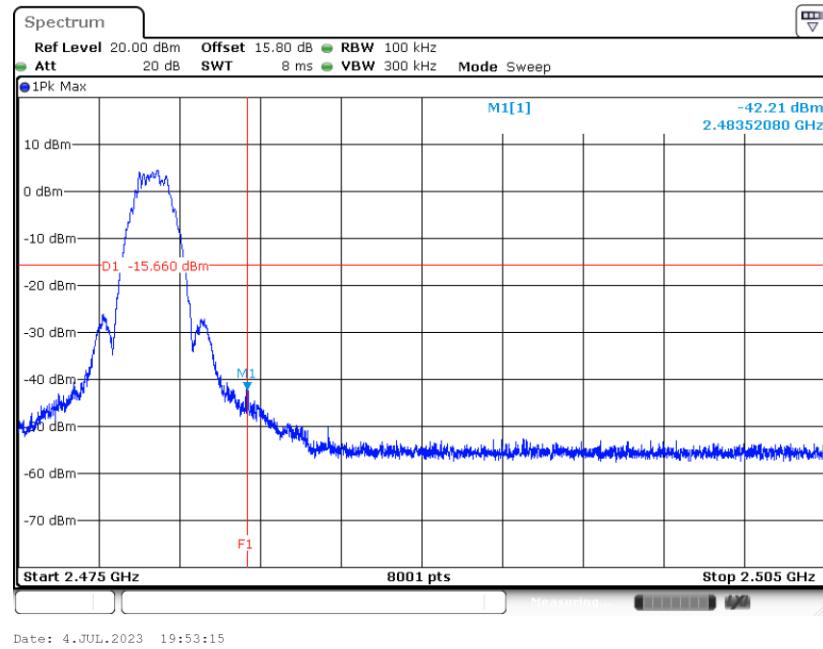


3.4.6 Test Result of Conducted Spurious Emission Plots

Bluetooth LE 1Mbps


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 00

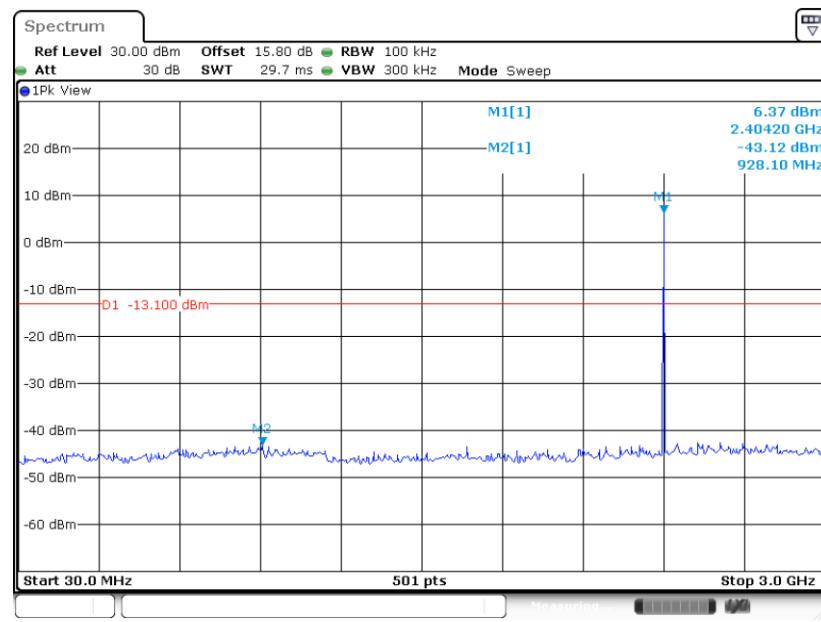

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

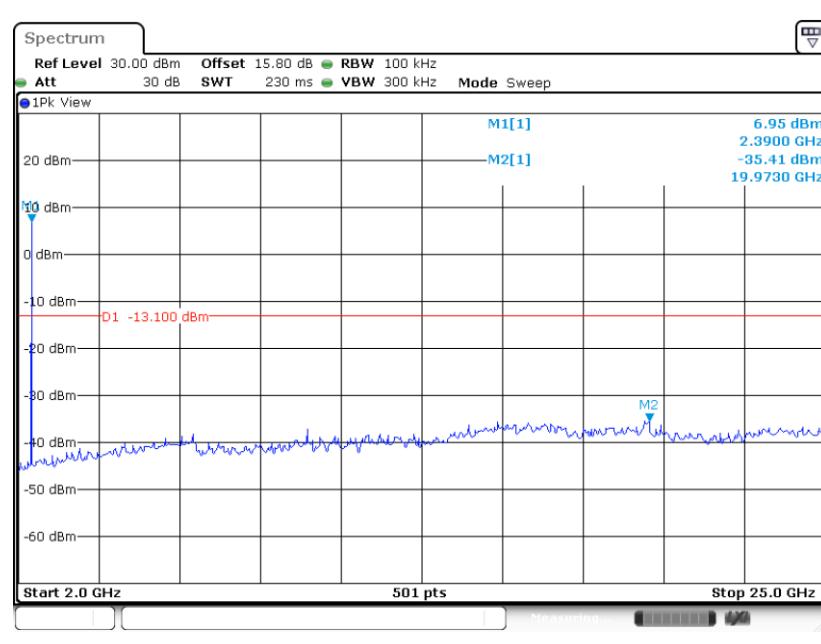




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 19

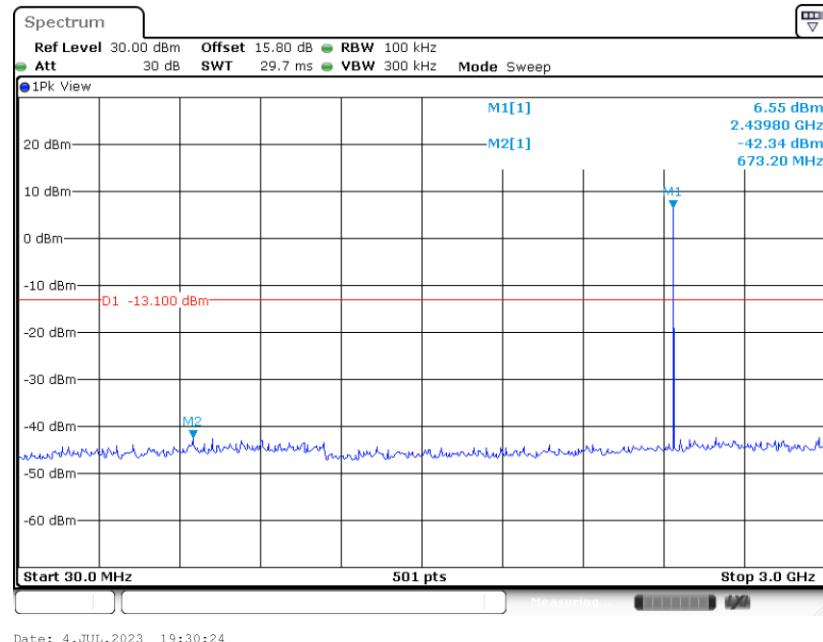


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 19

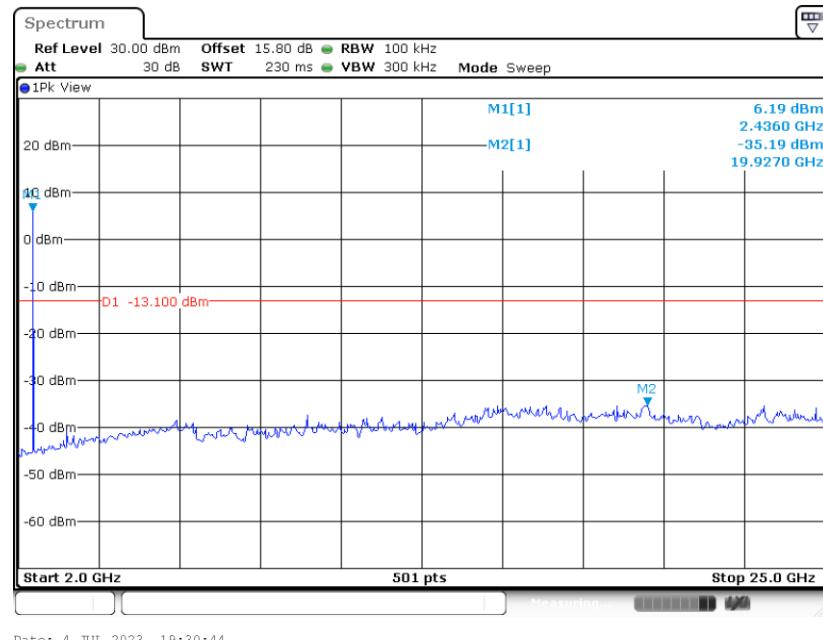


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

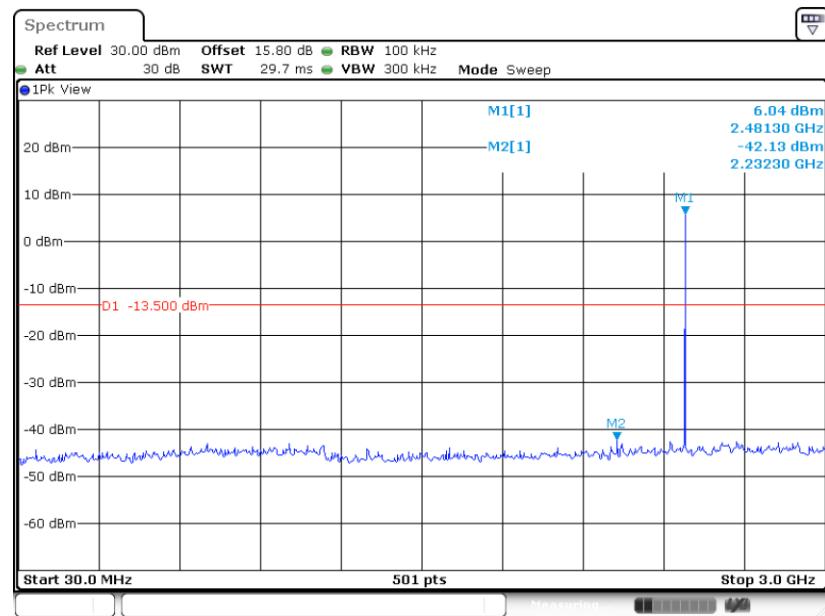

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

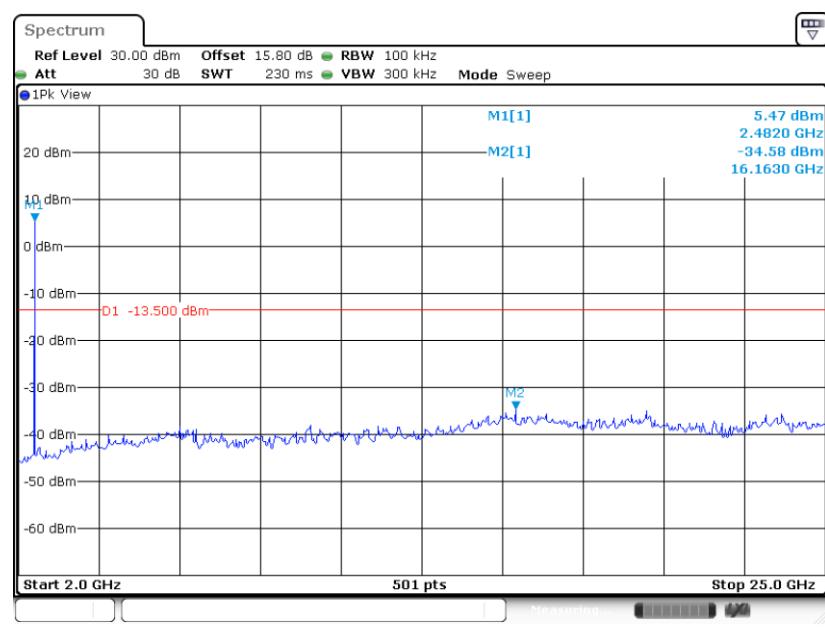




Bluetooth LE 2Mbps


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 00

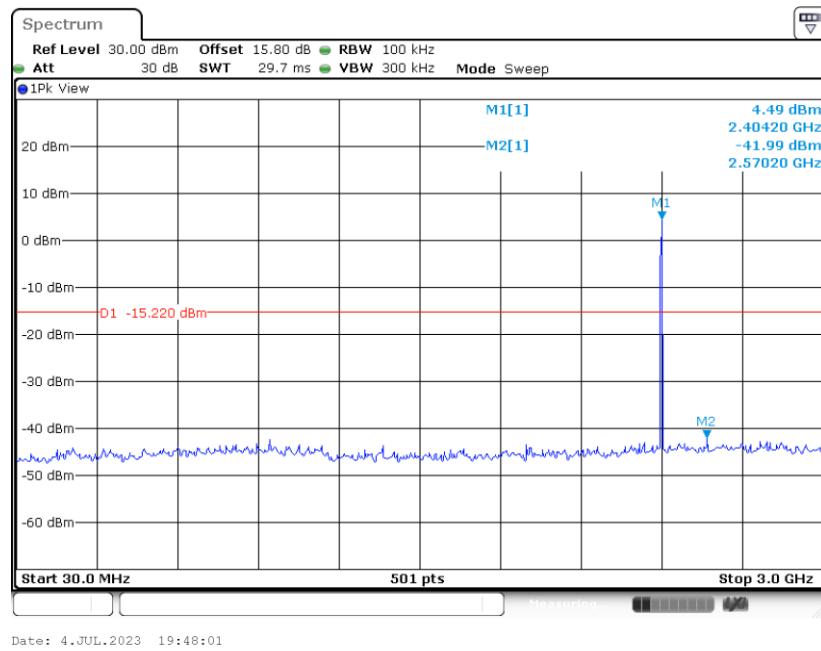


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 00

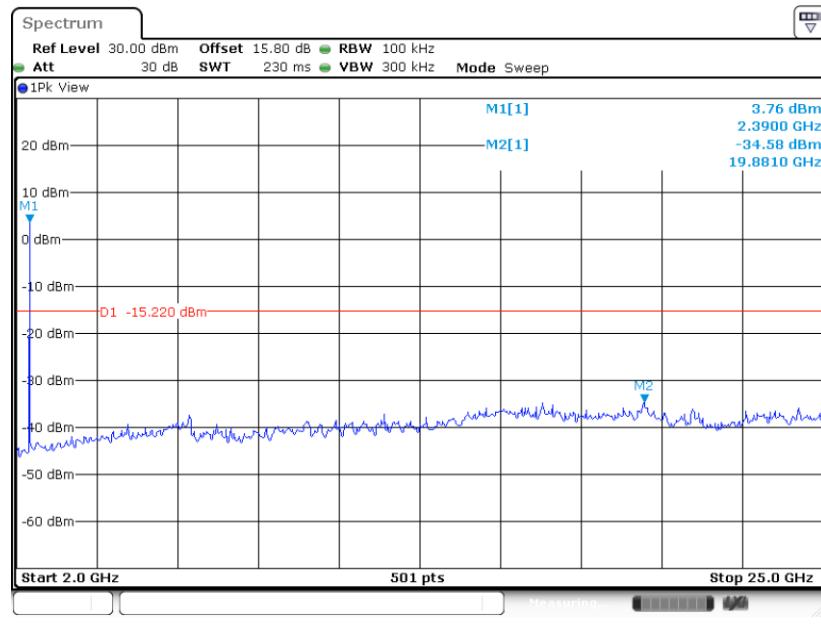


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 19

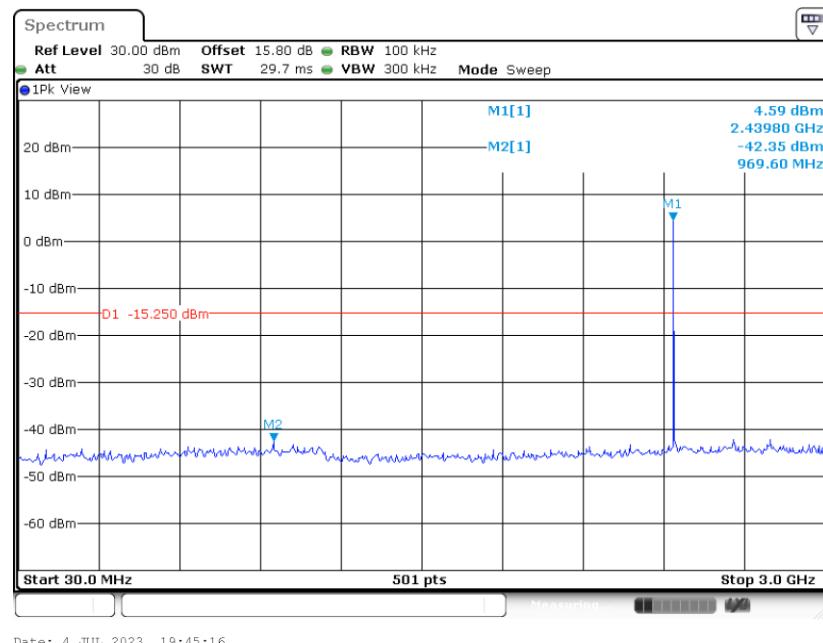

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps


GFSK Channel 19

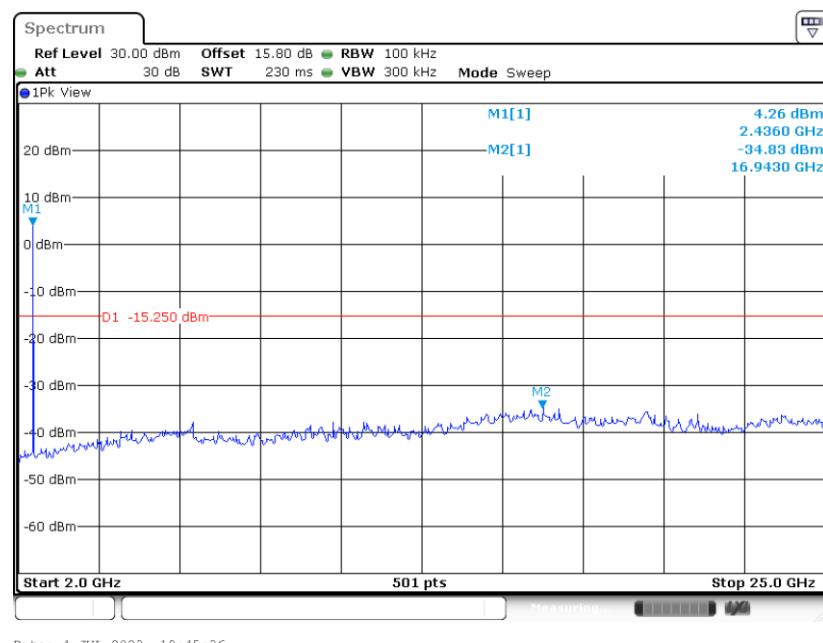




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 39

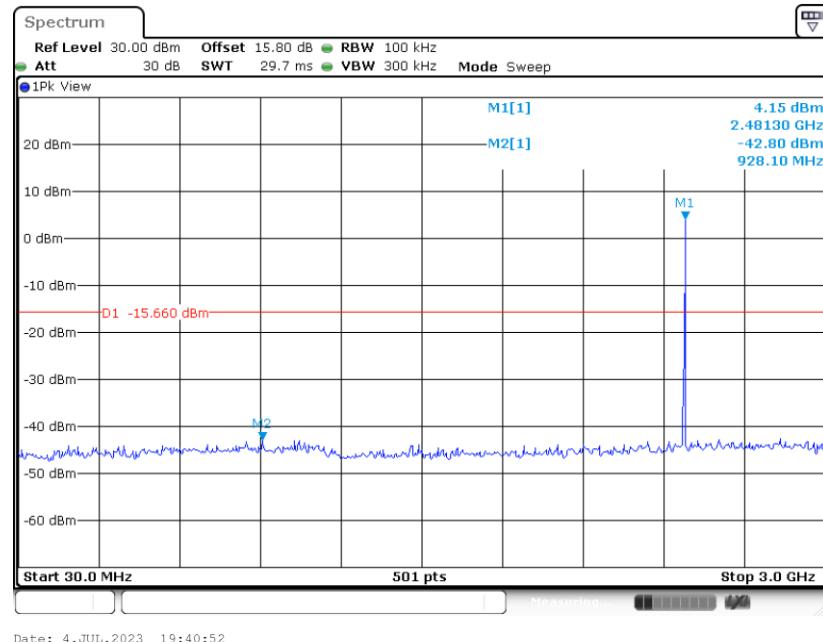

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 39

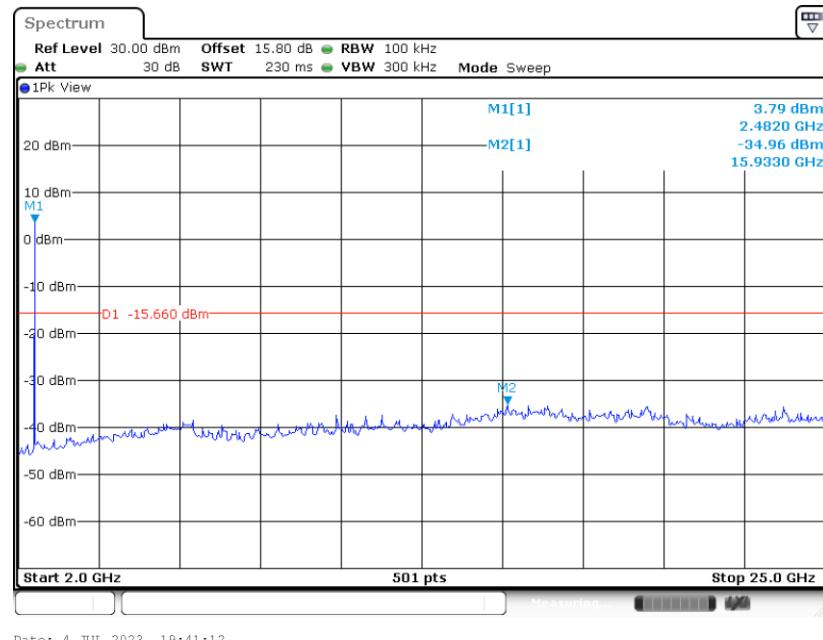



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.



3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

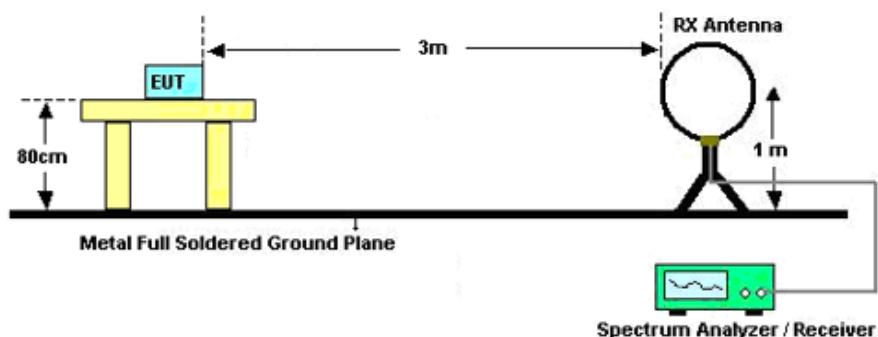

For radiated emissions from 30MHz to 1GHz

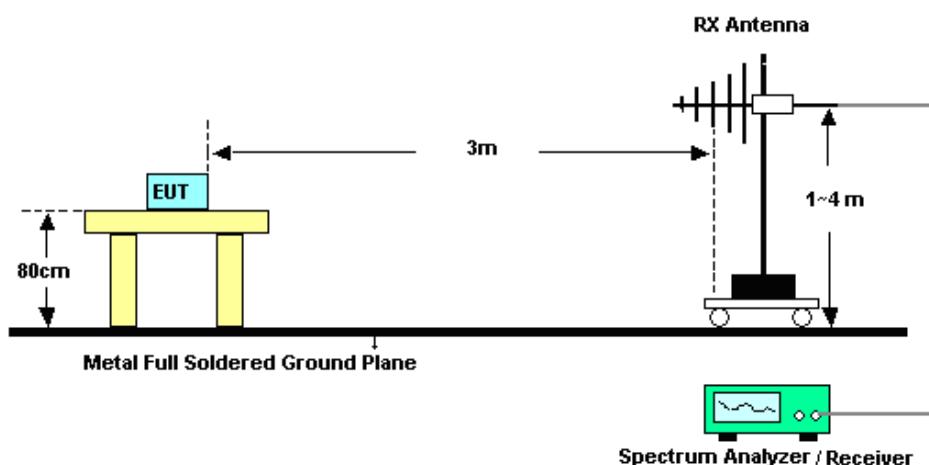

For radiated emissions above 1GHz

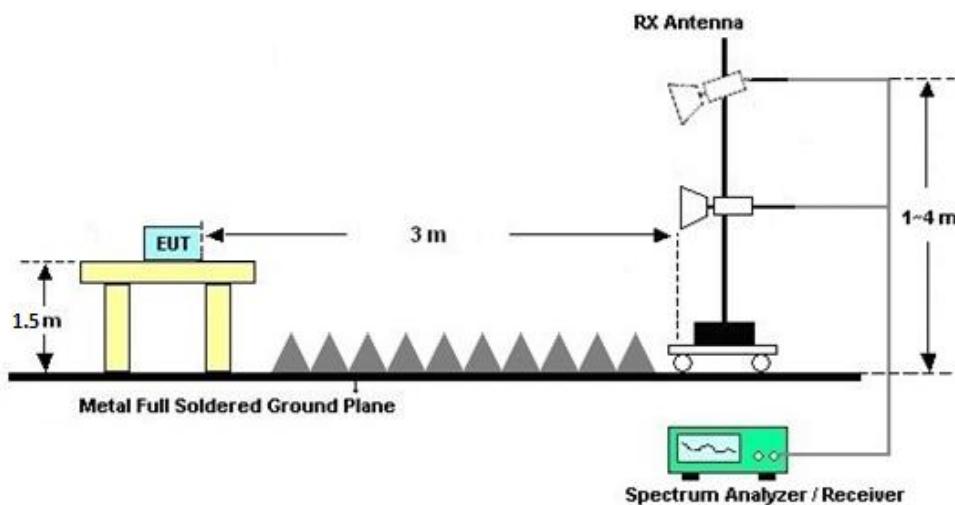



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

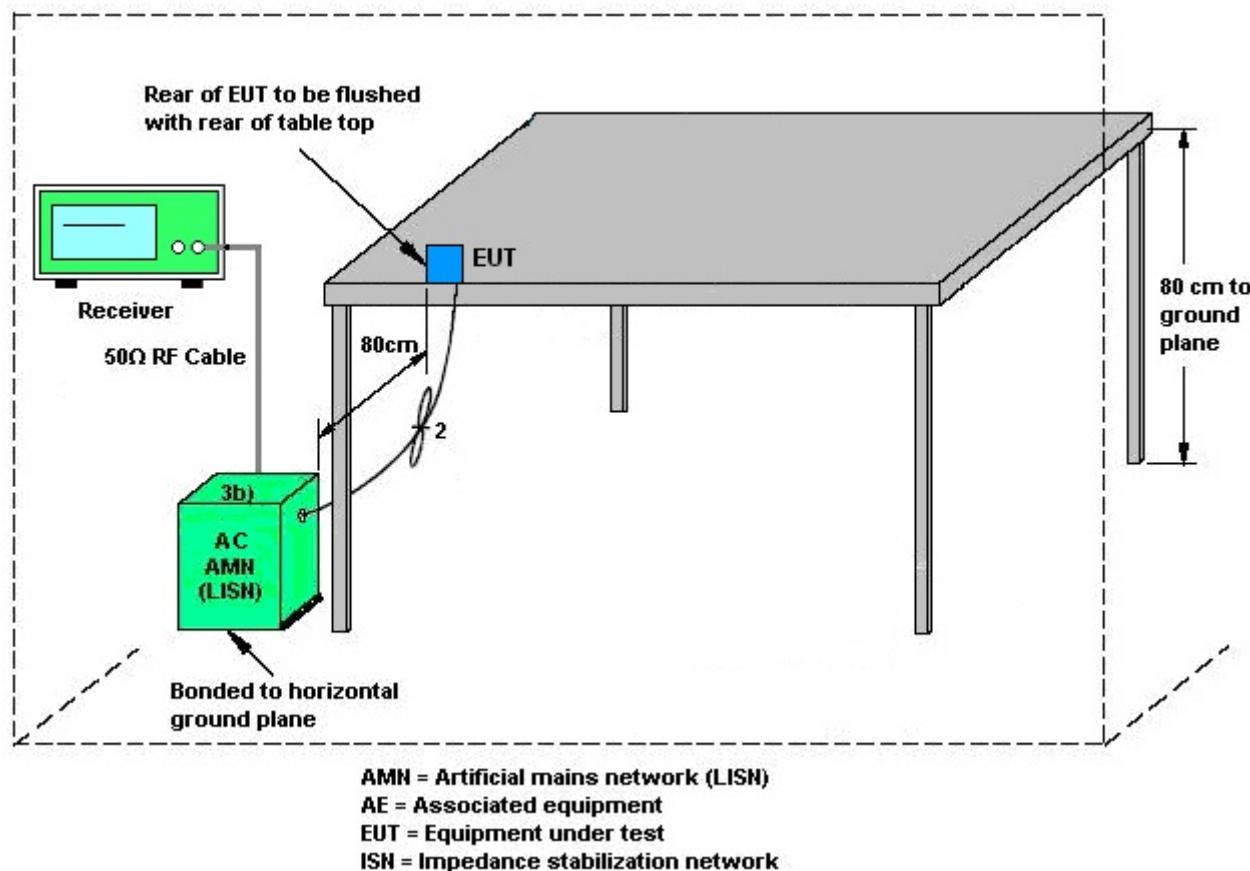

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Jul. 04, 2023~Aug. 03, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Jul. 04, 2023~Aug. 03, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Jul. 04, 2023~Aug. 03, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 13, 2022	Jul. 14, 2023~Jul. 26, 2023	Oct. 12, 2023	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 13, 2022	Jul. 14, 2023~Jul. 26, 2023	Oct. 12, 2023	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Jul. 14, 2023~Jul. 26, 2023	Oct. 15, 2023	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Apr. 09, 2023	Jul. 14, 2023~Jul. 26, 2023	Apr. 08, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 06, 2023	Jul. 14, 2023~Jul. 26, 2023	Apr. 05, 2024	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Jul. 14, 2023~Jul. 26, 2023	Jan. 07, 2024	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHz	Jul. 10, 2023	Jul. 14, 2023~Jul. 26, 2023	Jul. 09, 2024	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2023	Jul. 14, 2023~Jul. 26, 2023	Jan. 04, 2024	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz~18Ghz	Jan. 05, 2023	Jul. 14, 2023~Jul. 26, 2023	Jan. 04, 2024	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 12, 2022	Jul. 14, 2023~Jul. 26, 2023	Oct. 11, 2023	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 14, 2023~Jul. 26, 2023	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 14, 2023~Jul. 26, 2023	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 14, 2023~Jul. 26, 2023	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 16, 2023	Jul. 26, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Jul. 26, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Jul. 26, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Jul. 26, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.26dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.02dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26dB
--	--------

----- THE END -----



Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Kib Shi			Temperature:	20~26		°C
Test Date:	2023/7/4~2023/8/3			Relative Humidity:	40~51		%

BLE1M-Ant1**TEST RESULTS DATA*****6dB and 99% Occupied Bandwidth***

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.017	0.70	0.50	Pass
BLE	1Mbps	1	19	2440	1.017	0.70	0.50	Pass
BLE	1Mbps	1	39	2480	1.015	0.70	0.50	Pass

TEST RESULTS DATA***Peak Power Table***

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	8.33	30.00	2.10	10.43	36.00	Pass
BLE	1Mbps	1	19	2440	8.26	30.00	2.10	10.36	36.00	Pass
BLE	1Mbps	1	39	2480	7.87	30.00	2.10	9.97	36.00	Pass

TEST RESULTS DATA***Average Power Table******(Reporting Only)***

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	0.00	8.11
BLE	1Mbps	1	19	2440	0.00	8.03
BLE	1Mbps	1	39	2480	0.00	7.61

TEST RESULTS DATA***Peak Power Density***

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	6.90	-9.51	2.10	8.00	Pass
BLE	1Mbps	1	19	2440	6.90	-9.52	2.10	8.00	Pass
BLE	1Mbps	1	39	2480	6.50	-9.92	2.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Bluetooth Low Energy

Test Engineer:	Kib Shi	Temperature:	20~26	°C
Test Date:	2023/7/4~2023/8/3	Relative Humidity:	40~51	%

BLE2M-Ant1**TEST RESULTS DATA*****6dB and 99% Occupied Bandwidth***

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.042	1.37	0.50	Pass
BLE	2Mbps	1	19	2440	2.042	1.37	0.50	Pass
BLE	2Mbps	1	39	2480	2.042	1.37	0.50	Pass

TEST RESULTS DATA***Peak Power Table***

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	8.32	30.00	2.10	10.42	36.00	Pass
BLE	2Mbps	1	19	2440	8.30	30.00	2.10	10.40	36.00	Pass
BLE	2Mbps	1	39	2480	7.87	30.00	2.10	9.97	36.00	Pass

TEST RESULTS DATA***Average Power Table******(Reporting Only)***

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	0.00	8.07
BLE	2Mbps	1	19	2440	0.00	8.02
BLE	2Mbps	1	39	2480	0.00	7.59

TEST RESULTS DATA***Peak Power Density***

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	4.78	-14.80	2.10	8.00	Pass
BLE	2Mbps	1	19	2440	4.75	-14.80	2.10	8.00	Pass
BLE	2Mbps	1	39	2480	4.34	-15.24	2.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2023/7/4~2023/8/3	Relative Humidity:	40~51	%

<u>TEST RESULTS DATA</u>										
<u>Peak Power Table</u>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125K	1	0	2402	8.06	30.00	2.10	10.16	36.00	Pass
BLE	125K	1	19	2440	7.91	30.00	2.10	10.01	36.00	Pass
BLE	125K	1	39	2480	7.48	30.00	2.10	9.58	36.00	Pass

<u>TEST RESULTS DATA</u>						
<u>Average Power Table</u>						
<i>(Reporting Only)</i>						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	125K	1	0	2402	0.00	7.92
BLE	125K	1	19	2440	0.00	7.81
BLE	125K	1	39	2480	0.00	7.34


Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2023/7/4~2023/8/3	Relative Humidity:	40~51	%

<u>TEST RESULTS DATA</u>										
<u>Peak Power Table</u>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500K	1	0	2402	8.17	30.00	2.10	10.27	36.00	Pass
BLE	500K	1	19	2440	8.04	30.00	2.10	10.14	36.00	Pass
BLE	500K	1	39	2480	7.64	30.00	2.10	9.74	36.00	Pass


<u>TEST RESULTS DATA</u>						
<u>Average Power Table</u>						
<i>(Reporting Only)</i>						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	500K	1	0	2402	0.00	7.91
BLE	500K	1	19	2440	0.00	7.85
BLE	500K	1	39	2480	0.00	7.39

Appendix B. AC Conducted Emission Test Results

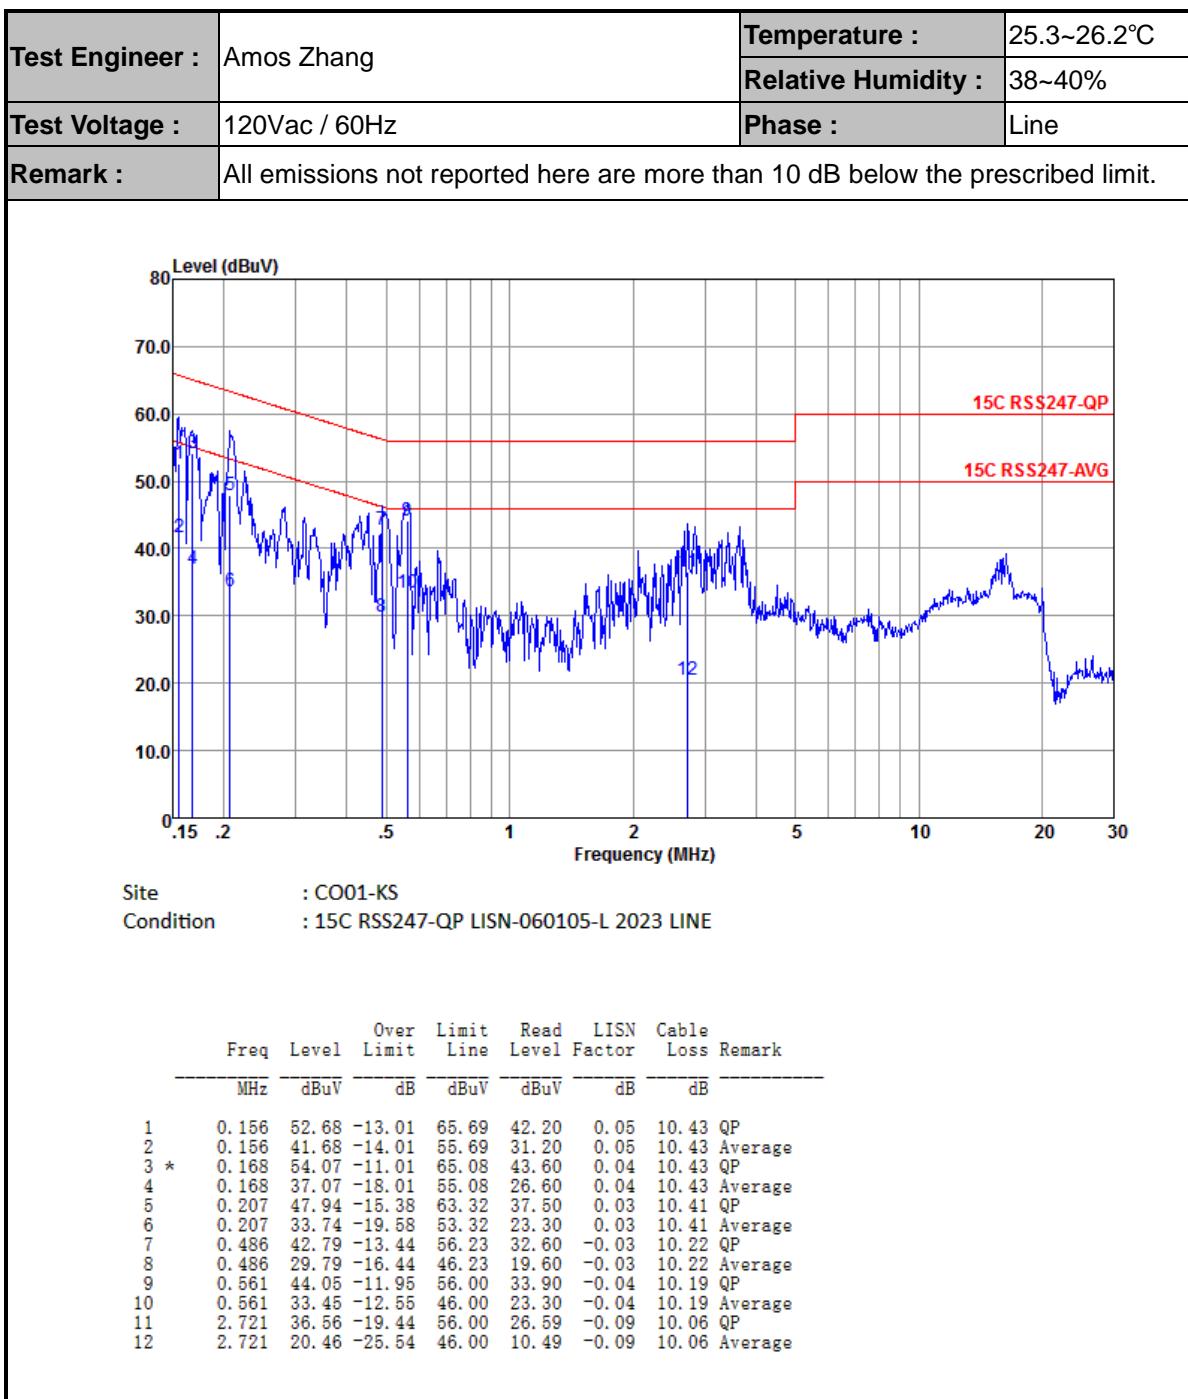



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
Test Voltage :	120Vac / 60Hz	Relative Humidity :	38~40%
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

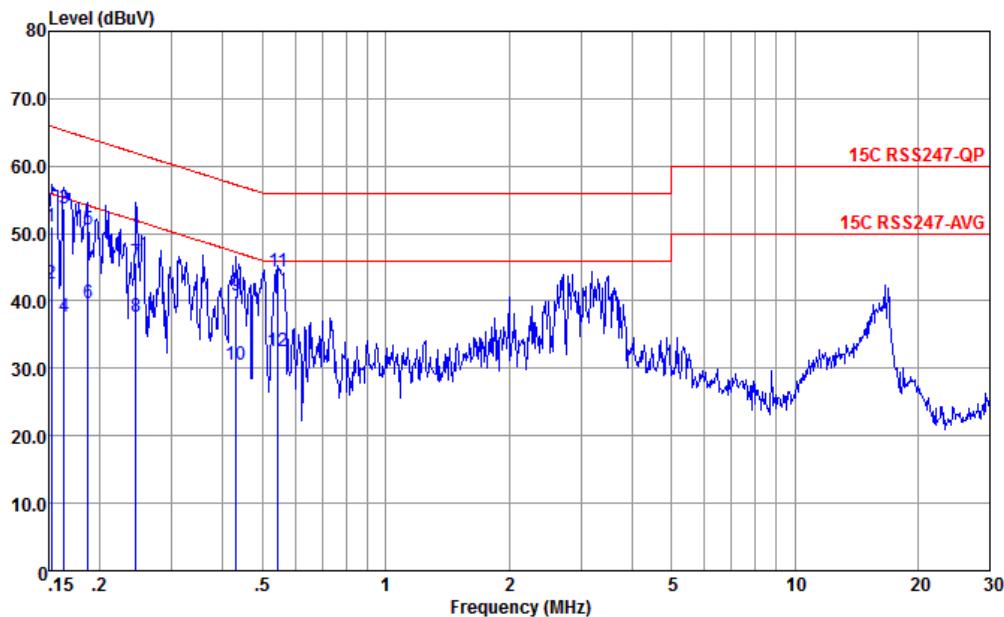

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL

Freq	Level	Over Limit	Limit Line	Read Level		LISN Factor	Cable Loss	Remark
				dBuV	dB			
1	0.152	51.07	-14.80	65.87	40.60	0.04	10.43	QP
2	0.152	42.67	-13.20	55.87	32.20	0.04	10.43	Average
3 *	0.163	53.77	-11.53	65.30	43.30	0.04	10.43	QP
4	0.163	37.77	-17.53	55.30	27.30	0.04	10.43	Average
5	0.187	50.67	-13.48	64.15	40.20	0.05	10.42	QP
6	0.187	39.77	-14.38	54.15	29.30	0.05	10.42	Average
7	0.246	45.59	-16.32	61.91	35.21	0.00	10.38	QP
8	0.246	37.69	-14.22	51.91	27.31	0.00	10.38	Average
9	0.431	40.81	-16.43	57.24	30.60	-0.06	10.27	QP
10	0.431	30.51	-16.73	47.24	20.30	-0.06	10.27	Average
11	0.546	44.33	-11.67	56.00	34.20	-0.07	10.20	QP
12	0.546	32.63	-13.37	46.00	22.50	-0.07	10.20	Average

Note:

1. Level(dB μ V) = Read Level(dB μ V) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dB μ V) - Limit Line(dB μ V)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Ryan Xu	Relative Humidity :	22 ~ 23 °C
		Temperature :	41 ~ 42 %

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	Bluetooth-LE_GSFK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	Bluetooth-LE_GSFK	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	Bluetooth-LE_GSFK	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	Bluetooth-LE_GSFK	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	Bluetooth-LE_GSFK	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	Bluetooth-LE_GSFK	39	2480	2Mbps	-	-
	2400-2483.5	Bluetooth-LE_GSFK	39	2480	2Mbps	-	LF







Summary of each worse mode


Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSFK	00	2389.43	42.59	54.00	-11.41	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	00	4804.00	43.68	74.00	-30.32	H	PEAK	Pass	Harmonic
2	Bluetooth-LE_GSFK	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE_GSFK	19	7320.00	45.49	74.00	-28.51	H	PEAK	Pass	Harmonic
3	Bluetooth-LE_GSFK	39	2483.50	44.27	54.00	-9.73	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	39	7440.00	44.66	74.00	-29.34	H	PEAK	Pass	Harmonic
4	Bluetooth-LE_GSFK	00	2389.17	42.60	54.00	-11.40	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	00	4804.00	44.27	74.00	-29.73	H	PEAK	Pass	Harmonic
5	Bluetooth-LE_GSFK	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE_GSFK	19	7320.00	44.80	74.00	-29.20	H	PEAK	Pass	Harmonic
6	Bluetooth-LE_GSFK	39	2483.50	46.26	54.00	-7.74	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	39	7440.00	45.78	74.00	-28.22	V	PEAK	Pass	Harmonic
	Bluetooth-LE_GSFK	39	191.99	35.77	43.50	-7.73	H	PEAK	Pass	LF

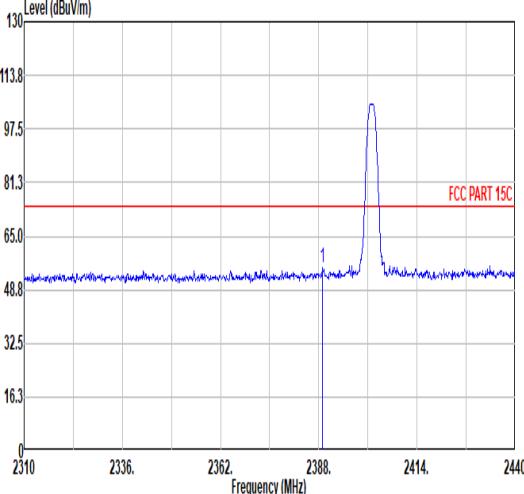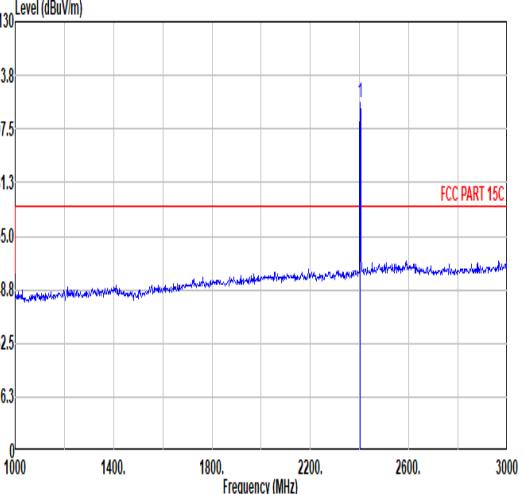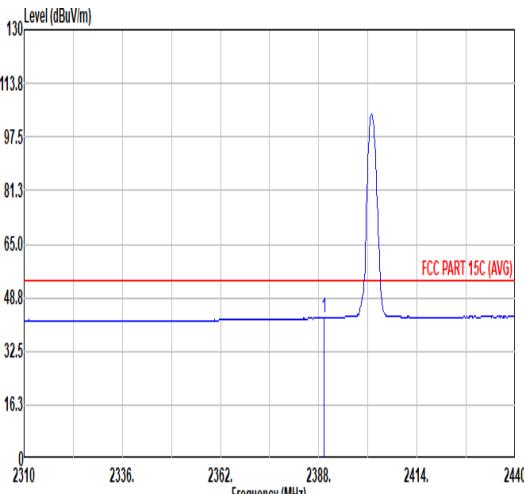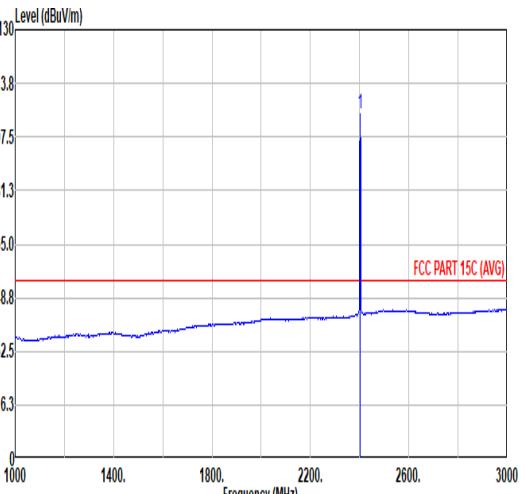


Mode	1																																																													
	Band Edge																																																													
	2400-2483.5_Bluetooth-LE_GSFK_CH00_2402MHz																																																													
ANT	1																																																													
Pol.	Horizontal	Fundamental																																																												
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>2388.91</td> <td>55.38</td> <td>74.00</td> <td>-18.62</td> <td>43.60</td> <td>32.04</td> <td>6.60</td> <td>32.86</td> <td>6.00</td> <td>338 6 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	2388.91	55.38	74.00	-18.62	43.60	32.04	6.60	32.86	6.00	338 6 PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>2402.00</td> <td>105.49</td> <td>93.41</td> <td>-----</td> <td>32.21</td> <td>6.62</td> <td>32.84</td> <td>6.00</td> <td>338</td> <td>6 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	2402.00	105.49	93.41	-----	32.21	6.62	32.84	6.00	338	6 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
2388.91	55.38	74.00	-18.62	43.60	32.04	6.60	32.86	6.00	338 6 PEAK																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
2402.00	105.49	93.41	-----	32.21	6.62	32.84	6.00	338	6 PEAK																																																					
 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>2389.43</td> <td>42.59</td> <td>54.00</td> <td>-11.41</td> <td>30.80</td> <td>32.05</td> <td>6.60</td> <td>32.86</td> <td>6.00</td> <td>338 6 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	2389.43	42.59	54.00	-11.41	30.80	32.05	6.60	32.86	6.00	338 6 AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>2402.00</td> <td>104.38</td> <td>92.39</td> <td>-----</td> <td>32.21</td> <td>6.62</td> <td>32.84</td> <td>6.00</td> <td>338</td> <td>6 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	2402.00	104.38	92.39	-----	32.21	6.62	32.84	6.00	338	6 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
2389.43	42.59	54.00	-11.41	30.80	32.05	6.60	32.86	6.00	338 6 AVERAGE																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
2402.00	104.38	92.39	-----	32.21	6.62	32.84	6.00	338	6 AVERAGE																																																					

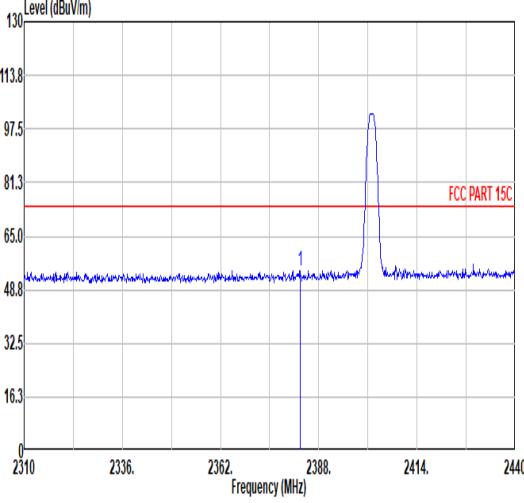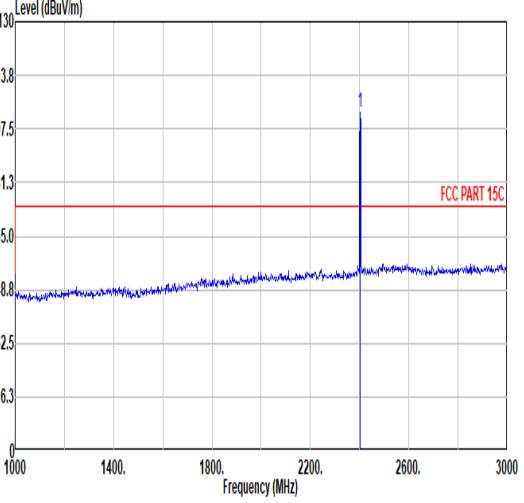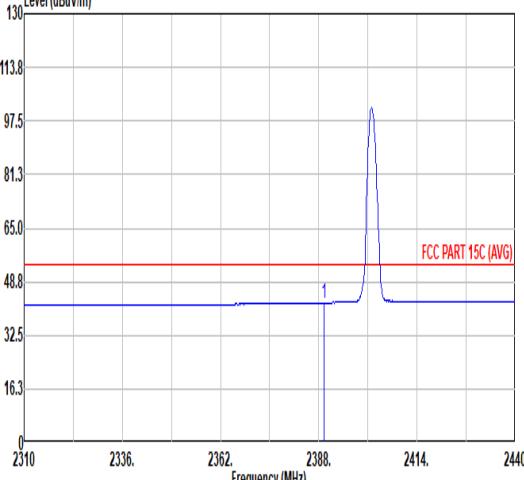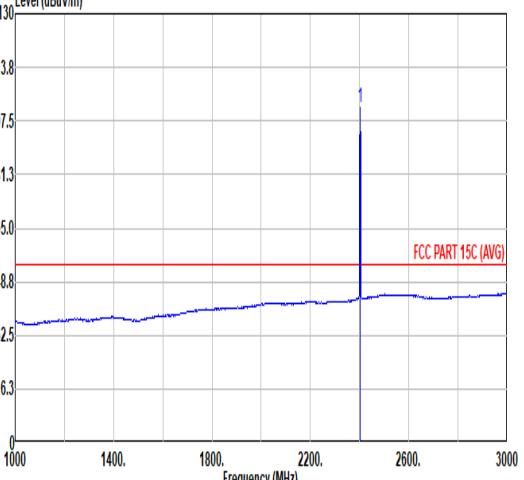





Mode	1																																																													
	Band Edge																																																													
	2400-2483.5_Bluetooth-LE_GSFK_CH00_2402MHz																																																													
ANT	1																																																													
Pol.	Vertical	Fundamental																																																												
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>2383.06</td> <td>54.47</td> <td>74.00</td> <td>-19.53</td> <td>42.79</td> <td>31.96</td> <td>6.59</td> <td>32.87</td> <td>6.00</td> <td>300 7 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	2383.06	54.47	74.00	-19.53	42.79	31.96	6.59	32.87	6.00	300 7 PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>2402.00</td> <td>102.49</td> <td>-----</td> <td>-----</td> <td>90.50</td> <td>32.21</td> <td>6.62</td> <td>32.84</td> <td>6.00</td> <td>300 7 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	2402.00	102.49	-----	-----	90.50	32.21	6.62	32.84	6.00	300 7 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
2383.06	54.47	74.00	-19.53	42.79	31.96	6.59	32.87	6.00	300 7 PEAK																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
2402.00	102.49	-----	-----	90.50	32.21	6.62	32.84	6.00	300 7 PEAK																																																					
 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>2389.43</td> <td>42.39</td> <td>54.00</td> <td>-11.61</td> <td>30.60</td> <td>32.05</td> <td>6.60</td> <td>32.86</td> <td>6.00</td> <td>300 7 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	2389.43	42.39	54.00	-11.61	30.60	32.05	6.60	32.86	6.00	300 7 AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>2402.00</td> <td>101.49</td> <td>-----</td> <td>-----</td> <td>89.50</td> <td>32.21</td> <td>6.62</td> <td>32.84</td> <td>6.00</td> <td>300 7 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	2402.00	101.49	-----	-----	89.50	32.21	6.62	32.84	6.00	300 7 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
2389.43	42.39	54.00	-11.61	30.60	32.05	6.60	32.86	6.00	300 7 AVERAGE																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
2402.00	101.49	-----	-----	89.50	32.21	6.62	32.84	6.00	300 7 AVERAGE																																																					

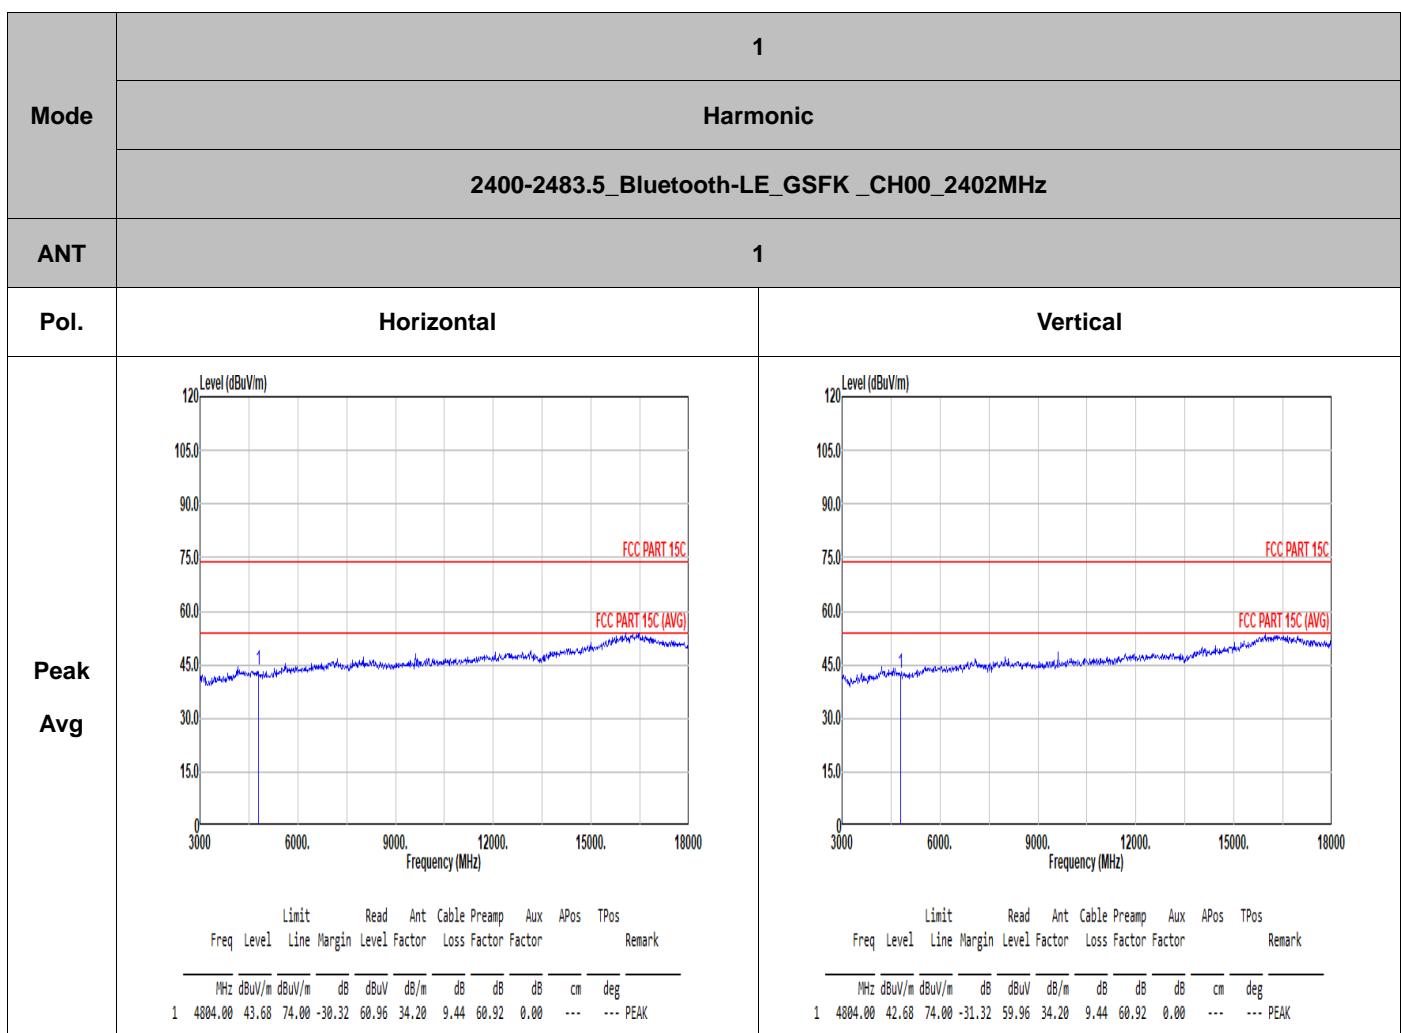




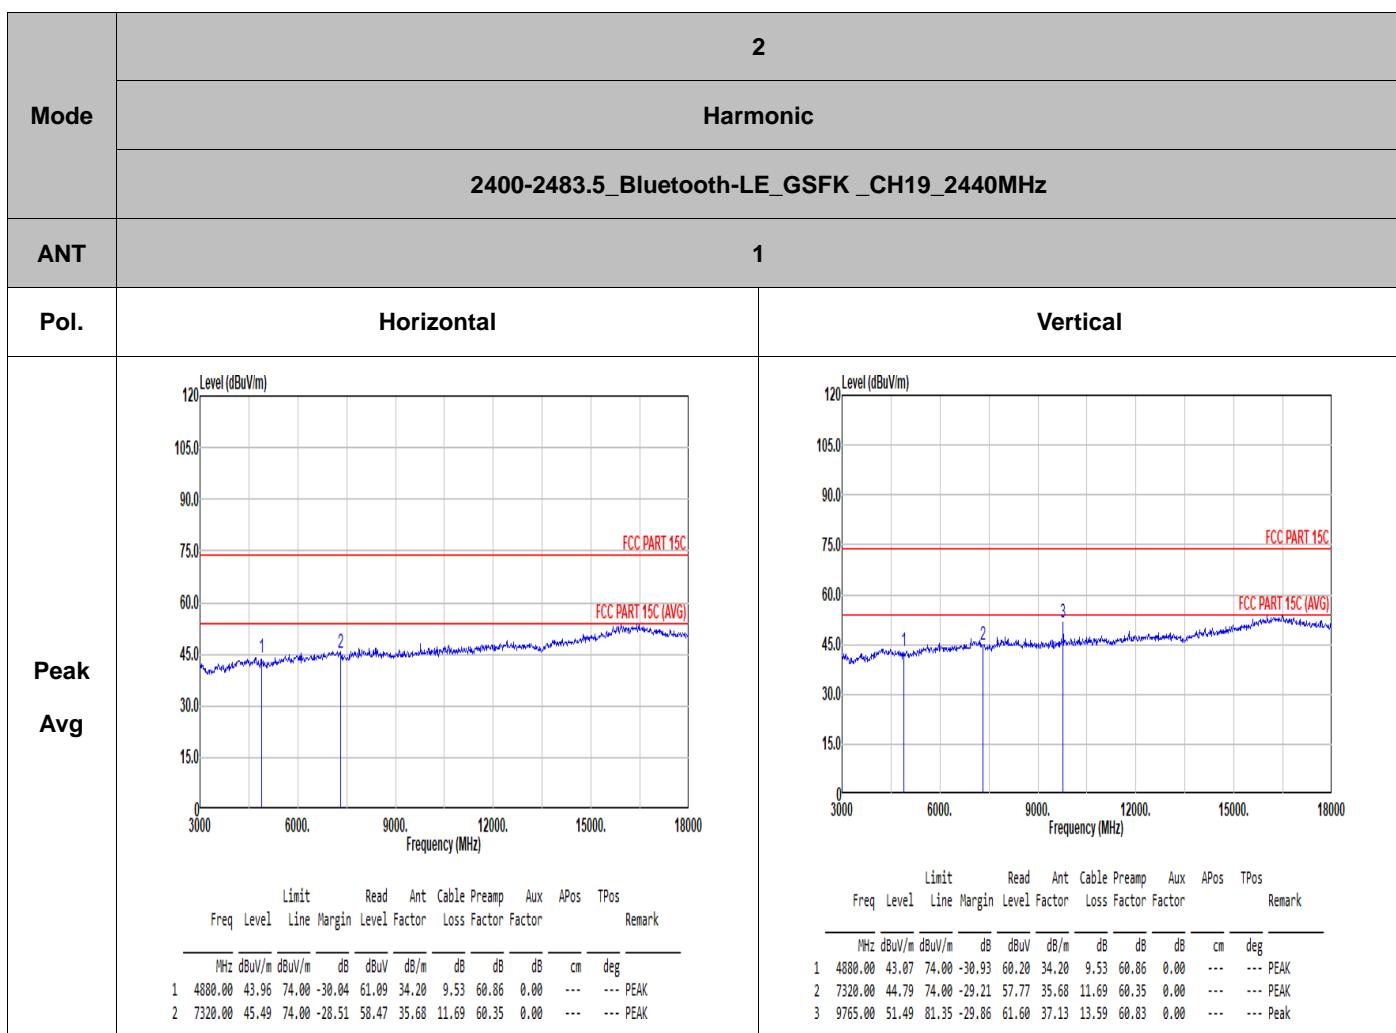



Note: The Remark #3 is non-restricted frequency which limit is 100kHz-PSD down 20dB

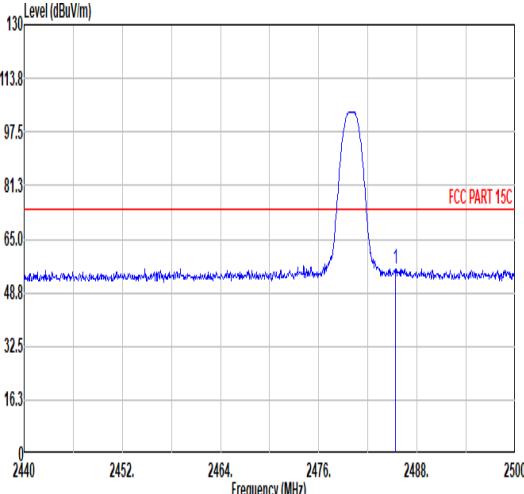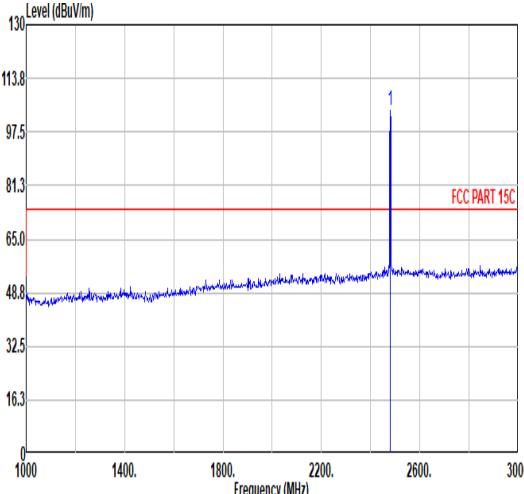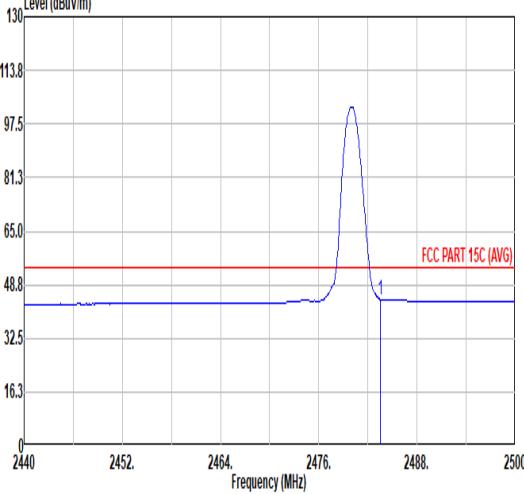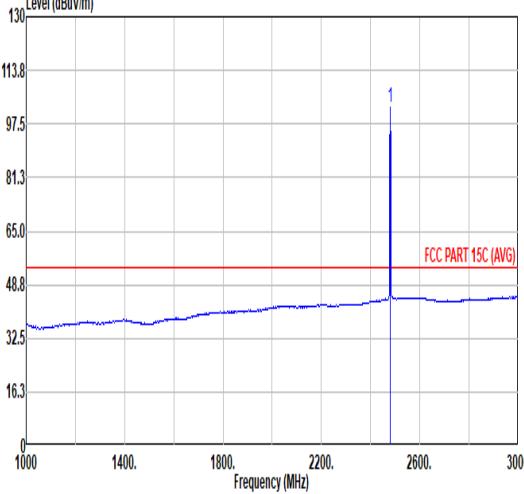

Mode	3																																																														
	Band Edge																																																														
	2400-2483.5_Bluetooth-LE_GSFK_CH39_2480MHz																																																														
ANT	1																																																														
Pol.	Horizontal	Fundamental																																																													
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C</p>	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C</p>																																																													
	<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Margin</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.36</td> <td>56.09</td> <td>74.00</td> <td>-17.91</td> <td>43.19</td> <td>32.78</td> <td>6.74</td> <td>32.62</td> <td>6.00</td> <td>116</td> <td>360 PEAK</td> </tr> </tbody> </table>	Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor		1 2483.36	56.09	74.00	-17.91	43.19	32.78	6.74	32.62	6.00	116	360 PEAK	<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Margin</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>103.76</td> <td>-----</td> <td>-----</td> <td>90.92</td> <td>32.74</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>116</td> <td>360 PEAK</td> </tr> </tbody> </table>	Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor		1 2480.00	103.76	-----	-----	90.92	32.74	6.73	32.63	6.00	116
Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor																																																							
1 2483.36	56.09	74.00	-17.91	43.19	32.78	6.74	32.62	6.00	116	360 PEAK																																																					
Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor																																																							
1 2480.00	103.76	-----	-----	90.92	32.74	6.73	32.63	6.00	116	360 PEAK																																																					
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C (AVG)</p>	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C (AVG)</p>																																																													
	<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Margin</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.50</td> <td>44.27</td> <td>54.00</td> <td>-9.73</td> <td>31.40</td> <td>32.77</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>116</td> <td>360 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor		1 2483.50	44.27	54.00	-9.73	31.40	32.77	6.73	32.63	6.00	116	360 AVERAGE	<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Margin</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>102.75</td> <td>-----</td> <td>-----</td> <td>89.91</td> <td>32.74</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>116</td> <td>360 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor		1 2480.00	102.75	-----	-----	89.91	32.74	6.73	32.63	6.00	116
Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor																																																							
1 2483.50	44.27	54.00	-9.73	31.40	32.77	6.73	32.63	6.00	116	360 AVERAGE																																																					
Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor																																																							
1 2480.00	102.75	-----	-----	89.91	32.74	6.73	32.63	6.00	116	360 AVERAGE																																																					

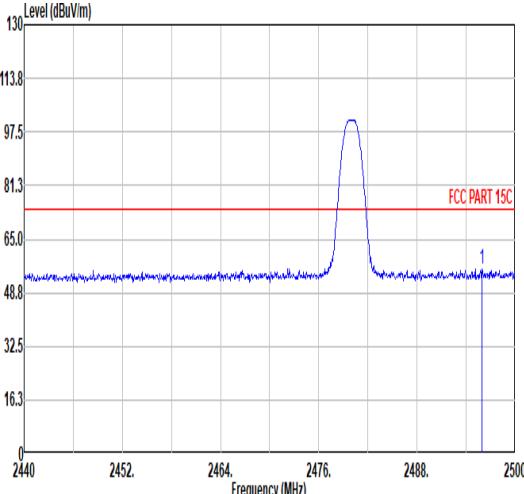
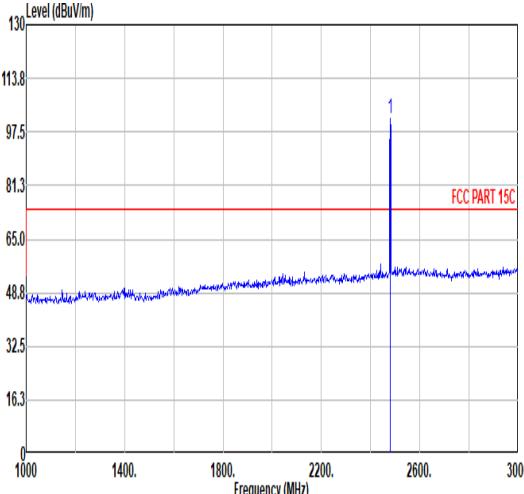
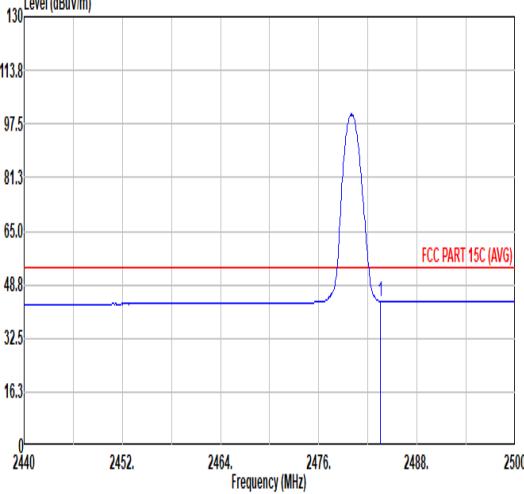
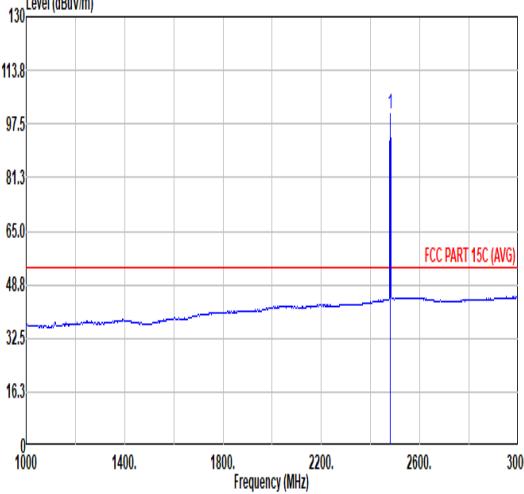


Mode	3																																																																	
	Band Edge																																																																	
	2400-2483.5_Bluetooth-LE_GSFK_CH39_2480MHz																																																																	
ANT	1																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>2440 2452. 2464. 2476. 2488. 2500</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Margin</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>TPos</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2495.92</td> <td>55.98</td> <td>74.00</td> <td>-18.02</td> <td>42.95</td> <td>32.87</td> <td>6.75</td> <td>32.59</td> <td>6.00</td> <td>246</td> <td>0 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor	TPos	1	2495.92	55.98	74.00	-18.02	42.95	32.87	6.75	32.59	6.00	246	0 PEAK	 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>1000 1400. 1800. 2200. 2600. 3000</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Margin</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>TPos</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>101.35</td> <td>-----</td> <td>-----</td> <td>88.51</td> <td>32.74</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>246</td> <td>0 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor	TPos	1	2480.00	101.35	-----	-----	88.51	32.74	6.73	32.63	6.00	246	0 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor	TPos																																																									
1	2495.92	55.98	74.00	-18.02	42.95	32.87	6.75	32.59	6.00	246	0 PEAK																																																							
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor	TPos																																																									
1	2480.00	101.35	-----	-----	88.51	32.74	6.73	32.63	6.00	246	0 PEAK																																																							
 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>2440 2452. 2464. 2476. 2488. 2500</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Margin</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>TPos</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>43.72</td> <td>54.00</td> <td>-10.28</td> <td>38.85</td> <td>32.77</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>246</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor	TPos	1	2483.50	43.72	54.00	-10.28	38.85	32.77	6.73	32.63	6.00	246	0 AVERAGE	 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>1000 1400. 1800. 2200. 2600. 3000</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Margin</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>TPos</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>100.36</td> <td>-----</td> <td>-----</td> <td>87.52</td> <td>32.74</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>246</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor	TPos	1	2480.00	100.36	-----	-----	87.52	32.74	6.73	32.63	6.00	246	0 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor	TPos																																																									
1	2483.50	43.72	54.00	-10.28	38.85	32.77	6.73	32.63	6.00	246	0 AVERAGE																																																							
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Factor	TPos																																																									
1	2480.00	100.36	-----	-----	87.52	32.74	6.73	32.63	6.00	246	0 AVERAGE																																																							




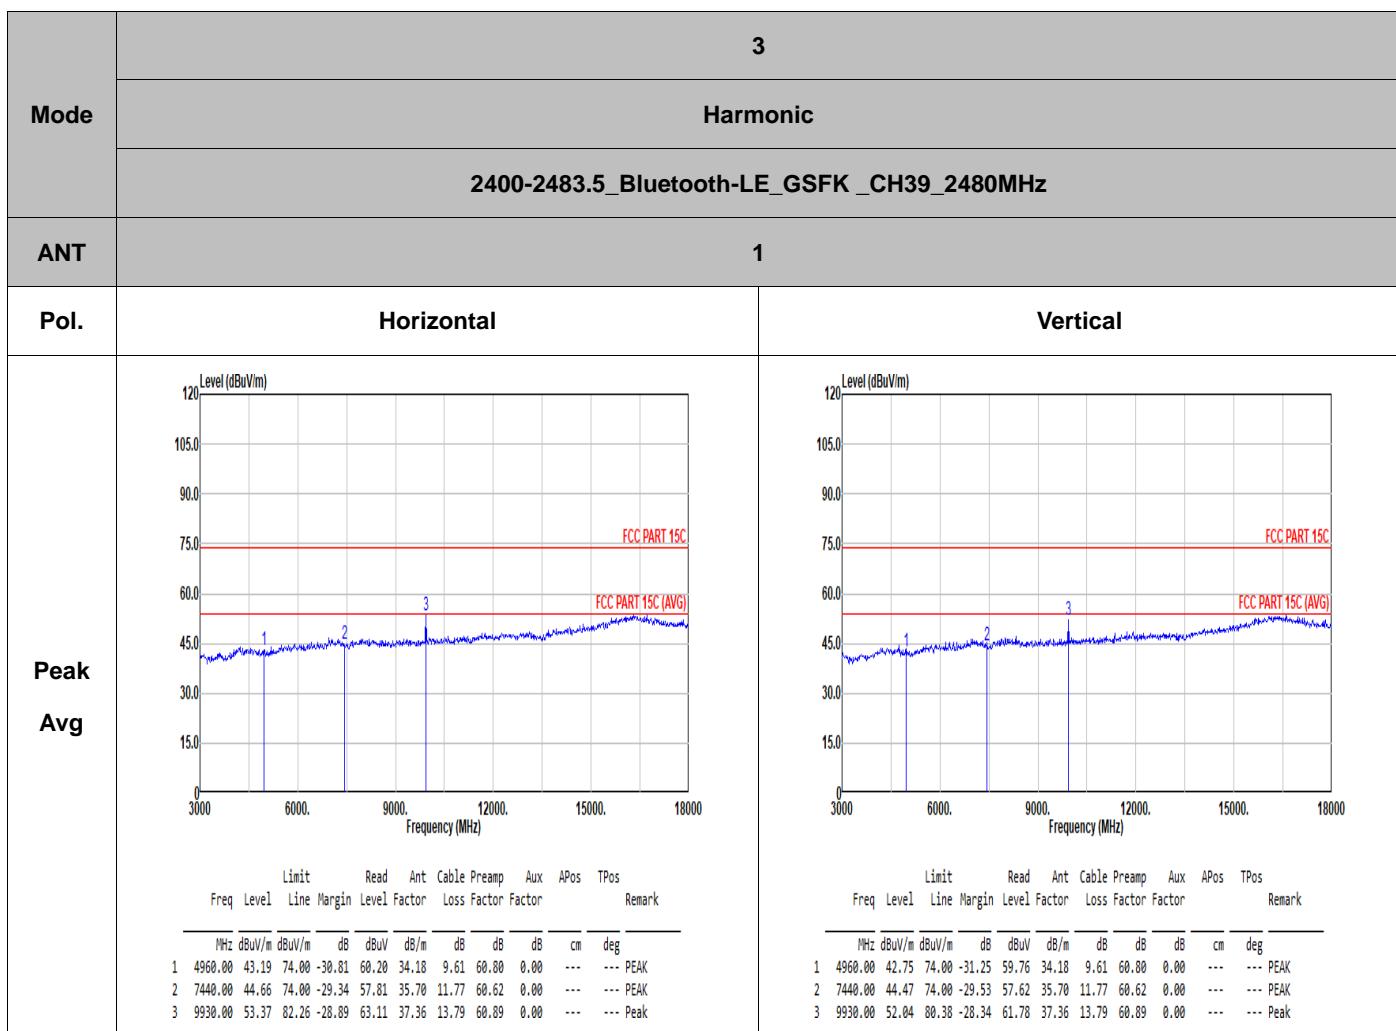



Note: The Remark #3 is non-restricted frequency which limit is 100kHz-PSD down 20dB

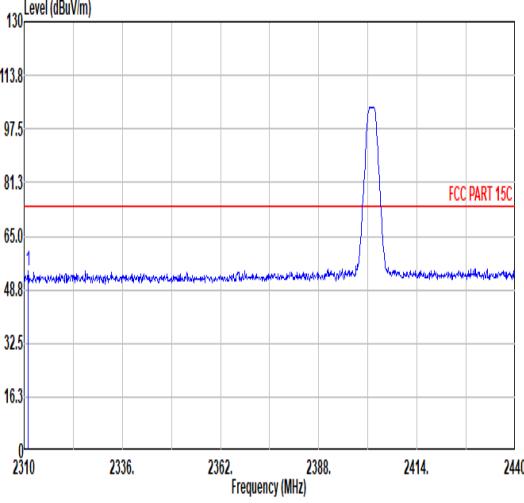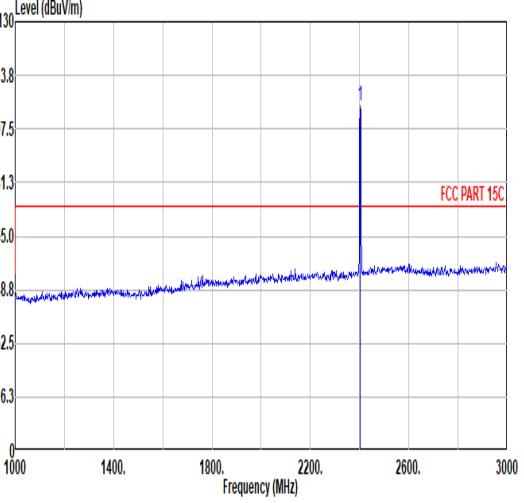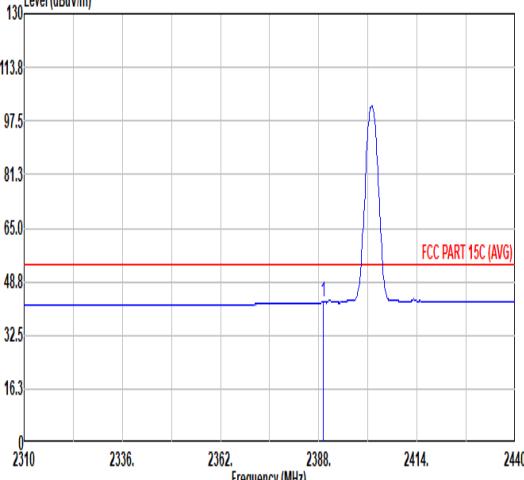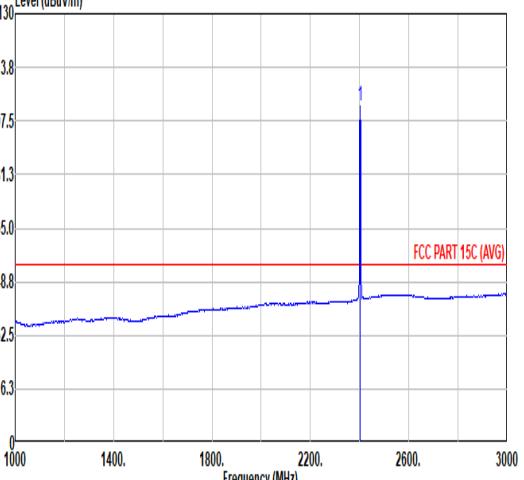


Mode	4																																																																										
	Band Edge																																																																										
	2400-2483.5_Bluetooth-LE_GSFK_CH00_2402MHz																																																																										
ANT	1																																																																										
Pol.	Horizontal						Fundamental																																																																				
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p>						 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p>																																																																				
	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2311.04</td> <td>54.67</td> <td>74.00</td> <td>-19.33</td> <td>43.37</td> <td>31.81</td> <td>6.48</td> <td>32.99</td> <td>6.00</td> <td>113</td> <td>360 PEAK</td> </tr> </tbody> </table>						Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2311.04	54.67	74.00	-19.33	43.37	31.81	6.48	32.99	6.00	113	360 PEAK	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>104.49</td> <td>-----</td> <td>-----</td> <td>92.41</td> <td>32.21</td> <td>6.62</td> <td>32.84</td> <td>6.00</td> <td>113</td> <td>360 PEAK</td> </tr> </tbody> </table>						Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2402.00	104.49	-----	-----	92.41	32.21	6.62	32.84	6.00	113
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																						
1	2311.04	54.67	74.00	-19.33	43.37	31.81	6.48	32.99	6.00	113	360 PEAK																																																																
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																						
1	2402.00	104.49	-----	-----	92.41	32.21	6.62	32.84	6.00	113	360 PEAK																																																																
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p>						 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p>																																																																				
	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.17</td> <td>42.60</td> <td>54.00</td> <td>-11.40</td> <td>30.81</td> <td>32.05</td> <td>6.60</td> <td>32.86</td> <td>6.00</td> <td>113</td> <td>360 AVERAGE</td> </tr> </tbody> </table>						Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2389.17	42.60	54.00	-11.40	30.81	32.05	6.60	32.86	6.00	113	360 AVERAGE	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>102.05</td> <td>-----</td> <td>-----</td> <td>90.06</td> <td>32.21</td> <td>6.62</td> <td>32.84</td> <td>6.00</td> <td>113</td> <td>360 AVERAGE</td> </tr> </tbody> </table>						Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2402.00	102.05	-----	-----	90.06	32.21	6.62	32.84	6.00	113
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																						
1	2389.17	42.60	54.00	-11.40	30.81	32.05	6.60	32.86	6.00	113	360 AVERAGE																																																																
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																						
1	2402.00	102.05	-----	-----	90.06	32.21	6.62	32.84	6.00	113	360 AVERAGE																																																																

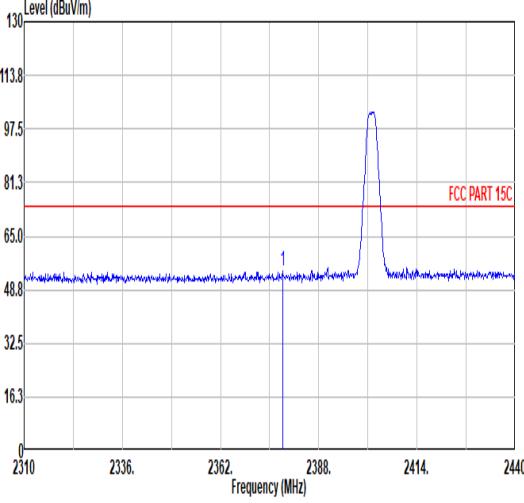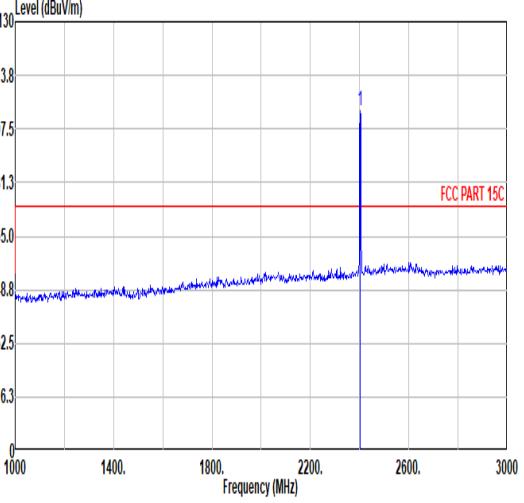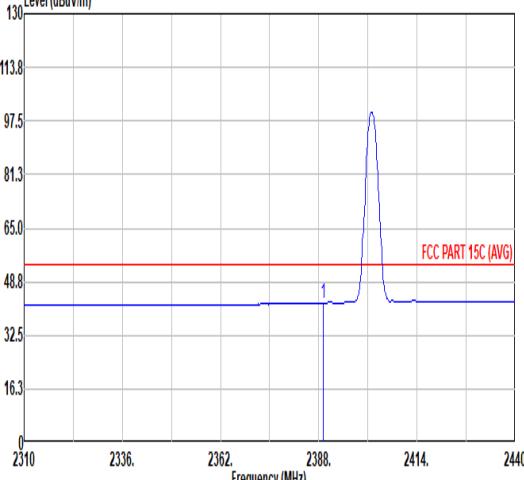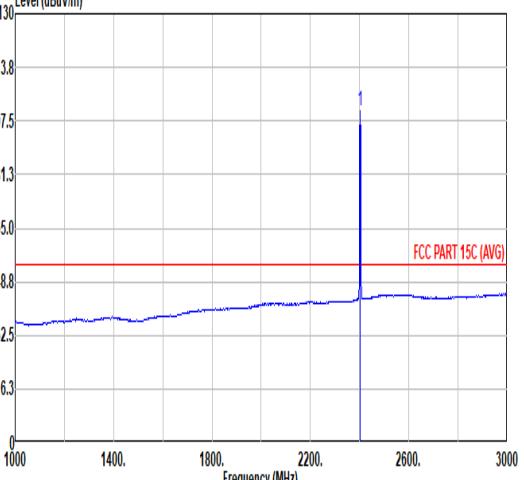

Mode	4																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GSFK_CH00_2402MHz																																																																									
ANT	1																																																																									
Pol.	Vertical						Fundamental																																																																			
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p>						 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p>																																																																			
	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2378.38</td> <td>54.33</td> <td>74.00</td> <td>-19.67</td> <td>42.72</td> <td>31.90</td> <td>6.59</td> <td>32.88</td> <td>6.00</td> <td>287</td> <td>9 PEAK</td> </tr> </tbody> </table>						Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2378.38	54.33	74.00	-19.67	42.72	31.90	6.59	32.88	6.00	287	9 PEAK	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>102.79</td> <td>-----</td> <td>-----</td> <td>90.80</td> <td>32.21</td> <td>6.62</td> <td>32.84</td> <td>6.00</td> <td>287</td> <td>9 PEAK</td> </tr> </tbody> </table>					Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2402.00	102.79	-----	-----	90.80	32.21	6.62	32.84	6.00	287
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
1	2378.38	54.33	74.00	-19.67	42.72	31.90	6.59	32.88	6.00	287	9 PEAK																																																															
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
1	2402.00	102.79	-----	-----	90.80	32.21	6.62	32.84	6.00	287	9 PEAK																																																															
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p>						 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p>																																																																			
	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.17</td> <td>42.41</td> <td>54.00</td> <td>-11.59</td> <td>30.62</td> <td>32.05</td> <td>6.60</td> <td>32.86</td> <td>6.00</td> <td>287</td> <td>9 AVERAGE</td> </tr> </tbody> </table>						Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2389.17	42.41	54.00	-11.59	30.62	32.05	6.60	32.86	6.00	287	9 AVERAGE	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>100.38</td> <td>-----</td> <td>-----</td> <td>88.39</td> <td>32.21</td> <td>6.62</td> <td>32.84</td> <td>6.00</td> <td>287</td> <td>9 AVERAGE</td> </tr> </tbody> </table>					Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2402.00	100.38	-----	-----	88.39	32.21	6.62	32.84	6.00	287
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
1	2389.17	42.41	54.00	-11.59	30.62	32.05	6.60	32.86	6.00	287	9 AVERAGE																																																															
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
1	2402.00	100.38	-----	-----	88.39	32.21	6.62	32.84	6.00	287	9 AVERAGE																																																															




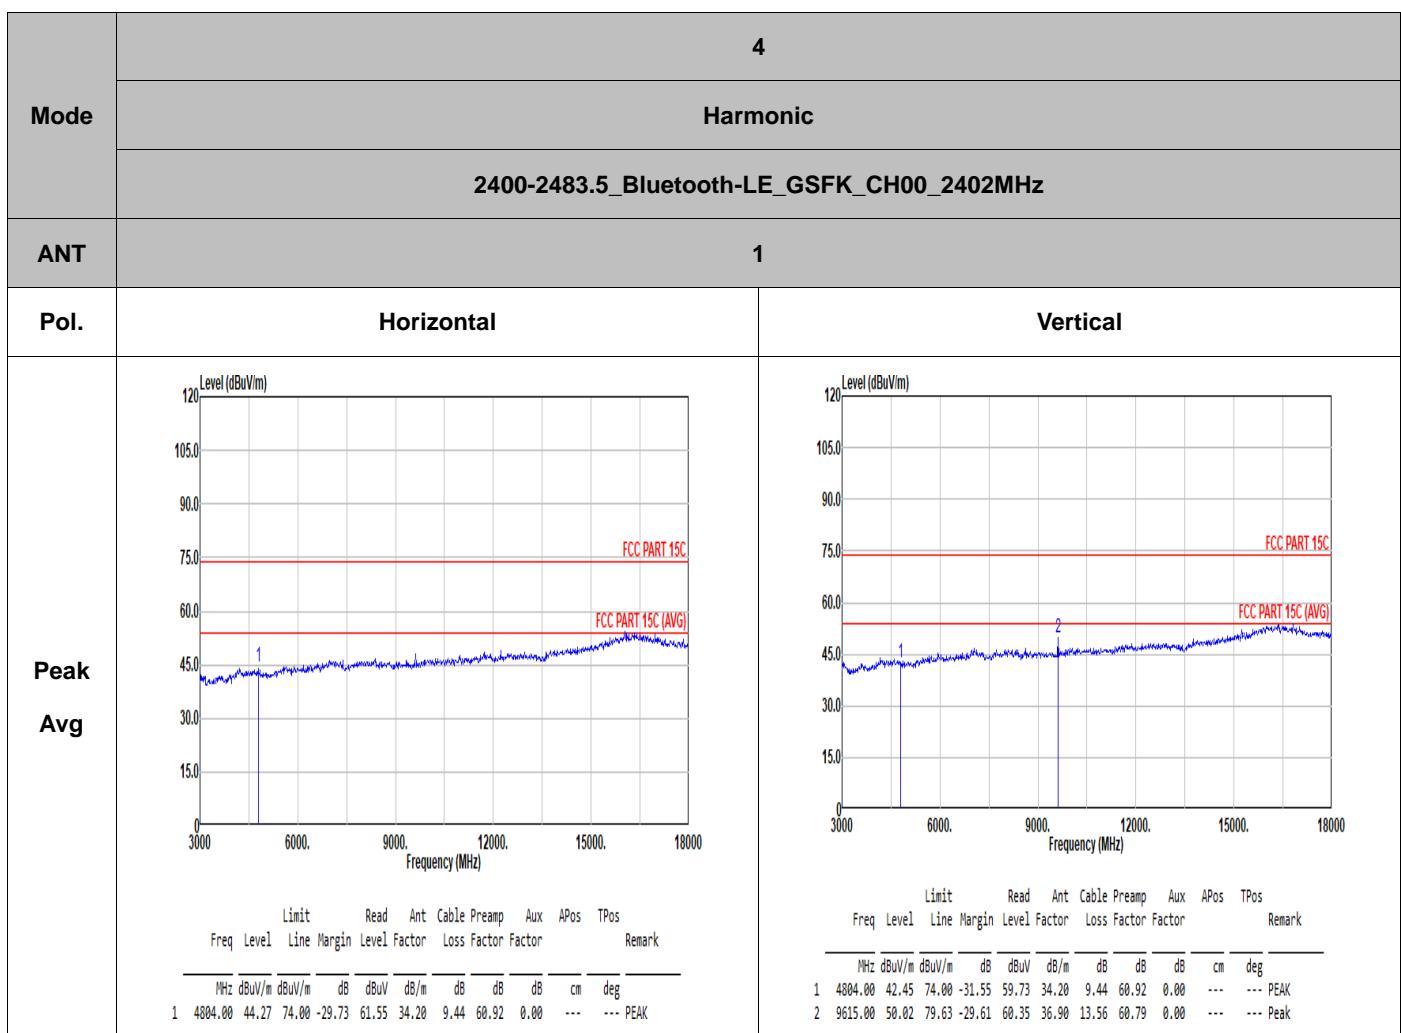


Note: The Remark #2 is non-restricted frequency which limit is 100kHz-PSD down 20dB




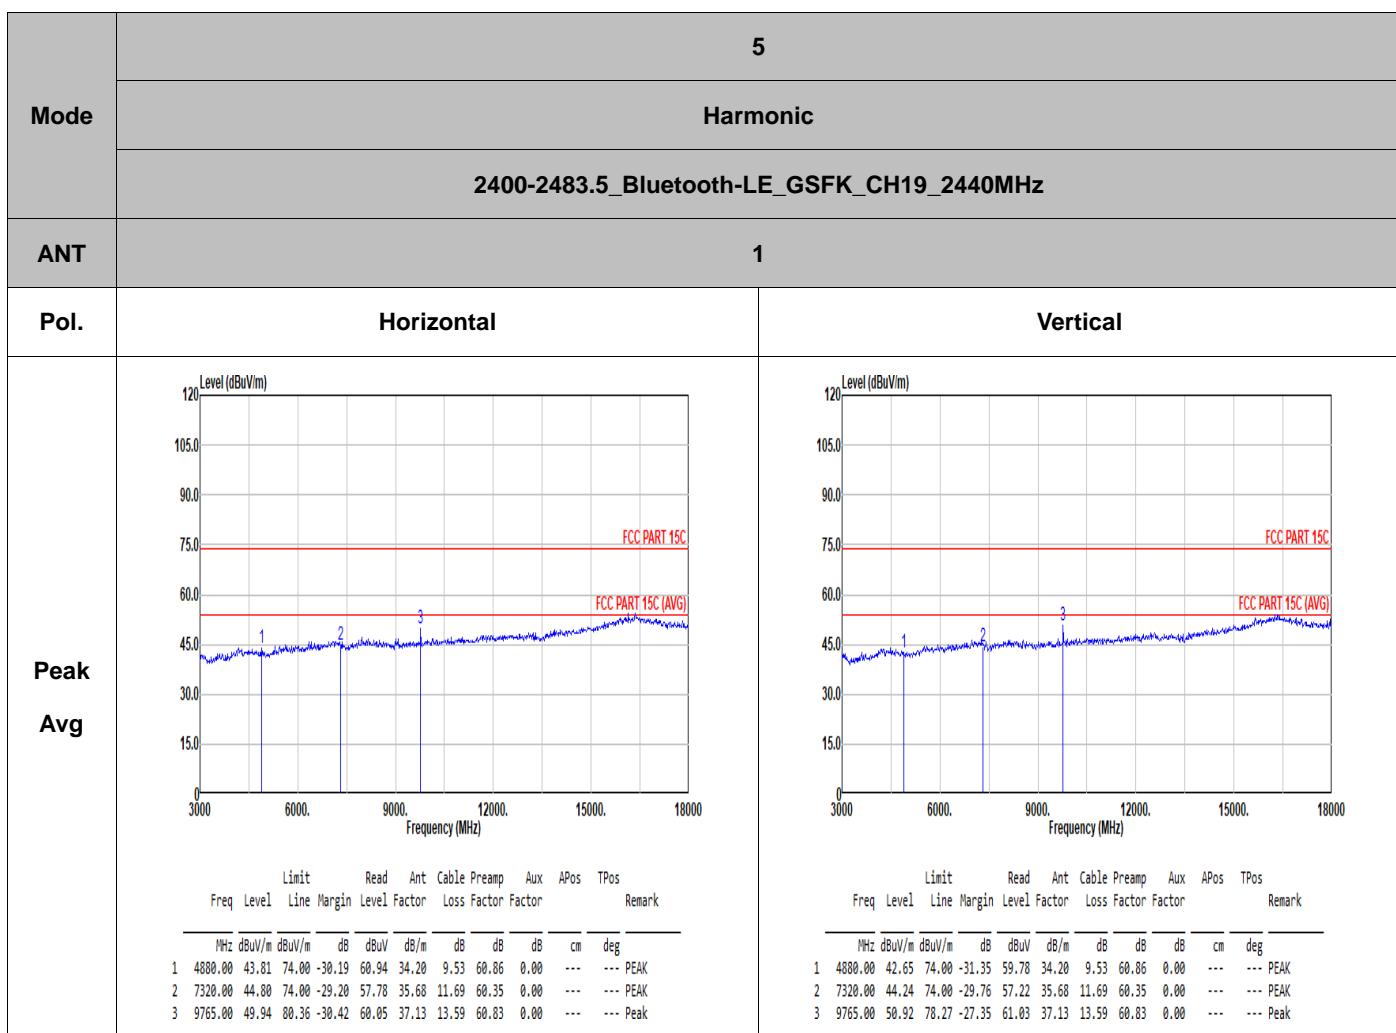


Note: The Remark #3 is non-restricted frequency which limit is 100kHz-PSD down 20dB

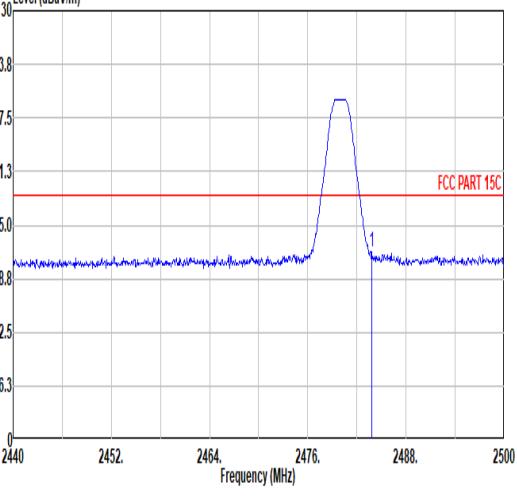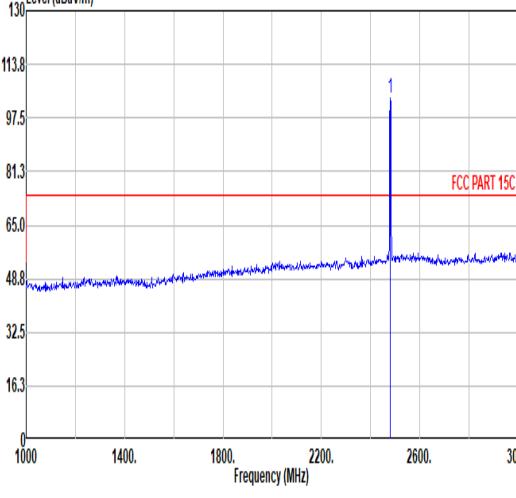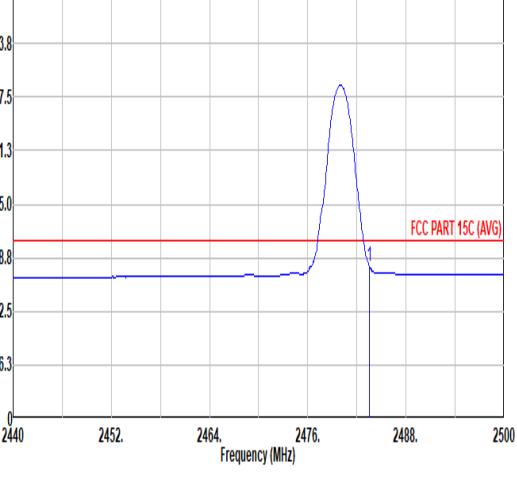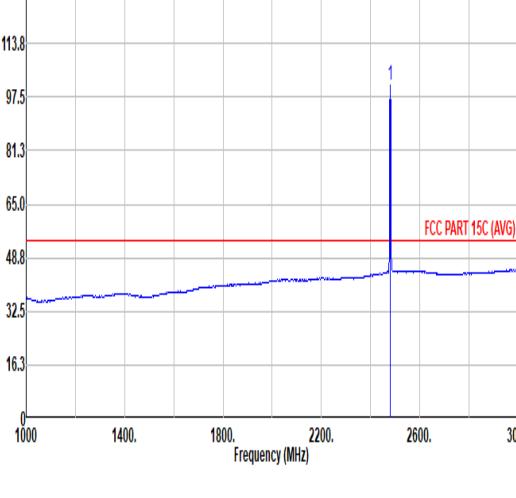

Mode	Band Edge																																																																											
2400-2483.5_Bluetooth-LE_GSFK_CH39_2480MHz																																																																												
ANT	1																																																																											
Pol.	Horizontal						Fundamental																																																																					
Peak																																																																												
	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.86</td> <td>57.02</td> <td>74.00</td> <td>-16.98</td> <td>44.14</td> <td>32.77</td> <td>6.73</td> <td>32.62</td> <td>6.00</td> <td>114</td> <td>360 PEAK</td> </tr> </tbody> </table>						Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.86	57.02	74.00	-16.98	44.14	32.77	6.73	32.62	6.00	114	360 PEAK	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>103.47</td> <td>-----</td> <td>-----</td> <td>90.63</td> <td>32.74</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>114</td> <td>360 PEAK</td> </tr> </tbody> </table>						Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	103.47	-----	-----	90.63	32.74	6.73	32.63	6.00	114	360 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2483.86	57.02	74.00	-16.98	44.14	32.77	6.73	32.62	6.00	114	360 PEAK																																																																	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2480.00	103.47	-----	-----	90.63	32.74	6.73	32.63	6.00	114	360 PEAK																																																																	
Avg																																																																												
	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>46.26</td> <td>54.00</td> <td>-7.74</td> <td>33.39</td> <td>32.77</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>114</td> <td>360 AVERAGE</td> </tr> </tbody> </table>						Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	46.26	54.00	-7.74	33.39	32.77	6.73	32.63	6.00	114	360 AVERAGE	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>101.07</td> <td>-----</td> <td>-----</td> <td>88.23</td> <td>32.74</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>114</td> <td>360 AVERAGE</td> </tr> </tbody> </table>						Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.07	-----	-----	88.23	32.74	6.73	32.63	6.00	114	360 AVERAGE
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2483.50	46.26	54.00	-7.74	33.39	32.77	6.73	32.63	6.00	114	360 AVERAGE																																																																	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2480.00	101.07	-----	-----	88.23	32.74	6.73	32.63	6.00	114	360 AVERAGE																																																																	

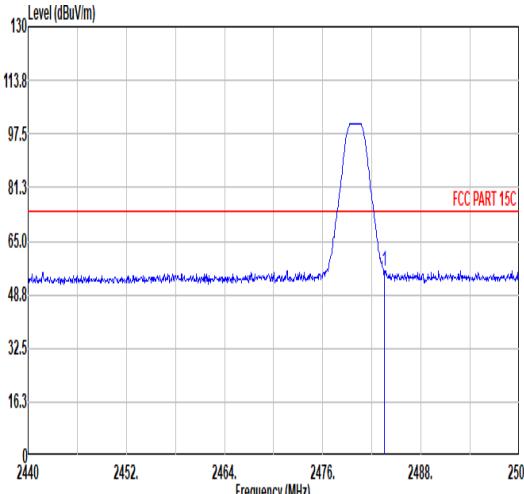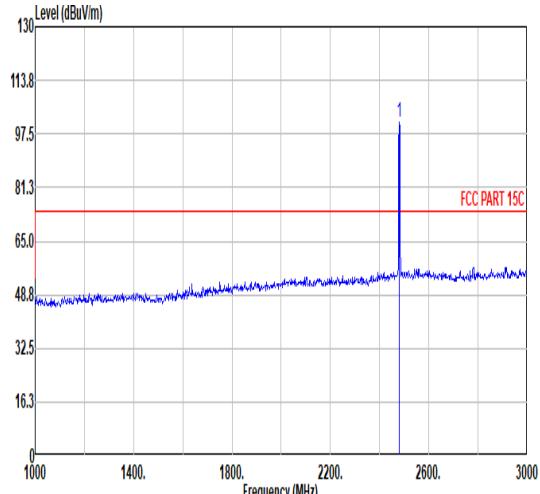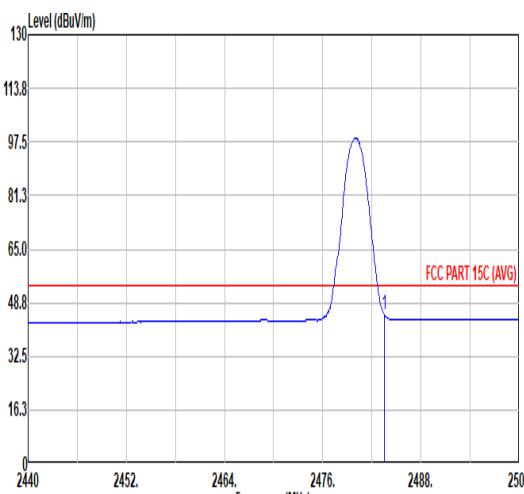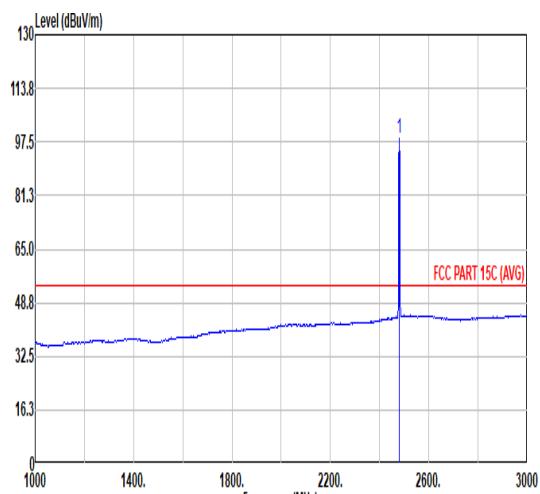


Mode	6																																																																																					
	Band Edge																																																																																					
	2400-2483.5_Bluetooth-LE_GSFK_CH39_2480MHz																																																																																					
ANT	1																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>56.11</td> <td>74.00</td> <td>-17.89</td> <td>43.24</td> <td>32.77</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>242</td> <td>0 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	56.11	74.00	-17.89	43.24	32.77	6.73	32.63	6.00	242	0 PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>101.13</td> <td>-----</td> <td>-----</td> <td>88.29</td> <td>32.74</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>242</td> <td>0 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.13	-----	-----	88.29	32.74	6.73	32.63	6.00	242	0 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2483.56	56.11	74.00	-17.89	43.24	32.77	6.73	32.63	6.00	242	0 PEAK																																																																											
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2480.00	101.13	-----	-----	88.29	32.74	6.73	32.63	6.00	242	0 PEAK																																																																											
 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C (AVG)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>45.34</td> <td>54.00</td> <td>-8.66</td> <td>32.47</td> <td>32.77</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>242</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	45.34	54.00	-8.66	32.47	32.77	6.73	32.63	6.00	242	0 AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C (AVG)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>98.70</td> <td>-----</td> <td>-----</td> <td>85.86</td> <td>32.74</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>242</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.70	-----	-----	85.86	32.74	6.73	32.63	6.00	242	0 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2483.50	45.34	54.00	-8.66	32.47	32.77	6.73	32.63	6.00	242	0 AVERAGE																																																																											
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2480.00	98.70	-----	-----	85.86	32.74	6.73	32.63	6.00	242	0 AVERAGE																																																																											





Note:

1. The Remark #3 is non-restricted frequency which limit is 100kHz-PSD down 20dB
2. Only the worst case has assessed 18G ~25GHz to test.

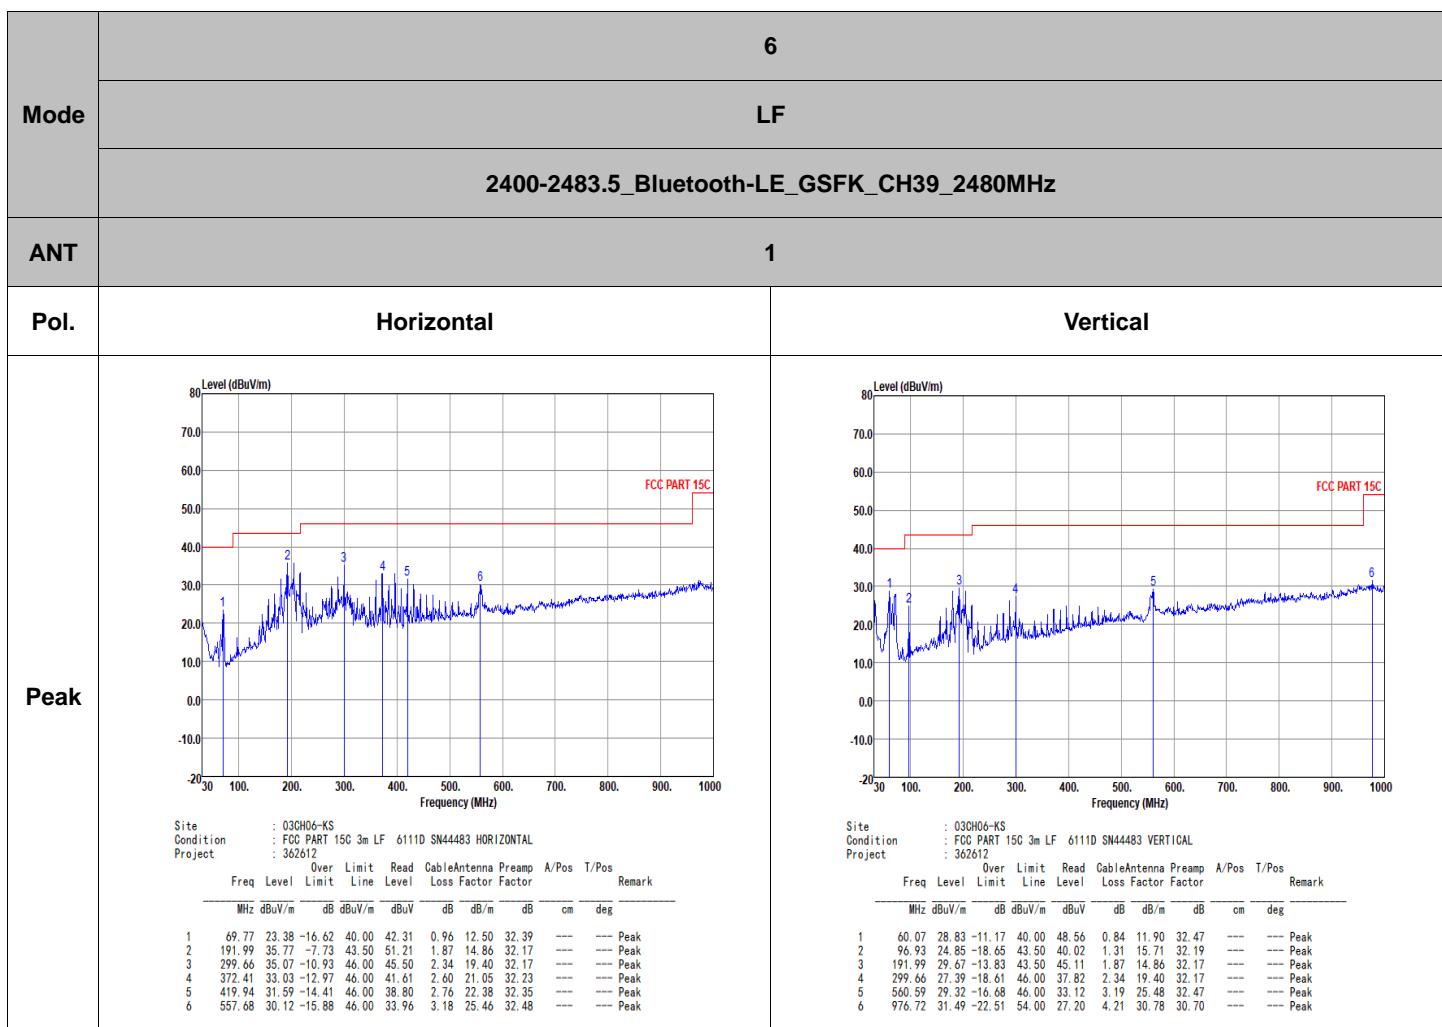




Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	100%	-	-	10Hz
Bluetooth LE 2Mbps	100%	-	-	10Hz

Bluetooth LE 1Mbps

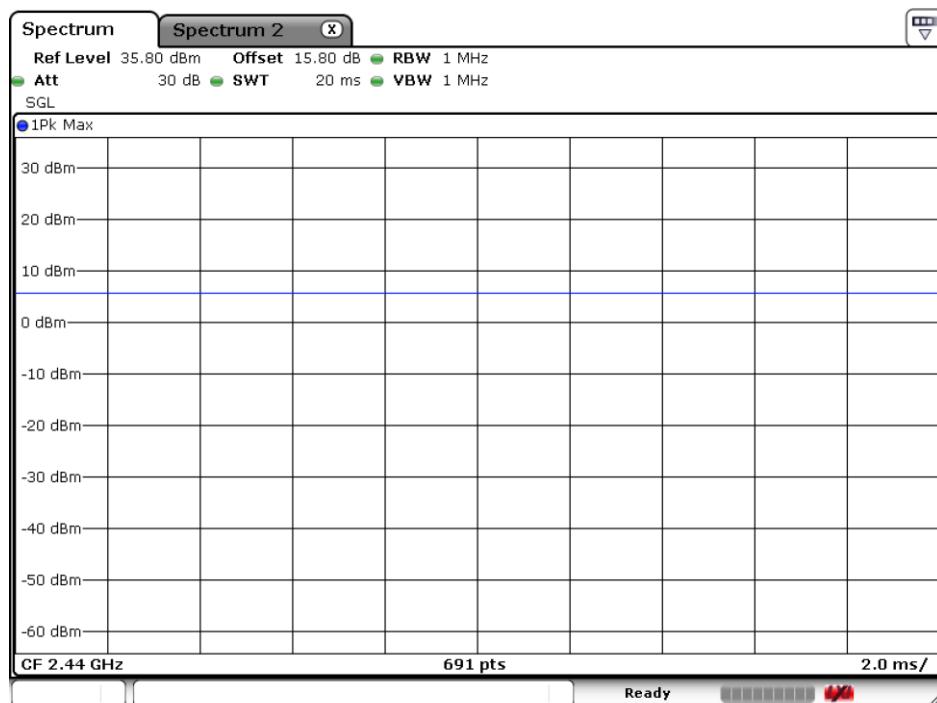



Bluetooth LE 2Mbps

