

Cheego

Smart Baby Monitor



Contents:

● Packing list	1
● Safety	2
● Product Introduction.....	3
● Installation	4
● Cheego Smart Application.....	5
● Technical Data	6
● Compliance	7

Packing list:

➤ **Clip-on Mounting**

- Cheego Smart Baby Camera x1
- Crib Clip Bracket x1
- Allen wrench for Installation x1
- M8*25 Screw x1
- DC 12V Power Adapter x1
- QSG x1



➤ **Floor Stand Mounting**

- Cheego Smart Baby Camera x1
- Floor Stand (Bracket) x1
- Counterweight plate x1
- DC 12V Power Adapter x1
- QSG x1



Safety and RF Statement

⚠ WARNING: Strangulation Hazard—Children have STRANGLED in cords. NEVER attempt to use cord without the protective covering. Check protective covering before each use to ensure that the cord is not exposed to your child. Immediately discontinue use if protective covering is damaged or broken.

- This device is designed to be used on or next to a standard crib, in the middle of the long side of the crib.
- Adult assembly is required. Keep small parts away from children when assembling.
- This product cannot replace adult supervision. Ensure your child's health by checking on him/her regularly.
- This device is designed for indoor use only.
- This product and its packaging are not toys. Do not allow children to play with them.
- Falling warning---In order to prevent products fell to hurt, be sure to install the monitor in a stable location, tighten the screws and tighten button, securely monitor your device.
- Make sure the virtual installation position in Cheego Smart Application is same to the actual installation position in the crib. And make sure the camera could capture the baby's facial image clearly after the installation.

- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
However,
there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.

- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with

minimum distance 20cm between the radiator and your body.

- **Non-modification Statement:**

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Product Introduction

Please read this user manual carefully before using the device

- **Live Video and Two-Way Audio**

You could watch& record the video, set the resolution, and adjust the pan/tilt angle of the image anytime via Cheego Smart Application. Hear or speak to your baby with two-way audio of the device.

- **Infrared Night Vision**

The camera will be switch to night vision mode based on the ambient light changes.

- **Precious Memories**

The built-in MicroSD card could record every adorable memory of your baby. And you could playback the recording video by Cheego Smart Application.

- **AI Functions**

With built-in AI chip, Cheego Smart Baby Monitor uses embedded algorithm and temperature detection module to realize below AI functions.

- **Crying Detection**

Use intelligent algorithms to detect baby's crying accurately. When it detected baby's crying, the smart night lamp will be auto lighted up and the white noise will be auto started.

- **Smart white noise comfort**

- **High precision contact-less detection of baby's temperature**

Use intelligent algorithms to detect baby's forehead temperature. And the device will automatically send alarm messages to the Cheego Smart Application if the temperature is overheated. And users could set the alarm level in the application.

- **video sharing**

The device can be set as a shared device in the tools menu of Cheego Smart Application. And you could invite your family members to watch the video via their own Cheego Smart Application.

Installation

Cheego Baby Monitor supports two installations: Clip-on Mounting and Floor Stand Mounting. Please watch the installation video before you start install it.

1) Clip-on Mounting

- The device is with Temperature Measurement function, so you need to choose one position from below three positions to install.
- Use the Allen wrench and M8*25 Screw to connect the camera and the clip bracket, then to fix the baby monitor to the selected position on the crib and tighten the screw.

2) Floor Stand Mounting

- The device is with Temperature Measurement function, so you need to put the floor stand mounting on one position from below three positions.
- Screw up the two aluminum rods, and tighten it with the counterweight plate, then connect the camera with the fixed aluminum rod.

Notes:


- The actual installation position must stay the same with the virtual installation position in your Cheego Smart Application.
- And please check if the camera could capture baby's facial image in your Cheego Smart APP after the installation and setting. If not, please adjust the installation position or angle.



Cheego Smart Application

- Download the Cheego Smart App and set up your account.
- Follow the in-app instructions to set up your Cheego Smart Camera. Choose:

Homepage > Add your device > Scan QR code to connect>Pair succeed> Choose installation way> Choose installation position
- You can choose to follow the assembly instructions in-app or in this booklet.

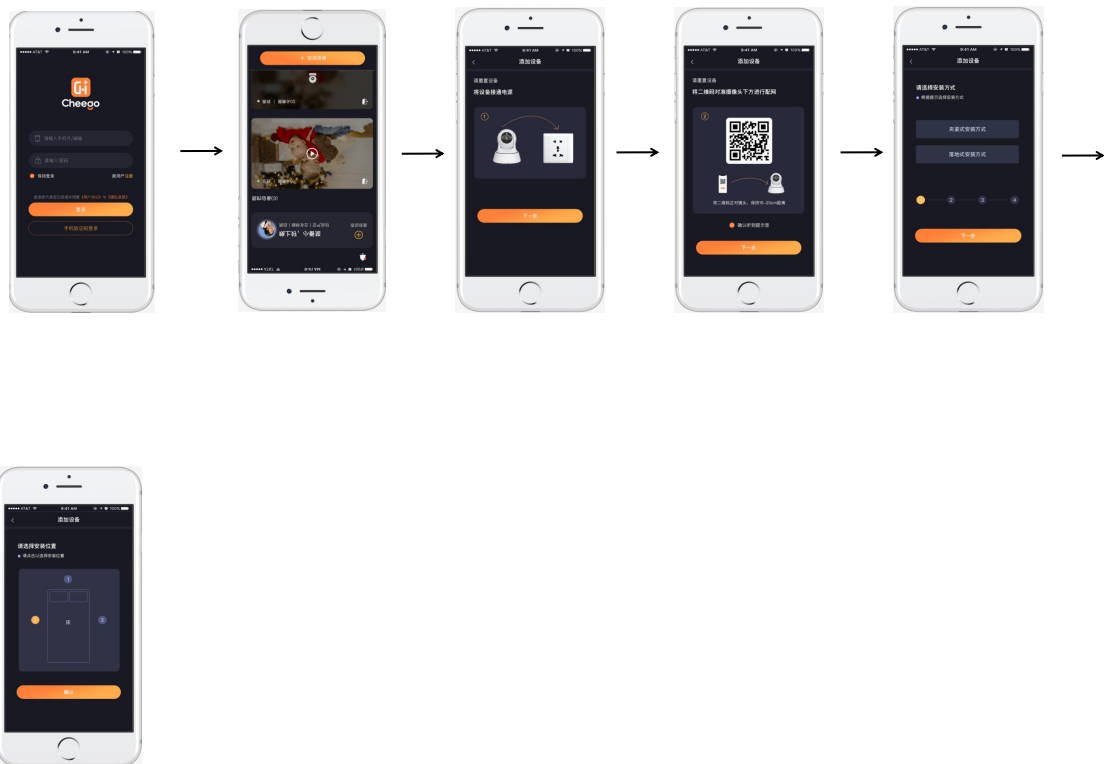

Technical Data

Model	CCA3-*
Sensor	1/2.5" 5MP CMOS
Focal Lens	2.1mm
Iris	F2.0
Horizontal Viewing Angle	120°
Wi-Fi	2.4GHz, IEEE 802.11b/g/n
Support System	Android 7.0 or IOS 11.0 or above
Power	DC12V, 1A, ≤10W
Operationg Temperature	0-35℃
Net Weight	500 g
Resolution	1280×720
TF card	32G
Installation	Clip-on Mounting
Speaker Power	3W
Frequency Range	150-20000Hz
Temperature Measurement Accuracy	±0.3°
LED Power	2W
Color Temperature	4000K