

FCC REPORT

Report Reference No.....	CHTEW2112012501	Report Verification: 
Project No.....	SHT2108128604EW	 ReportNo: CHTEW21120124
FCC ID	2A3QD-WB-HSTS61A01	
Applicant's name.....	Telecom Square, Inc.	
Address.....	3F Homat Horizon Building, 6-2 Gobancho, Chiyoda-ku, Tokyo 102-0076	
Test item description	TS-61	
Trade Mark	-	
Model/Type reference.....	TS-61	
Listed Model(s)	-	
Standard	FCC CFR Title 47 Part 2 FCC CFR Title 47 Part 90	
Date of receipt of test sample.....	Sep.02, 2021	
Date of testing.....	Sep.03, 2021-Dec.17, 2021	
Date of issue.....	Dec.20, 2021	
Result.....	Pass	

Compiled by (Position+Printed name+Signature):	File administrator Fanghui Zhu	
Supervised by (Position+Printed name+Signature):	Project Engineer David Chen	
Approved by (position+printedname+signature)....:	Manager Hans Hu	

Testing Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.
Address.....	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1. TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1. Applicable Standards	3
1.2. Report version information	3
<u>2. TEST DESCRIPTION</u>	<u>4</u>
<u>3. SUMMARY</u>	<u>5</u>
3.1. Client Information	5
3.2. Product Description	5
3.3. Operation state	6
3.4. EUT operation mode	7
3.5. EUT configuration	7
3.6. Modifications	7
<u>4. TEST ENVIRONMENT</u>	<u>7</u>
4.1. Testing Laboratory Information	7
4.2. Equipments Used during the Test	8
4.3. Environmental conditions	9
4.4. Statement of the measurement uncertainty	9
<u>5. TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1. Conducted Output Power	10
5.2. Peak-to-Average Ratio	11
5.3. 99% Occupied Bandwidth & 26 dB Bandwidth	12
5.4. Band Edge	13
5.5. Conducted Spurious Emissions	14
5.6. Frequency stability VS Temperature measurement	15
5.7. Frequency stability VS Voltage measurement	16
5.8. ERP	17
5.9. Radiated Spurious Emission	19
<u>6. TEST SETUP PHOTOS OF THE EUT</u>	<u>22</u>
<u>7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>22</u>
<u>8. APPENDIX REPORT</u>	<u>22</u>

1. **TEST STANDARDS AND REPORT VERSION**

1.1. **Applicable Standards**

The tests were performed according to following standards:

[FCC Rules Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[FCC Rules Part 90](#): PRIVATE LAND MOBILE RADIO SERVICES.

[ANSI C63.26: 2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[KDB 971168 D01 Power Meas License Digital Systems v03](#): MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

1.2. **Report version information**

Revision No.	Date of issue	Description
N/A	2021-12-20	Original

2. Test Description

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Output Power	Part 2.1046 Part 90.635(b)	Pass	Tiancheng.Huang
Peak-to-Average Ratio	-	Pass	Tiancheng.Huang
99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049	Pass	Tiancheng.Huang
Band Edge	Part 2.1051 Part 90.691	Pass	Tiancheng.Huang
Conducted Spurious Emissions	Part 2.1051 Part 90.691	Pass	Tiancheng.Huang
Frequency stability VS Temperature	Part 2.1055(a)(1)(b) Part 90.213	Pass	Tiancheng.Huang
Frequency stability VS Voltage	Part 2.1055(d)(1)(2) Part 90.213	Pass	Tiancheng.Huang
ERP	Part 22.913(a) Part 90.635(b)	Pass	Tiancheng.Huang
Radiated Spurious Emissions	Part 2.1053 Part 90.691	Pass	Quanhai Deng

Note: The measurement uncertainty is not included in the test result.

3. **SUMMARY**

3.1. Client Information

Applicant:	Telecom Square, Inc.
Address:	3F Homat Horizon Building, 6-2 Gobancho, Chiyoda-ku, Tokyo 102-0076
Manufacturer:	Skyroam Technology Co., Ltd.
Address:	No.902, 9th Floor, Weisheng Technology Building, No.9966, Shennan Avenue, Shenzhen, Guangdong, China

3.2. Product Description

Name of EUT:	TS-61
Trade Mark:	-
Model No.:	TS-61
Listed Model(s):	-
SIM Information:	Support One SIM Card
Power supply:	DC3.8V
Hardware version:	Y6154A-V1.1
Software version:	y6154a_a_skyraom_v01_2021062914

4G

Operation Band:	<input checked="" type="checkbox"/> FDD Band 26
Transmit frequency:	814.7 MHz – 823.3 MHz
Receive frequency:	859.7 MHz – 868.3 MHz
Channel bandwidth:	1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz
Power Class:	Class 3
Modulation type:	QPSK, 16QAM
Antenna type	FPC Antenna

3.3. Operation state

➤ Test frequency list

TDD Band 26	Test Frequency ID	Banwidth[MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	1.4	26997	814.7	8697	859.7	
Low Range	3	26705	815.5	8705	860.5	
	5	26715	816.5	8715	861.5	
	10	-	-	-	-	
	15	26765	821.5			
	Mid Range	1.4/3/5/10	26740	819	8740	864
High Range	1.4	26783	823.3	8783	868.3	
	3	26775	822.5	8775	867.5	
	5	26765	821.5	8765	866.5	
	10	-	-	-	-	

3.4. EUT operation mode

For RF test items

The EUT has been tested under typical operating condition. Testing was performed by configuring EUT to maximum output power status.

Test Items	Band	Bandwidth (MHz)					Modulation		RB #		
		1.4	3	5	10	15	QPSK	16QAM	1	Half	Full
Conducted Output Power	26	o	o	o	o	o	o	o	o	o	o
Peak-to-Average Ratio	26	o	o	o	o	o	o	o	o	-	o
99% Occupied Bandwidth & 26 dB Bandwidth	26	o	o	o	o	o	o	o	-	-	o
Band Edge	26	o	o	o	o	o	o	o	o	-	o
Conducted Spurious Emission	26	o	o	o	o	o	o	o	o	-	-
Frequency Stability	26	o	o	o	o	o	o	o	-	-	o
ERP and EIRP	26	o	o	o	o	o	o	o	o	-	-
Radiated Spurious Emission	26	o	o	o	o	o	o	o	o	-	-
Remark	1. The mark “o”means that this configuration is chosen for testing 2. The mark “-”means that this bandwidth is not test. 3. The device is investigated from 30MHz to 10 times off fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.										

3.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	/	Manufacturer:	/
		Model No.:	/
○	/	Manufacturer:	/
		Model No.:	/

3.6. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.		
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China		
Connect information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn		
Qualifications	Type	Accreditation Number	
	FCC	762235	

4.2. Equipments Used during the Test

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	HTWE0242	FSV40	100048	2021/9/13	2022/9/12
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2021/9/13	2022/9/12
●	Spectrum Analyzer	Agilent	HTWE0286	N9020A	MY50510187	2021/9/13	2022/9/12
●	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2021/9/13	2022/9/12
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A

● Radiated Spurious Emission

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2022/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2021/9/13	2022/9/12
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2021/04/06	2022/04/05
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2020/4/27	2023/4/27
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2021/04/06	2022/04/05
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2021/11/5	2022/11/4
●	Broadband Preamplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2021/03/05	2022/03/04
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0119-05	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2021/02/26	2022/02/25
●	EMI Test Software	Audix	N/A	E3	N/A	N/A	N/A

● Auxiliary Equipment

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2021/9/13	2022/9/12
●	High pass filter	Wainwright	HTWE0297	WHKX3.0/18G-10SS	38	2021/05/14	2022/05/13
○	Band Stop filter		HTW0039	N/A	N/A	2021/01/27	2022/01/26

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Voltage	VN=Nominal Voltage	DC 3.80V
	VL=Lower Voltage	DC 3.42V
	VH=Higher Voltage	DC 4.18V
Temperature	TN=Normal Temperature	25 °C
	Extreme Temperature	From -30° to + 50° centigrade
Humidity	30~60 %	
Air Pressure	950-1050 hPa	

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.51 dB	(1)
Transmitter power Radiated	2.66dB for <1GHz 3.44dB for >1GHz	(1)
Conducted spurious emissions 9kHz~40GHz	0.51 dB	(1)
Radiated spurious emissions	2.66dB for <1GHz 3.44dB for >1GHz	(1)
Occupied Bandwidth	15Hz for <1GHz 70Hz for >1GHz	(1)
Frequency error	15Hz for <1GHz 70Hz for >1GHz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.


5. **TEST CONDITIONS AND RESULTS**

5.1. Conducted Output Power

LIMIT

N/A

TEST CONFIGURATION

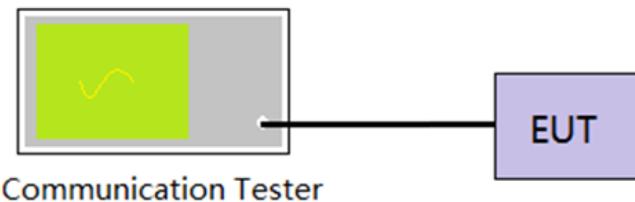

TEST PROCEDURE

1. The EUT output port was connected to communication tester.
2. Set EUT at maximum power through communication tester.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable


Refer to appendix A on the section 8 appendix report

5.2. Peak-to-Average Ratio

LIMIT

13dB

TEST CONFIGURATION

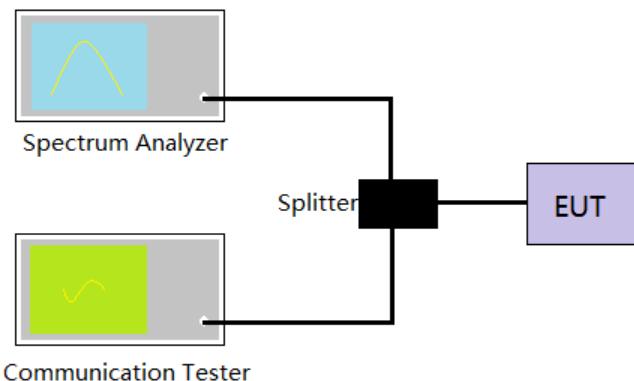

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Center Frequency = Carrier frequency, RBW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed.
 - i. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.
 - ii. For burst transmissions, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power
6. Record the maximum PAPR level associated with a probability of 0.1%.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable


Refer to appendix B on the section 8 appendix report

5.3. 99% Occupied Bandwidth & 26 dB Bandwidth

LIMIT

N/A

TEST CONFIGURATION

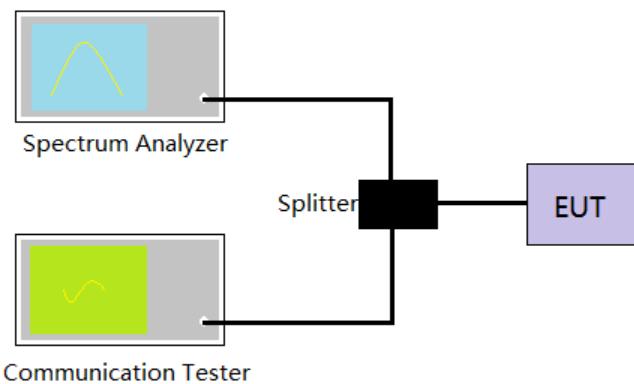

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Center Frequency= Carrier frequency, RBW=1% to 5% of the anticipated OBW, VBW= 3 * RBW,
Detector=Peak,
Trace maximum hold.
4. Record the value of 99% Occupied bandwidth and 26dB bandwidth.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable


Refer to appendix C on the section 8 appendix report

5.4. Band Edge

LIMIT

- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

TEST CONFIGURATION

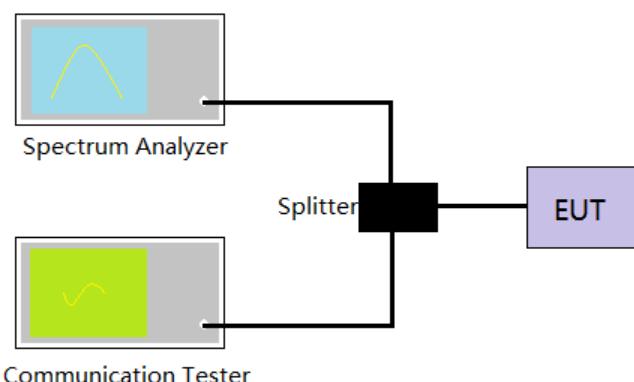

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. The band edges of low and high channels were measured.
4. Spectrum analyzer setting as follow:
RBW= no less than 1% of the OBW, VBW =3 * RBW, Sweep time= Auto
5. Record the test plot.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable

Refer to appendix D on the section 8 appendix report


5.5. Conducted Spurious Emissions

LIMIT

(3) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(4) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

TEST CONFIGURATION

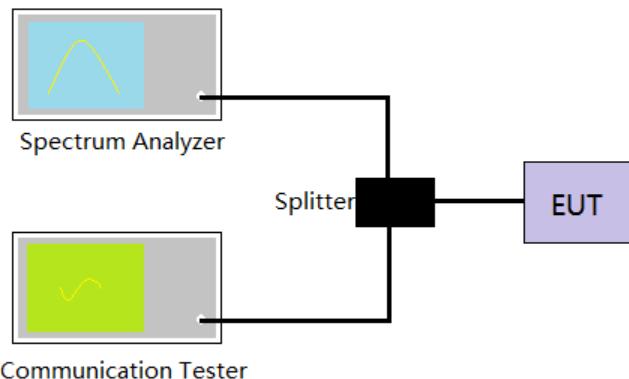

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Below 1GHz, RBW=100KHz, VBW = 300KHz, Detector=Peak, Sweep time= Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time= Auto
Scan frequency range up to 10th harmonic.
4. Record the test plot.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable


Refer to appendix E on the section 8 appendix report

5.6. Frequency stability VS Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

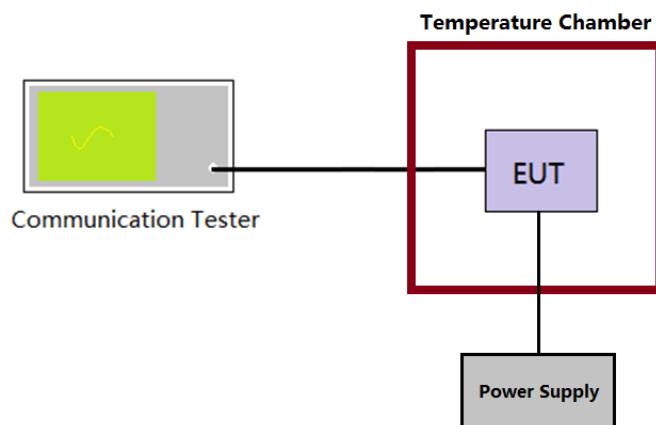

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber.
4. Turn EUT off and set the chamber temperature to -30°C . After the temperature stabilized for approximately 30 minutes recorded the frequency.
5. Repeat step 4 measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable


Refer to appendix F on the section 8 appendix report

5.7. Frequency stability VS Voltage measurement

LIMIT

2.5ppm

TEST CONFIGURATION

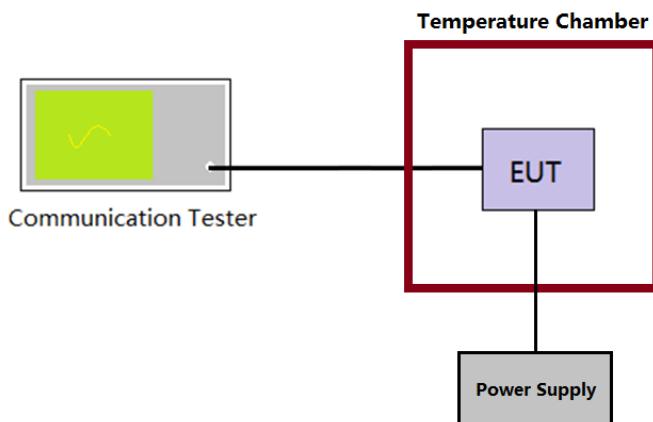

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber at 25°C
4. The power supply voltage to the EUT was varied $\pm 15\%$ of the nominal value measured at the input to the EUT
5. Record the maximum frequency change.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable


Refer to appendix F on the section 8 appendix report

5.8. ERP

LIMIT

LTE Band 26: 100W(50.00dBm) ERP

TEST CONFIGURATION

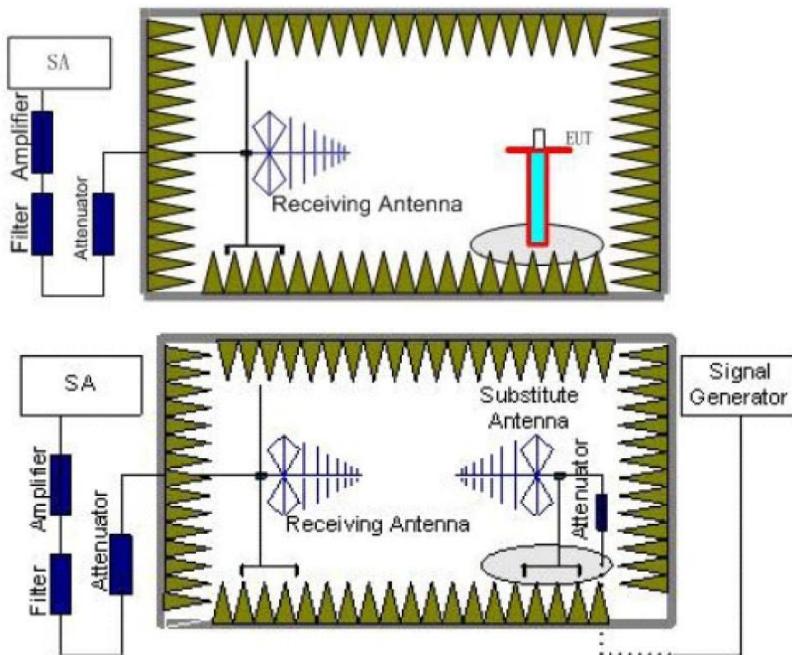

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:

Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto

Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.

7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$Pe = Ps(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
Pe = equivalent emission power in dBm
Ps = source (signal generator) power in dBm
NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}.$$
If necessary, the antenna gain can be calculated from calibrated antenna factor information
14. Provide the complete measurement results as a part of the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable


Refer to appendix G on the section 8 appendix report

5.9. Radiated Spurious Emission

LIMIT

- (5) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (6) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

TEST CONFIGURATION

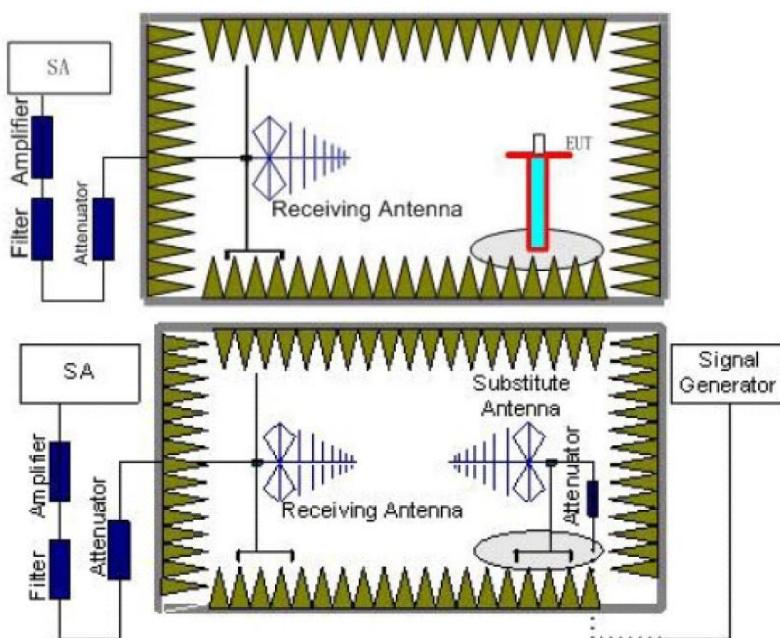

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:
 - Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto
 - Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.

- b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
- c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
- d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
- e) Record the measured emission amplitude level and frequency

6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.

7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.

8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.

9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.

10. For each emission that was detected and measured in the initial test

- a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
- b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
- c) Record the output power level of the signal generator when equivalence is achieved in step b).

11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.

12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$Pe = Ps(dBm) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where

Pe = equivalent emission power in dBm

Ps = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.

13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:

$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB.}$$

If necessary, the antenna gain can be calculated from calibrated antenna factor information

14. Provide the complete measurement results as a part of the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable

Note: only show the worse case for QPSK modulation.



LTE Band 26 Mid						Polarization: Horizontal				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark	
1	40.74	-60.73	27.43	6.94	30.85	-57.21	-13.00	-44.21	Peak	
2	248.30	-67.79	22.86	8.44	30.57	-67.06	-13.00	-54.06	Peak	
3	1650.32	-63.79	36.12	12.76	29.59	-44.50	-13.00	-31.50	Peak	
4	2475.28	-65.43	39.25	15.13	28.04	-39.09	-13.00	-26.09	Peak	
5	4988.90	-68.15	44.32	8.80	34.80	-49.83	-13.00	-36.83	Peak	
6	10822.77	-74.62	52.48	12.51	32.59	-42.22	-13.00	-29.22	Peak	

LTE Band 26 Mid						Polarization: Vertical				
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark	
1	49.60	-44.67	22.04	7.04	31.00	-46.59	-13.00	-33.59	Peak	
2	252.70	-63.43	20.92	8.46	30.57	-64.62	-13.00	-51.62	Peak	
3	1650.32	-63.79	36.12	12.76	29.59	-44.50	-13.00	-31.50	Peak	
4	2475.28	-65.43	39.25	15.13	28.04	-39.09	-13.00	-26.09	Peak	
5	4825.23	-70.56	43.74	8.51	34.09	-52.40	-13.00	-39.40	Peak	
6	8706.88	-75.61	48.71	11.98	29.97	-44.89	-13.00	-31.89	Peak	

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

6. TEST SETUP PHOTOS OF THE EUT

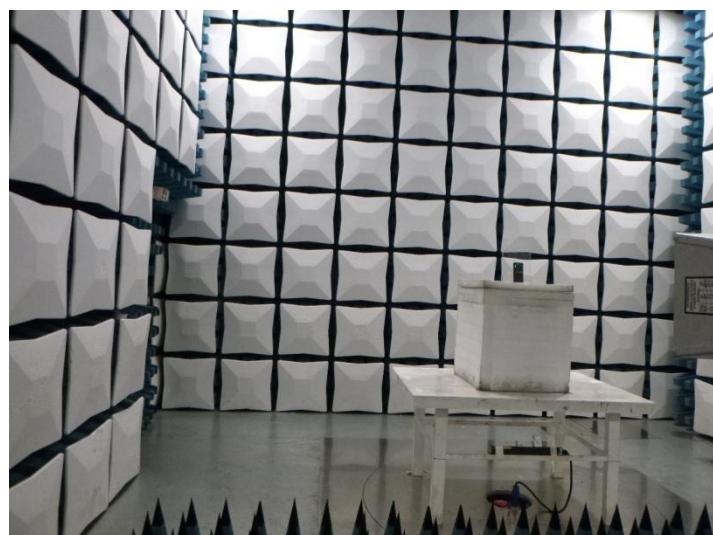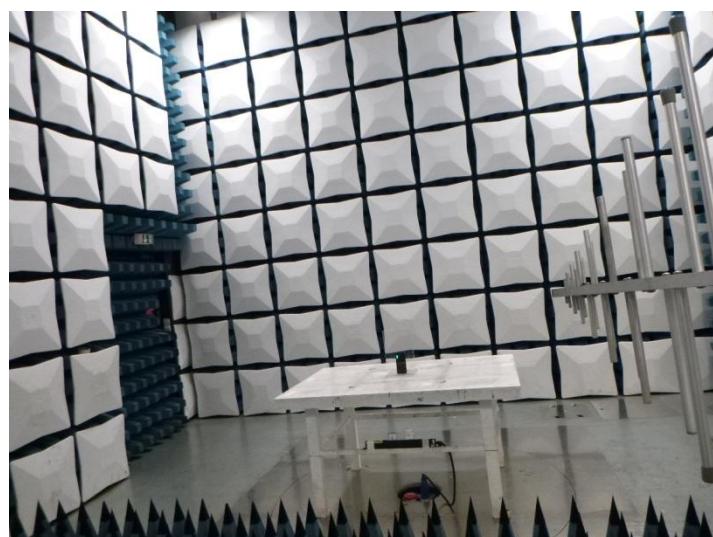

7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Refere to the test report No.: CHTEW21120120

8. APPENDIX REPORT

APPENDIX REPORT A

Project No.	SHT2108128604EW	Radio Specification	LTE
Test sample No.	YPHT2107089002	Model No.	TS-61
Start test date	2021/9/7	Finish date	2021/9/7
Temperature	25.8°C	Humidity	43%
Test Engineer	Jiongsheng.Feng	Auditor	Xiaodong.Zhuo

Appendix clause	Test item	Result
A	Conducted Output Power	PASS
B	Peak-to-Average Ratio	PASS
C	26 dB Bandwidth and Occupied Bandwidth	PASS
D	Band edge	PASS
E	Conducted Spurious Emission	PASS
F	Frequency Stability	PASS
G	ERP and EIRP	PASS

8.1 Appendix A: Conducted Output Power

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band26	1.4MHz	QPSK	26697	1RB#0	22.92	PASS
Band26	1.4MHz	QPSK	26697	1RB#2	23.06	PASS
Band26	1.4MHz	QPSK	26697	1RB#5	22.93	PASS
Band26	1.4MHz	QPSK	26697	3RB#0	23.06	PASS
Band26	1.4MHz	QPSK	26697	3RB#1	23.07	PASS
Band26	1.4MHz	QPSK	26697	3RB#3	23.07	PASS
Band26	1.4MHz	QPSK	26697	6RB#0	22.06	PASS
Band26	1.4MHz	QPSK	26740	1RB#0	23.06	PASS
Band26	1.4MHz	QPSK	26740	1RB#2	23.11	PASS
Band26	1.4MHz	QPSK	26740	1RB#5	23.02	PASS
Band26	1.4MHz	QPSK	26740	3RB#0	23.10	PASS
Band26	1.4MHz	QPSK	26740	3RB#1	23.11	PASS
Band26	1.4MHz	QPSK	26740	3RB#3	23.15	PASS
Band26	1.4MHz	QPSK	26740	6RB#0	22.10	PASS
Band26	1.4MHz	QPSK	26783	1RB#0	23.10	PASS
Band26	1.4MHz	QPSK	26783	1RB#2	23.22	PASS
Band26	1.4MHz	QPSK	26783	1RB#5	23.07	PASS
Band26	1.4MHz	QPSK	26783	3RB#0	23.16	PASS
Band26	1.4MHz	QPSK	26783	3RB#1	23.15	PASS
Band26	1.4MHz	QPSK	26783	3RB#3	23.19	PASS
Band26	1.4MHz	QPSK	26783	6RB#0	22.15	PASS
Band26	1.4MHz	16QAM	26697	1RB#0	22.03	PASS
Band26	1.4MHz	16QAM	26697	1RB#2	22.22	PASS
Band26	1.4MHz	16QAM	26697	1RB#5	22.04	PASS
Band26	1.4MHz	16QAM	26697	3RB#0	21.96	PASS
Band26	1.4MHz	16QAM	26697	3RB#1	21.97	PASS
Band26	1.4MHz	16QAM	26697	3RB#3	21.93	PASS
Band26	1.4MHz	16QAM	26697	6RB#0	21.08	PASS
Band26	1.4MHz	16QAM	26740	1RB#0	22.18	PASS
Band26	1.4MHz	16QAM	26740	1RB#2	22.37	PASS
Band26	1.4MHz	16QAM	26740	1RB#5	22.18	PASS
Band26	1.4MHz	16QAM	26740	3RB#0	22.05	PASS
Band26	1.4MHz	16QAM	26740	3RB#1	22.04	PASS

Band26	1.4MHz	16QAM	26740	3RB#3	22.06	PASS
Band26	1.4MHz	16QAM	26740	6RB#0	20.98	PASS
Band26	1.4MHz	16QAM	26783	1RB#0	22.21	PASS
Band26	1.4MHz	16QAM	26783	1RB#2	22.57	PASS
Band26	1.4MHz	16QAM	26783	1RB#5	22.23	PASS
Band26	1.4MHz	16QAM	26783	3RB#0	22.12	PASS
Band26	1.4MHz	16QAM	26783	3RB#1	22.11	PASS
Band26	1.4MHz	16QAM	26783	3RB#3	22.10	PASS
Band26	1.4MHz	16QAM	26783	6RB#0	21.06	PASS
Band26	3MHz	QPSK	26705	1RB#0	23.22	PASS
Band26	3MHz	QPSK	26705	1RB#8	23.21	PASS
Band26	3MHz	QPSK	26705	1RB#14	23.21	PASS
Band26	3MHz	QPSK	26705	8RB#0	22.24	PASS
Band26	3MHz	QPSK	26705	8RB#4	22.25	PASS
Band26	3MHz	QPSK	26705	8RB#7	22.28	PASS
Band26	3MHz	QPSK	26705	15RB#0	22.20	PASS
Band26	3MHz	QPSK	26740	1RB#0	23.20	PASS
Band26	3MHz	QPSK	26740	1RB#8	23.17	PASS
Band26	3MHz	QPSK	26740	1RB#14	23.21	PASS
Band26	3MHz	QPSK	26740	8RB#0	22.24	PASS
Band26	3MHz	QPSK	26740	8RB#4	22.27	PASS
Band26	3MHz	QPSK	26740	8RB#7	22.27	PASS
Band26	3MHz	QPSK	26740	15RB#0	22.23	PASS
Band26	3MHz	QPSK	26775	1RB#0	23.27	PASS
Band26	3MHz	QPSK	26775	1RB#8	23.22	PASS
Band26	3MHz	QPSK	26775	1RB#14	23.25	PASS
Band26	3MHz	QPSK	26775	8RB#0	22.23	PASS
Band26	3MHz	QPSK	26775	8RB#4	22.29	PASS
Band26	3MHz	QPSK	26775	8RB#7	22.27	PASS
Band26	3MHz	QPSK	26775	15RB#0	22.30	PASS
Band26	3MHz	16QAM	26705	1RB#0	22.12	PASS
Band26	3MHz	16QAM	26705	1RB#8	22.15	PASS
Band26	3MHz	16QAM	26705	1RB#14	22.10	PASS
Band26	3MHz	16QAM	26705	8RB#0	21.23	PASS
Band26	3MHz	16QAM	26705	8RB#4	21.29	PASS
Band26	3MHz	16QAM	26705	8RB#7	21.26	PASS
Band26	3MHz	16QAM	26705	15RB#0	21.15	PASS
Band26	3MHz	16QAM	26740	1RB#0	22.39	PASS
Band26	3MHz	16QAM	26740	1RB#8	22.36	PASS

Band26	3MHz	16QAM	26740	1RB#14	22.38	PASS
Band26	3MHz	16QAM	26740	8RB#0	21.26	PASS
Band26	3MHz	16QAM	26740	8RB#4	21.31	PASS
Band26	3MHz	16QAM	26740	8RB#7	21.30	PASS
Band26	3MHz	16QAM	26740	15RB#0	21.25	PASS
Band26	3MHz	16QAM	26775	1RB#0	22.45	PASS
Band26	3MHz	16QAM	26775	1RB#8	22.40	PASS
Band26	3MHz	16QAM	26775	1RB#14	22.41	PASS
Band26	3MHz	16QAM	26775	8RB#0	21.29	PASS
Band26	3MHz	16QAM	26775	8RB#4	21.28	PASS
Band26	3MHz	16QAM	26775	8RB#7	21.29	PASS
Band26	3MHz	16QAM	26775	15RB#0	21.23	PASS
Band26	5MHz	QPSK	26715	1RB#0	23.22	PASS
Band26	5MHz	QPSK	26715	1RB#12	23.36	PASS
Band26	5MHz	QPSK	26715	1RB#24	23.28	PASS
Band26	5MHz	QPSK	26715	12RB#0	22.35	PASS
Band26	5MHz	QPSK	26715	12RB#6	22.34	PASS
Band26	5MHz	QPSK	26715	12RB#13	22.32	PASS
Band26	5MHz	QPSK	26715	25RB#0	22.34	PASS
Band26	5MHz	QPSK	26740	1RB#0	23.30	PASS
Band26	5MHz	QPSK	26740	1RB#12	23.36	PASS
Band26	5MHz	QPSK	26740	1RB#24	23.35	PASS
Band26	5MHz	QPSK	26740	12RB#0	22.24	PASS
Band26	5MHz	QPSK	26740	12RB#6	22.31	PASS
Band26	5MHz	QPSK	26740	12RB#13	22.32	PASS
Band26	5MHz	QPSK	26740	25RB#0	22.35	PASS
Band26	5MHz	QPSK	26765	1RB#0	23.27	PASS
Band26	5MHz	QPSK	26765	1RB#12	23.32	PASS
Band26	5MHz	QPSK	26765	1RB#24	22.95	PASS
Band26	5MHz	QPSK	26765	12RB#0	22.02	PASS
Band26	5MHz	QPSK	26765	12RB#6	22.12	PASS
Band26	5MHz	QPSK	26765	12RB#13	22.06	PASS
Band26	5MHz	QPSK	26765	25RB#0	22.05	PASS
Band26	5MHz	16QAM	26715	1RB#0	22.46	PASS
Band26	5MHz	16QAM	26715	1RB#12	22.54	PASS
Band26	5MHz	16QAM	26715	1RB#24	22.45	PASS
Band26	5MHz	16QAM	26715	12RB#0	21.33	PASS
Band26	5MHz	16QAM	26715	12RB#6	21.37	PASS
Band26	5MHz	16QAM	26715	12RB#13	21.34	PASS

Band26	5MHz	16QAM	26715	25RB#0	21.35	PASS
Band26	5MHz	16QAM	26740	1RB#0	22.28	PASS
Band26	5MHz	16QAM	26740	1RB#12	22.38	PASS
Band26	5MHz	16QAM	26740	1RB#24	22.31	PASS
Band26	5MHz	16QAM	26740	12RB#0	21.26	PASS
Band26	5MHz	16QAM	26740	12RB#6	21.35	PASS
Band26	5MHz	16QAM	26740	12RB#13	21.37	PASS
Band26	5MHz	16QAM	26740	25RB#0	21.36	PASS
Band26	5MHz	16QAM	26765	1RB#0	22.29	PASS
Band26	5MHz	16QAM	26765	1RB#12	22.06	PASS
Band26	5MHz	16QAM	26765	1RB#24	21.93	PASS
Band26	5MHz	16QAM	26765	12RB#0	20.86	PASS
Band26	5MHz	16QAM	26765	12RB#6	20.97	PASS
Band26	5MHz	16QAM	26765	12RB#13	20.90	PASS
Band26	5MHz	16QAM	26765	25RB#0	21.14	PASS
Band26	10MHz	QPSK	26740	1RB#0	23.18	PASS
Band26	10MHz	QPSK	26740	1RB#24	23.31	PASS
Band26	10MHz	QPSK	26740	1RB#49	22.86	PASS
Band26	10MHz	QPSK	26740	25RB#0	21.98	PASS
Band26	10MHz	QPSK	26740	25RB#12	22.07	PASS
Band26	10MHz	QPSK	26740	25RB#25	22.04	PASS
Band26	10MHz	QPSK	26740	50RB#0	21.88	PASS
Band26	10MHz	16QAM	26740	1RB#0	22.20	PASS
Band26	10MHz	16QAM	26740	1RB#24	22.11	PASS
Band26	10MHz	16QAM	26740	1RB#49	22.04	PASS
Band26	10MHz	16QAM	26740	25RB#0	20.99	PASS
Band26	10MHz	16QAM	26740	25RB#12	20.97	PASS
Band26	10MHz	16QAM	26740	25RB#25	21.02	PASS
Band26	10MHz	16QAM	26740	50RB#0	20.95	PASS
Band26	15MHz	QPSK	26765	1RB#0	23.15	PASS
Band26	15MHz	QPSK	26765	1RB#38	23.29	PASS
Band26	15MHz	QPSK	26765	1RB#74	23.17	PASS
Band26	15MHz	QPSK	26765	38RB#0	22.29	PASS
Band26	15MHz	QPSK	26765	38RB#18	22.49	PASS
Band26	15MHz	QPSK	26765	38RB#37	22.15	PASS
Band26	15MHz	QPSK	26765	75RB#0	21.86	PASS
Band26	15MHz	16QAM	26765	1RB#0	22.39	PASS
Band26	15MHz	16QAM	26765	1RB#38	22.59	PASS
Band26	15MHz	16QAM	26765	1RB#74	22.43	PASS

Band26	15MHz	16QAM	26765	38RB#0	22.33	PASS
Band26	15MHz	16QAM	26765	38RB#18	22.25	PASS
Band26	15MHz	16QAM	26765	38RB#37	22.04	PASS
Band26	15MHz	16QAM	26765	75RB#0	20.85	PASS


8.2 Appendix B: Peak-to-Average Ratio(CCDF)

Test Result


Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band26	1.4MHz	QPSK	26697	1RB#0	4.54	13	PASS
Band26	1.4MHz	QPSK	26697	6RB#0	5.15	13	PASS
Band26	1.4MHz	QPSK	26740	1RB#0	4.59	13	PASS
Band26	1.4MHz	QPSK	26740	6RB#0	5.23	13	PASS
Band26	1.4MHz	QPSK	26783	1RB#0	4.80	13	PASS
Band26	1.4MHz	QPSK	26783	6RB#0	5.57	13	PASS
Band26	1.4MHz	16QAM	26697	1RB#0	5.31	13	PASS
Band26	1.4MHz	16QAM	26697	6RB#0	5.99	13	PASS
Band26	1.4MHz	16QAM	26740	1RB#0	5.21	13	PASS
Band26	1.4MHz	16QAM	26740	6RB#0	6.03	13	PASS
Band26	1.4MHz	16QAM	26783	1RB#0	5.56	13	PASS
Band26	1.4MHz	16QAM	26783	6RB#0	6.30	13	PASS
Band26	3MHz	QPSK	26705	1RB#0	4.67	13	PASS
Band26	3MHz	QPSK	26705	15RB#0	5.22	13	PASS
Band26	3MHz	QPSK	26740	1RB#0	4.62	13	PASS
Band26	3MHz	QPSK	26740	15RB#0	5.35	13	PASS
Band26	3MHz	QPSK	26775	1RB#0	4.66	13	PASS
Band26	3MHz	QPSK	26775	15RB#0	5.57	13	PASS
Band26	3MHz	16QAM	26705	1RB#0	5.68	13	PASS
Band26	3MHz	16QAM	26705	15RB#0	6.09	13	PASS
Band26	3MHz	16QAM	26740	1RB#0	5.33	13	PASS
Band26	3MHz	16QAM	26740	15RB#0	6.14	13	PASS
Band26	3MHz	16QAM	26775	1RB#0	5.38	13	PASS
Band26	3MHz	16QAM	26775	15RB#0	6.44	13	PASS
Band26	5MHz	QPSK	26715	1RB#0	4.80	13	PASS
Band26	5MHz	QPSK	26715	25RB#0	5.41	13	PASS
Band26	5MHz	QPSK	26740	1RB#0	4.59	13	PASS
Band26	5MHz	QPSK	26740	25RB#0	5.55	13	PASS
Band26	5MHz	QPSK	26765	1RB#0	4.81	13	PASS
Band26	5MHz	QPSK	26765	25RB#0	5.73	13	PASS
Band26	5MHz	16QAM	26715	1RB#0	5.61	13	PASS
Band26	5MHz	16QAM	26715	25RB#0	6.16	13	PASS
Band26	5MHz	16QAM	26740	1RB#0	5.28	13	PASS
Band26	5MHz	16QAM	26740	25RB#0	6.21	13	PASS
Band26	5MHz	16QAM	26765	1RB#0	5.64	13	PASS
Band26	5MHz	16QAM	26765	25RB#0	6.36	13	PASS
Band26	10MHz	QPSK	26740	1RB#0	4.96	13	PASS
Band26	10MHz	QPSK	26740	50RB#0	5.56	13	PASS

Band26	10MHz	16QAM	26740	1RB#0	5.84	13	PASS
Band26	10MHz	16QAM	26740	50RB#0	6.26	13	PASS
Band26	15MHz	QPSK	26765	1RB#0	5.01	13	PASS
Band26	15MHz	QPSK	26765	75RB#0	5.99	13	PASS
Band26	15MHz	16QAM	26765	1RB#0	5.64	13	PASS
Band26	15MHz	16QAM	26765	75RB#0	6.47	13	PASS

Test Graphs

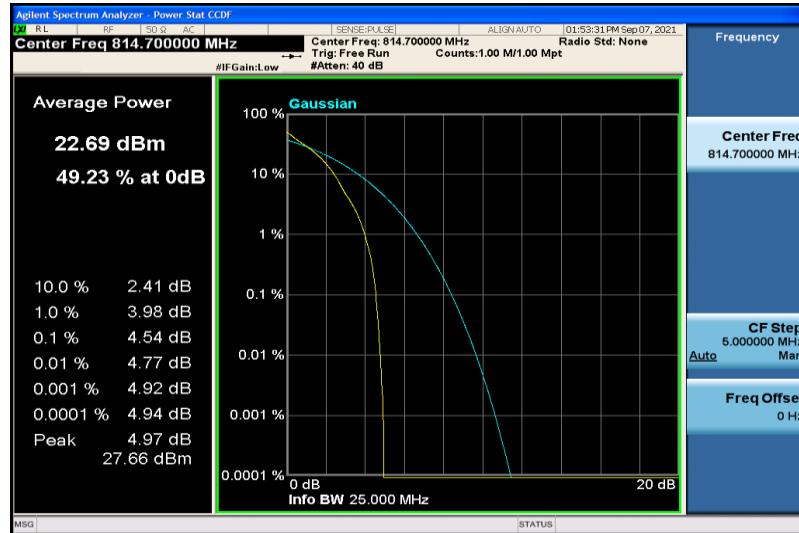

Band26-1.4MHz-QPSK-26697-1RB#0

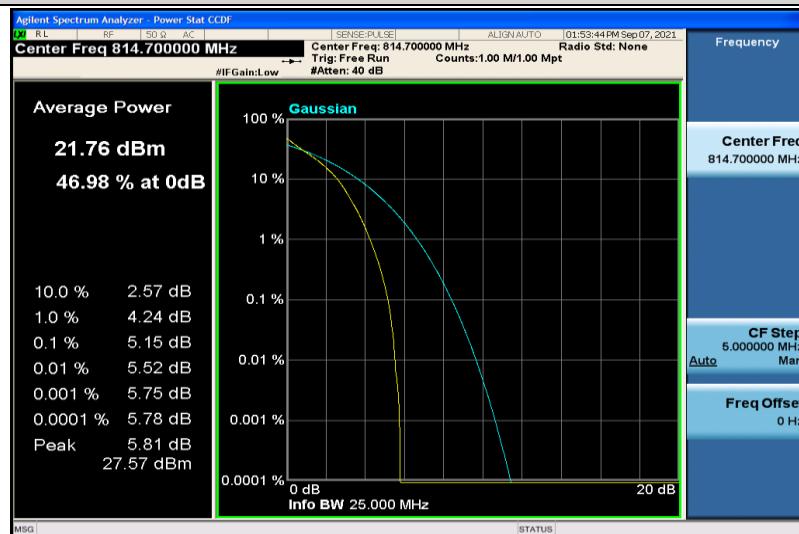

Band26-1.4MHz-QPSK-26697-6RB#0




Band26-1.4MHz-QPSK-26740-1RB#0








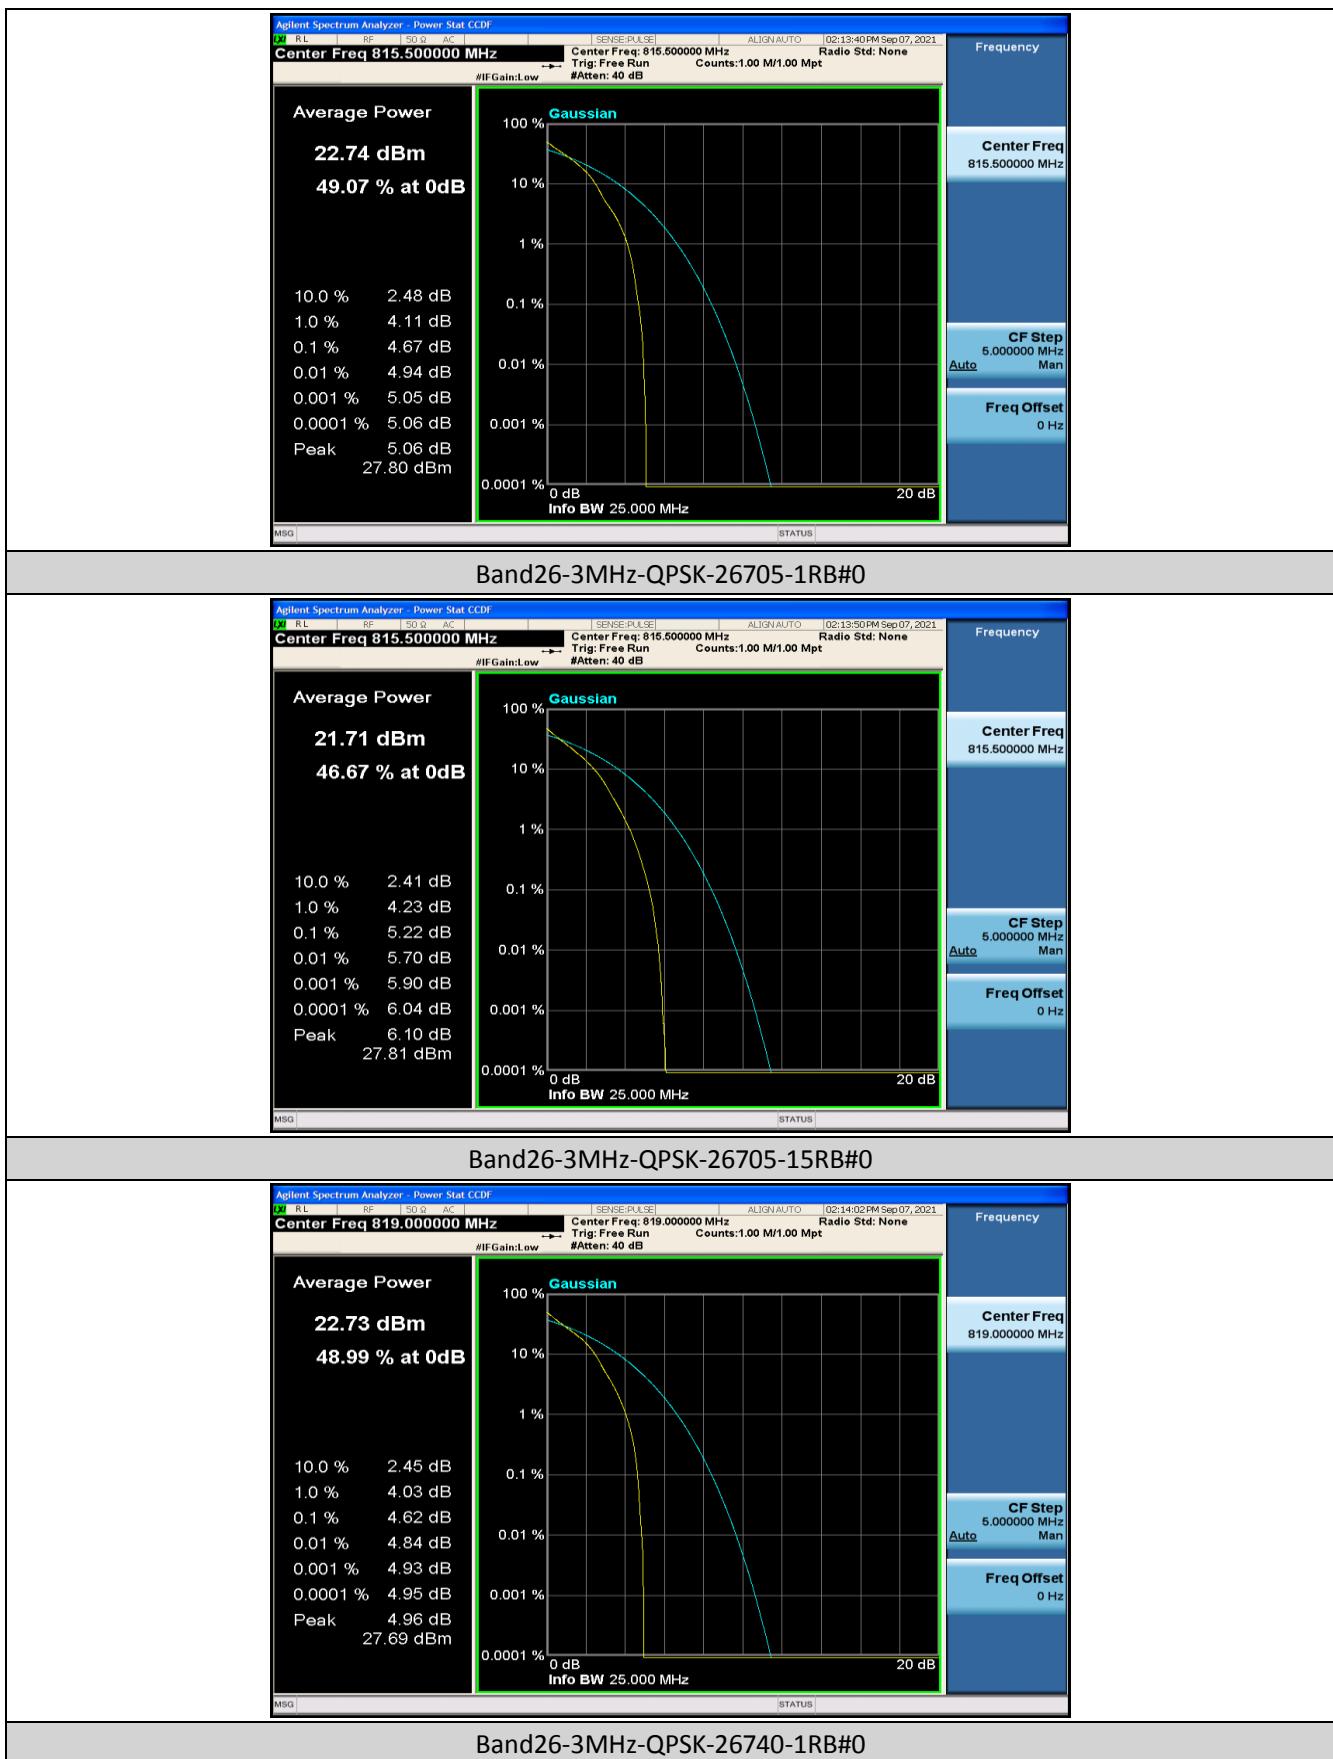








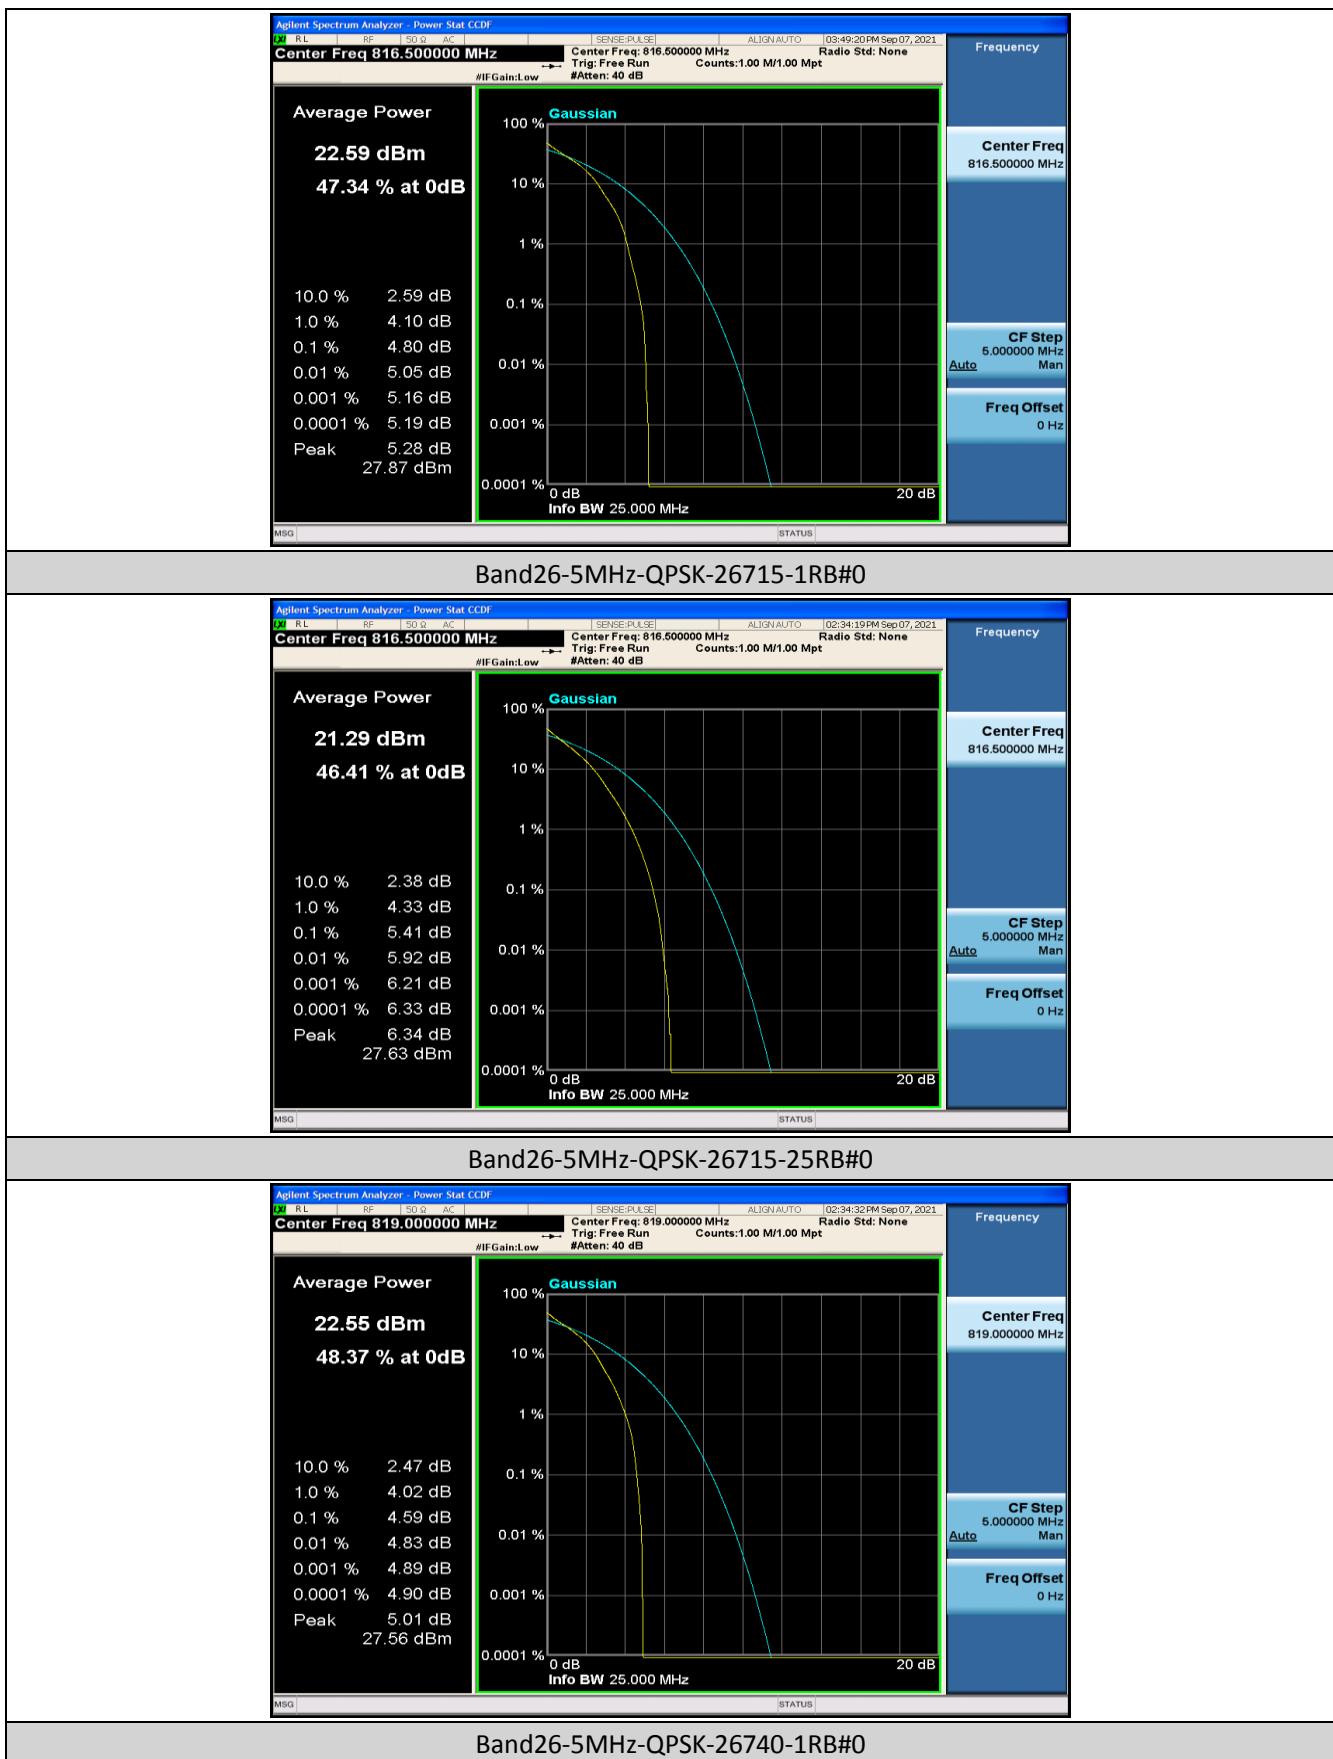


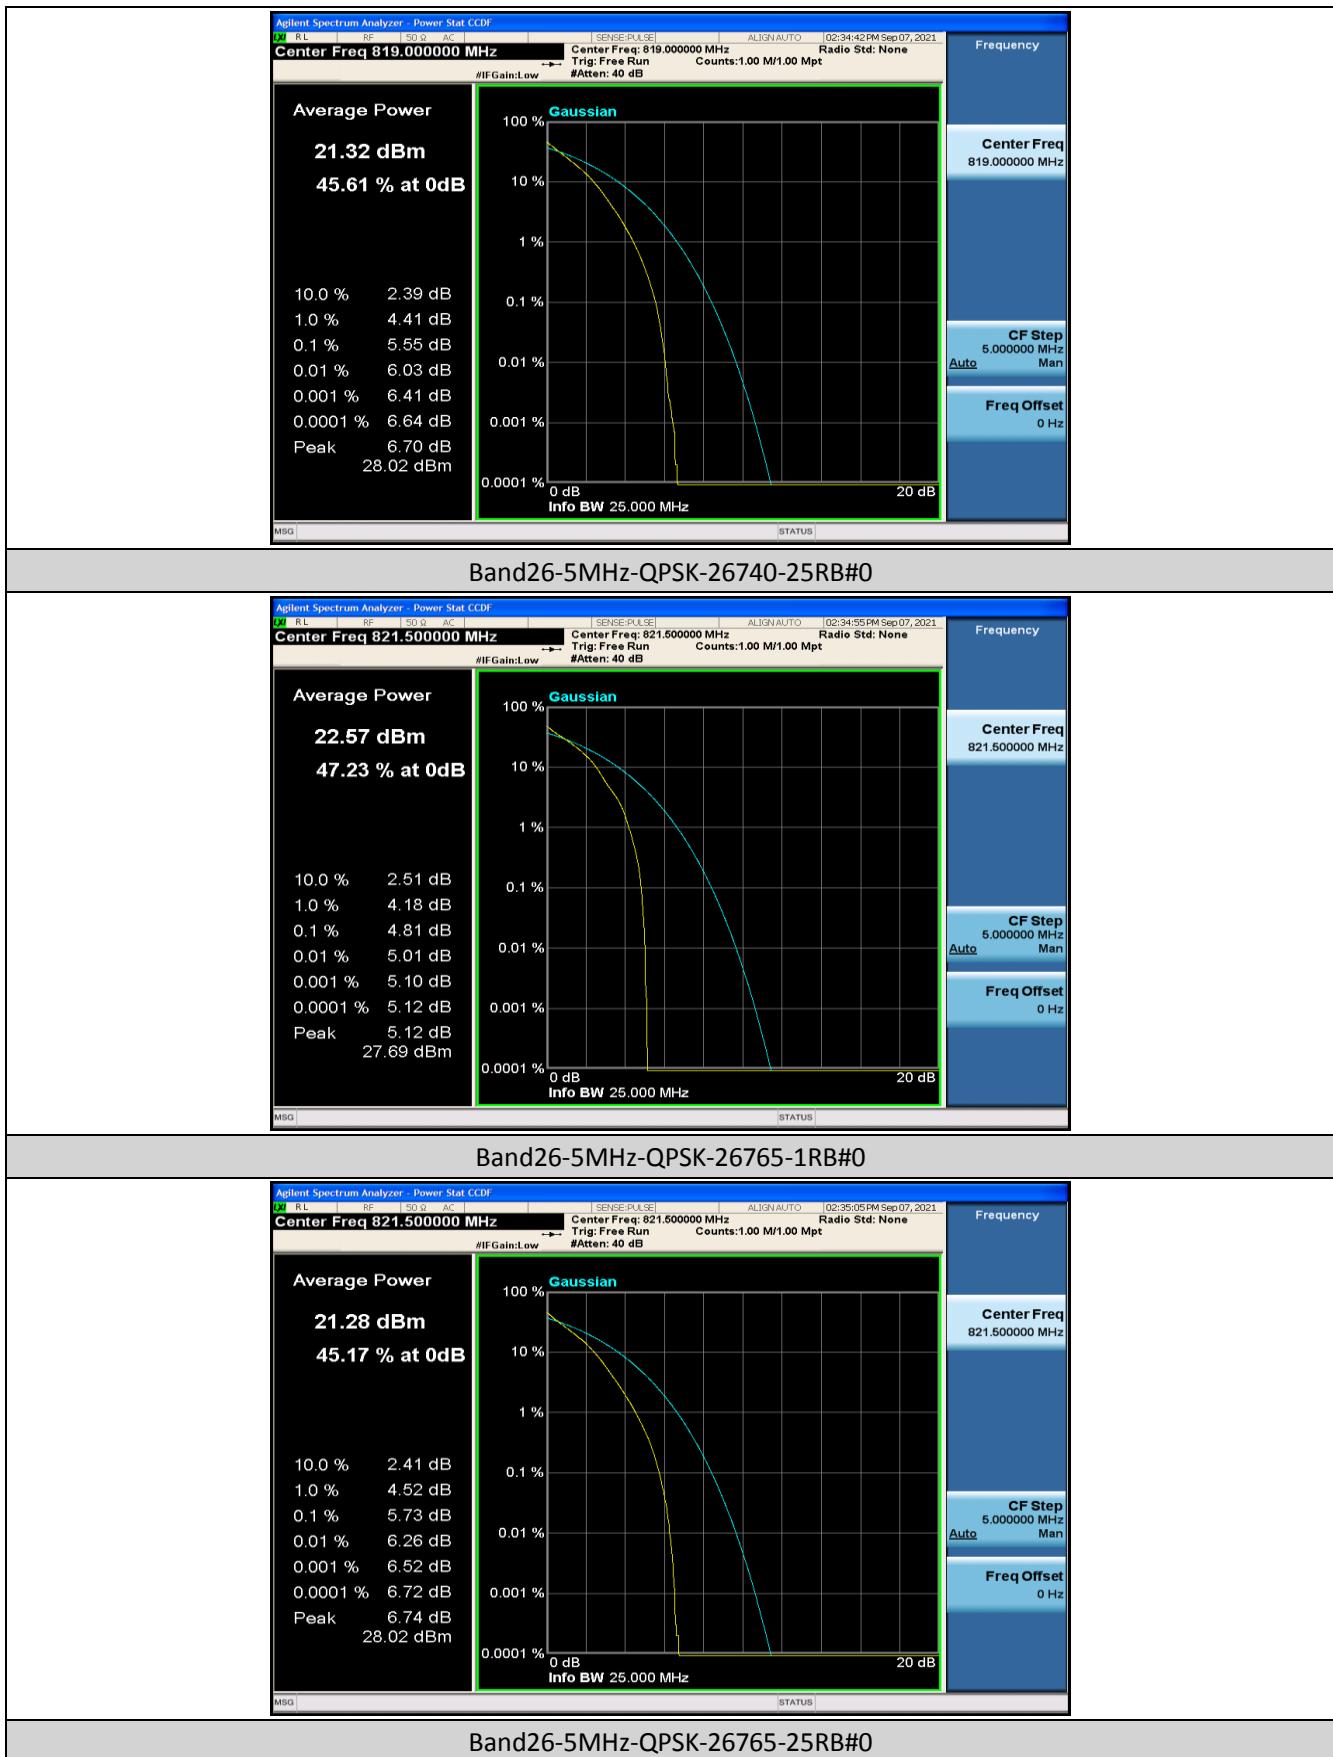








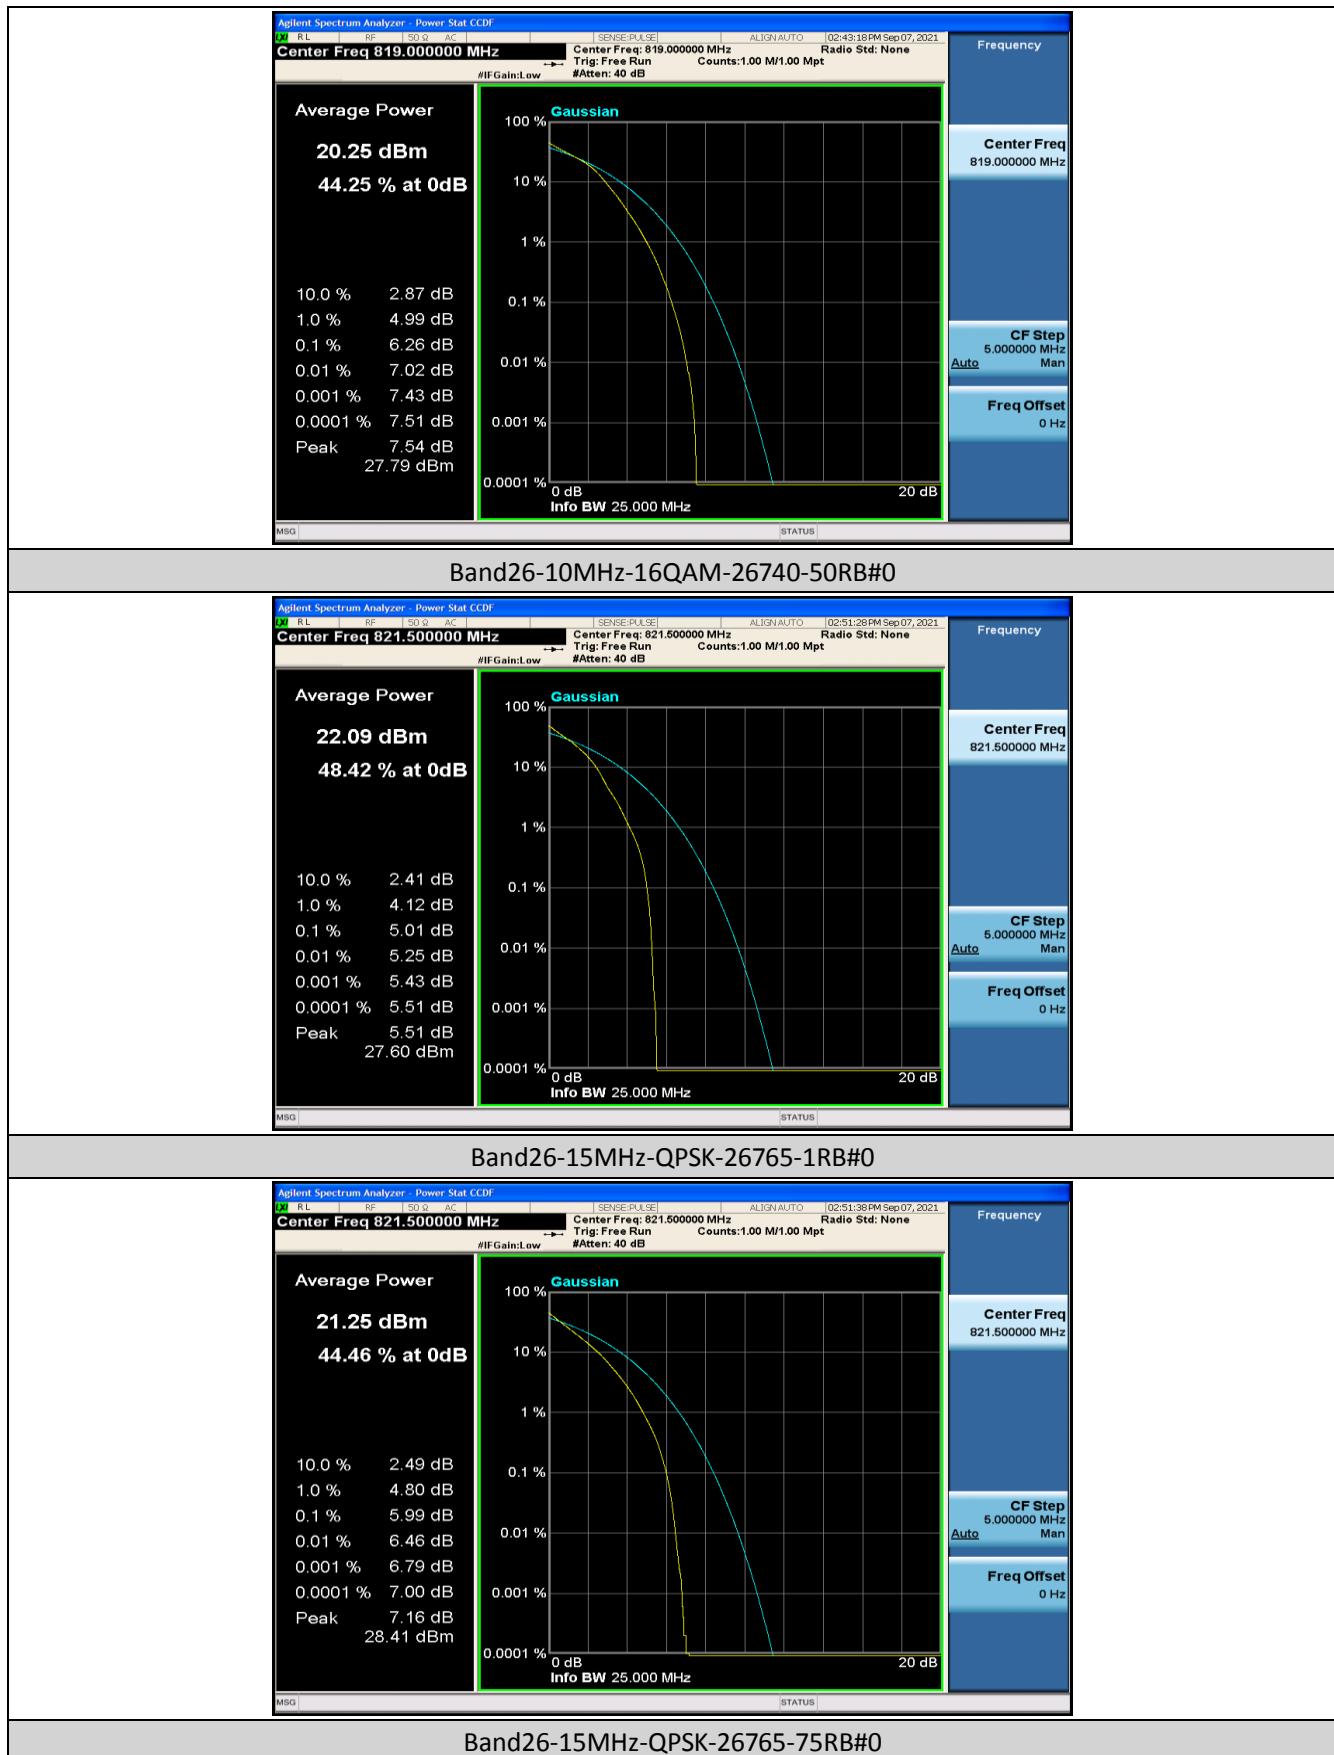

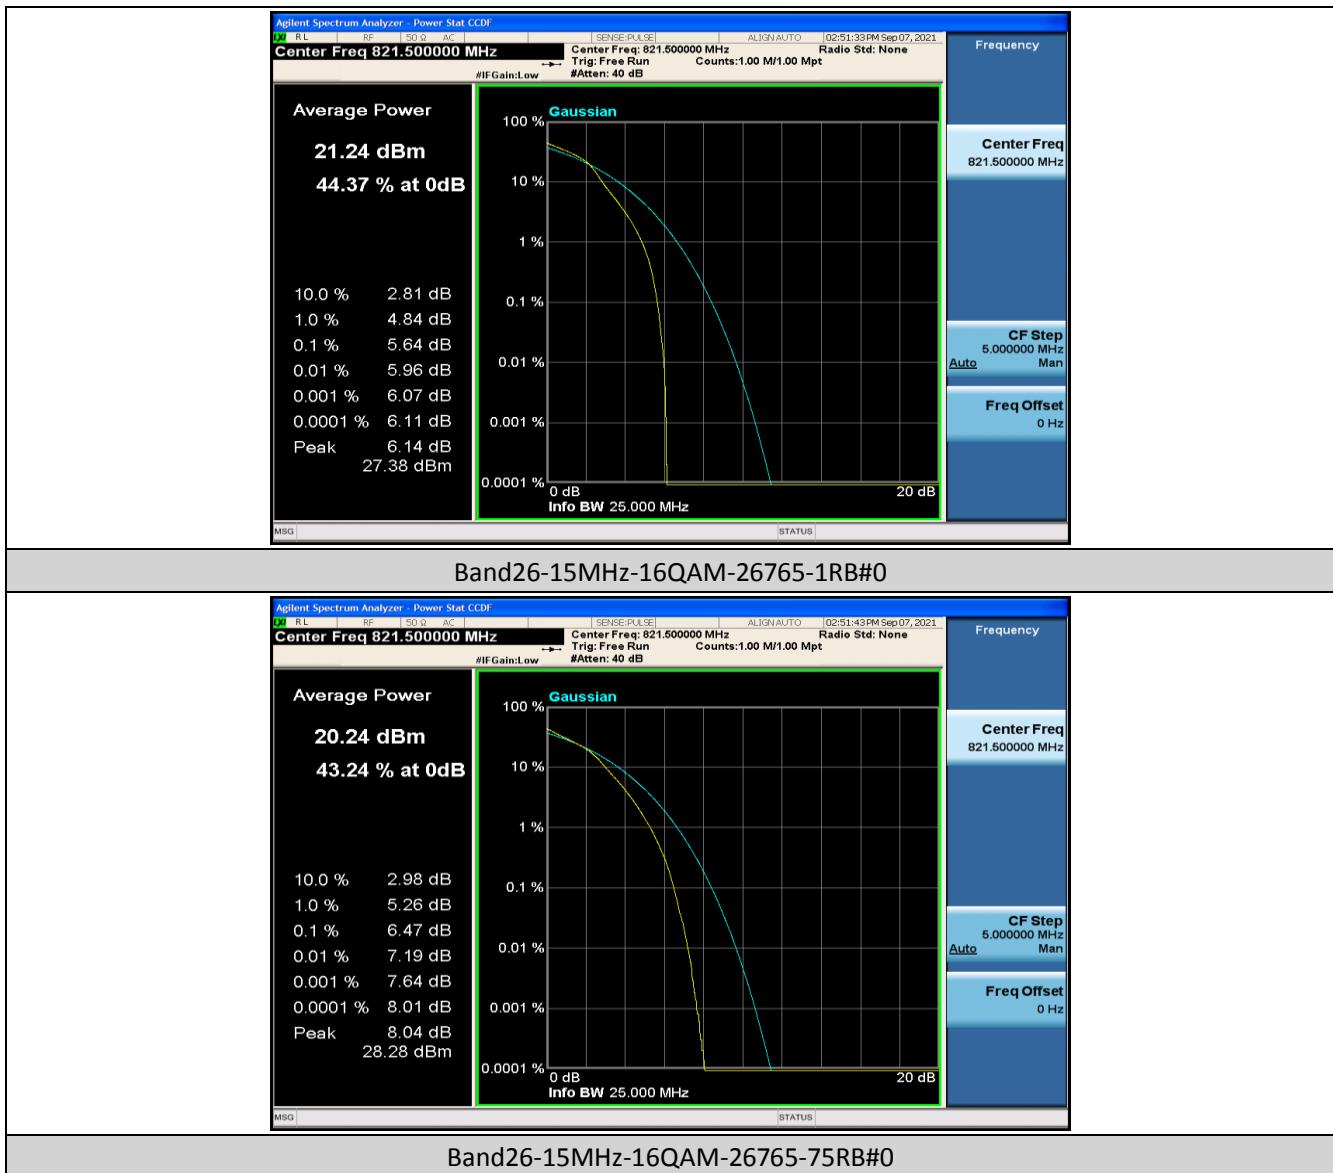



8.3 Appendix C: 26dB Bandwidth and Occupied Bandwidth


Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band26	1.4MHz	QPSK	26697	6RB#0	1.0779	1.230	PASS
Band26	1.4MHz	QPSK	26740	6RB#0	1.0782	1.235	PASS
Band26	1.4MHz	QPSK	26783	6RB#0	1.0820	1.239	PASS
Band26	1.4MHz	16QAM	26697	6RB#0	1.0781	1.241	PASS
Band26	1.4MHz	16QAM	26740	6RB#0	1.0800	1.244	PASS
Band26	1.4MHz	16QAM	26783	6RB#0	1.0756	1.257	PASS
Band26	3MHz	QPSK	26705	15RB#0	2.6770	2.859	PASS
Band26	3MHz	QPSK	26740	15RB#0	2.6805	2.859	PASS
Band26	3MHz	QPSK	26775	15RB#0	2.6768	2.871	PASS
Band26	3MHz	16QAM	26705	15RB#0	2.6777	2.861	PASS
Band26	3MHz	16QAM	26740	15RB#0	2.6764	2.876	PASS
Band26	3MHz	16QAM	26775	15RB#0	2.6750	2.856	PASS
Band26	5MHz	QPSK	26715	25RB#0	4.4678	4.809	PASS
Band26	5MHz	QPSK	26740	25RB#0	4.4790	4.839	PASS
Band26	5MHz	QPSK	26765	25RB#0	4.4805	4.855	PASS
Band26	5MHz	16QAM	26715	25RB#0	4.4708	4.862	PASS
Band26	5MHz	16QAM	26740	25RB#0	4.4765	4.843	PASS
Band26	5MHz	16QAM	26765	25RB#0	4.4674	4.766	PASS
Band26	10MHz	QPSK	26740	50RB#0	8.9588	9.618	PASS
Band26	10MHz	16QAM	26740	50RB#0	8.9450	9.517	PASS
Band26	15MHz	QPSK	26765	75RB#0	13.426	14.40	PASS
Band26	15MHz	16QAM	26765	75RB#0	13.431	14.28	PASS

Test Graphs

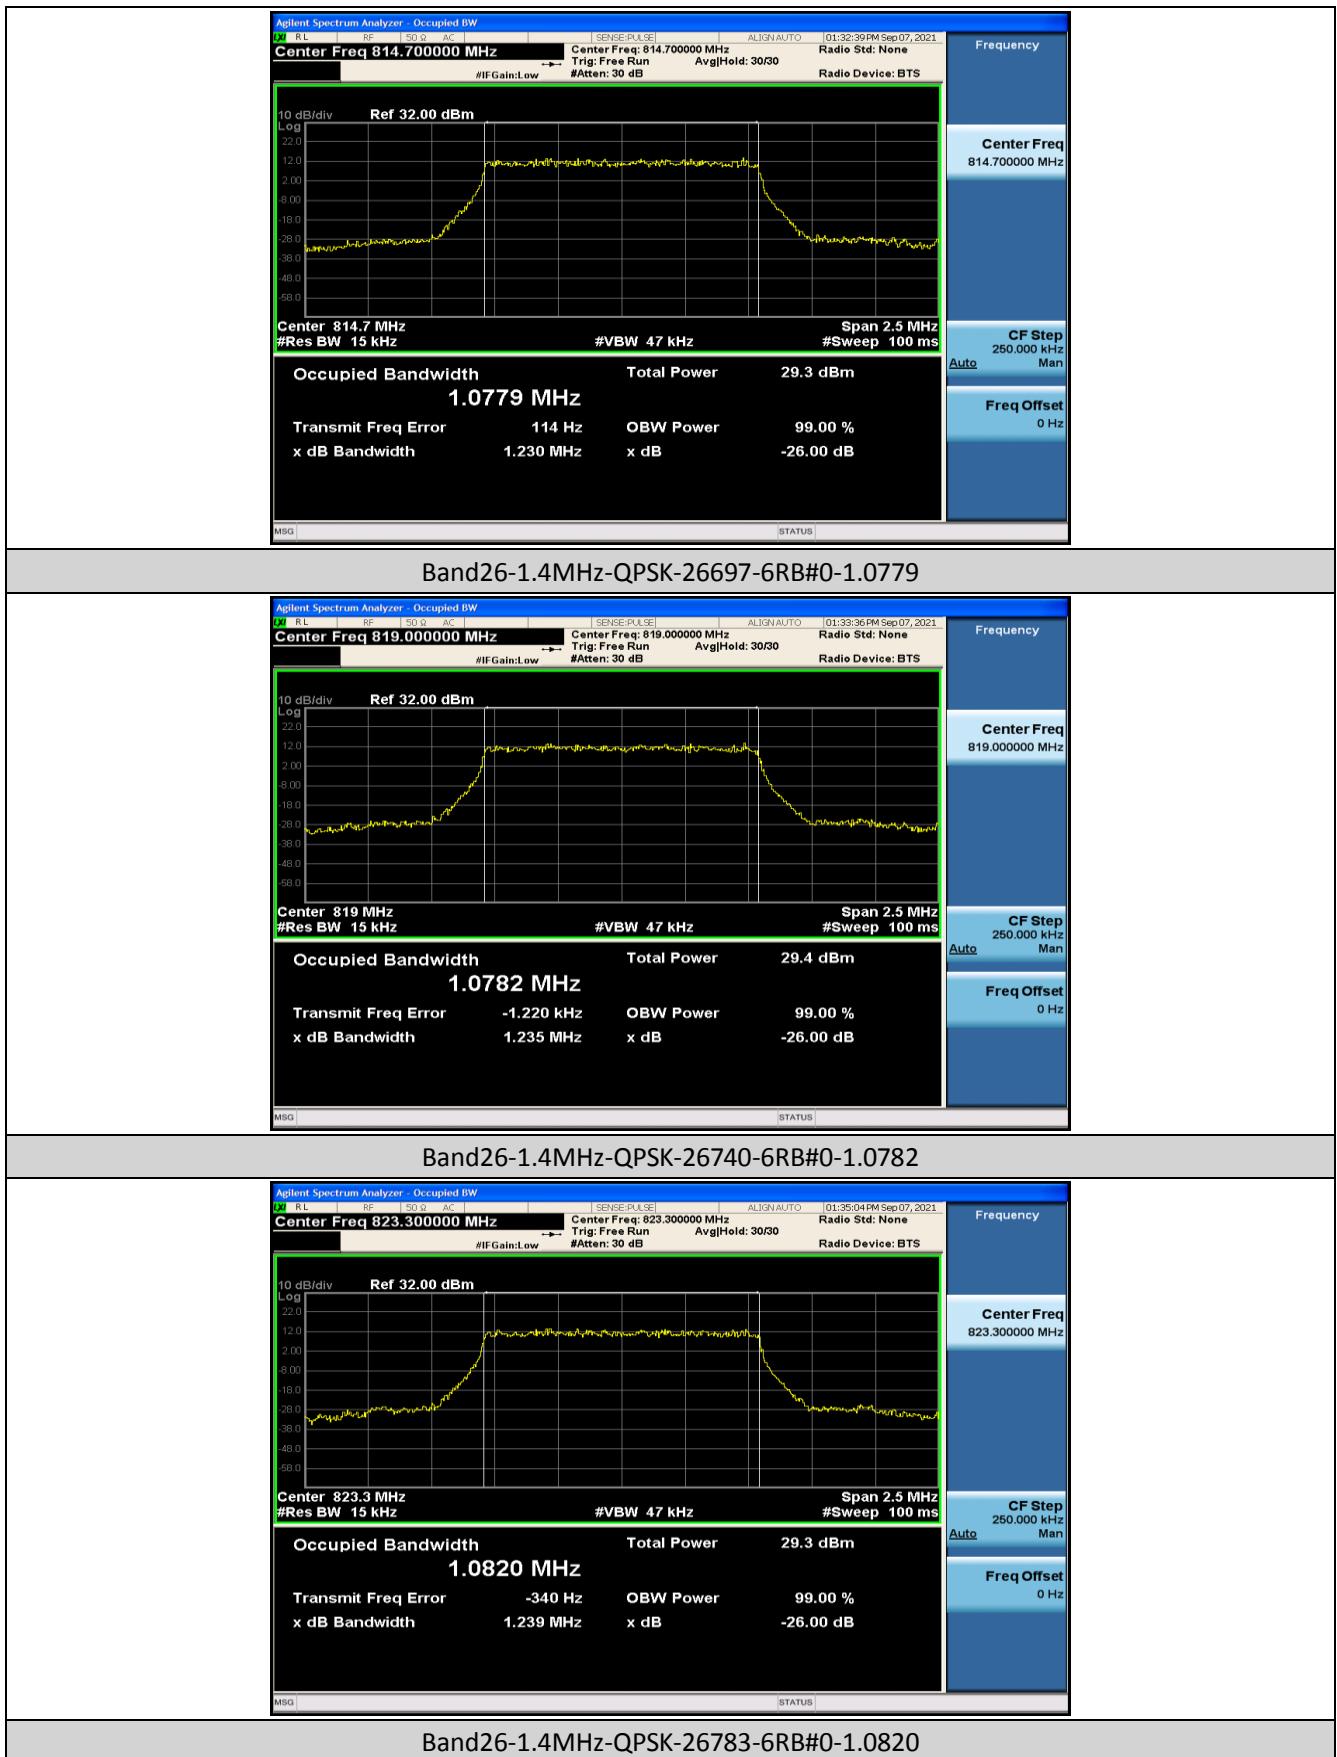


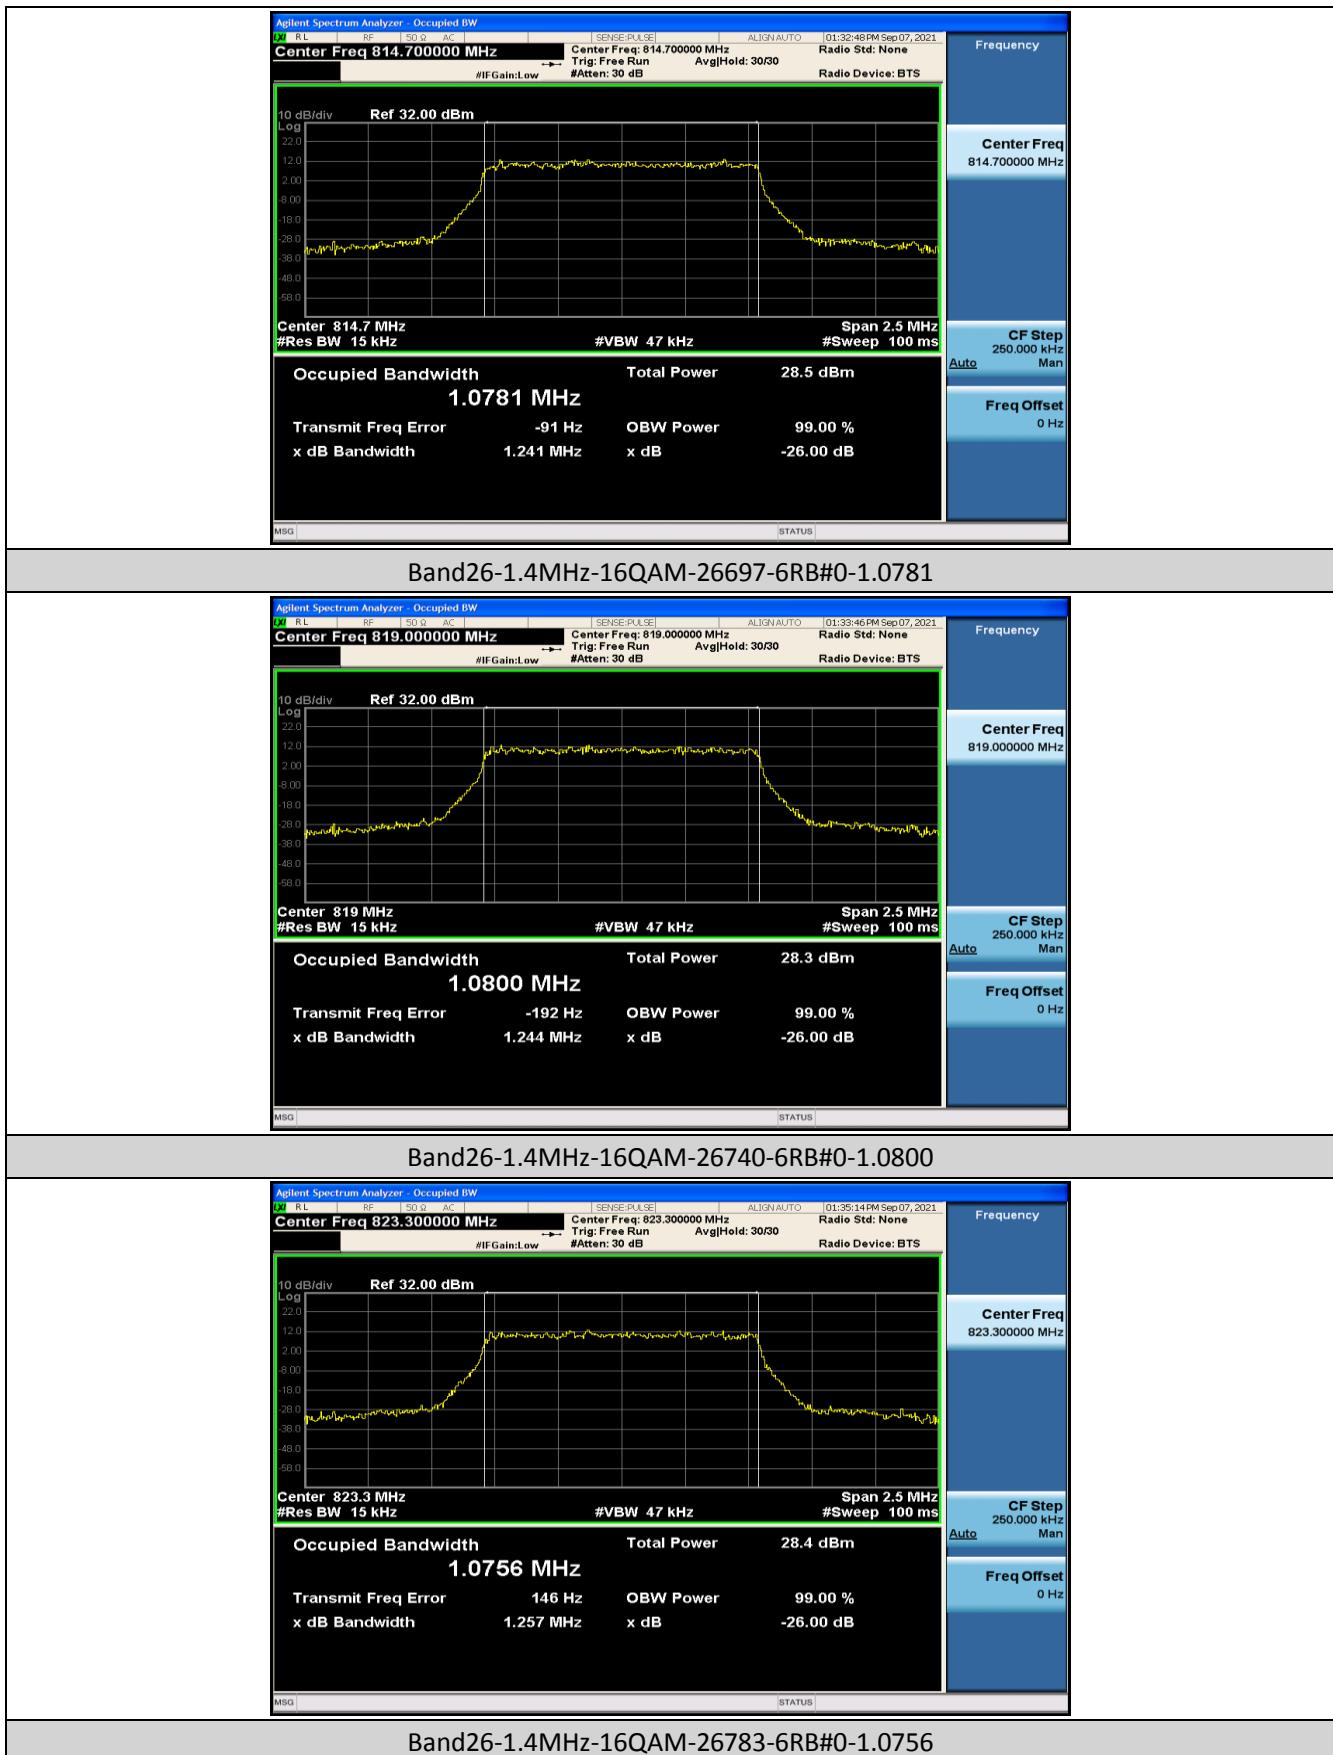

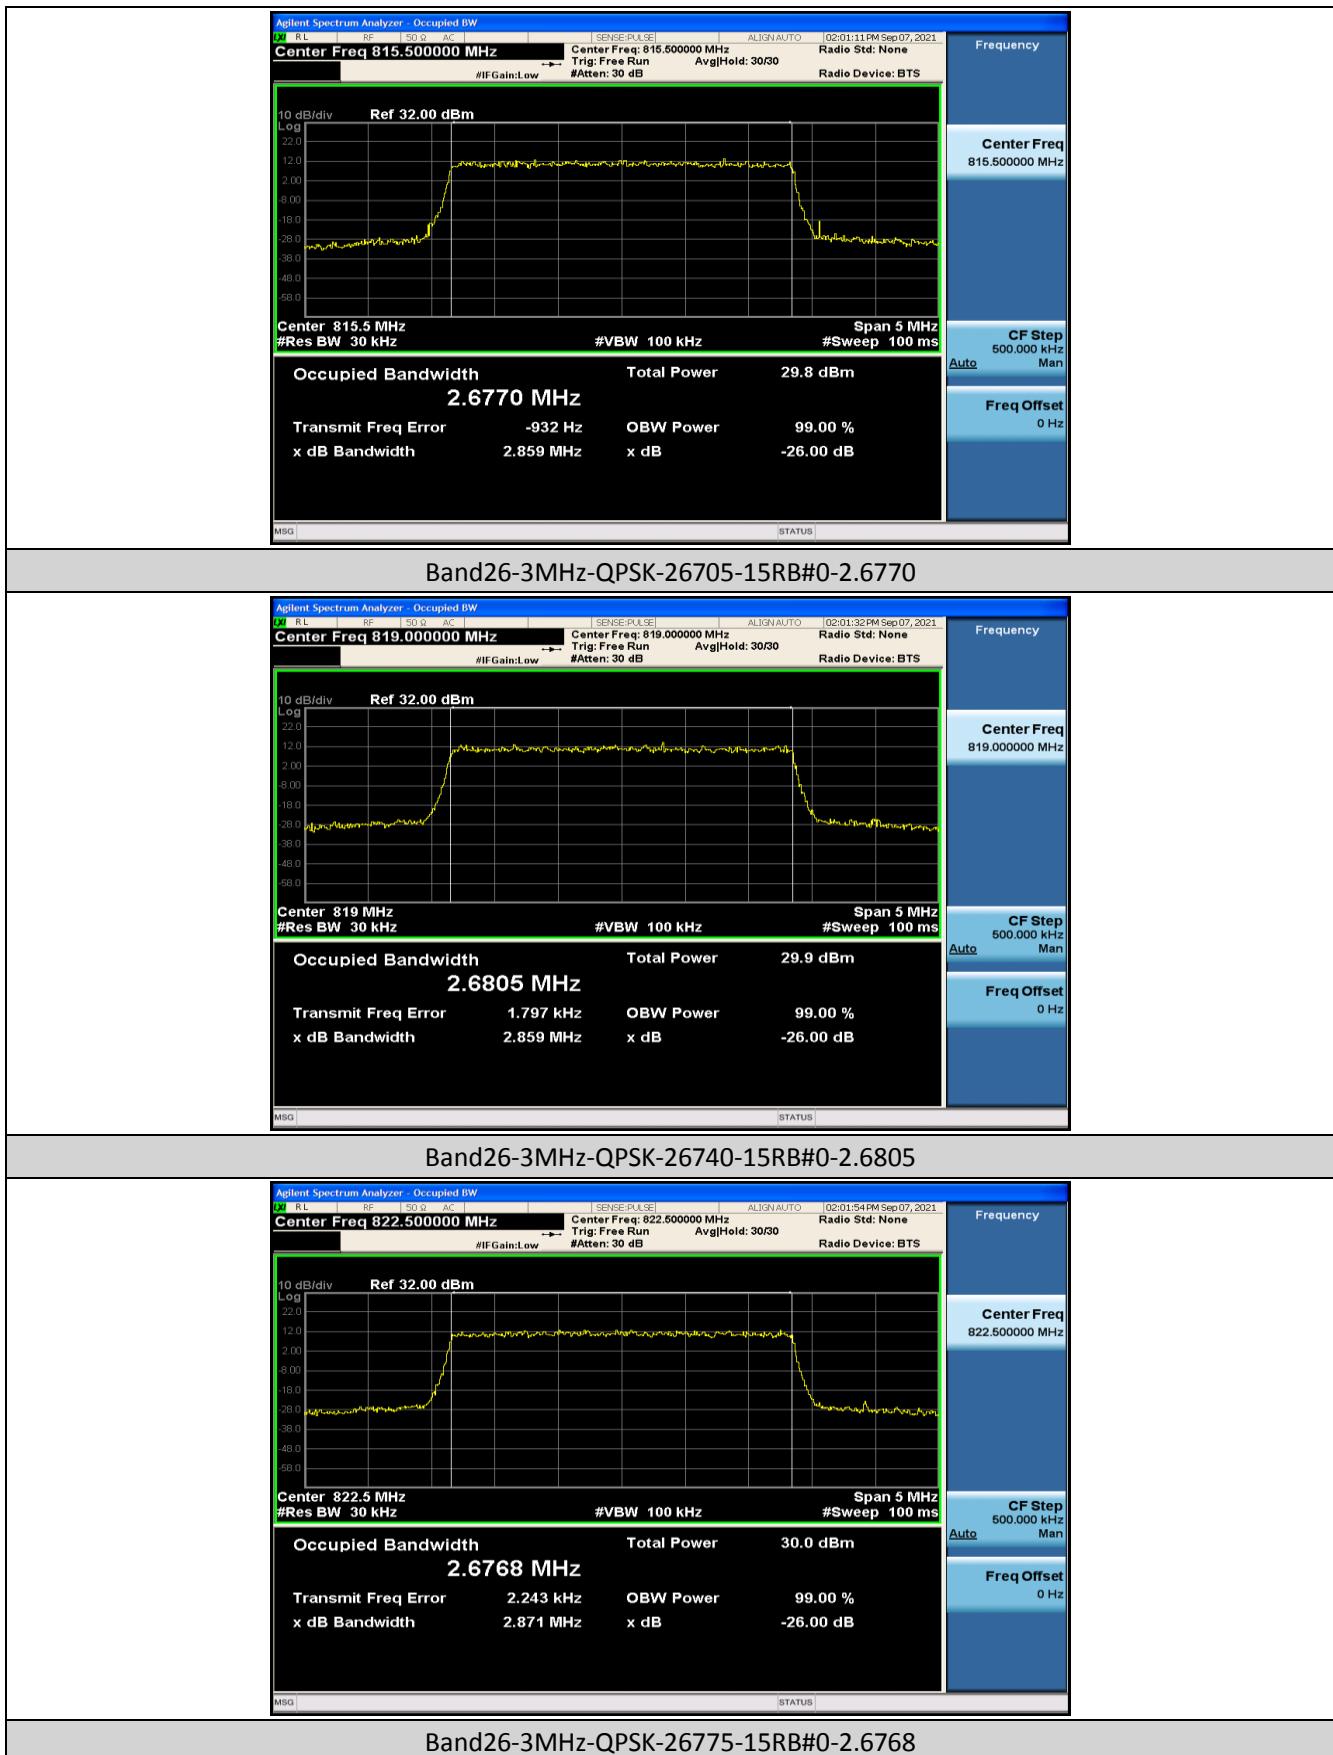






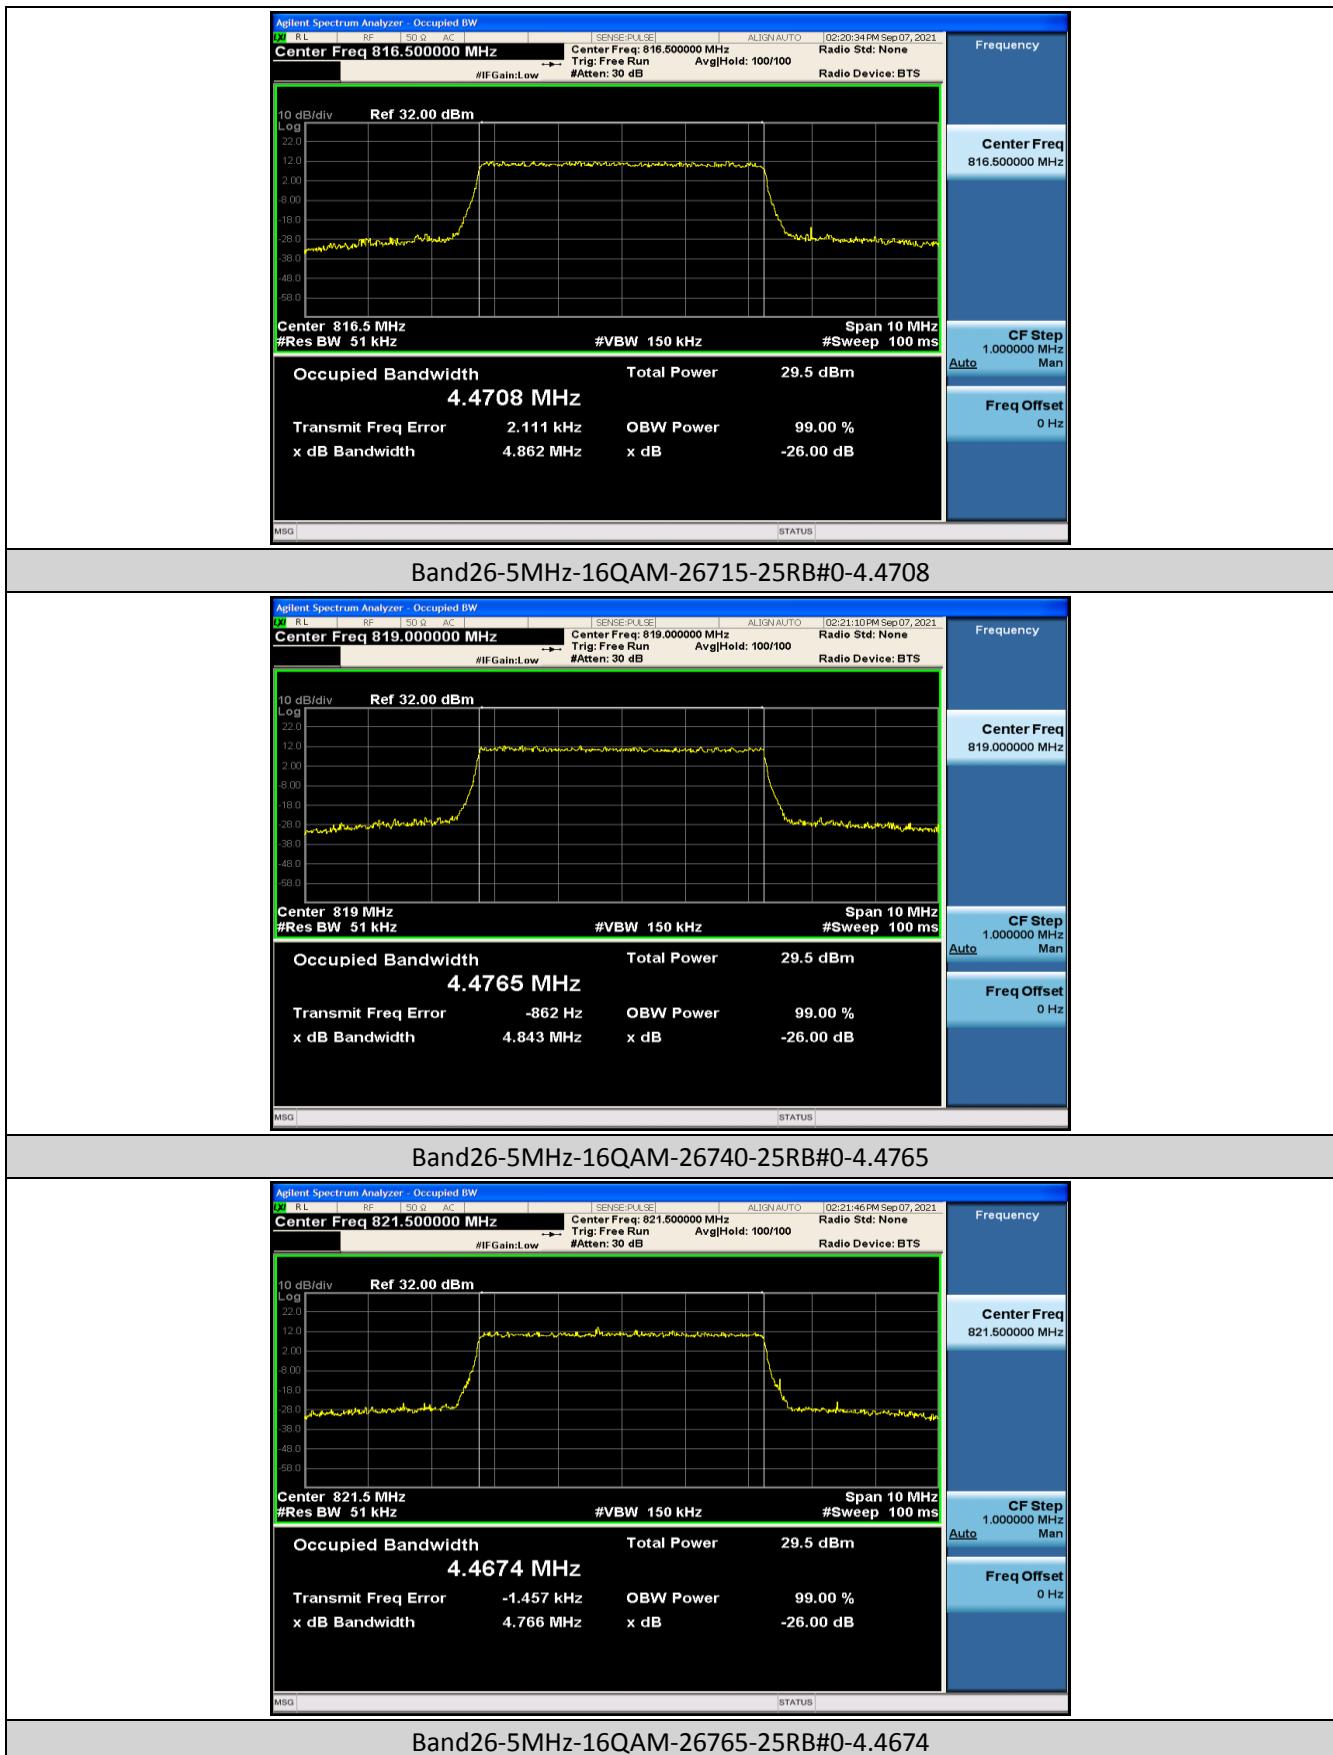



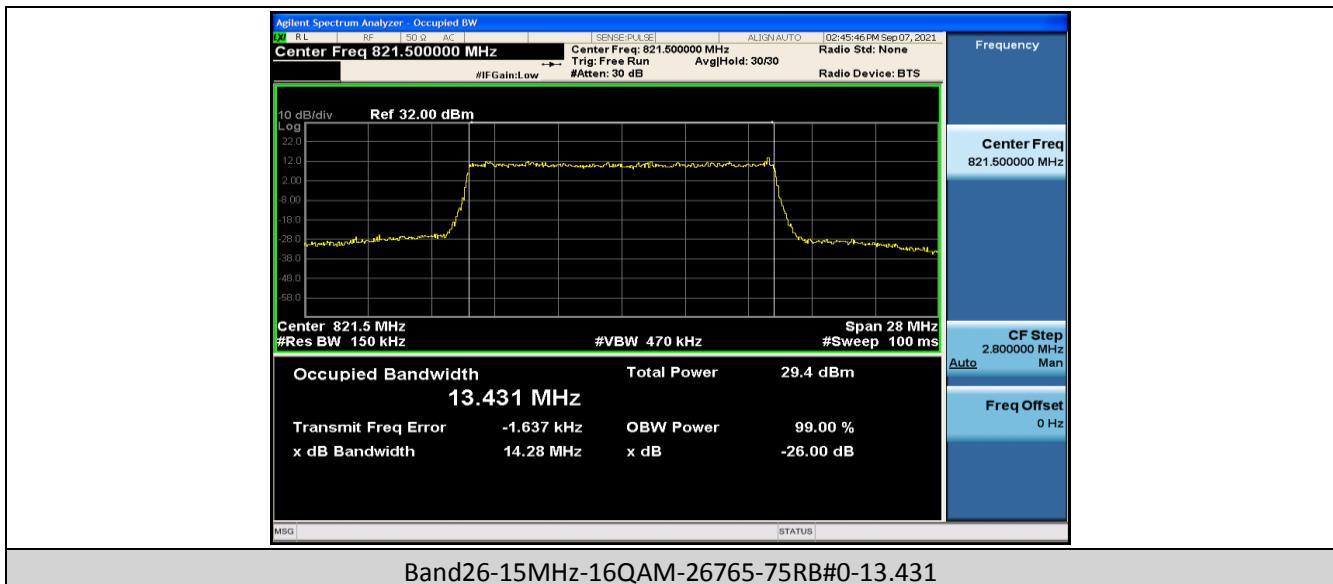


8.4 Appendix D: Band Edge

Test Result


Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band26	1.4MHz	QPSK	26697	1RB#0	-37.04,-40.08	PASS
Band26	1.4MHz	QPSK	26697	6RB#0	-26.28,-31.27	PASS
Band26	1.4MHz	QPSK	26783	1RB#5	-38.29,-40.27	PASS
Band26	1.4MHz	QPSK	26783	6RB#0	-26.50,-29.82	PASS
Band26	1.4MHz	16QAM	26697	1RB#0	-36.04,-40.66	PASS
Band26	1.4MHz	16QAM	26697	6RB#0	-28.66,-31.90	PASS
Band26	1.4MHz	16QAM	26783	1RB#5	-39.31,-38.42	PASS
Band26	1.4MHz	16QAM	26783	6RB#0	-30.88,-31.40	PASS
Band26	3MHz	QPSK	26705	1RB#0	-34.23,-36.70	PASS
Band26	3MHz	QPSK	26705	15RB#0	-30.49,-33.05	PASS
Band26	3MHz	QPSK	26775	1RB#14	-32.55,-36.03	PASS
Band26	3MHz	QPSK	26775	15RB#0	-30.40,-32.50	PASS
Band26	3MHz	16QAM	26705	1RB#0	-34.29,-37.66	PASS
Band26	3MHz	16QAM	26705	15RB#0	-30.56,-34.88	PASS
Band26	3MHz	16QAM	26775	1RB#14	-34.25,-36.36	PASS
Band26	3MHz	16QAM	26775	15RB#0	-31.23,-34.13	PASS
Band26	5MHz	QPSK	26715	1RB#0	-25.69,-28.84	PASS
Band26	5MHz	QPSK	26715	25RB#0	-29.14,-31.76	PASS
Band26	5MHz	QPSK	26765	1RB#24	-27.69,-29.70	PASS
Band26	5MHz	QPSK	26765	25RB#0	-29.58,-32.21	PASS
Band26	5MHz	16QAM	26715	1RB#0	-25.85,-30.07	PASS
Band26	5MHz	16QAM	26715	25RB#0	-30.26,-31.76	PASS
Band26	5MHz	16QAM	26765	1RB#24	-24.46,-29.38	PASS
Band26	5MHz	16QAM	26765	25RB#0	-27.63,-31.96	PASS
Band26	10MHz	QPSK	26740	1RB#49	-44.41,-46.26,-23.25,-22.17	PASS
Band26	10MHz	QPSK	26740	50RB#0	-33.18,-31.42,-33.83,-33.33	PASS
Band26	10MHz	16QAM	26740	1RB#49	-45.11,-46.61,-22.68,-24.05	PASS
Band26	10MHz	16QAM	26740	50RB#0	-34.31,-32.36,-34.00,-33.85	PASS
Band26	15MHz	QPSK	26765	1RB#74	-49.50,-48.33,-10.11	PASS
Band26	15MHz	QPSK	26765	75RB#0	-31.55,-30.38	PASS
Band26	15MHz	16QAM	26765	1RB#74	-49.70,-48.90,-10.39	PASS
Band26	15MHz	16QAM	26765	75RB#0	-33.69,-33.63	PASS

Test Graphs

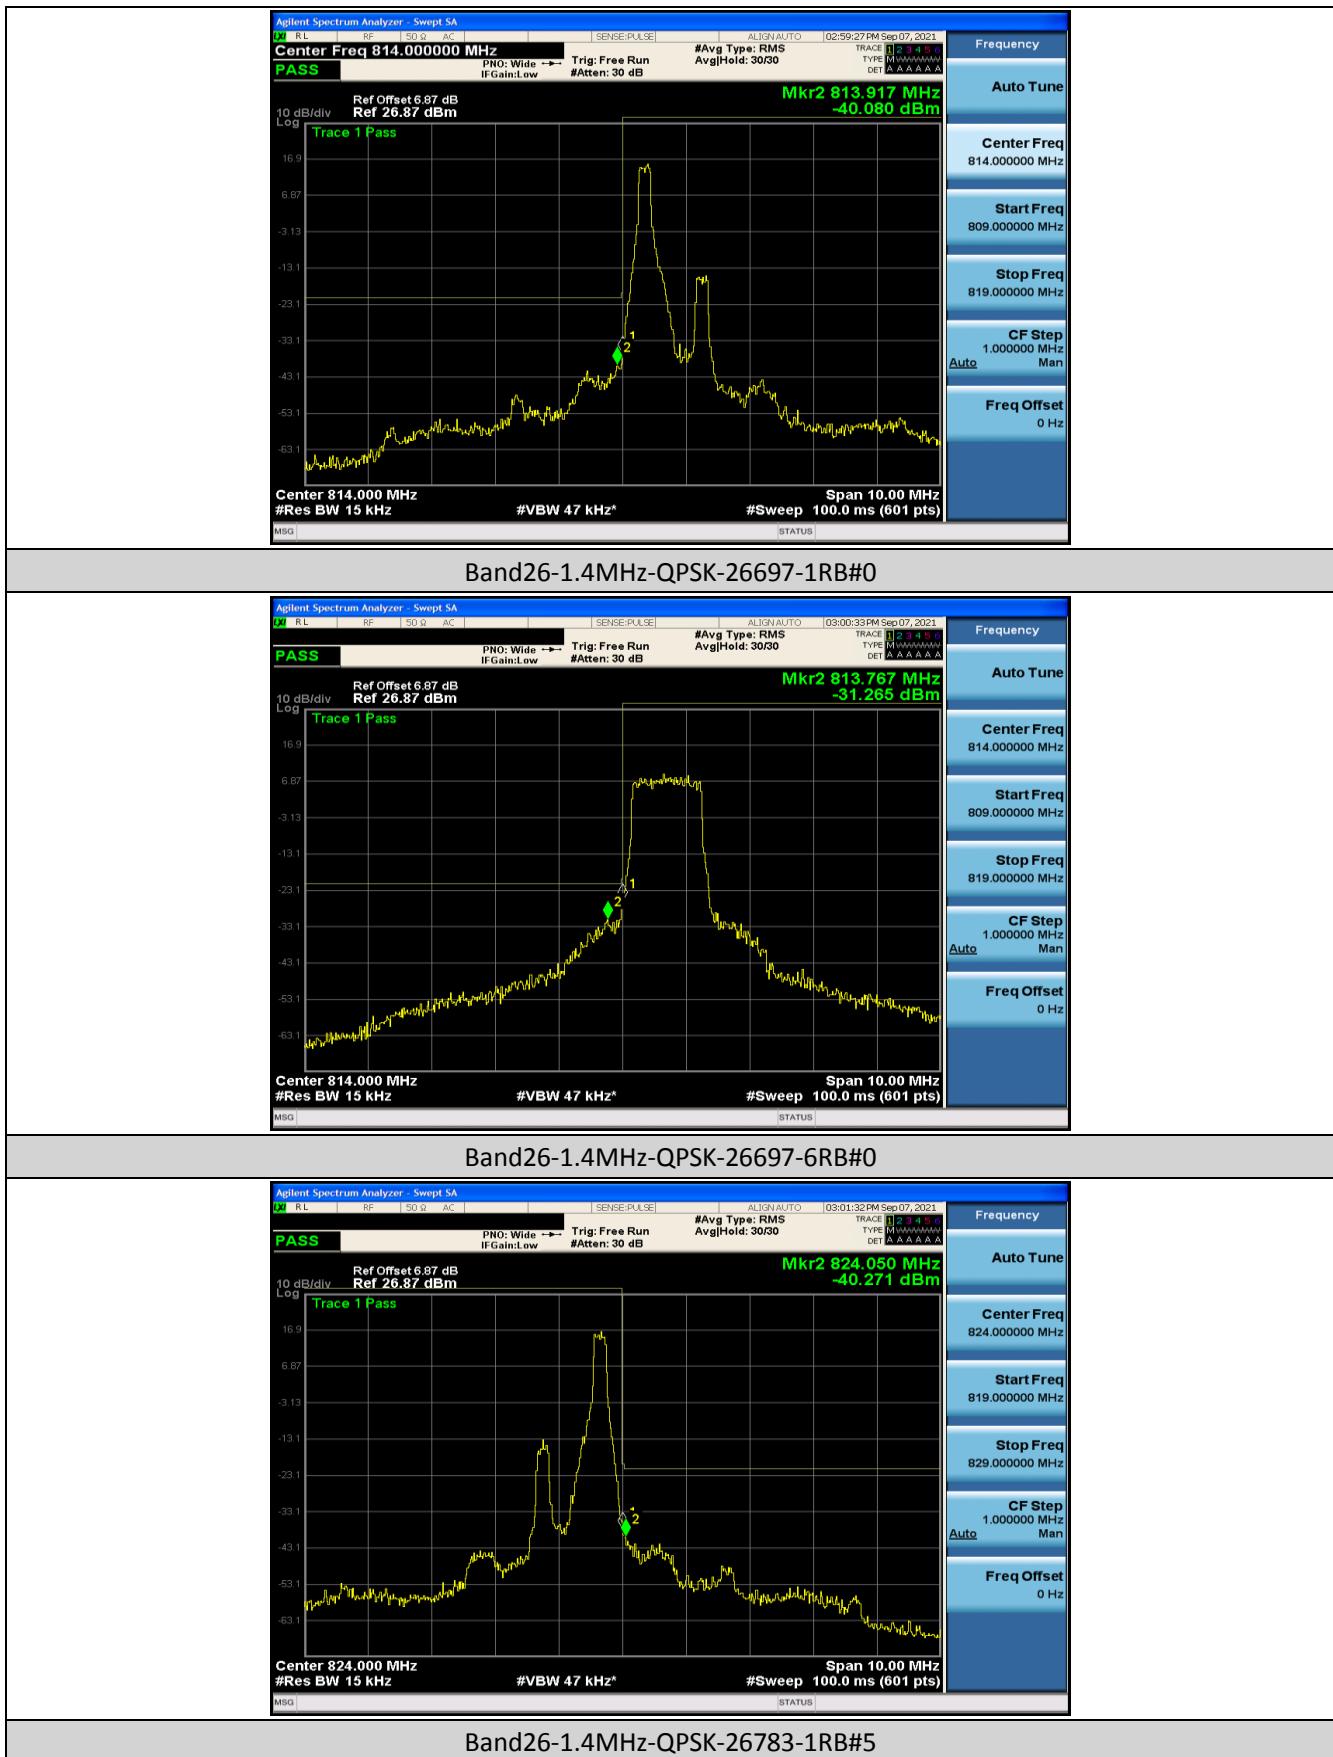



Band26-1.4MHz-QPSK-26783-6RB#0

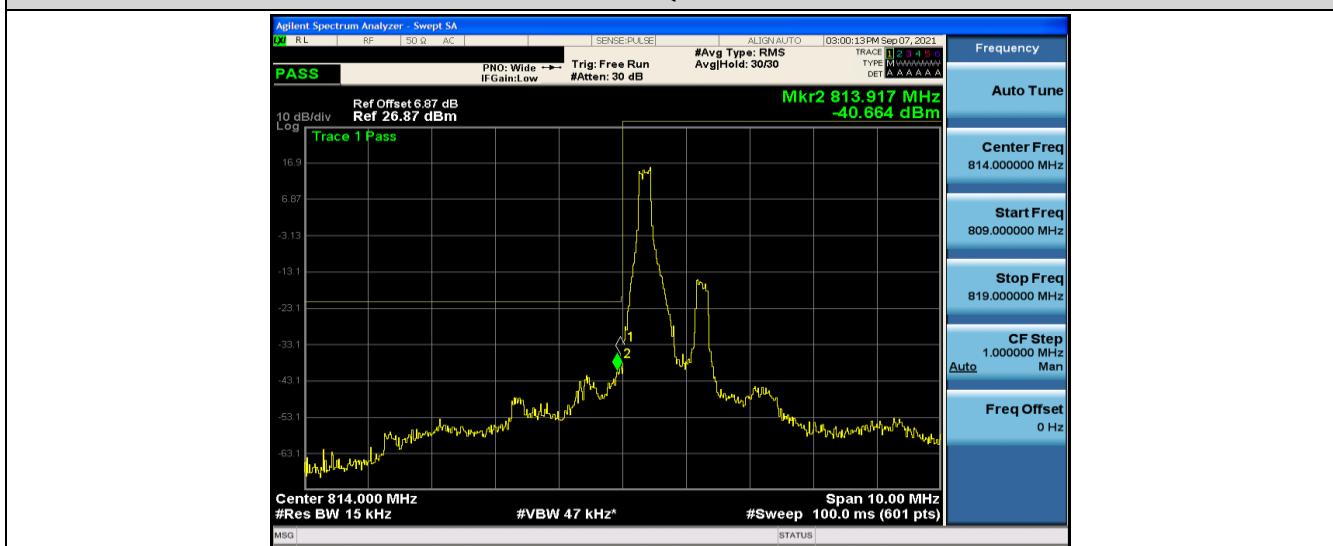

Band26-1.4MHz-16QAM-26697-1RB#0



Band26-1.4MHz-16QAM-26697-6RB#0