

# **BM71 Regulatory Compliance Information**

**Revision 0.4**  
**Dec' 2015**

**This document covers the Regulatory Compliance information which is part of the BM71 Module datasheet and related documents shared with customers.**


## 1.0 ANTENNA

### 1.1 Antenna Characteristics

#### 1.1.1 CERAMIC CHIP ANTENNA

The BM71 module contains an integral ceramic chip antenna. The [Figure 1-1](#) illustrates the antenna performance of the module.

**FIGURE 1-1: BM71 ANTENNA RADIATION PATTERN**

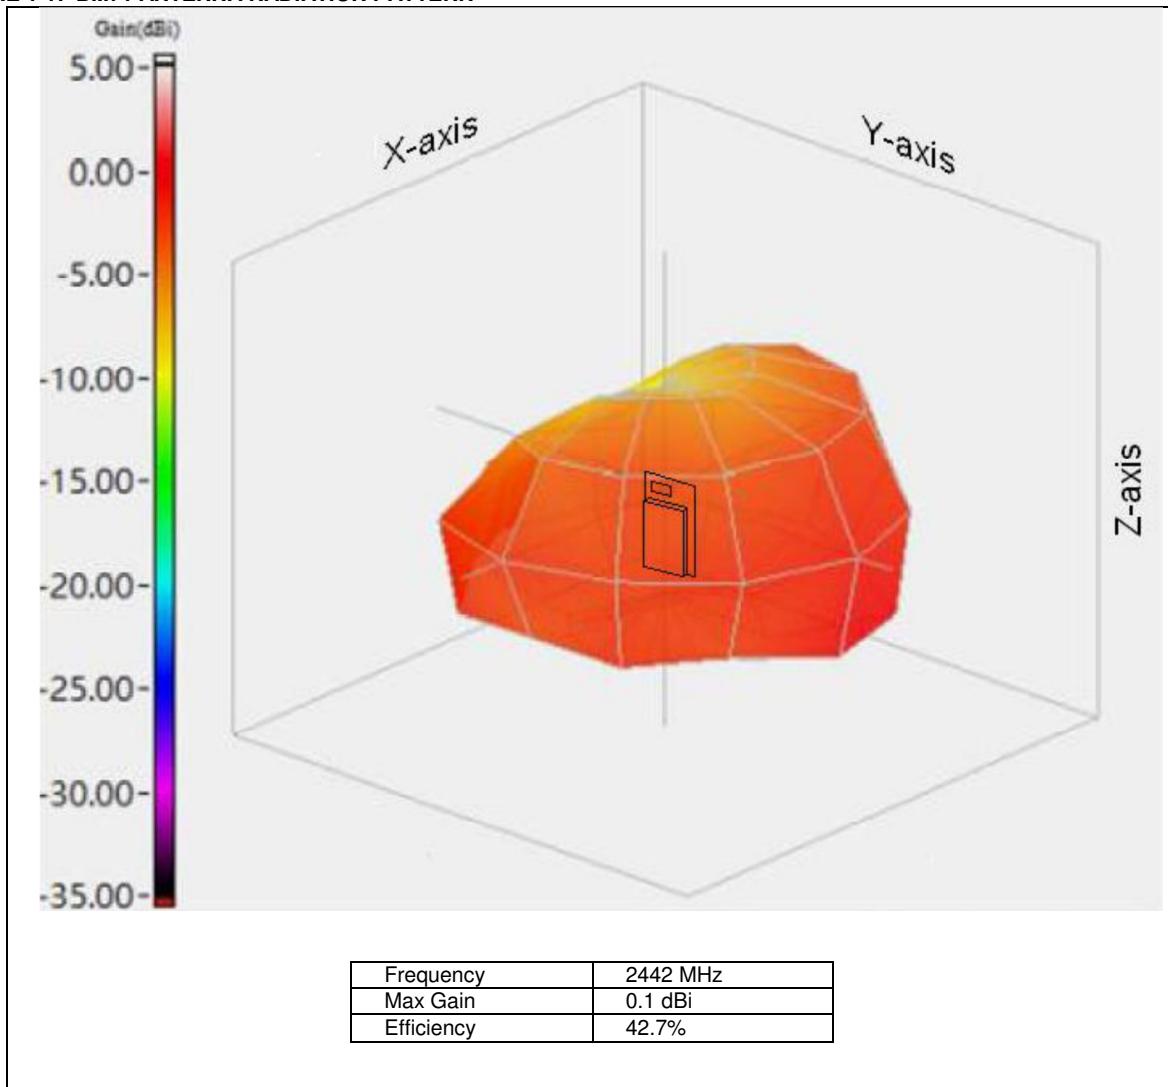

## APPENDIX A: CERTIFICATION NOTICES

**Note:** This device has not been authorized as required by the rules of the Federal Communications Commission. This device is not, and may not be, offered for sale or lease, or sold or leased, until authorization is obtained.

BM71 module regulatory approval status:

- BT SIG/QDID:74246
- United States/FCC ID: 2A3UI-TX4871
- Canada/IC ID: 27990-TX4871

HVIN: BM71BLES1FC2  
PMN: Bluetooth Module

### A.1 REGULATORY APPROVAL

This section outlines the regulatory information for the BM71 module for the following countries:

- United States
- Canada

#### A.1.1 UNITED STATES

The BM71 module is in progress to receive Federal Communications Commission (FCC) CFR47 Telecommunications, Part 15 Subpart C "Intentional Radiators" modular approval in accordance with Part 15.212 Modular Transmitter approval. Modular approval allows the end user to integrate the BM71 module into a finished product without obtaining subsequent and separate FCC approvals for intentional radiation, provided no changes or modifications are made to the module circuitry. Changes or modifications could void the user's authority to operate the equipment. The end user must comply with all of the instructions provided by the Grantee, which indicate installation and/or operating conditions necessary for compliance.

The finished product is required to comply with all applicable FCC equipment authorizations regulations, requirements and equipment functions not associated with the transmitter module portion. For example, compliance must be demonstrated to regulations for other transmitter components within the host product; to requirements for unintentional radiators (Part 15 Subpart B "Unintentional Radiators"), such as digital

devices, computer peripherals, radio receivers, etc.; and to additional authorization requirements for the non-transmitter functions on the transmitter module (i.e., Verification, or Declaration of Conformity) (e.g., transmitter modules may also contain digital logic functions) as appropriate.

#### A.1.2 LABELING AND USER INFORMATION REQUIREMENTS

The **BM71** module has to be labeled with its own FCC ID number, and if the FCC ID is not visible when the module is installed inside another device, then the outside of the finished product into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording as follows:

Contains Transmitter Module FCC ID:  
2A3UI-TX4871

or  
Contains FCC ID: 2A3UI-TX4871

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

Due to the limited module size (9.0 x 11.5mm) the FCC Identifier is displayed in the Datasheet only and cannot be displayed on the module label.

A user's manual for the finished product should include the following statement:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Additional information on labeling and user information requirements for Part 15 devices can be found in KDB Publication 784748 available at the FCC Office of Engineering and Technology (OET) Laboratory Division Knowledge Database (KDB)

<http://apps.fcc.gov/oetcf/kdb/index.cfm>.

#### A.1.3 RF EXPOSURE

All transmitters regulated by FCC must comply with RF exposure requirements. KDB 447498 General RF Exposure Guidance provides guidance in determining whether proposed or existing transmitting facilities, operations or devices comply with limits for human exposure to Radio Frequency (RF) fields adopted by the Federal Communications Commission (FCC).

From the FCC Grant: Output power listed is conducted. This grant is valid only when the module is sold to OEM integrators and must be installed by the OEM or OEM integrators. This transmitter is restricted for use with the specific antenna(s) tested in this application for Certification and must not be co-located or operating in conjunction with any other antenna or transmitters within a host device, except in accordance with FCC multi-transmitter product procedures.

#### A.1.4 HELPFUL WEB SITES

Federal Communications Commission (FCC):  
<http://www.fcc.gov>

FCC Office of Engineering and Technology (OET) Laboratory Division Knowledge Database (KDB):  
<http://apps.fcc.gov/oetcf/kdb/index.cfm>

## A.2 Canada

The BM71 module certification is in progress for use in Canada under Industry Canada (IC) Radio Standards Specification (RSS) RSS-247 and RSS-Gen. Modular approval permits the installation of a module in a host device without the need to recertify the device.

### Certification details:

IC Certification Number: 27990-TX4871

HVIN: BM71BLES1FC2

### A.2.1 LABELING AND USER INFORMATION REQUIREMENTS

Labeling Requirements for the Host Device (from Section 3.1, RSS-Gen, Issue 4, November 2014): The host device shall be properly labeled to identify the module within the host device.

The Industry Canada certification label of a module shall be clearly visible at all times when installed in the host device, otherwise the host device must be labeled to display the Industry Canada certification number of the module, preceded by the words "Contains transmitter module", or the word "Contains", or similar wording expressing the same meaning, as follows:

Contains transmitter module IC:  
27990-TX4871

Due to the limited module size (9.0 x 11.5mm) the IC identifier is displayed in the Datasheet only and cannot be displayed on the module label.

User Manual Notice for License-Exempt Radio Apparatus (from Section 8.4, RSS-Gen, Issue 4, November 2014): User manuals for license-exempt radio appa-

tus shall contain the following or equivalent notice in a conspicuous location in the user manual or alternatively on the device or both:

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Transmitter Antenna (from Section 8.3, RSS-Gen, Issue 4, November 2014): User manuals for transmitters shall display the following notice in a conspicuous location:

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

The above notice may be affixed to the device instead of displayed in the user manual.

**A.2.2 RF EXPOSURE**

All transmitters regulated by IC must comply with RF exposure requirements listed in RSS-102 - Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands).

**A.2.3 HELPFUL WEB SITES**


Industry Canada: <http://www.ic.gc.ca/>

## Appendix B: Labelling Considerations

BM71 module, due to the module dimension limitation, could not add the certificate ID on module directly, we apply the certificate ID on the Datasheet and alternatively on the shipping package instead of on the module.

Description :

1. BM71 Module dimension

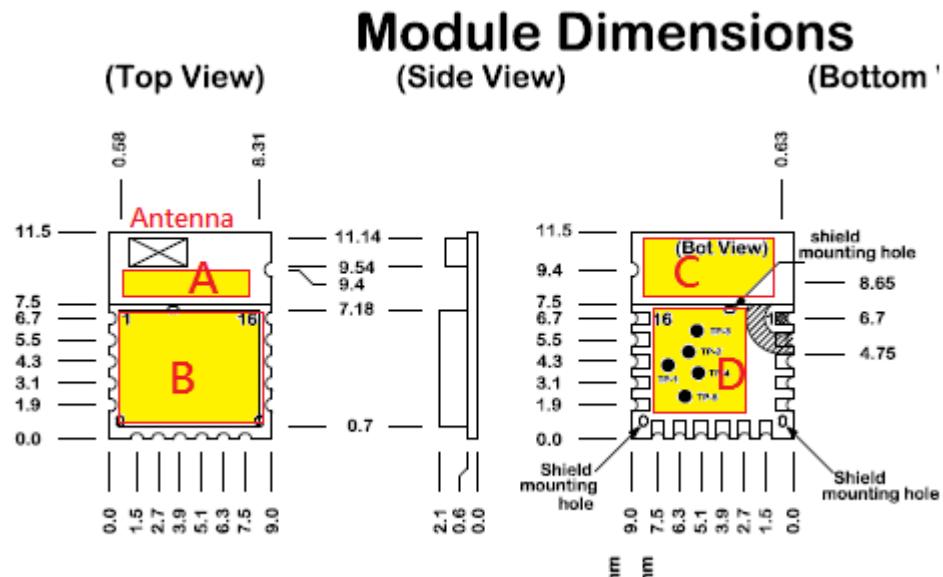


Area A: 1.5X8.5mm<sup>2</sup>

Area B: 7.7X6.1mm<sup>2</sup>, this is a shielding case with a label for BT address and date code

Area C: 3.5X8.5mm<sup>2</sup>

Area D: 2.1X6.35mm<sup>2</sup> and 1.4X3.6mm<sup>2</sup>, the area is not complete and continuous.

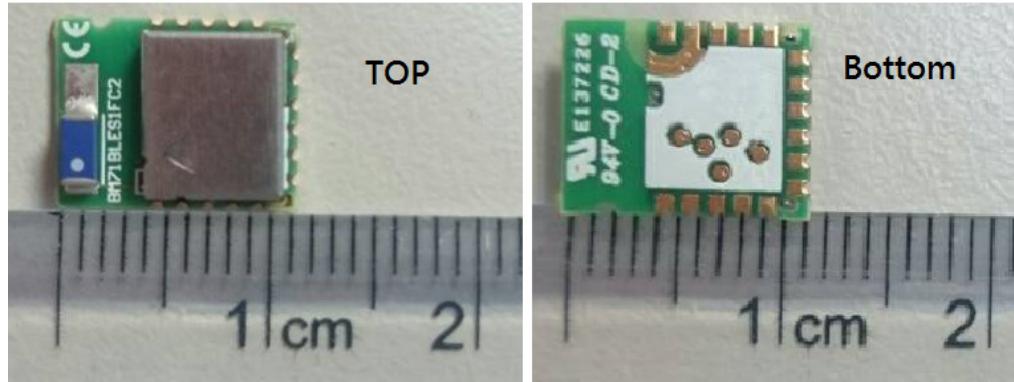

2. According the description above, due to the dimension limitation, we could not find out an area good to print a clear certificate ID or logo.
3. We would apply for your kindly permission to allow Microchip to ship the module by the new approach, in appendix I, to add the certificate ID on the anti-static bag, the out pack of the module tray
4. Appendix B-1 is one of the proposal.

## Appendix B-1

There is an anti-static bag outside the module tray, we suggest adding the certificate ID on the bag, it is very clear for the custom and government to check the ID, and we will also add the certificate ID information in the module user manual to avoid any possible confusion by the user.



Module tray in the anti-static bag



Open BOX



Logo and ID is pasted on the anti-static bag  
and also noted in user manual