

Product Name: Wireless Access Point	Report No: FCC022022-05744RF1
Product Model: AP 6WA	Security Classification: Open
Version: V1.0	Total Page:200

TIRT Testing Report



Prepared By:	Checked By:	Approved By:	A large blue circular stamp with the text "TIRT Technology Service Co., Ltd." around the top and "Shenzhen" in the center. The stamp is partially overlapping the bottom row of the table.
Stone Tang	Randy Lv	Daniel Chen	
Stone Tang	Randy Lv	Daniel Chen	

FCC Radio Test Report

FCC ID: 2A3WK-AP6WAR1

This report concerns: Original Grant

Equipment : Wireless Access Point
Brand Name :  NOMADIX
Test Model : AP 6WA
Series Model : N/A
Applicant : Nomadix, Inc.
Address : 21600 Oxnard Street - 19th floor, Woodland Hills, California, United States
Manufacturer : Nomadix, Inc.
Address : 21600 Oxnard Street - 19th floor, Woodland Hills, California, United States
Date of Receipt : 2022.07.24
Date of Test : 2022.07.24-2022.10.31
Issued Date : 2022.11.03
Report Version : V1.0
Test Sample : Engineering Sample No.: 20221103019324
Standard(s) : FCC CFR Title 47, Part 15, Subpart C
FCC KDB 558074 D01 15.247 Meas Guidance v05r02
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

- The test result referred exclusively to the presented test model /sample.
- Without written approval of TIRT Inc. the test report shall not reproduced except in full.

Lab: Beijing TIRT Technology Service Co.,Ltd Shenzhen

Add: 101, 3 # Factory Building, Gongjin Electronics, Shatin Community, Kengzi
Street, Pingshan District, Shenzhen City, China

TEL: +86-0755-27087573

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST LOCATION	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	11
2.3 PARAMETERS OF TEST SOFTWARE	13
2.4 DUTY CYCLE	14
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
2.6 SUPPORT UNITS	16
3 . AC POWER LINE CONDUCTED EMISSIONS	17
3.1 LIMIT	17
3.2 TEST PROCEDURE	17
3.3 DEVIATION FROM TEST STANDARD	17
3.4 TEST SETUP	18
3.5 EUT OPERATION CONDITIONS	18
3.6 TEST RESULTS	18
4 . RADIATED EMISSIONS	19
4.1 LIMIT	19
4.2 TEST PROCEDURE	20
4.3 DEVIATION FROM TEST STANDARD	21
4.4 TEST SETUP	21
4.5 EUT OPERATION CONDITIONS	22
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	22
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	22
4.8 TEST RESULTS - ABOVE 1000 MHZ	22
5 . BANDWIDTH	23
5.1 LIMIT	23
5.2 TEST PROCEDURE	23
5.3 DEVIATION FROM STANDARD	23
5.4 TEST SETUP	23

Table of Contents

	Page
5.5 EUT OPERATION CONDITIONS	23
5.6 TEST RESULTS	23
6 . MAXIMUM OUTPUT POWER & E.I.R.P.	24
6.1 LIMIT	24
6.2 TEST PROCEDURE	24
6.3 DEVIATION FROM STANDARD	24
6.4 TEST SETUP	24
6.5 EUT OPERATION CONDITIONS	24
6.6 TEST RESULTS	24
7 . CONDUCTED SPURIOUS EMISSIONS	25
7.1 LIMIT	25
7.2 TEST PROCEDURE	25
7.3 DEVIATION FROM STANDARD	25
7.4 TEST SETUP	25
7.5 EUT OPERATION CONDITIONS	25
7.6 TEST RESULTS	25
8 . POWER SPECTRAL DENSITY	26
8.1 LIMIT	26
8.2 TEST PROCEDURE	26
8.3 DEVIATION FROM STANDARD	26
8.4 TEST SETUP	26
8.5 EUT OPERATION CONDITIONS	26
8.6 TEST RESULTS	26
9 . MEASUREMENT INSTRUMENTS LIST	27
10 . EUT TEST PHOTO	28
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	31
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	34
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	35
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	38
APPENDIX E - BANDWIDTH	99
APPENDIX F - MAXIMUM AVERAGE OUTPUT POWER	138
APPENDIX G - CONDUCTED SPURIOUS EMISSIONS	145

Table of Contents	Page
APPENDIX H - POWER SPECTRAL DENSITY	182

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
FCC022022-05744RF1	V1.0	Original Report.	2022.11.03	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST LOCATION

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	101, 3 # Factory Building, Gongjin Electronics, Shatin Community, Kengzi Street, Pingshan District, Shenzhen City, China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number	6049.01
Telephone:	+86-0755-27087573

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The TIRT measurement uncertainty as below table:

Uncertainty	Parameter	Uncertainty
	Occupied Channel Bandwidth	±142.12kHz
	RF power conducted	±0.74dB
	RF power radiated	±3.25dB
	Spurious emissions, conducted	±1.78dB
	Spurious emissions, radiated (30MHz~1GHz)	±4.6dB
	Spurious emissions, radiated (1GHz ~ 18GHz)	±4.9dB
	Conduction Emissions(150kHz~30MHz)	±3.1dB
	Humidity	±4.6%
	Temperature	±0.7°C
	Time	±1.25%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	24.4°C	56%	AC 120V/60Hz	Stone Tang
Radiated Emissions-9kHz to 30 MHz	24.6°C	55%	AC 120V/60Hz	Stone Tang
Radiated Emissions-30MHz to 1000MHz	24.6°C	55%	AC 120V/60Hz	Stone Tang
Radiated Emissions-Above 1000MHz	24.6°C	55%	AC 120V/60Hz	Stone Tang
Bandwidth	24.2°C	54%	DC 12V	Stone Tang
Maximum Output Power	24.2°C	54%	DC 12V	Stone Tang
Conducted Spurious Emissions	24.2°C	54%	DC 12V	Stone Tang
Power Spectral Density	24.2°C	54%	DC 12V	Stone Tang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless Access Point
Brand Name	 NOMADIX
Test Model	AP 6WA
Series Model	N/A
Model Difference(s)	N/A
Software Version	AP-NOS
Hardware Version	AP 6WAR1
Power Source	DC Port or POE.
Power Rating	DC 12V or POE 48V
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ax: up to 573.6 Mbps
Maximum Output Power CDD	IEEE 802.11b: 22.96 dBm (0.198 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20), IEEE 802.11ax(HE20) CH03 - CH09 for IEEE 802.11n(HT40), IEEE 802.11ax(HE40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Integral	N/A	3.33
2	N/A	N/A	Integral	N/A	2.64

Note:

- 1) This EUT supports CDD, and all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$.
For power measurements, $\text{Array Gain}=0\text{dB}$ ($N_{ANT} \leq 4$), so the Directional gain=3.33.
For power spectral density measurements, $N_{ANT}=2$, $N_{SS} = 1$.
So the Directional gain= $G_{ANT} + \text{Array Gain}=G_{ANT}+10\log(N_{ANT}/N_{SS})\text{dBi}=3.33+10\log(2/1)\text{dBi}=6.34$
- 2) The antenna gain are provided by the manufacturer.

4. Table for Antenna Configuration:

Operating Mode	TX Mode	2TX
IEEE 802.11b		V (Ant. 1 + Ant. 2)
IEEE 802.11g		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2)

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09
Mode 5	TX AX(HE20) Mode Channel 01/06/11
Mode 6	TX AX(HE40) Mode Channel 03/06/09
Mode 7	TX B Mode Channel 06

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 7	TX B Mode Channel 06

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 7	TX B Mode Channel 06

Radiated emissions test- Above 1GHz	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09
Mode 5	TX AX(HE20) Mode Channel 01/06/11
Mode 6	TX AX(HE40) Mode Channel 03/06/09

Conducted test	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09
Mode 5	TX AX(HE20) Mode Channel 01/06/11
Mode 6	TX AX(HE40) Mode Channel 03/06/09

NOTE:

- (1) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (2) For AC power line conducted emissions and radiated emission below 1 GHz test, the IEEE 802.11b channel 06 is found to be the worst case and recorded.
- (3) For radiated emission above 1 GHz test, the spurious points of 1GHz~18GHz and 18GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (4) IEEE 802.11ax mode only supports full RU, so only the full RU is evaluated and measured inside report.
- (5) For radiated emission, pre-scan in the X, Y and Z axes of orientation, the worst case of orientation was recorded

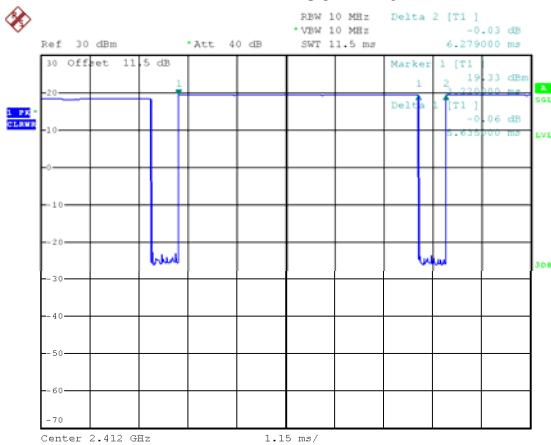
2.3 PARAMETERS OF TEST SOFTWARE

Frequency (MHz)	2412	2437	2462
/	Power setting		
Test Software Version	AccessMTool_REL_3_1_0_3		
IEEE 802.11b	94	120	99
IEEE 802.11g	62	90	70
IEEE 802.11n(HT20)	60	87	66
IEEE 802.11ax(HE20)	57	86	63
Frequency (MHz)	2422	2437	2452
IEEE 802.11n(HT40)	55	74	64
IEEE 802.11ax(HE40)	54	72	63

2.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.
The output power = measured power + duty factor.

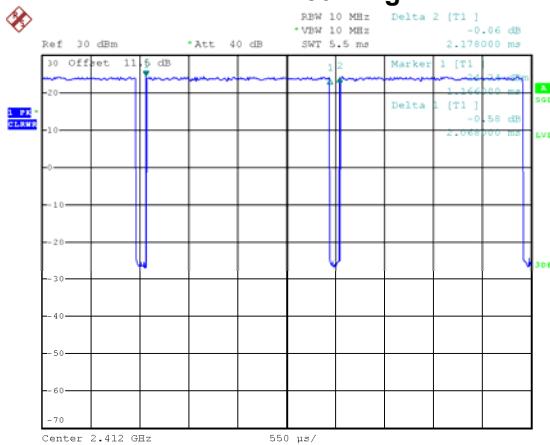
IEEE 802.11b



Date: 25.JUL.2022 09:42:22

Duty cycle = $5.635 \text{ ms} / 6.279 \text{ ms} = 89.74\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.47$

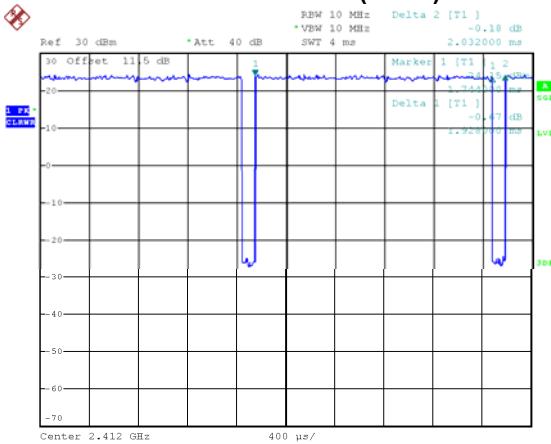
IEEE 802.11g



Date: 25.JUL.2022 09:43:35

Duty cycle = $2.068 \text{ ms} / 2.178 \text{ ms} = 94.95\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.23$

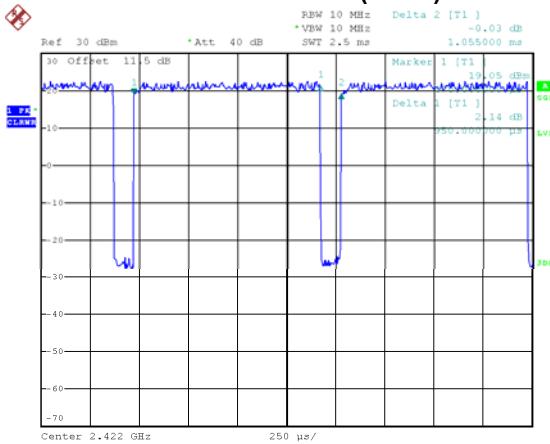
IEEE 802.11n(HT20)



Date: 25.JUL.2022 09:44:43

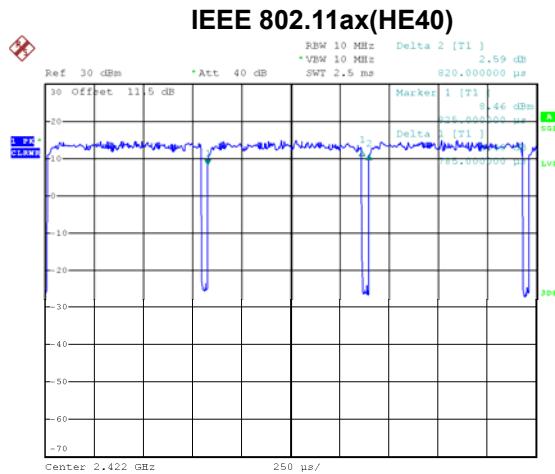
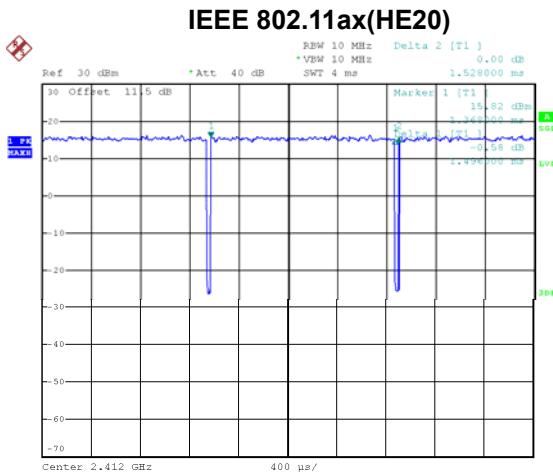
Duty cycle = $1.928 \text{ ms} / 2.032 \text{ ms} = 94.88\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.23$

IEEE 802.11n(HT40)



Date: 25.JUL.2022 09:45:27

Duty cycle = $0.95 \text{ ms} / 1.055 \text{ ms} = 90.05\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.46$



Date: 25.JUL.2022 09:54:49

Duty cycle = 1.496 ms / 1.528 ms = 97.91%
Duty Factor = 10 log(1/Duty cycle) = 0.09

Date: 25.JUL.2022 09:55:32

$$\text{Duty cycle} = 0.785 \text{ ms} / 0.820 \text{ ms} = 95.73\%$$

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle}) = 0.19$$

NOTE:

For IEEE 802.11b:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 122Hz.

For IEEE 802.11g:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 186Hz.

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 441Hz.

For IEEE 802.11n(HT40):

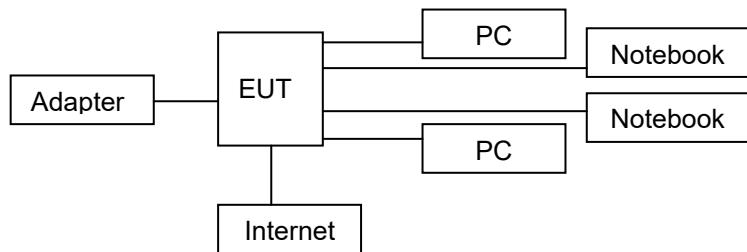
For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 897Hz

For IEEE 802.11ax (HE20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 512 Hz.

For IEEE 802.11ax (HE10):

For IEEE 802.11ax(HE40),
For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 512 Hz.

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**2.6 SUPPORT UNITS**

Support Equipment				
No.	Equipment	Brand Name	Model Name	Remarks
1	Notebook	Lenovo	M4500T	N/A
2	Notebook	Lenovo	M4500T	N/A
3	PC	Lenovo	510S-07IAB	N/A
4	PC	Lenovo	510Pro-15ICK	N/A
5	Power Adapter	RUIDE	RD1201000-C55-35MGD	12V/1A
6	Lan Cable	/	Cable 5e	Unshield 10m*5

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

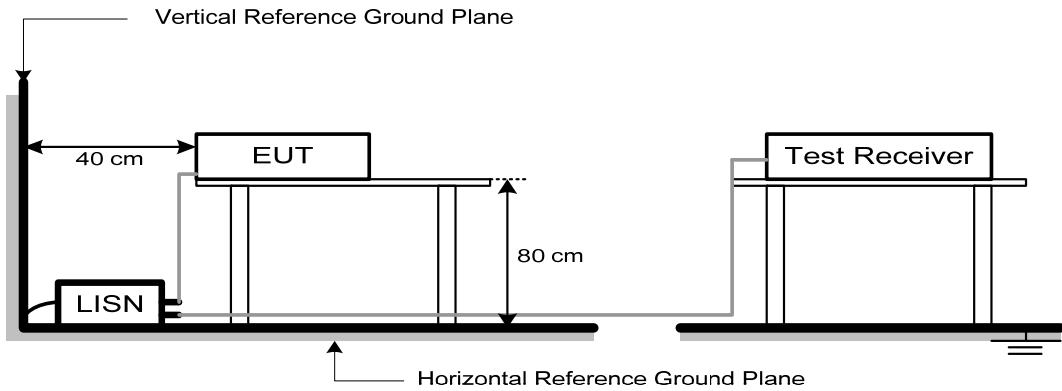
The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP



3.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a) , then the 15.209(a) and limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value

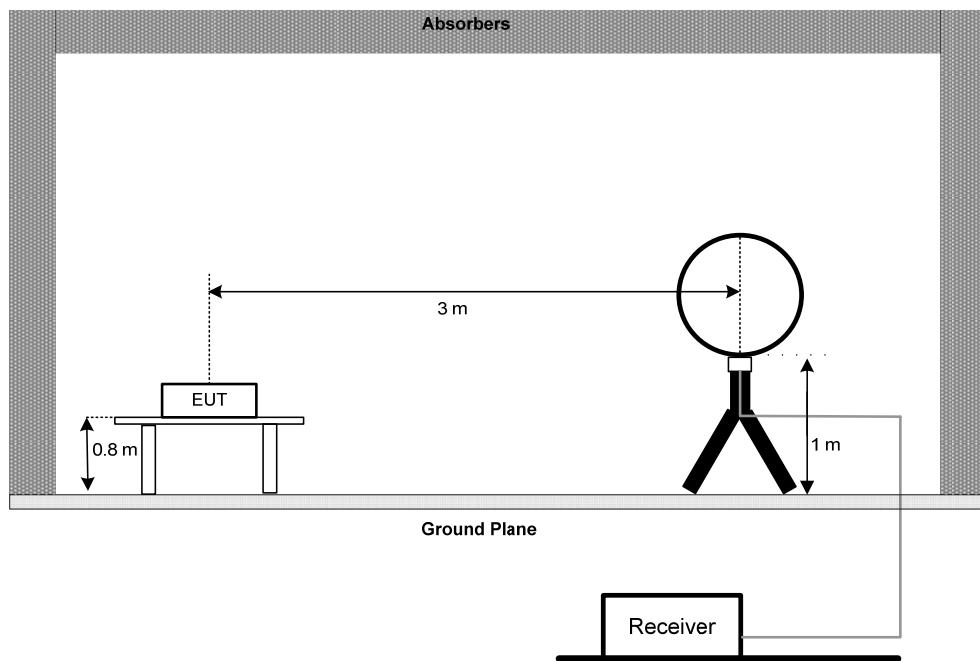
Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD

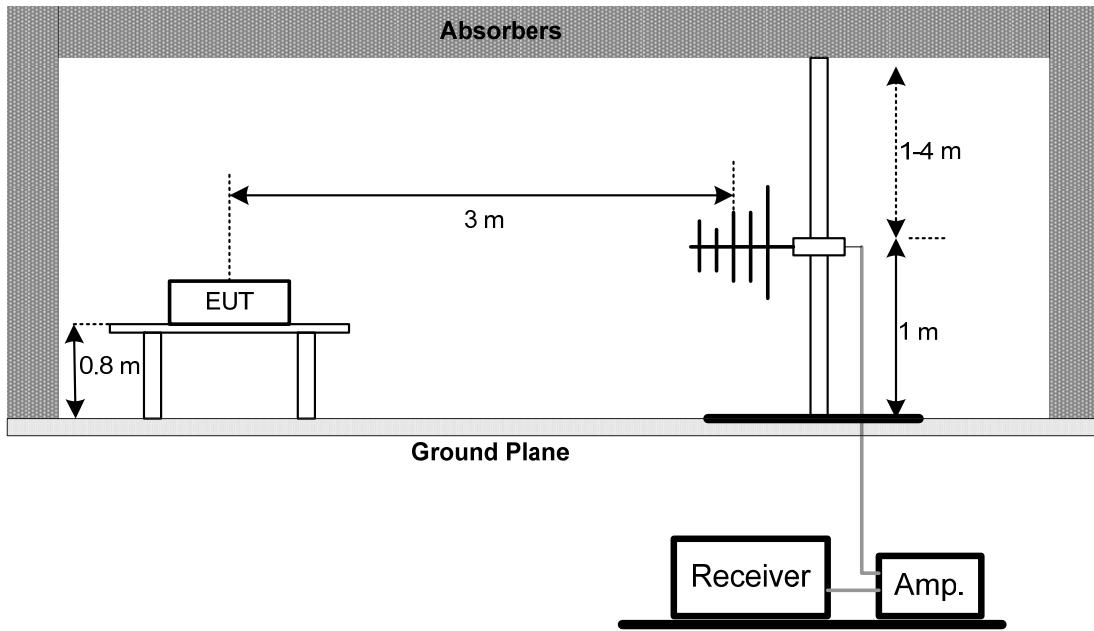
No deviation.

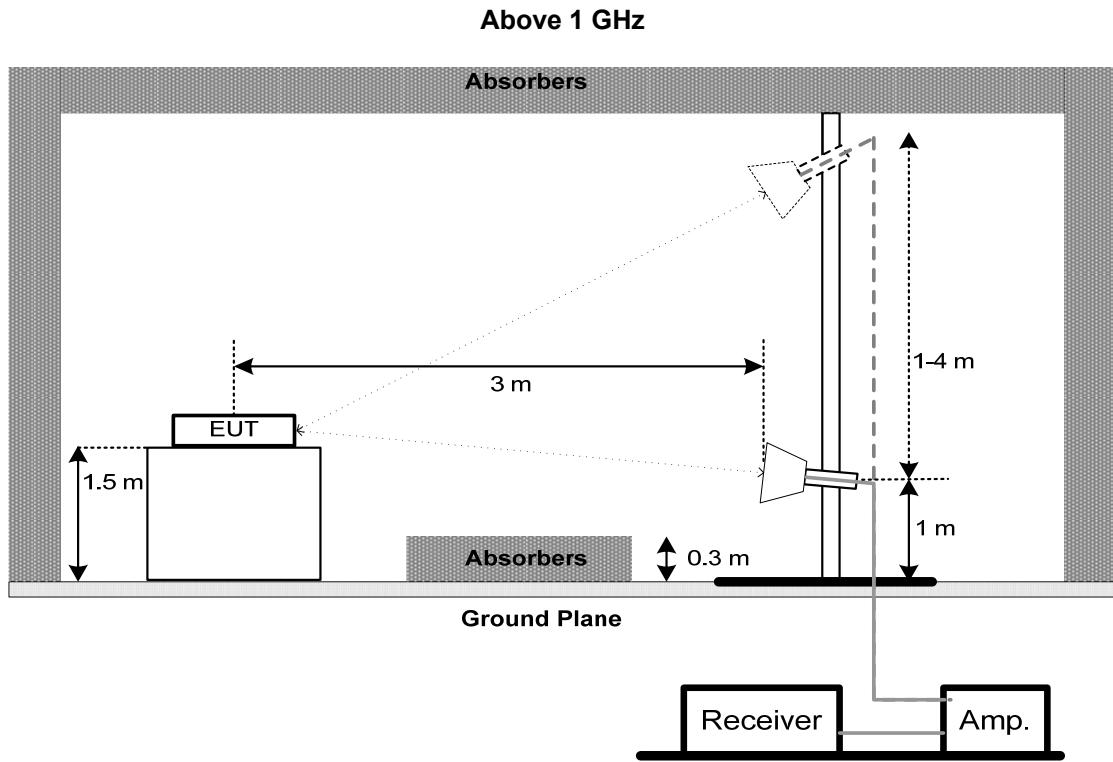
4.4 TEST SETUP

9 kHz to 30 MHz



30 MHz to 1 GHz





4.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH

5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	300 kHz For 20MHz 1 MHz For 40MHz
VBW	1 MHz For 20MHz 3 MHz For 40MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER & E.I.R.P.

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 Watt or 30.00 dBm

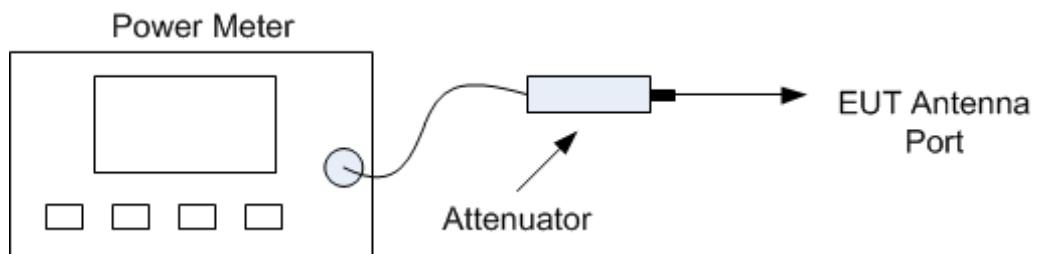
6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. The maximum conducted output power was performed in accordance with method 11.9.2.3.1 (for AVG power) of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. CONDUCTED SPURIOUS EMISSIONS

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. The following table is the setting of the spectrum analyzer:

For Emission Level:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	25 MHz (20 MHz) / 60 MHz (40 MHz)
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

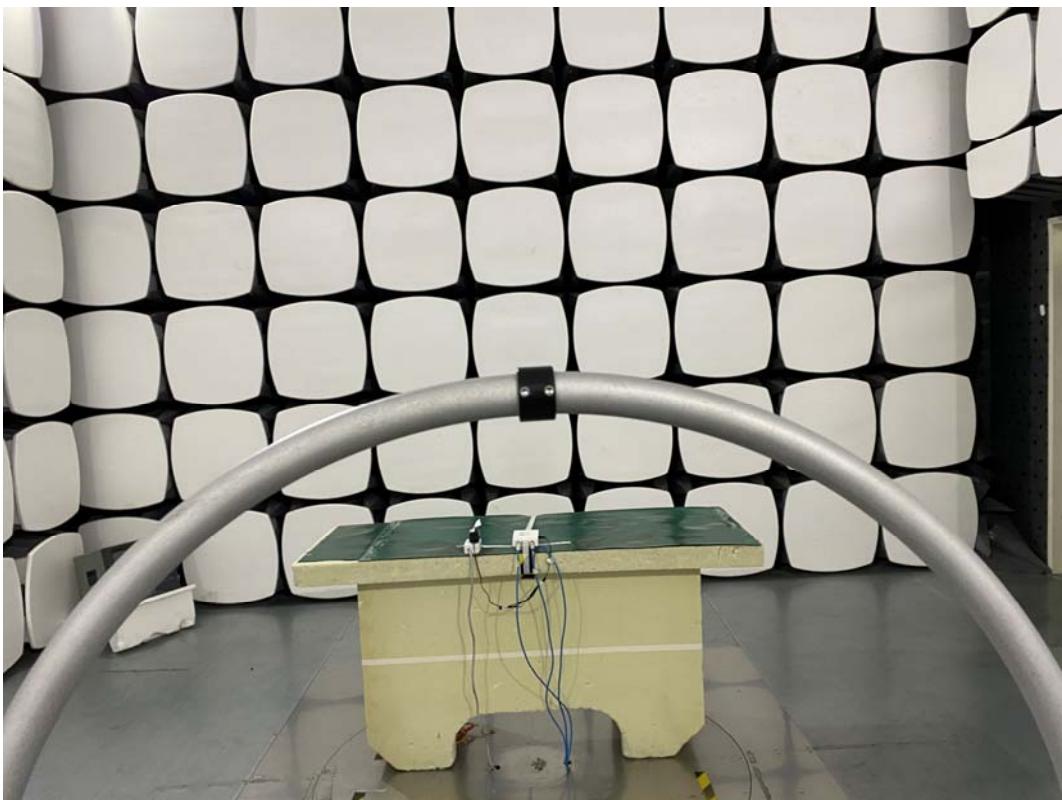
9. MEASUREMENT INSTRUMENTS LIST

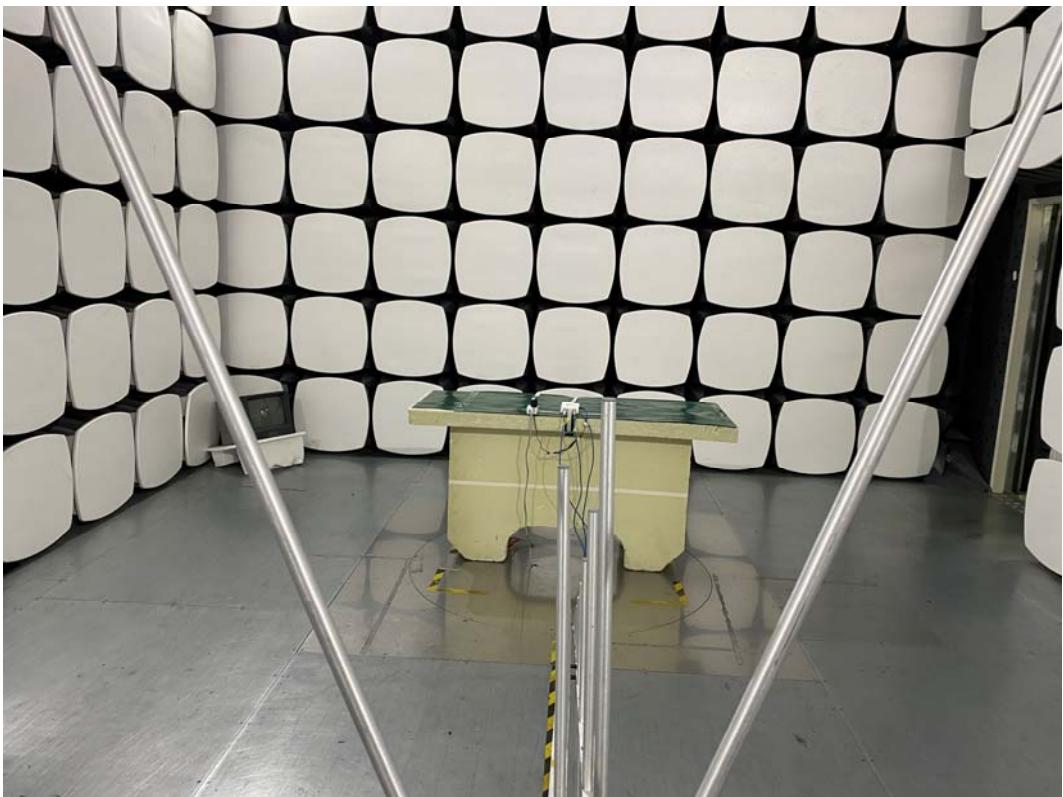
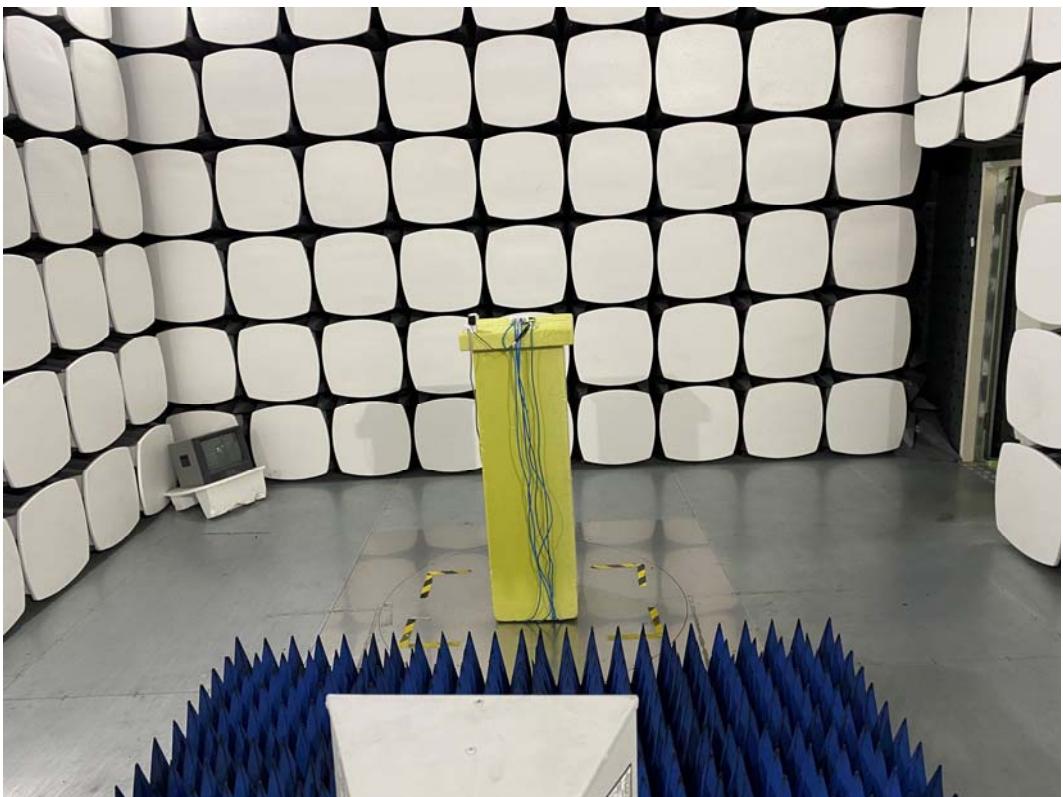
No.	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Receiver	Rohde&Schwarz	ESCI	1166.5950.03	2022/11/09
2	AMN	Rohde&Schwarz	ENV216	3560.6550.05	2022/11/09
3	AMN	Schwarzbeck	NSLK8127	#829	2022/11/09
4	ECSI RF IN RF Cable	Rohde&Schwarz	RP-X1	N/A	2022/11/09
5	ECSI RF IN RF Cable	Rohde&Schwarz	Sapre sm	N/A	2022/11/09
6	EMI Receiver	Rohde&Schwarz	ESR7	102013	2022/11/09
7	Spectrum analyzer	Rohde&Schwarz	FSV30	103741	2022/11/09
8	Spectrum analyzer	KEYSIGHT	N9010A-44	MY51440158	2022/11/09
9	Integral Antenna	Schwarzbeck	VULB 9163	VULB 9163-361	2022/11/20
10	Integral Antenna	Schwarzbeck	BBHA 9120D	BBHA 9120D 1201	2022/11/20
11	Integral Antenna	Schwarzbeck	BBHA 9170	9170#685	2022/11/20
12	Preamplifier	Schwarzbeck	BBV9745	#78	2022/11/09
13	Preamplifier	Schwarzbeck	BBV9721	9721-019	2022/11/09
14	Preamplifier	RF System/UK	TRLA-0101 80G50B	22062101	2023/07/20
15	ECSI RF IN RF Cable	Rohde&Schwarz	AP-X1	N/A	2022/11/09
16	ECSI RF IN RF Cable	HAOXUN	Z-108	N/A	2022/11/09
17	RF Cable	ZDECL	ZT40-2.92J -2.92J-6M	18124358	2023/07/20
18	Spectrum Analyzer	Agilent	N9010A	MY51440158	2022/11/09
19	Spectrum Analyzer	Agilent	N9010A	MY52221119	2022/11/09
20	EMI Receiver	Rohde&Schwarz	ESU	100184	2023/07/20
21	Temp&Humidity Recorder	Anymetre	JR900	N/A	2022/11/03
22	Temp&Humidity Chamber	ETOMA	NTH1100-3 0A	16080628	2022/11/03
23	Filter	STI	STI15-9845	N/A	N/A
24	Filter	STI	5.1G	N/A	N/A
25	Filter	STI	STI15-9845	N/A	N/A
26	Testing Software	EZ-EMC	TW-03A2	N/A	N/A

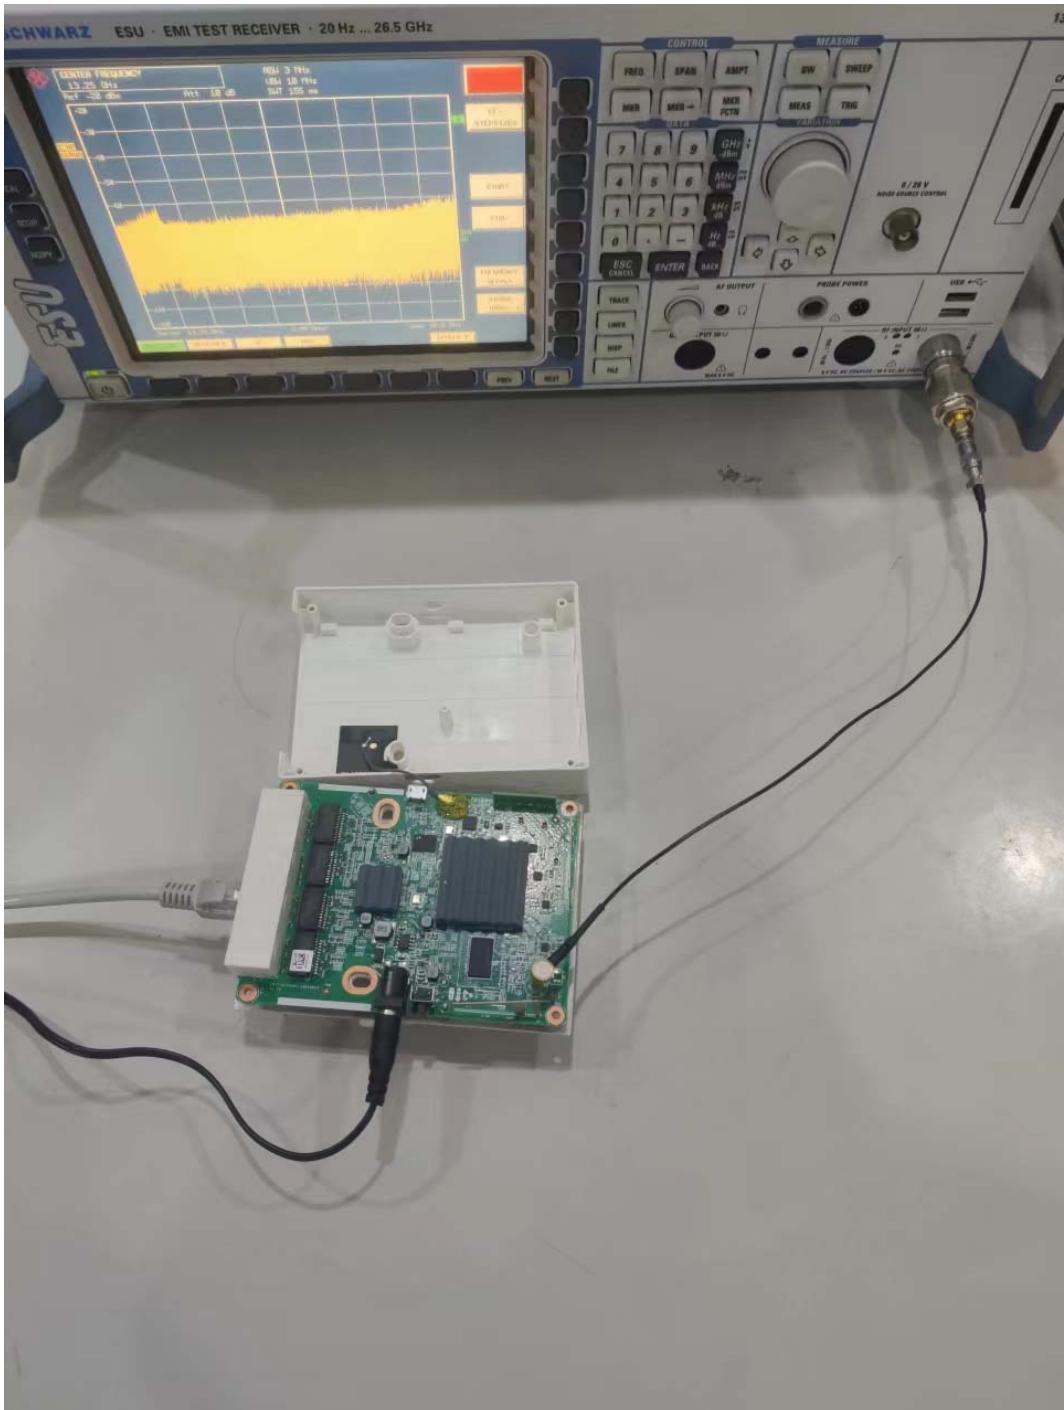
Remark: "N/A" denotes no model name, serial no. or calibration specified.

** calibration period of equipment list is three year.

Except * item, all calibration period of equipment list is one year.

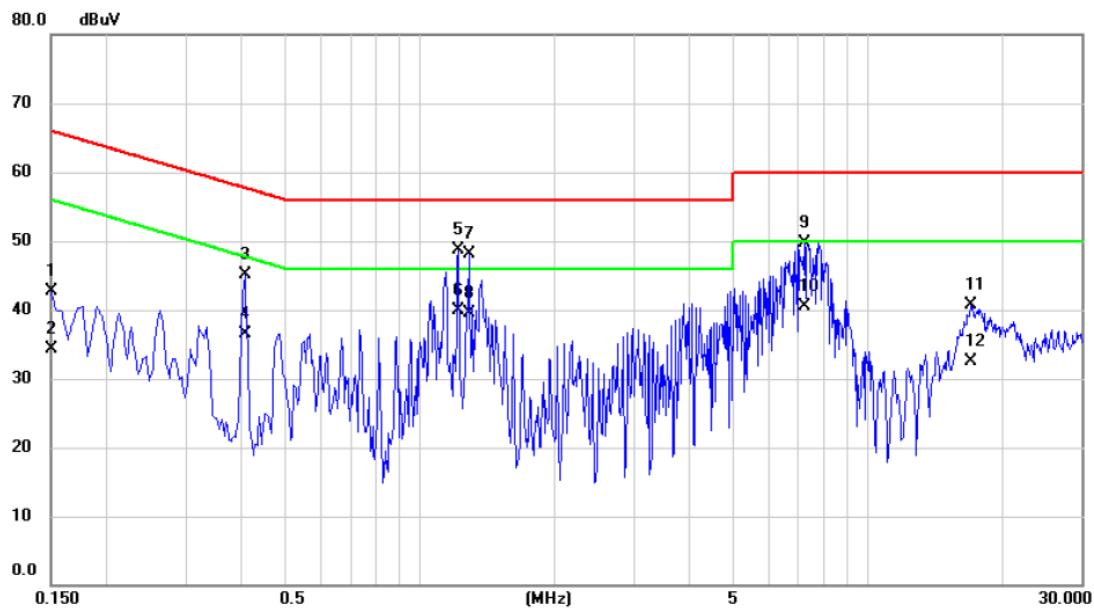
10. EUT TEST PHOTO**AC Power Line Conducted Emissions Test Photos****Radiated Emissions Test Photos****9 kHz to 30 MHz**

Radiated Emissions Test Photos**30 MHz to 1 GHz****Above 1 GHz**

Conducted Test Photos

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX B Mode Channel 6	Phase	Line
-----------	---------------------	-------	------

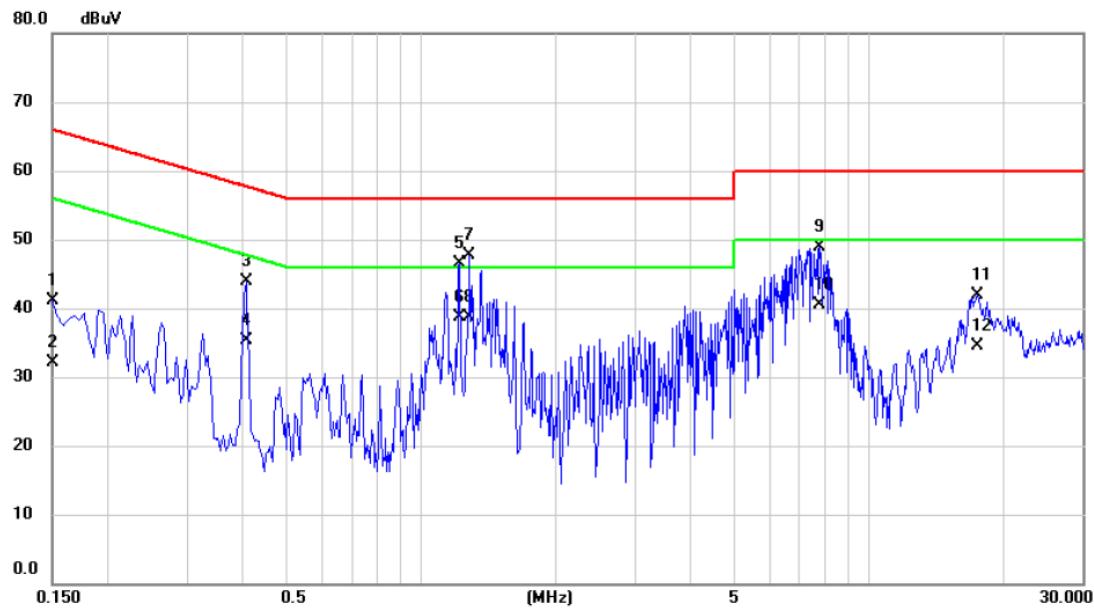
Conducted Emission Measurement

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Margin Detector	Comment
1		0.1500	33.12	9.66	42.78	66.00	-23.22	QP
2		0.1500	24.60	9.66	34.26	56.00	-21.74	AVG
3		0.4065	35.27	9.76	45.03	57.72	-12.69	QP
4		0.4065	26.70	9.76	36.46	47.72	-11.26	AVG
5		1.2164	38.93	9.84	48.77	56.00	-7.23	QP
6	*	1.2164	30.10	9.84	39.94	46.00	-6.06	AVG
7		1.2885	38.25	9.85	48.10	56.00	-7.90	QP
8		1.2885	29.60	9.85	39.45	46.00	-6.55	AVG
9		7.2105	39.49	10.31	49.80	60.00	-10.20	QP
10		7.2105	30.20	10.31	40.51	50.00	-9.49	AVG
11		17.0115	30.01	10.67	40.68	60.00	-19.32	QP
12		17.0115	21.80	10.67	32.47	50.00	-17.53	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

Test Mode	TX B Mode Channel 6	Phase	Neutral
-----------	---------------------	-------	---------

Conducted Emission Measurement

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Margin Detector	Comment
1		0.1500	31.32	9.71	41.03	66.00	-24.97	QP
2		0.1500	22.40	9.71	32.11	56.00	-23.89	AVG
3		0.4065	34.15	9.79	43.94	57.72	-13.78	QP
4		0.4065	25.60	9.79	35.39	47.72	-12.33	AVG
5		1.2164	36.60	9.87	46.47	56.00	-9.53	QP
6		1.2164	28.90	9.87	38.77	46.00	-7.23	AVG
7		1.2840	37.76	9.88	47.64	56.00	-8.36	QP
8	*	1.2840	28.90	9.88	38.78	46.00	-7.22	AVG
9		7.7685	38.63	10.36	48.99	60.00	-11.01	QP
10		7.7685	30.10	10.36	40.46	50.00	-9.54	AVG
11		17.4794	31.24	10.72	41.96	60.00	-18.04	QP
12		17.4794	23.80	10.72	34.52	50.00	-15.48	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

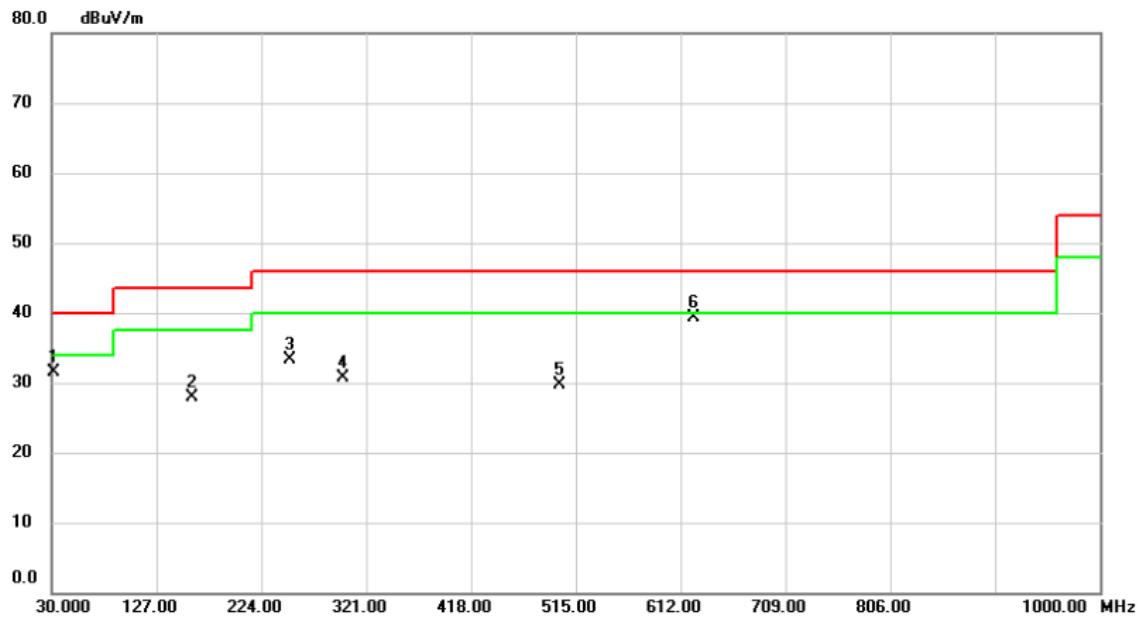
Radiated emission: 9KHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX B Mode Channel 06	Polarization	Vertical
-----------	----------------------	--------------	----------

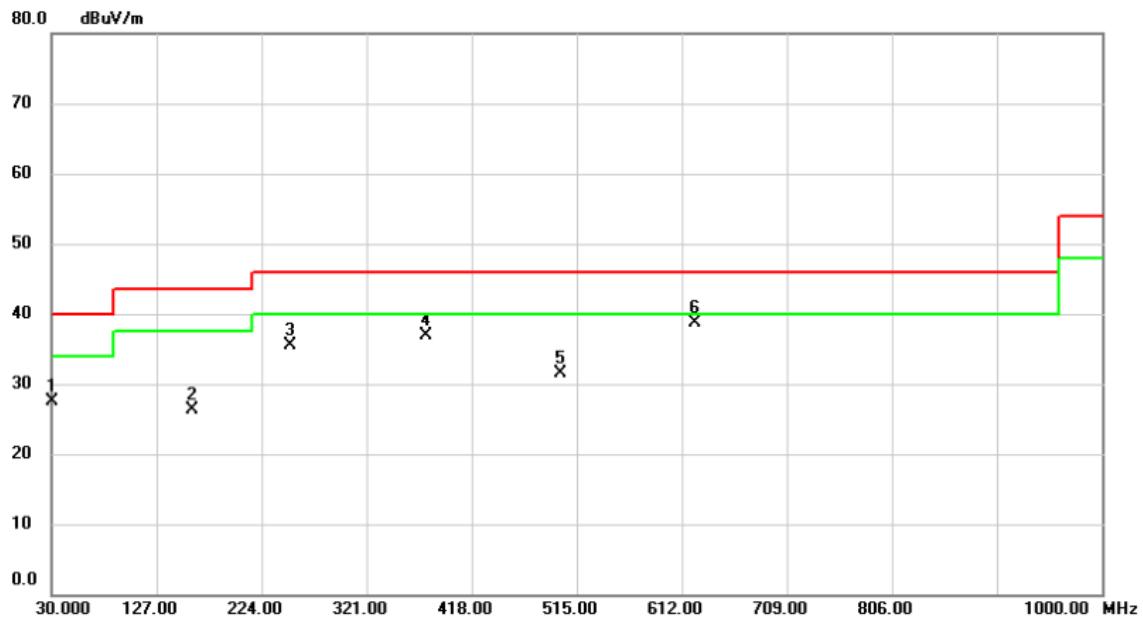
Radiated Emission Measurement

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	47.26	-15.74	31.52	40.00	-8.48	peak	
2		159.9800	40.57	-12.72	27.85	43.50	-15.65	peak	
3		250.1900	46.53	-13.17	33.36	46.00	-12.64	peak	
4		299.6600	41.95	-11.26	30.69	46.00	-15.31	peak	
5		500.4500	36.50	-6.87	29.63	46.00	-16.37	peak	
6	*	624.6100	43.75	-4.40	39.35	46.00	-6.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Polarization	Horizontal
-----------	----------------------	--------------	------------

Radiated Emission Measurement

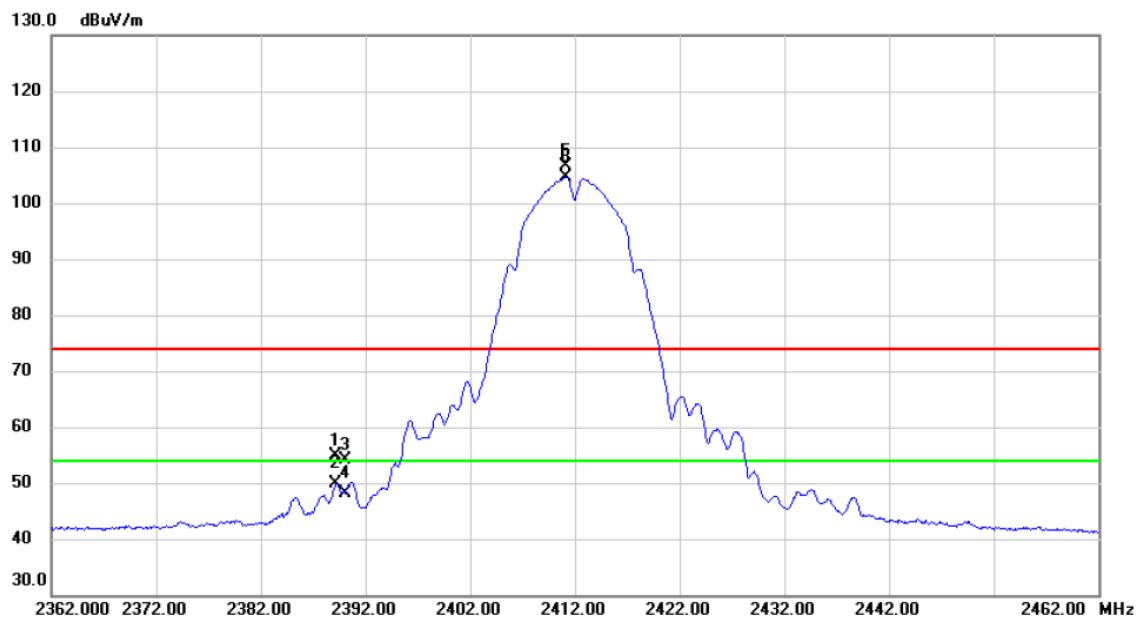
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		30.0000	43.60	-16.07	27.53	40.00	-12.47	peak
2		159.9800	39.04	-12.72	26.32	43.50	-17.18	peak
3		250.1900	48.59	-13.17	35.42	46.00	-10.58	peak
4		375.3200	46.50	-9.58	36.92	46.00	-9.08	peak
5		500.4500	38.44	-6.87	31.57	46.00	-14.43	peak
6	*	624.6100	43.17	-4.40	38.77	46.00	-7.23	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2389.200	47.65	7.17	54.82	74.00	-19.18	peak	
2		2389.200	42.62	7.17	49.79	54.00	-4.21	AVG	
3		2390.000	46.94	7.17	54.11	74.00	-19.89	peak	
4		2390.000	40.98	7.17	48.15	54.00	-5.85	AVG	
5	X	2411.200	99.37	7.17	106.54	74.00	32.54	peak	No Limit
6	*	2411.200	97.47	7.17	104.64	54.00	50.64	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

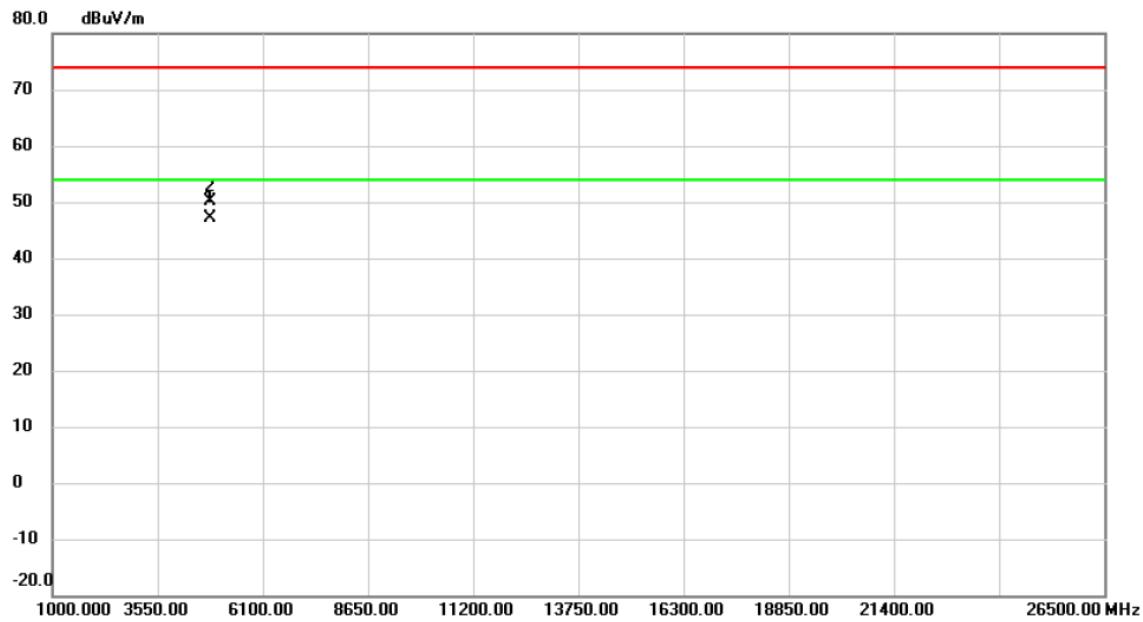
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2389.200	49.25	7.17	56.42	74.00	-17.58	peak	
2		2389.200	43.80	7.17	50.97	54.00	-3.03	AVG	
3		2390.000	47.84	7.17	55.01	74.00	-18.99	peak	
4		2390.000	41.93	7.17	49.10	54.00	-4.90	AVG	
5	X	2411.100	90.46	7.16	97.62	74.00	23.62	peak	No Limit
6	*	2411.200	88.56	7.17	95.73	54.00	41.73	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

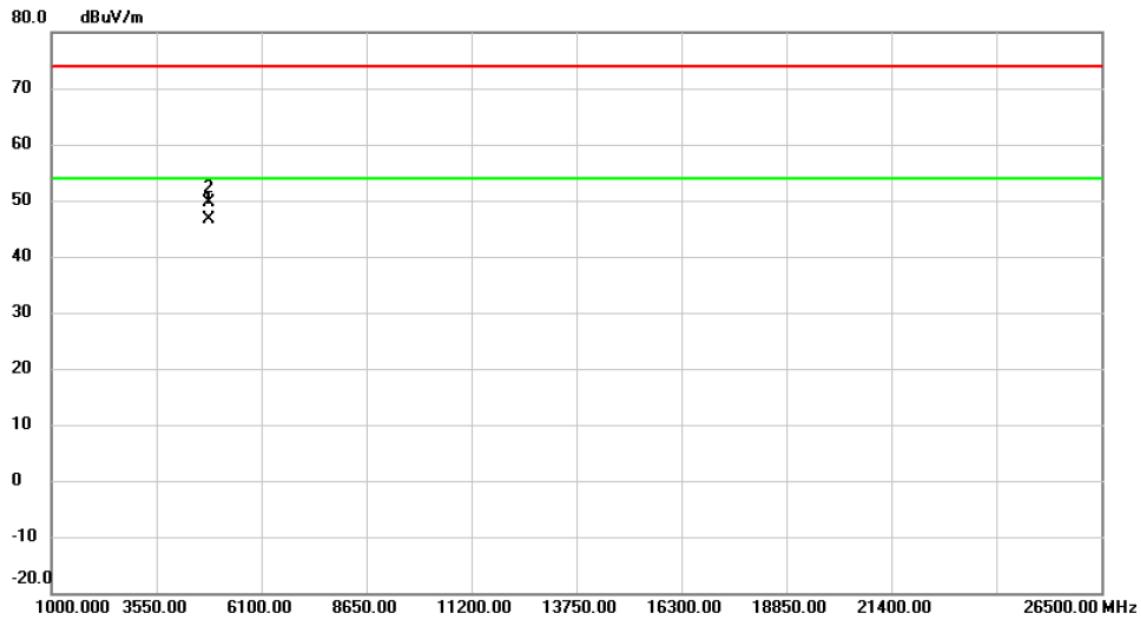
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4823.920	42.96	4.23	47.19	54.00	-6.81	AVG
2		4824.100	45.83	4.23	50.06	74.00	-23.94	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

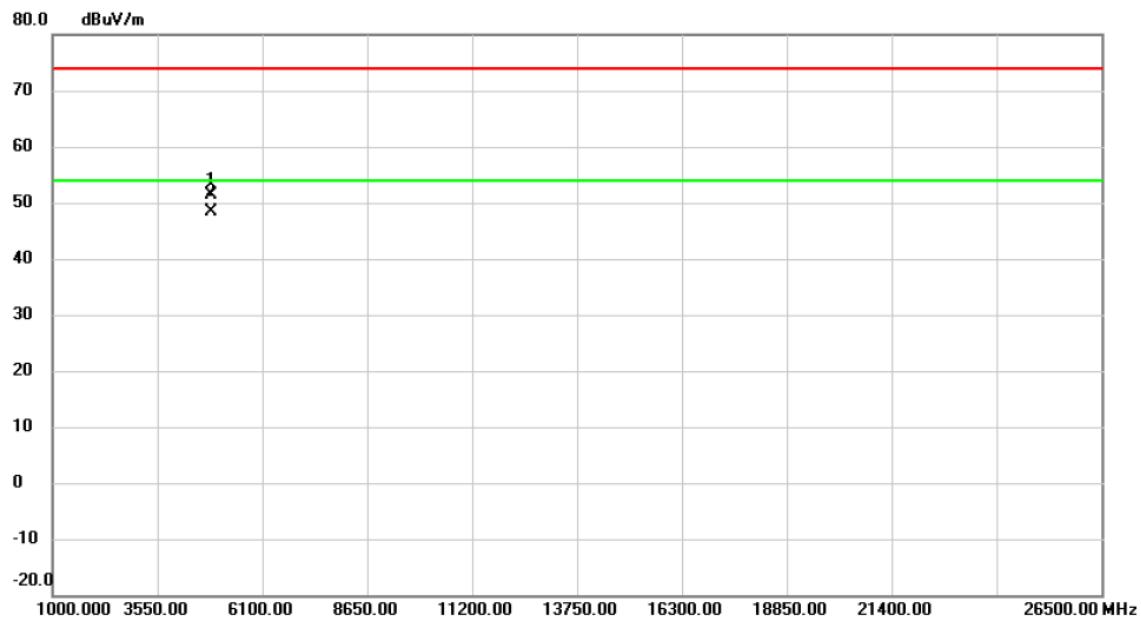
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4823.900	42.30	4.23	46.53	54.00	-7.47	AVG	
2		4823.960	45.51	4.23	49.74	74.00	-24.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

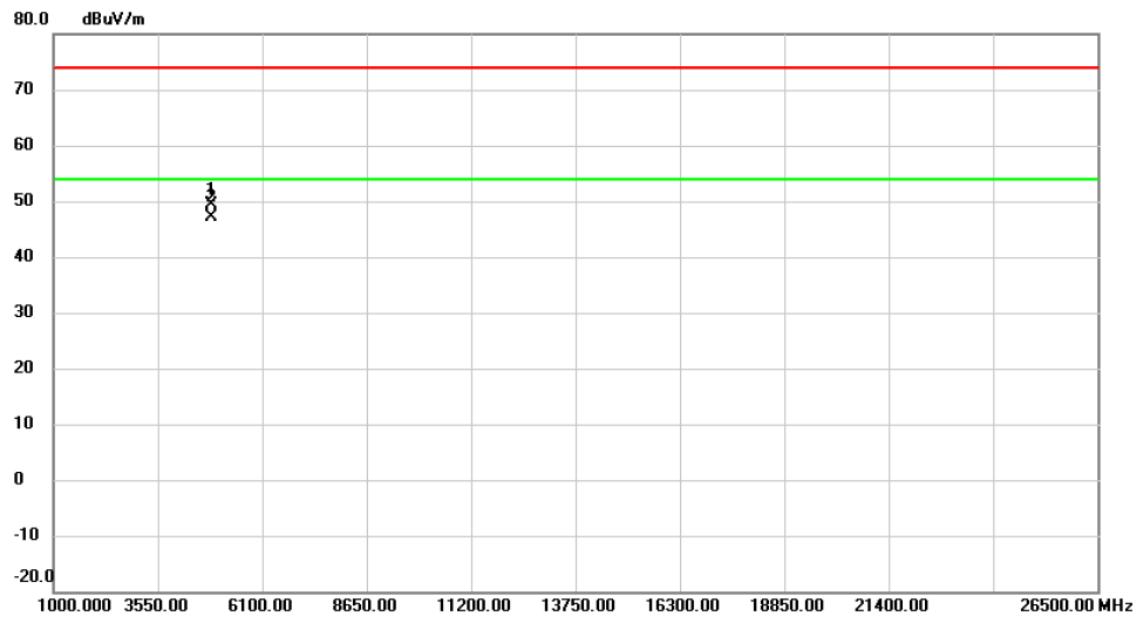
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4873.780	47.06	4.37	51.43	74.00	-22.57	peak
2	*	4873.960	43.93	4.37	48.30	54.00	-5.70	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

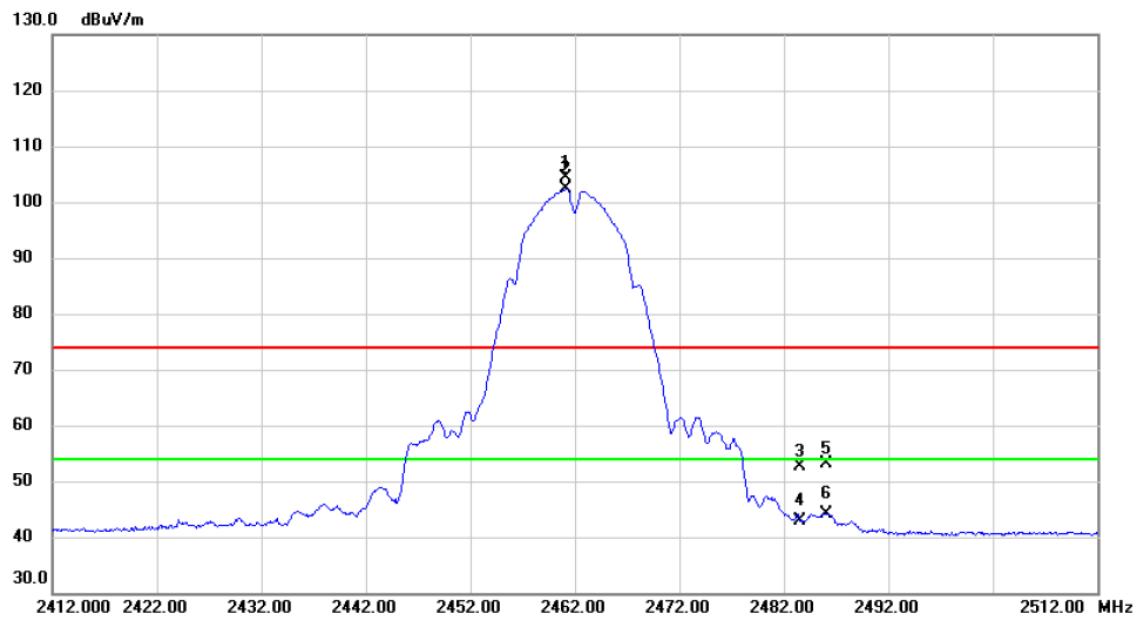
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4873.850	45.01	4.37	49.38	74.00	-24.62	peak
2	*	4873.910	42.71	4.37	47.08	54.00	-6.92	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

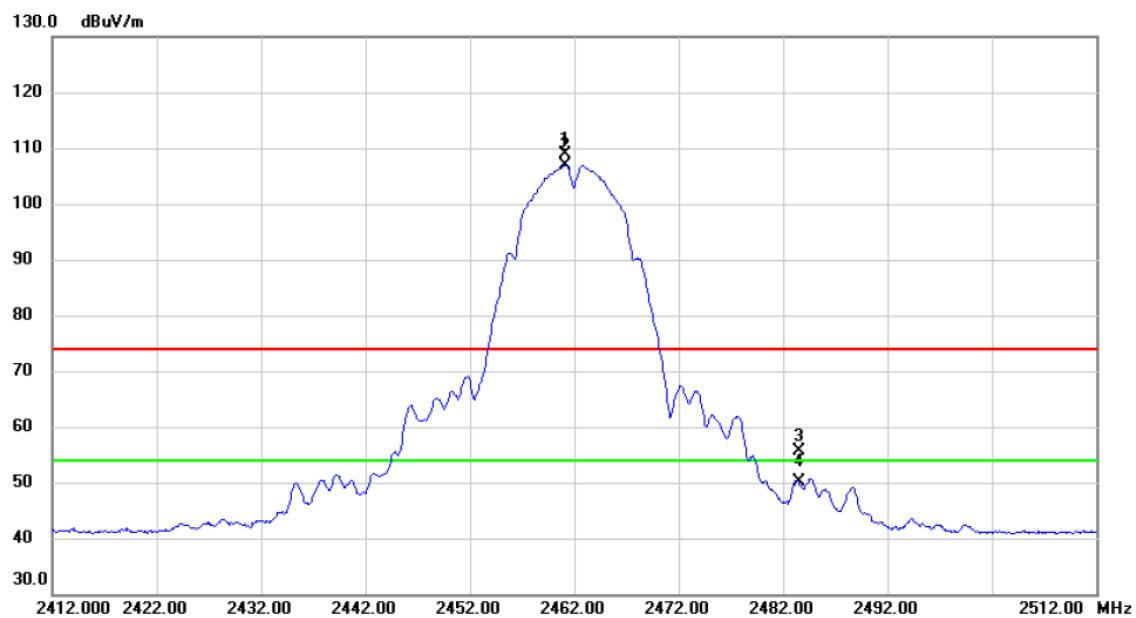
Radiated Emission Measurement

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		dBuV	dB	dBuV/m	dBuV/m	dB		
1 X	2461.200	97.20	7.18	104.38	74.00	30.38	peak	No Limit
2 *	2461.200	95.16	7.18	102.34	54.00	48.34	AVG	No Limit
3	2483.500	45.39	7.20	52.59	74.00	-21.41	peak	
4	2483.500	35.66	7.20	42.86	54.00	-11.14	AVG	
5	2486.100	45.86	7.20	53.06	74.00	-20.94	peak	
6	2486.100	37.00	7.20	44.20	54.00	-9.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

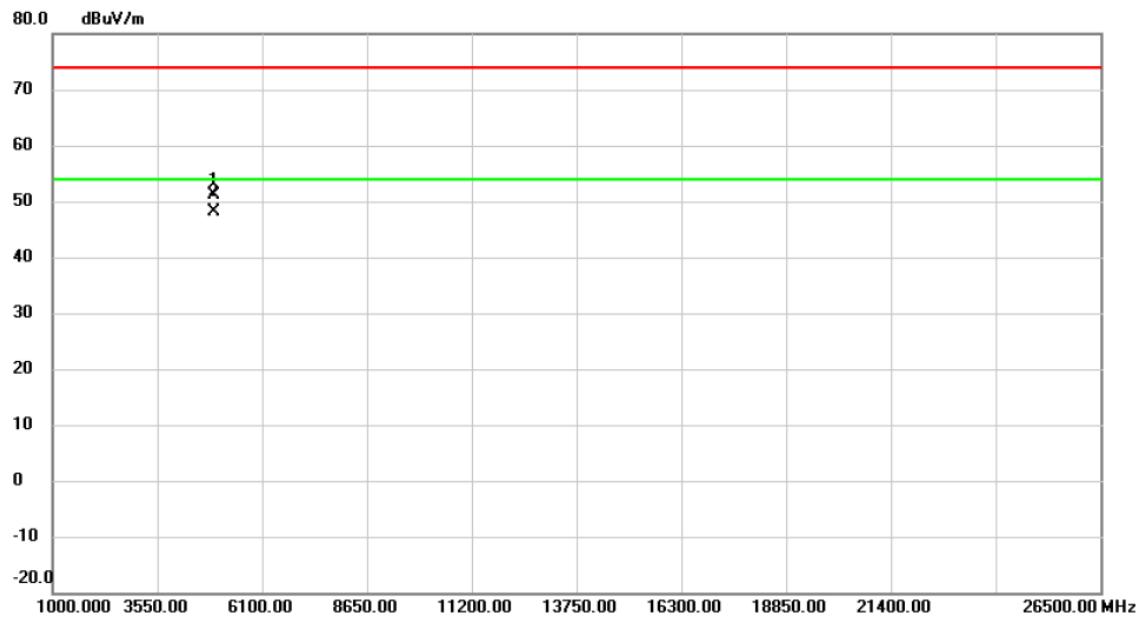
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2461.100	101.7	7.18	108.94	74.00	34.94	peak	No Limit
2	*	2461.200	99.81	7.18	106.99	54.00	52.99	AVG	No Limit
3		2483.500	48.42	7.20	55.62	74.00	-18.38	peak	
4		2483.500	42.97	7.20	50.17	54.00	-3.83	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

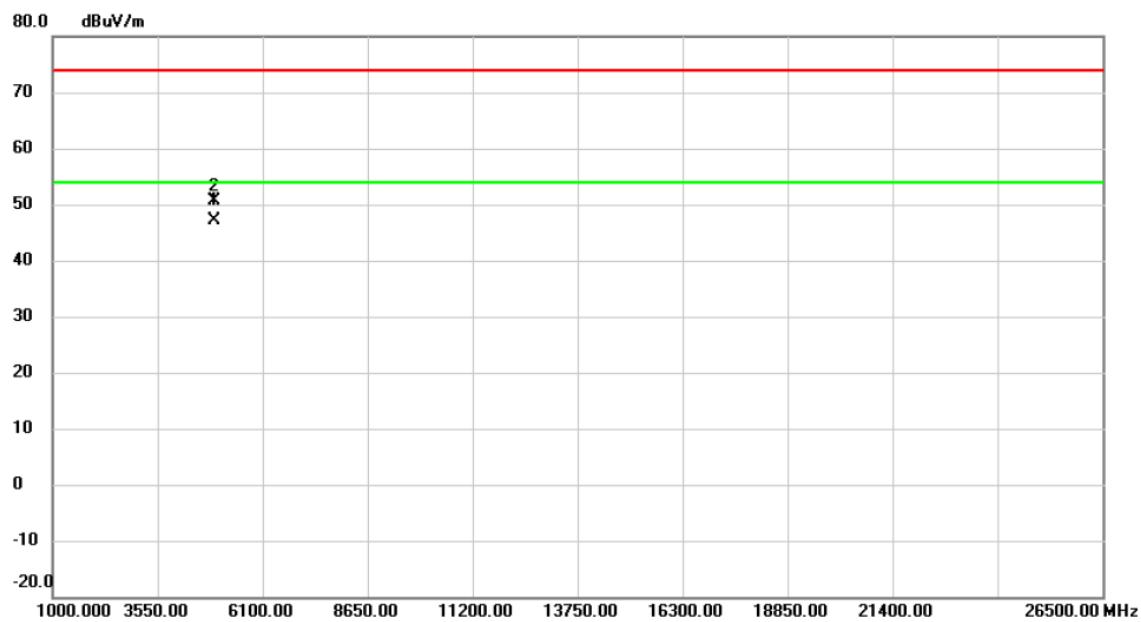
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4923.890	46.50	4.52	51.02	74.00	-22.98	peak
2	*	4923.950	43.67	4.52	48.19	54.00	-5.81	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

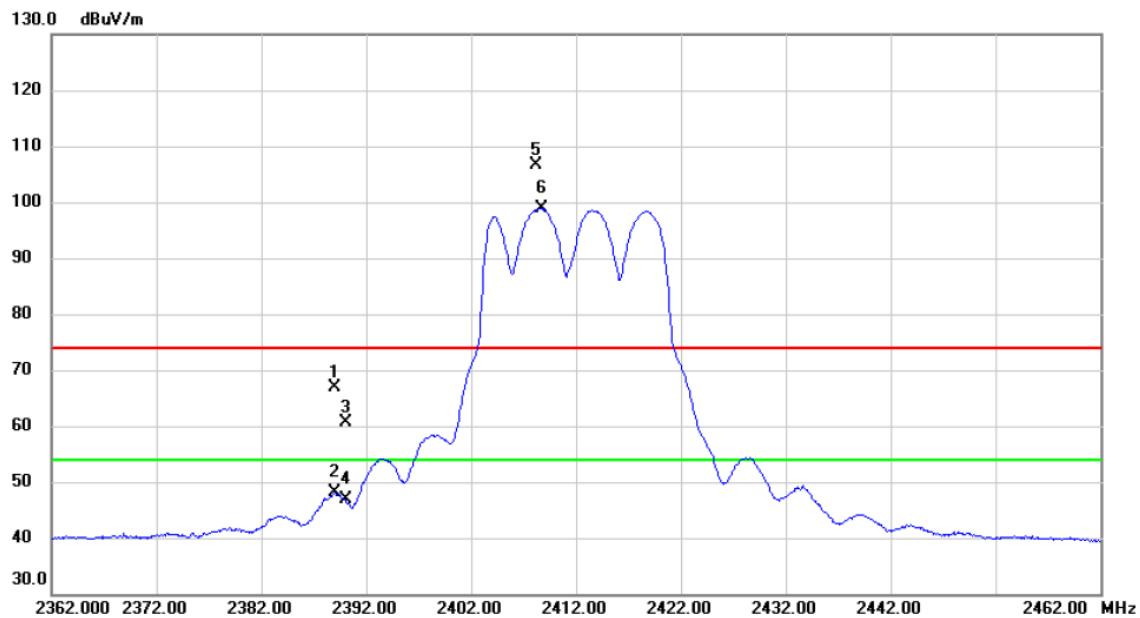
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4923.920	42.60	4.52	47.12	54.00	-6.88	AVG	
2		4923.990	46.07	4.52	50.59	74.00	-23.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

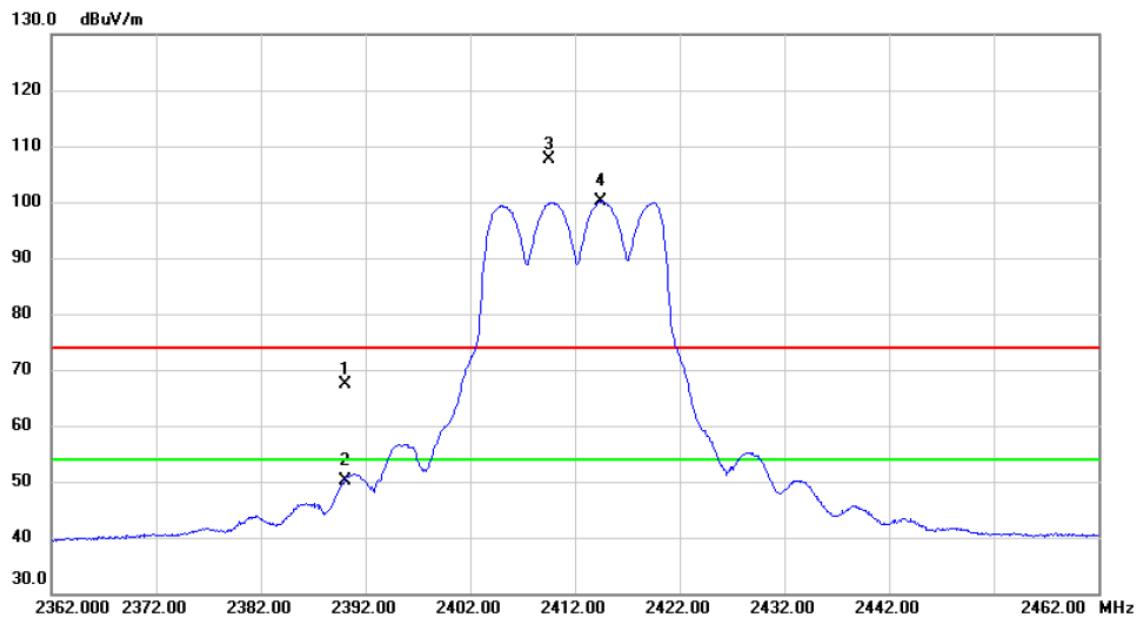
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		2389.000	59.60	7.17	66.77	74.00	-7.23	peak
2		2389.000	40.88	7.17	48.05	54.00	-5.95	AVG
3		2390.000	53.42	7.17	60.59	74.00	-13.41	peak
4		2390.000	39.80	7.17	46.97	54.00	-7.03	AVG
5	X	2408.200	99.36	7.16	106.52	74.00	32.52	peak No Limit
6	*	2408.700	91.66	7.16	98.82	54.00	44.82	AVG No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

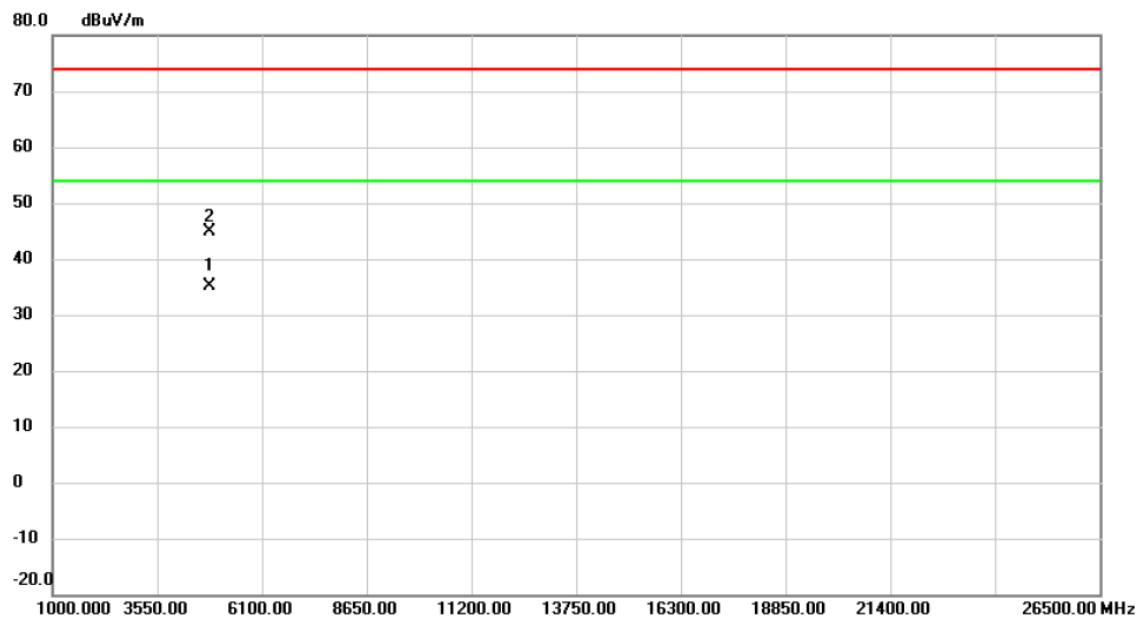
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		2390.000	60.26	7.17	67.43	74.00	-6.57	peak
2		2390.000	43.07	7.17	50.24	54.00	-3.76	AVG
3	X	2409.500	100.3	7.16	107.52	74.00	33.52	peak No Limit
4	*	2414.500	92.90	7.17	100.07	54.00	46.07	AVG No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

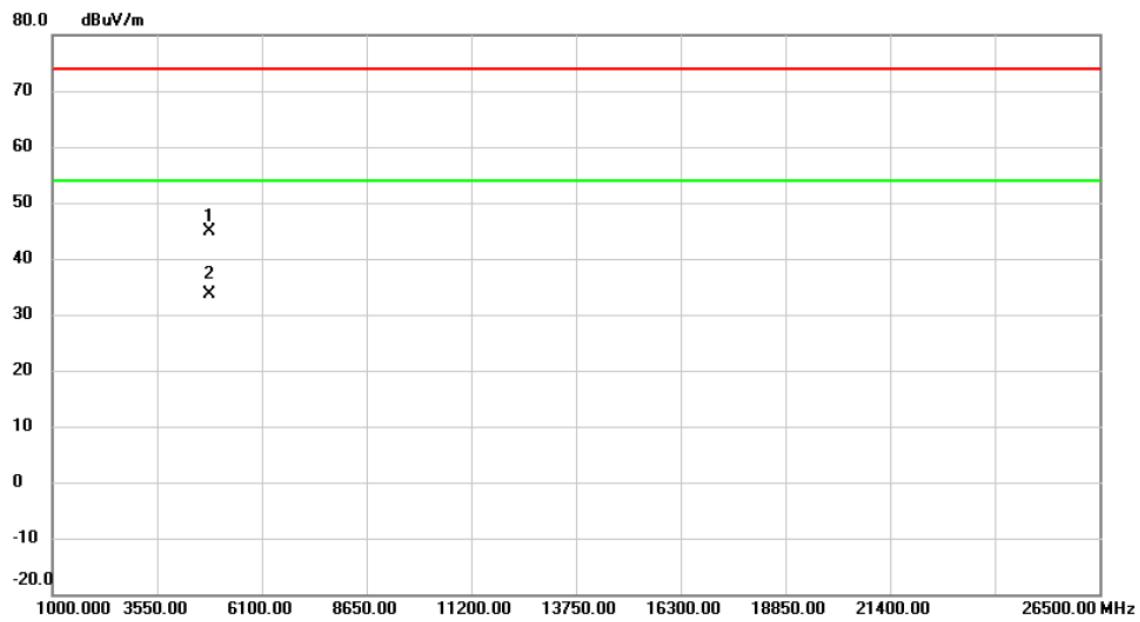
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4823.850	31.02	4.23	35.25	54.00	-18.75	AVG	
2		4824.190	40.72	4.23	44.95	74.00	-29.05	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

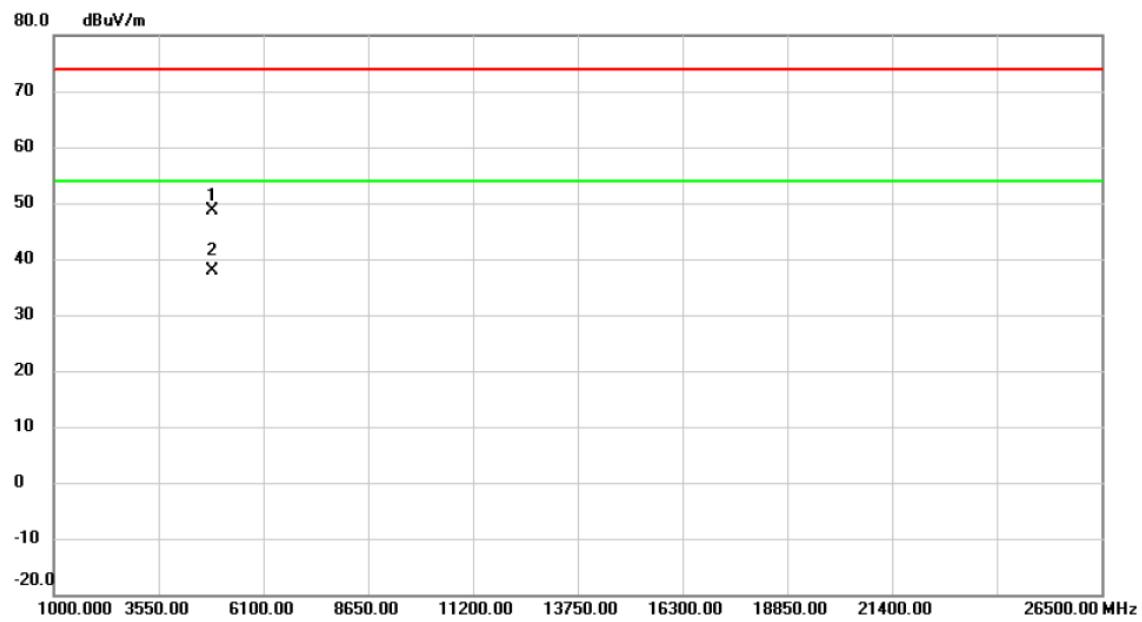
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4823.730	40.68	4.23	44.91	74.00	-29.09	peak
2	*	4823.920	29.51	4.23	33.74	54.00	-20.26	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

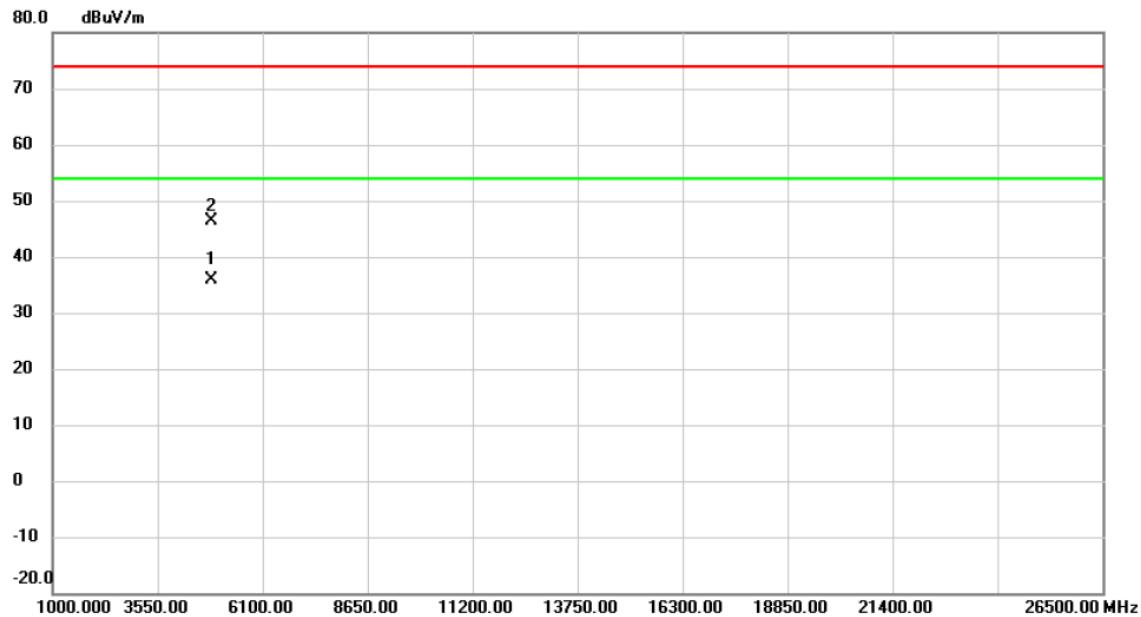
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4869.480	44.34	4.36	48.70	74.00	-25.30	peak
2	*	4874.490	33.46	4.38	37.84	54.00	-16.16	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

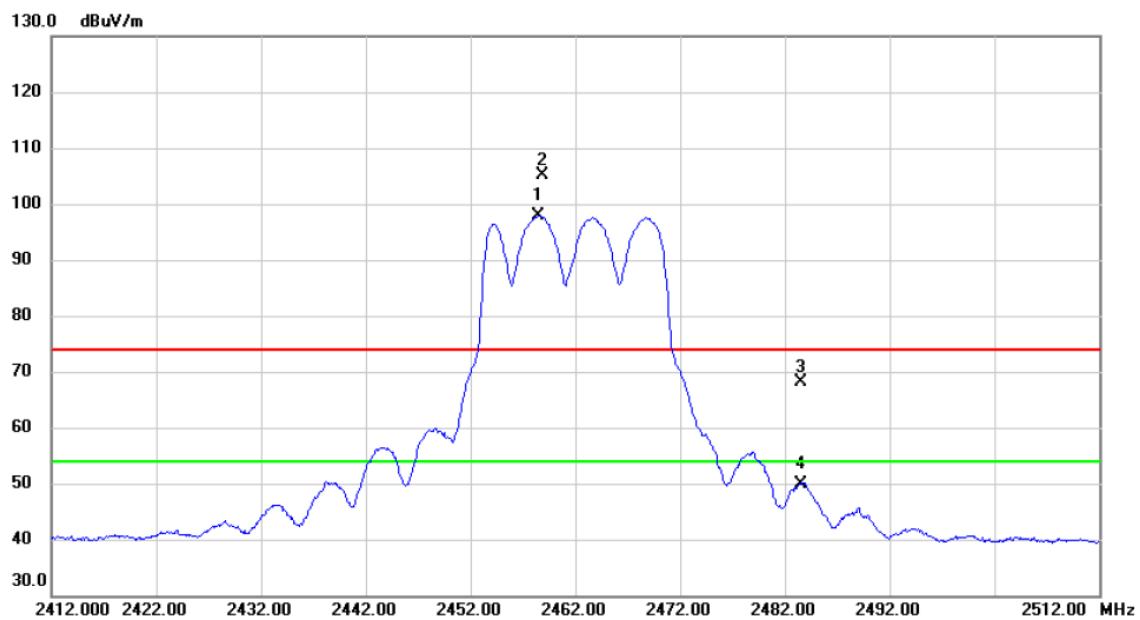
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4872.210	31.49	4.37	35.86	54.00	-18.14	AVG	
2		4873.960	42.01	4.37	46.38	74.00	-27.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

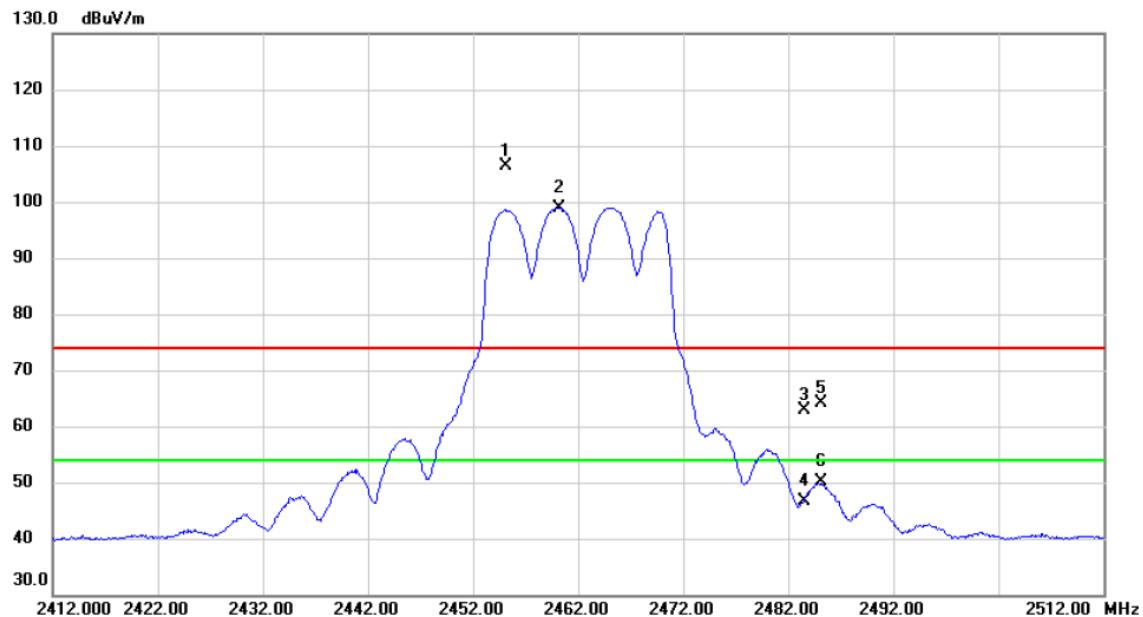
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2458.500	90.63	7.19	97.82	54.00	43.82	AVG	No Limit
2	X	2458.900	97.85	7.19	105.04	74.00	31.04	peak	No Limit
3		2483.500	60.97	7.20	68.17	74.00	-5.83	peak	
4		2483.500	42.78	7.20	49.98	54.00	-4.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

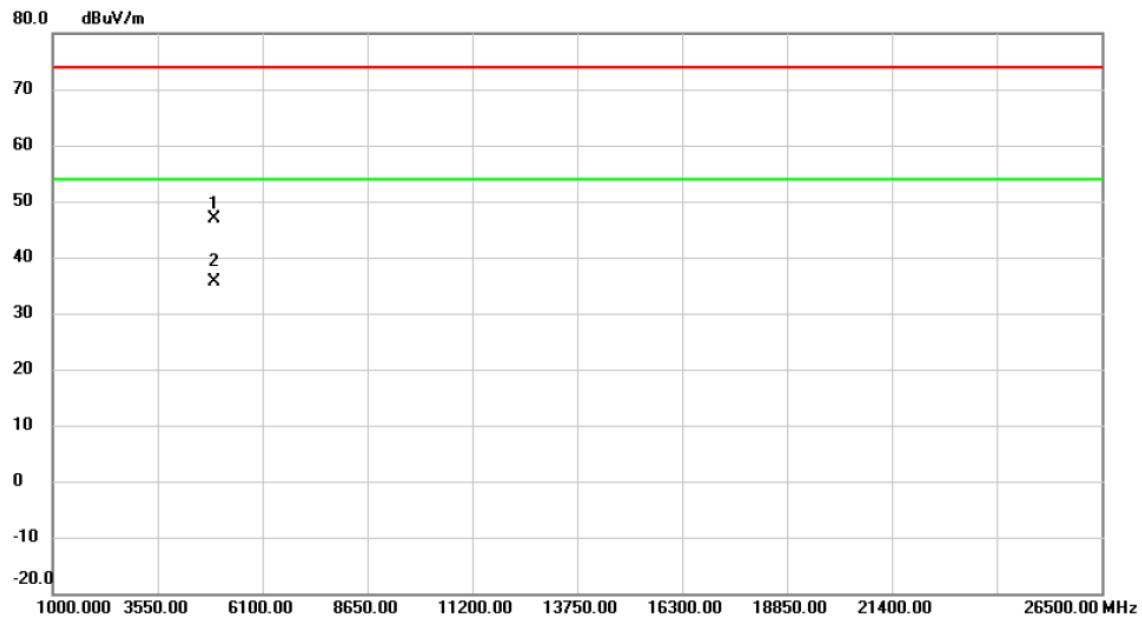
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2455.100	99.30	7.18	106.48	74.00	32.48	peak	No Limit
2	*	2460.200	91.81	7.19	99.00	54.00	45.00	AVG	No Limit
3		2483.500	55.72	7.20	62.92	74.00	-11.08	peak	
4		2483.500	39.52	7.20	46.72	54.00	-7.28	AVG	
5		2485.100	56.83	7.20	64.03	74.00	-9.97	peak	
6		2485.100	42.83	7.20	50.03	54.00	-3.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

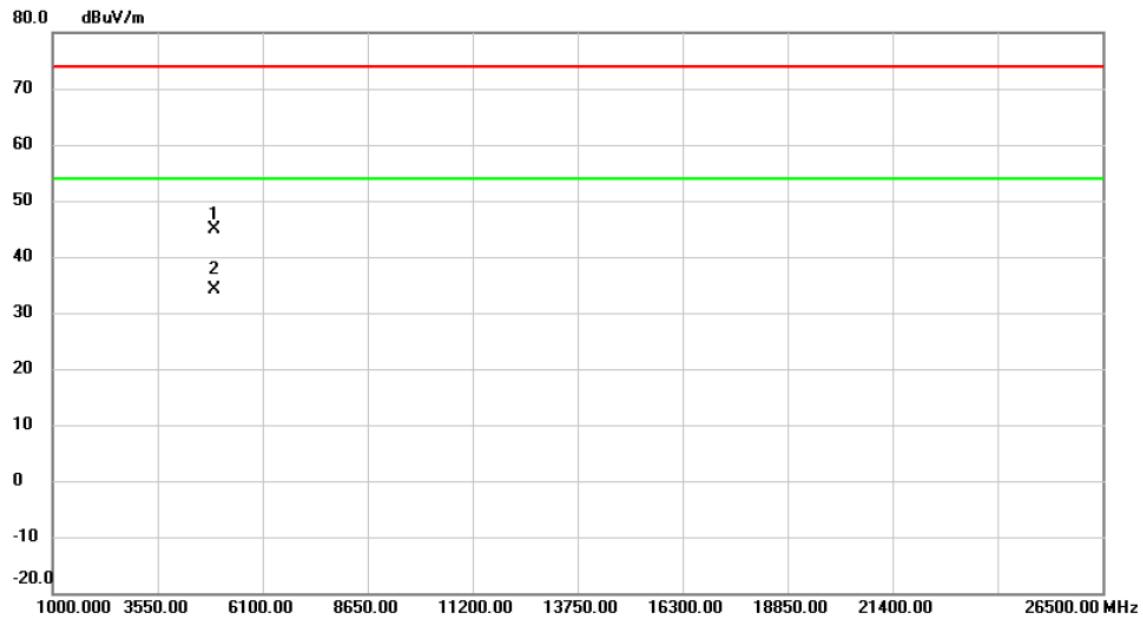
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4921.990	42.36	4.51	46.87	74.00	-27.13	peak
2	*	4923.830	31.09	4.52	35.61	54.00	-18.39	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

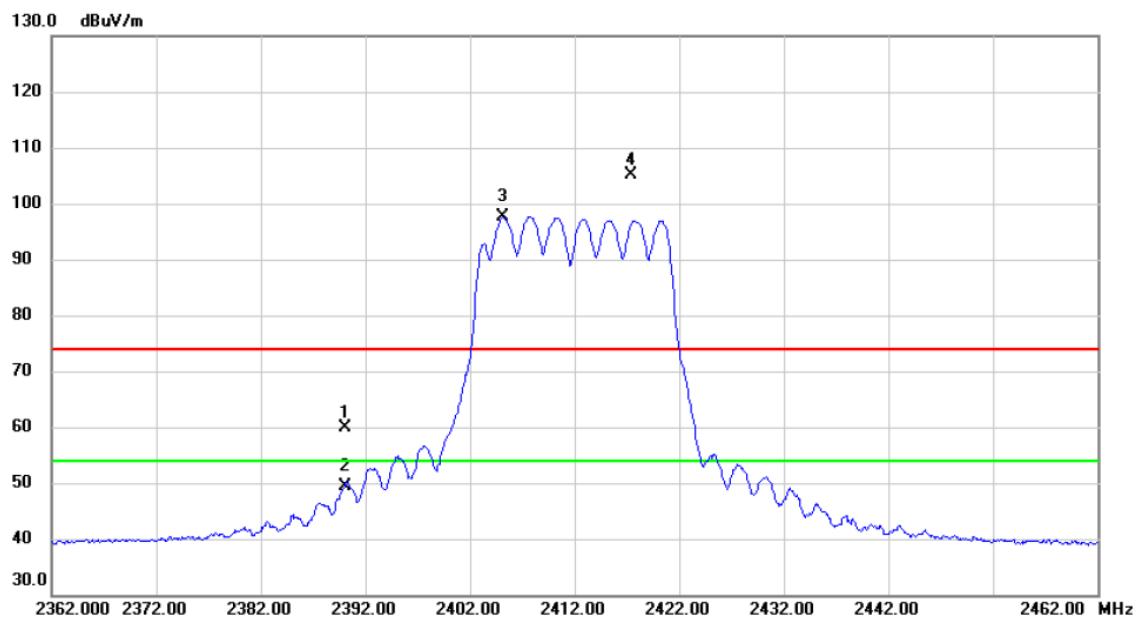
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4921.840	40.26	4.51	44.77	74.00	-29.23	peak
2	*	4923.950	29.67	4.52	34.19	54.00	-19.81	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

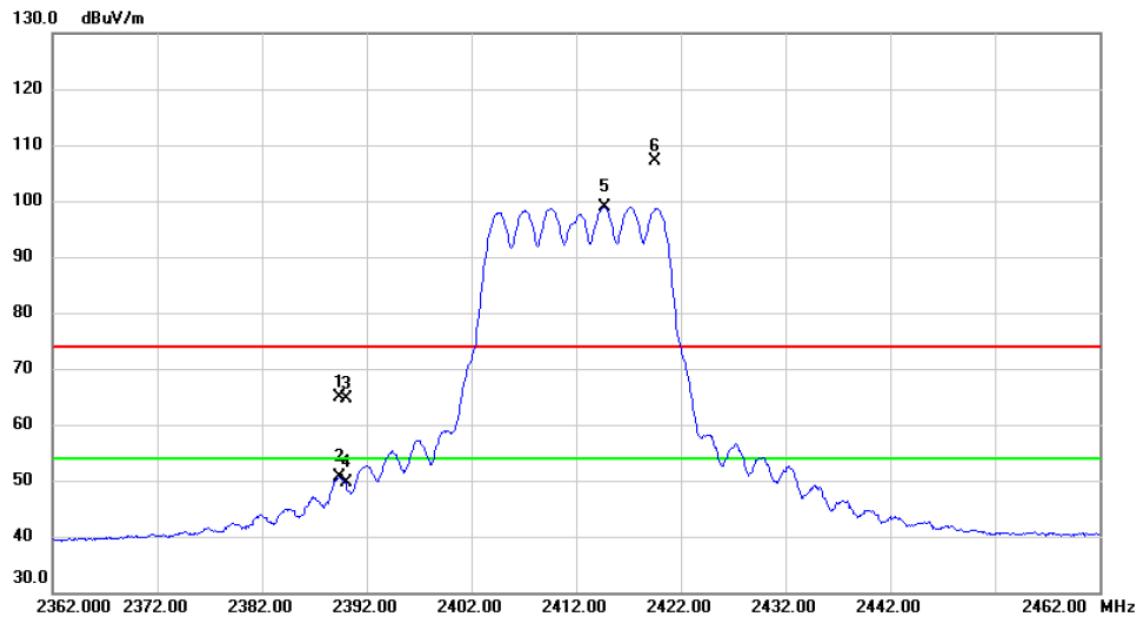
Radiated Emission Measurement

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure-ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.000	52.79	7.17	59.96	74.00	-14.04	peak	
2	2390.000	42.27	7.17	49.44	54.00	-4.56	AVG	
3	* 2405.100	90.45	7.17	97.62	54.00	43.62	AVG	No Limit
4	X 2417.400	98.07	7.18	105.25	74.00	31.25	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

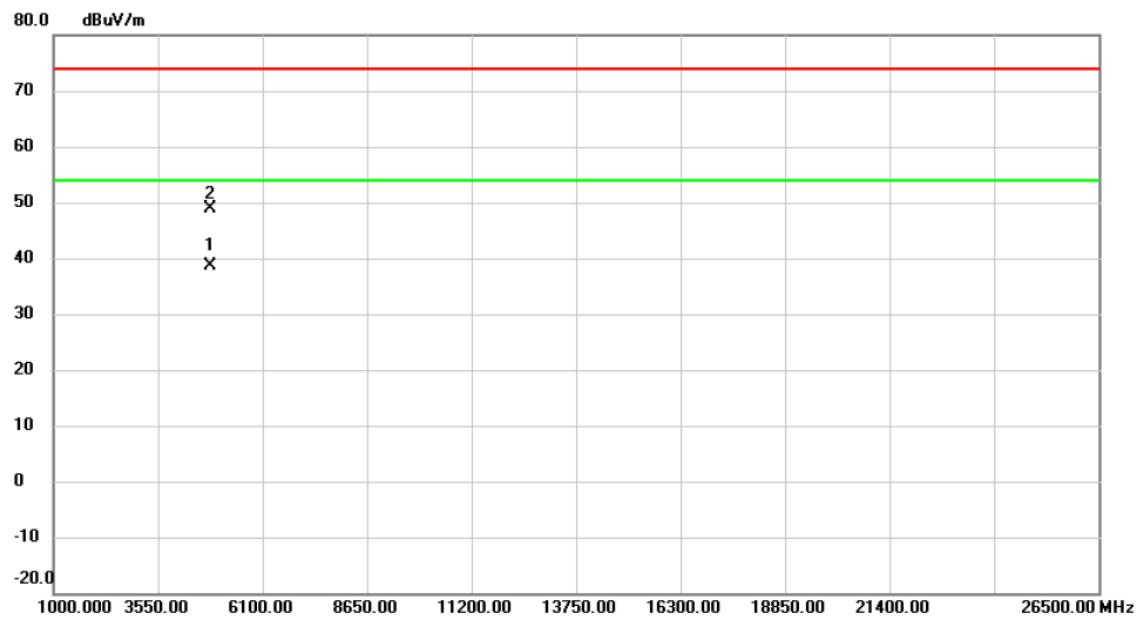
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2389.400	57.61	7.17	64.78	74.00	-9.22	peak	
2		2389.400	43.42	7.17	50.59	54.00	-3.41	AVG	
3		2390.000	57.50	7.17	64.67	74.00	-9.33	peak	
4		2390.000	42.46	7.17	49.63	54.00	-4.37	AVG	
5	*	2414.700	91.67	7.17	98.84	54.00	44.84	AVG	No Limit
6	X	2419.600	99.96	7.18	107.14	74.00	33.14	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

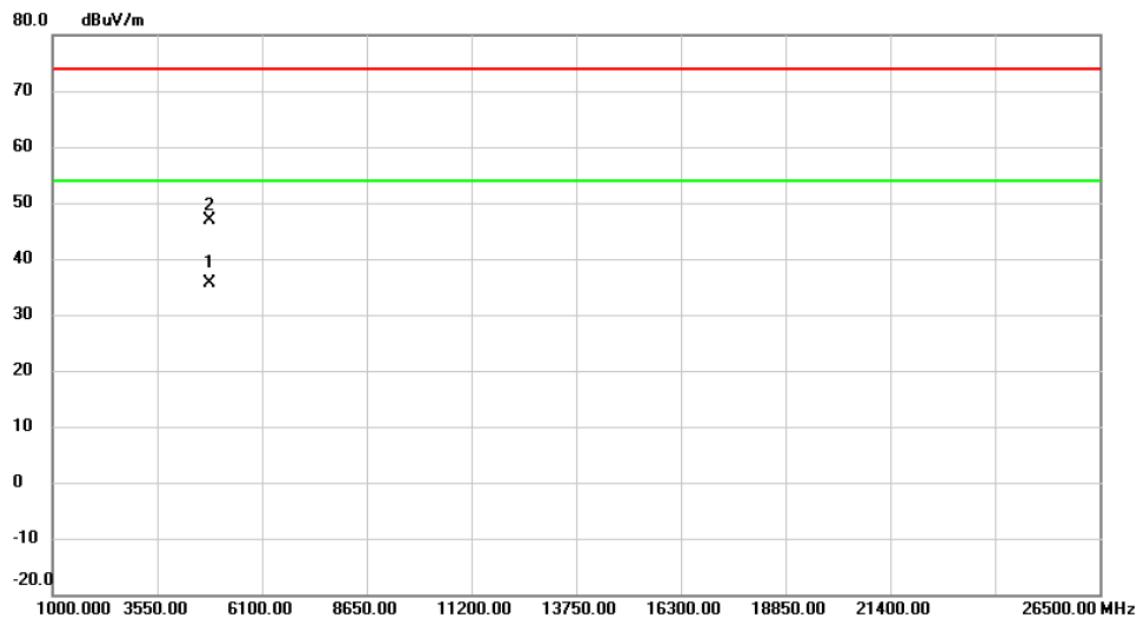
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4823.230	34.52	4.23	38.75	54.00	-15.25	AVG
2		4823.860	44.64	4.23	48.87	74.00	-25.13	peak

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

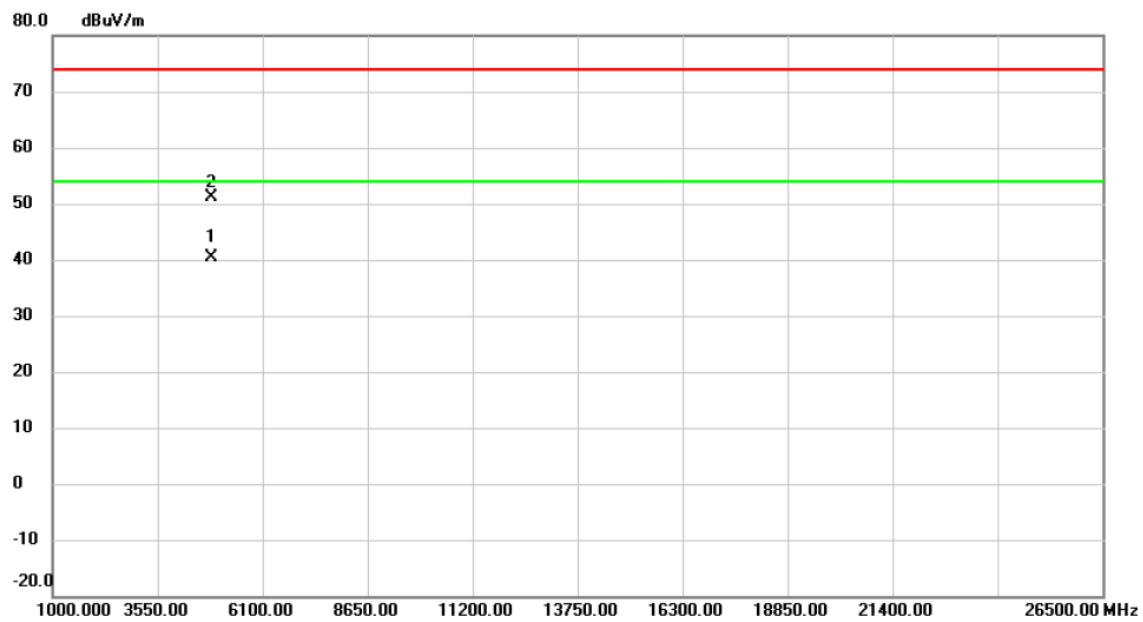
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4823.230	31.52	4.23	35.75	54.00	-18.25	AVG
2		4823.860	42.64	4.23	46.87	74.00	-27.13	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

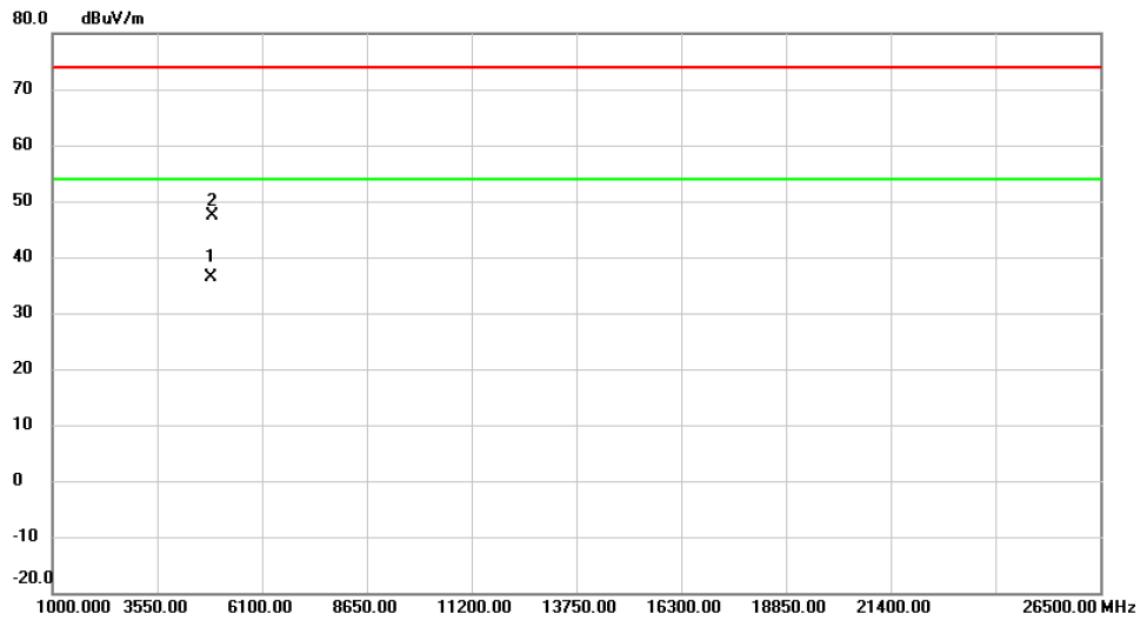
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4869.000	35.95	4.36	40.31	54.00	-13.69	AVG
2		4873.910	46.75	4.37	51.12	74.00	-22.88	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

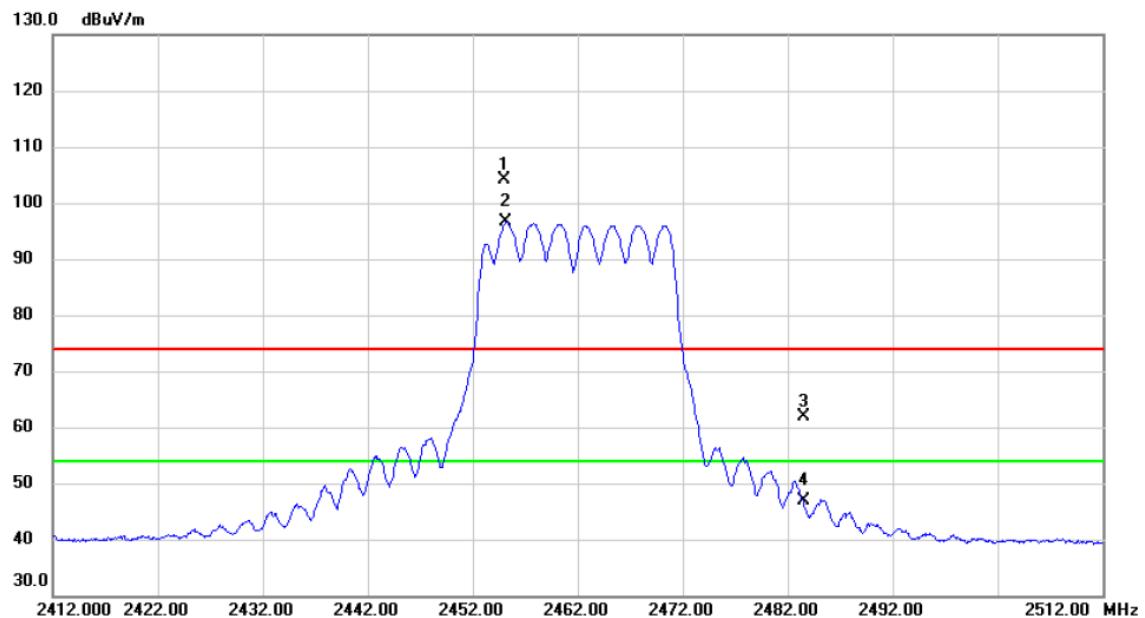
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4875.340	32.04	4.39	36.43	54.00	-17.57	AVG	
2		4876.880	42.89	4.39	47.28	74.00	-26.72	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

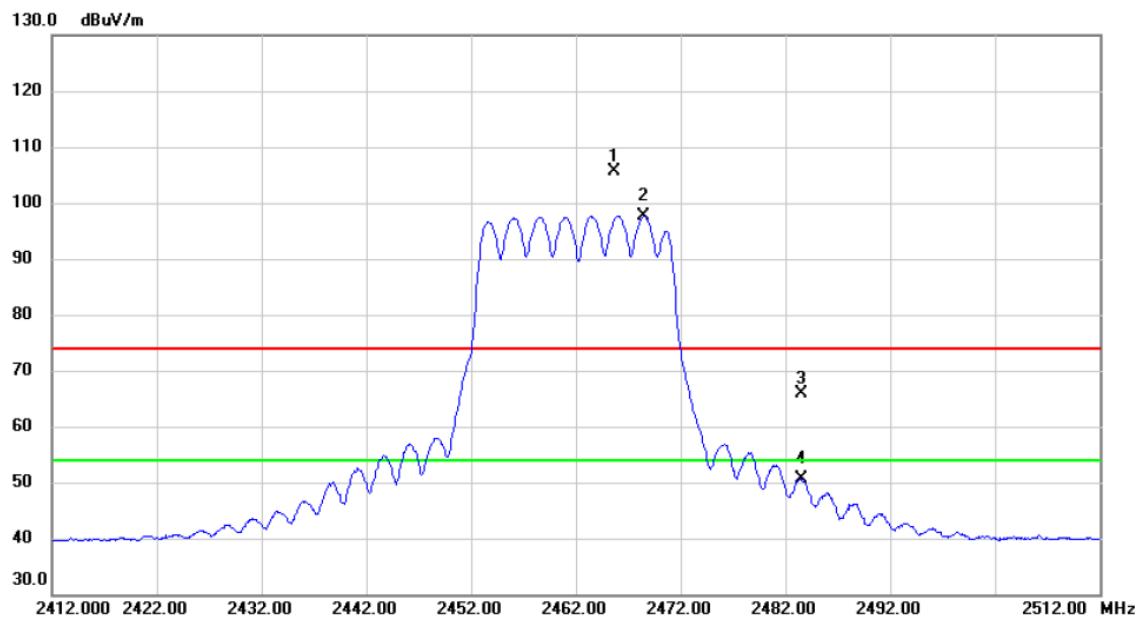
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	X	2455.000	96.94	7.18	104.12	74.00	30.12	peak No Limit
2	*	2455.200	89.37	7.18	96.55	54.00	42.55	AVG No Limit
3		2483.500	54.65	7.20	61.85	74.00	-12.15	peak
4		2483.500	39.64	7.20	46.84	54.00	-7.16	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

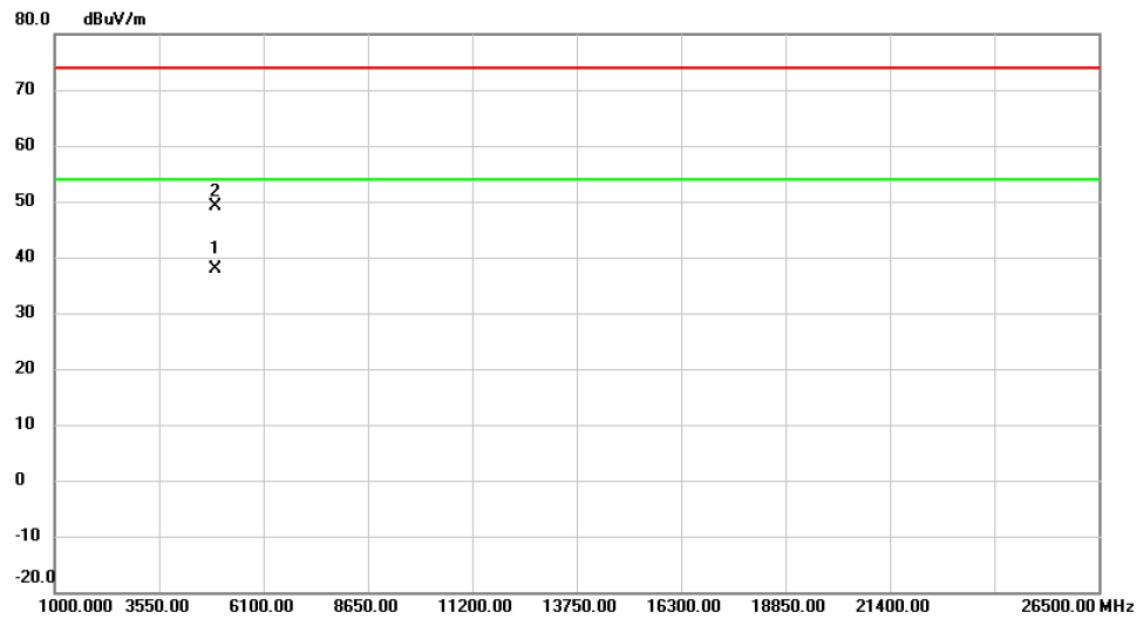
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	X	2465.700	98.36	7.18	105.54	74.00	31.54	peak No Limit
2	*	2468.500	90.46	7.18	97.64	54.00	43.64	AVG No Limit
3		2483.500	58.71	7.20	65.91	74.00	-8.09	peak
4		2483.500	43.48	7.20	50.68	54.00	-3.32	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

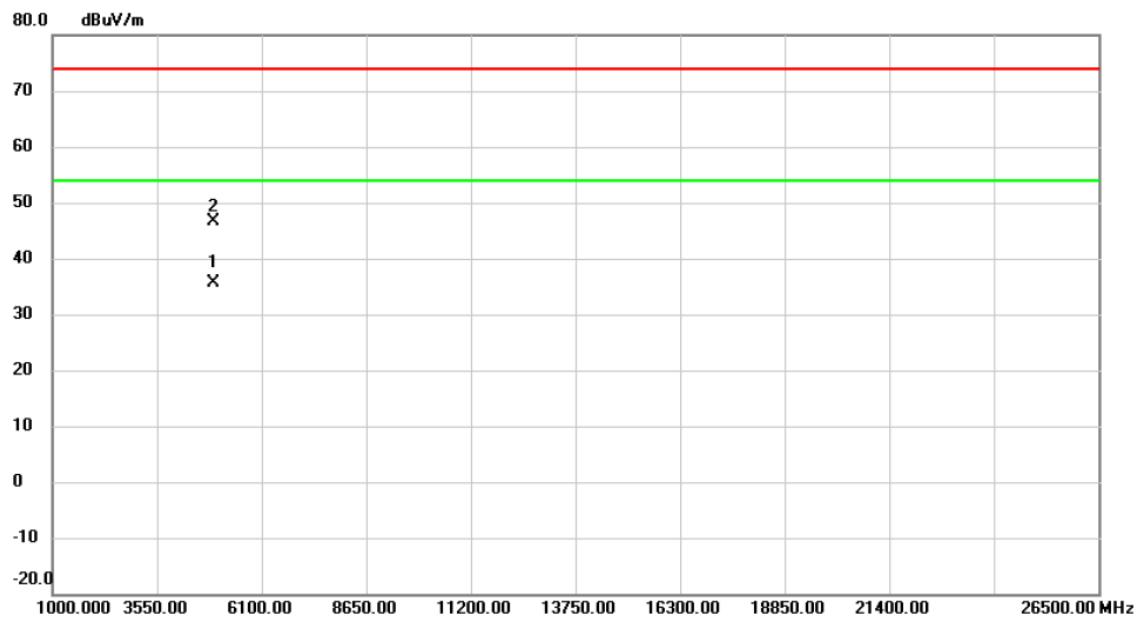
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4920.780	33.29	4.51	37.80	54.00	-16.20	AVG
2		4923.980	44.50	4.52	49.02	74.00	-24.98	peak

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

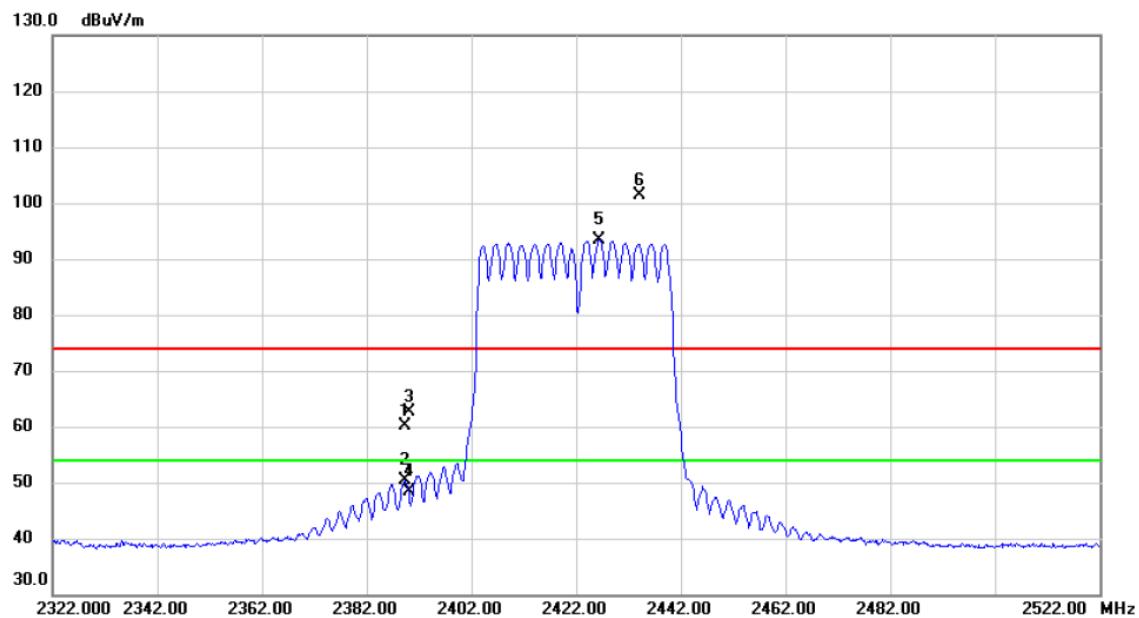
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4922.860	31.21	4.52	35.73	54.00	-18.27	AVG	
2		4927.480	42.05	4.53	46.58	74.00	-27.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

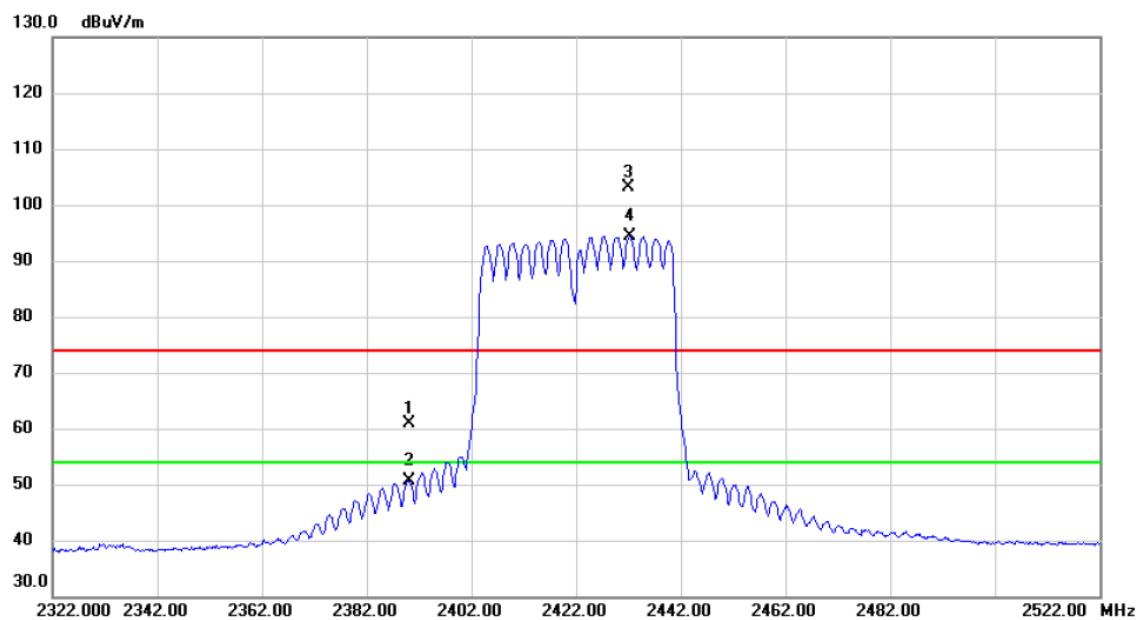
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2389.400	53.07	7.17	60.24	74.00	-13.76	peak	
2		2389.400	43.10	7.17	50.27	54.00	-3.73	AVG	
3		2390.000	55.43	7.17	62.60	74.00	-11.40	peak	
4		2390.000	41.20	7.17	48.37	54.00	-5.63	AVG	
5	*	2426.400	86.12	7.18	93.30	54.00	39.30	AVG	No Limit
6	X	2434.000	94.16	7.19	101.35	74.00	27.35	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

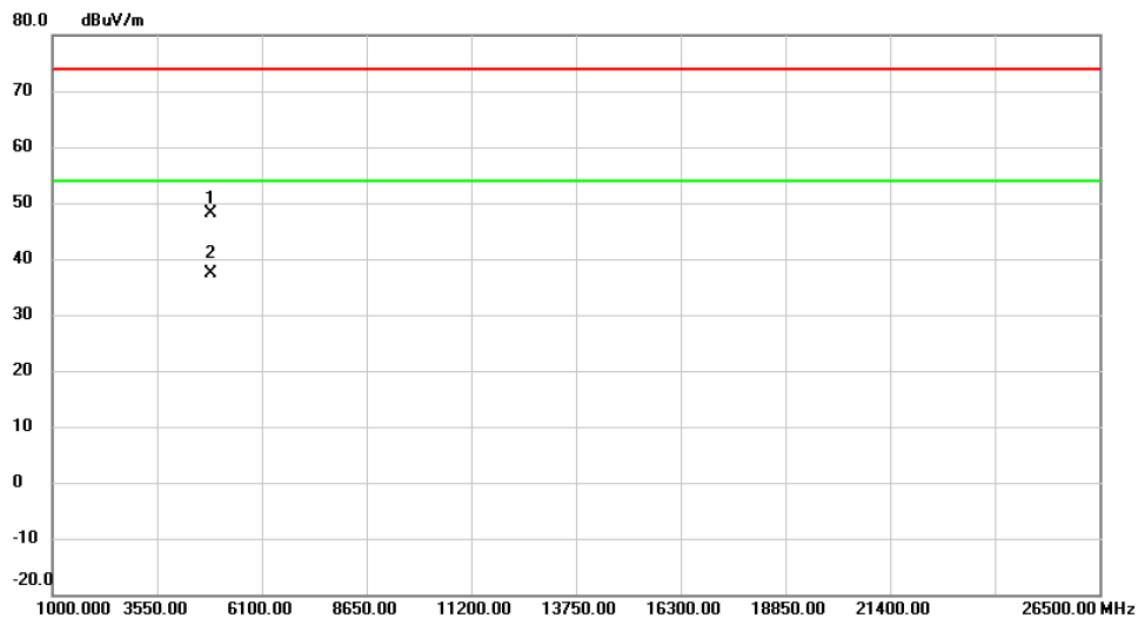
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	53.65	7.17	60.82	74.00	-13.18	peak	
2		2390.000	43.46	7.17	50.63	54.00	-3.37	AVG	
3	X	2432.000	95.87	7.18	103.05	74.00	29.05	peak	No Limit
4	*	2432.200	87.17	7.18	94.35	54.00	40.35	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

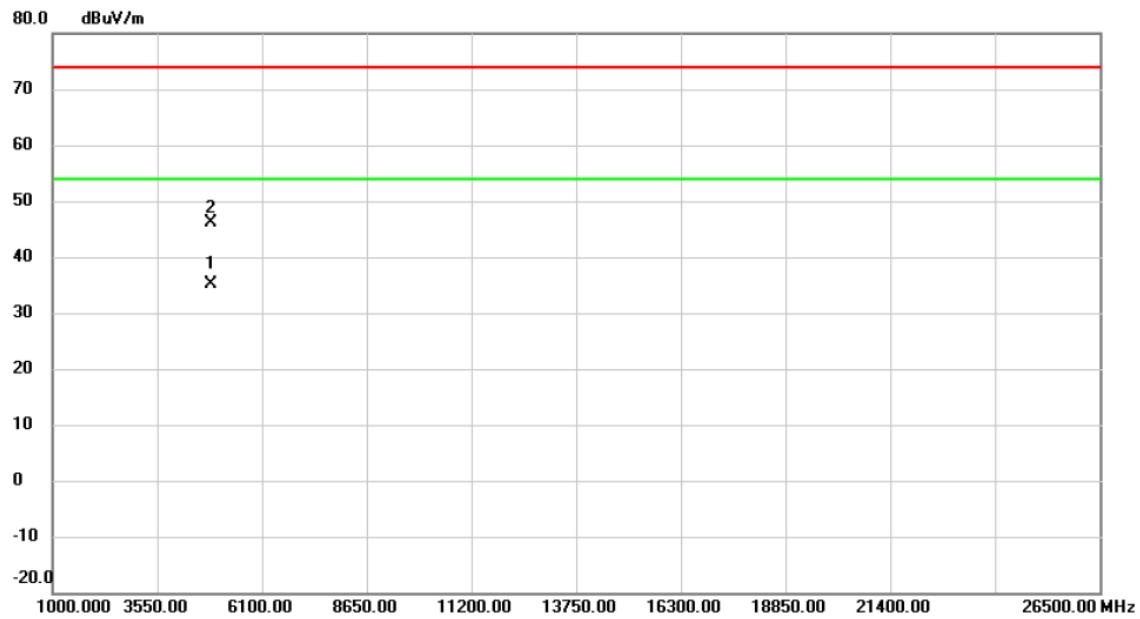
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4844.825	43.90	4.29	48.19	74.00	-25.81	peak
2	*	4845.480	33.07	4.29	37.36	54.00	-16.64	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

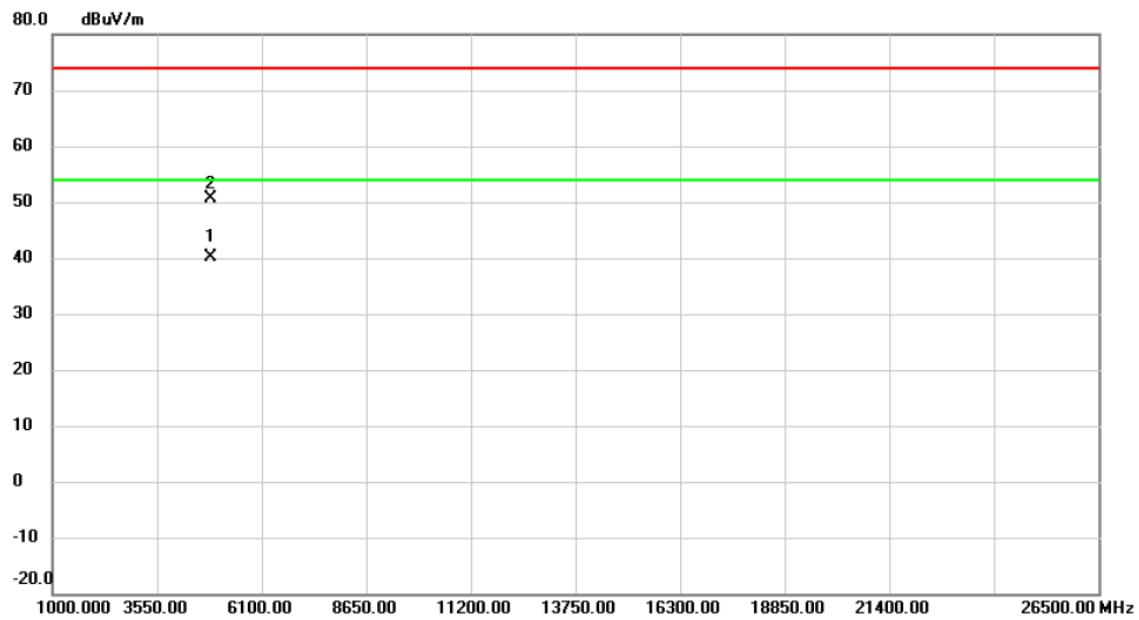
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4842.370	30.85	4.29	35.14	54.00	-18.86	AVG
2		4844.800	41.78	4.29	46.07	74.00	-27.93	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

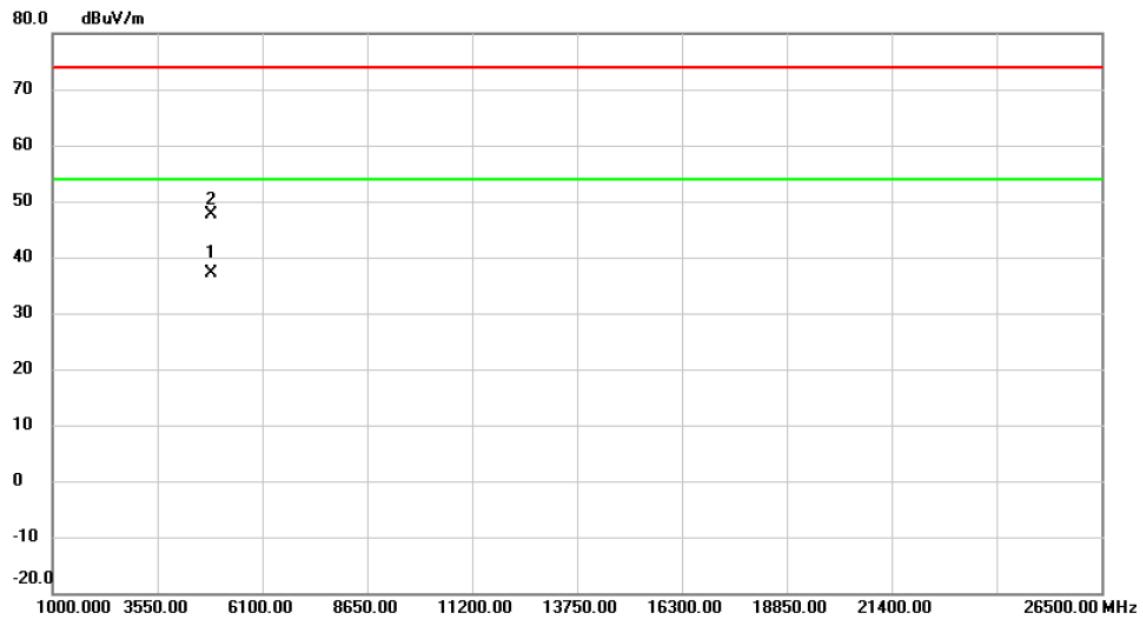
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4873.470	35.68	4.37	40.05	54.00	-13.95	AVG
2		4874.305	46.34	4.38	50.72	74.00	-23.28	peak

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

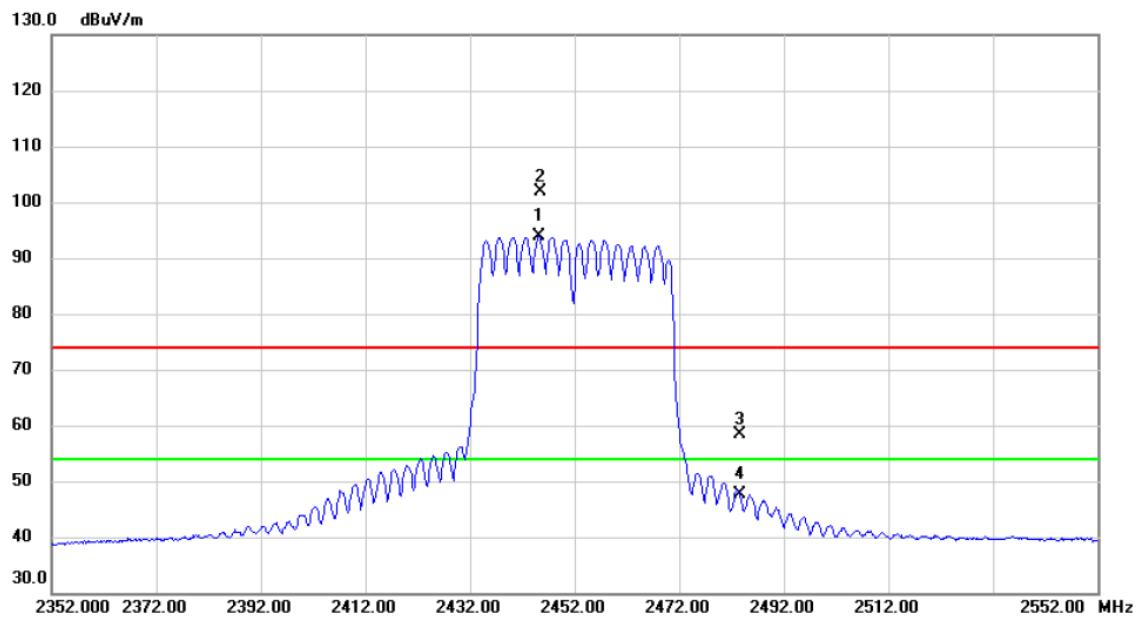
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4874.140	32.80	4.38	37.18	54.00	-16.82	AVG
2		4874.470	43.24	4.38	47.62	74.00	-26.38	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

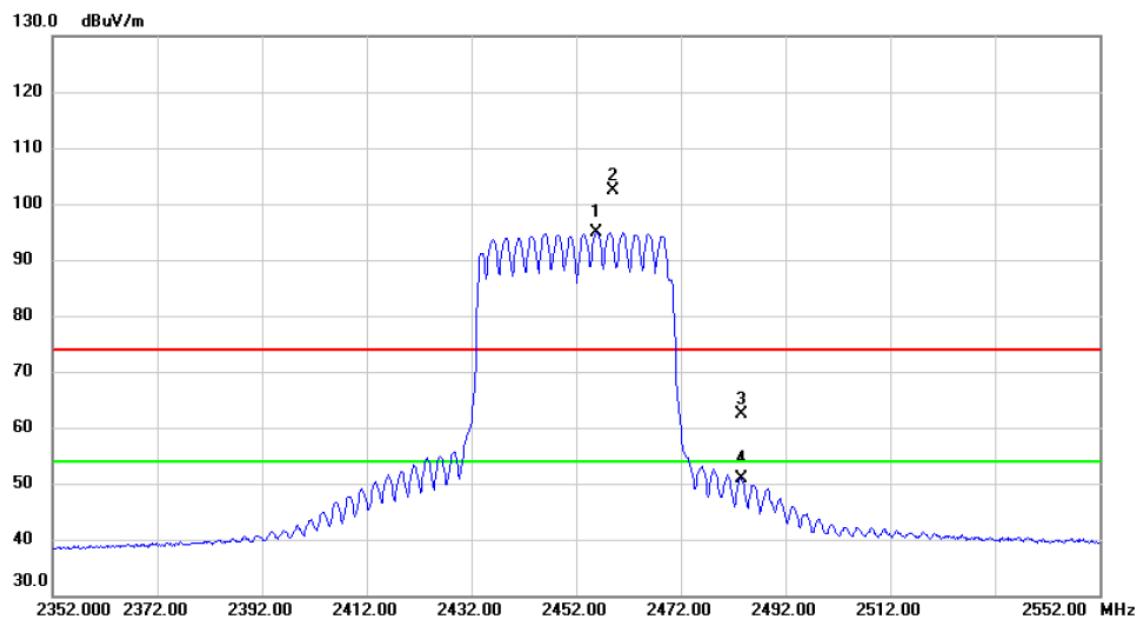
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2445.200	86.70	7.18	93.88	54.00	39.88	AVG	No Limit
2	X	2445.600	94.64	7.18	101.82	74.00	27.82	peak	No Limit
3		2483.500	51.10	7.20	58.30	74.00	-15.70	peak	
4		2483.500	40.43	7.20	47.63	54.00	-6.37	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

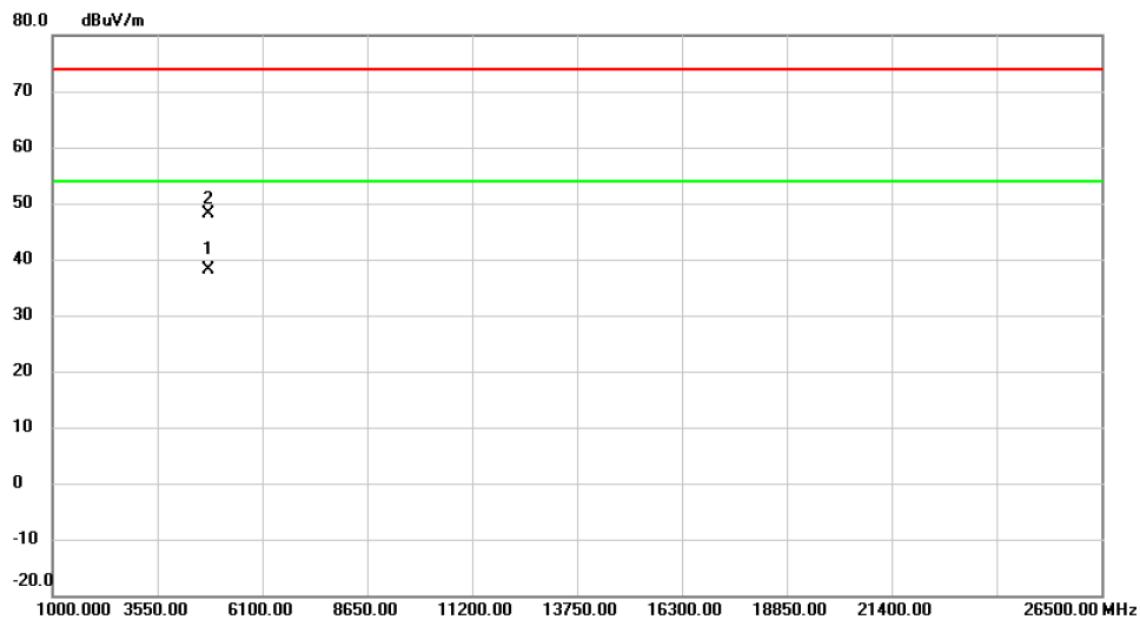
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2455.800	87.73	7.19	94.92	54.00	40.92	AVG	No Limit
2	X	2459.000	95.14	7.19	102.33	74.00	28.33	peak	No Limit
3		2483.500	55.07	7.20	62.27	74.00	-11.73	peak	
4		2483.500	43.62	7.20	50.82	54.00	-3.18	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

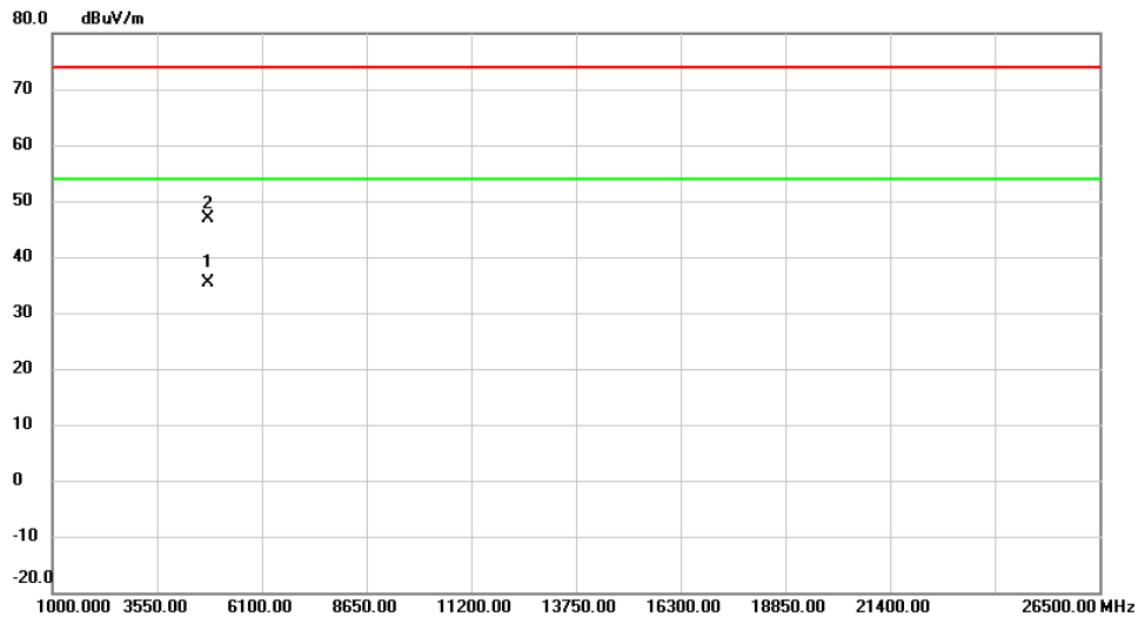
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4803.720	33.93	4.17	38.10	54.00	-15.90	AVG
2		4805.840	44.01	4.17	48.18	74.00	-25.82	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

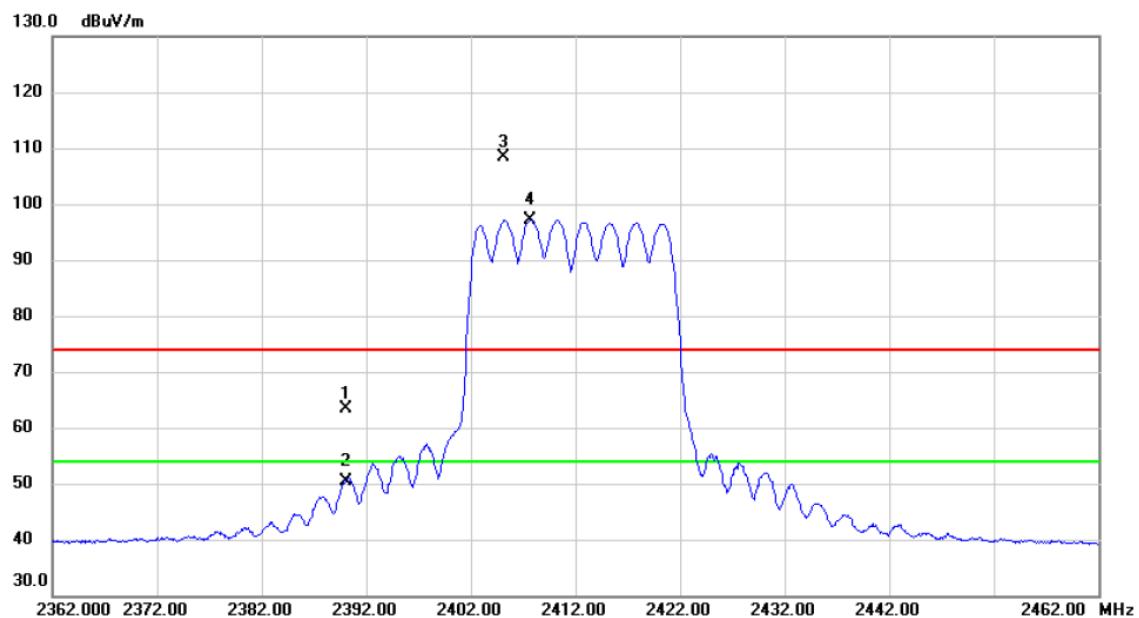
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4802.870	31.23	4.17	35.40	54.00	-18.60	AVG	
2		4804.730	42.69	4.17	46.86	74.00	-27.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2412 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

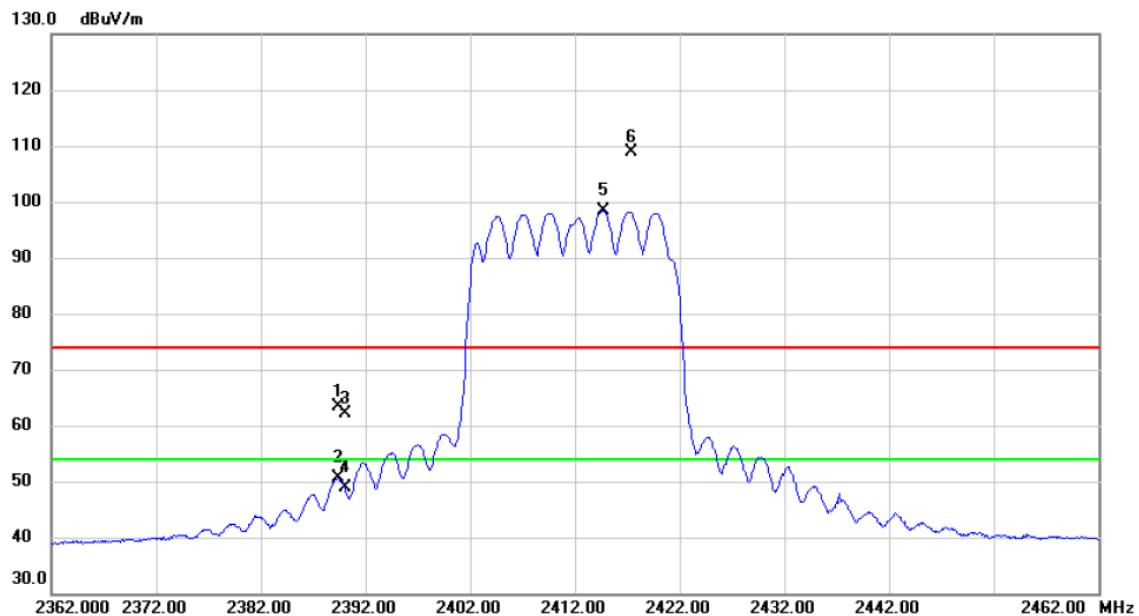
Radiated Emission Measurement

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	2390.000	56.20	7.17	63.37	74.00	-10.63	peak	
2	2390.000	43.19	7.17	50.36	54.00	-3.64	AVG	
3	X 2405.200	101.1	7.17	108.31	74.00	34.31	peak	No Limit
4	* 2407.700	89.92	7.17	97.09	54.00	43.09	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2412 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

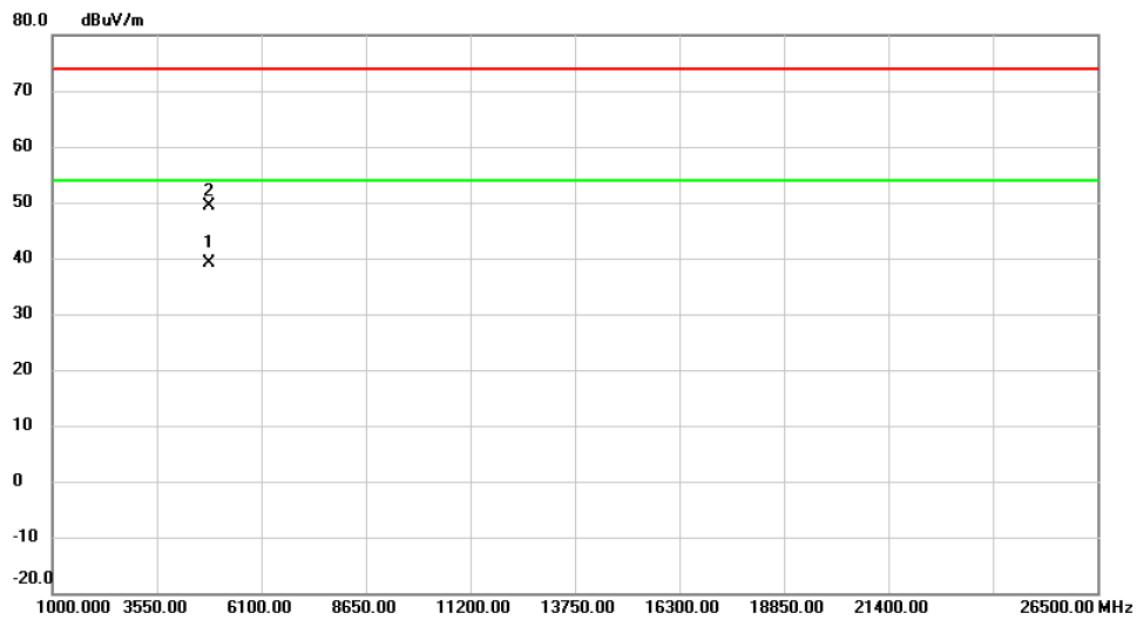
Radiated Emission Measurement

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.400	56.19	7.17	63.36	74.00	-10.64	peak	
2	2389.400	43.40	7.17	50.57	54.00	-3.43	AVG	
3	2390.000	54.85	7.17	62.02	74.00	-11.98	peak	
4	2390.000	41.63	7.17	48.80	54.00	-5.20	AVG	
5 *	2414.700	91.18	7.17	98.35	54.00	44.35	AVG	No Limit
6 X	2417.400	101.7	7.18	108.92	74.00	34.92	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2412 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

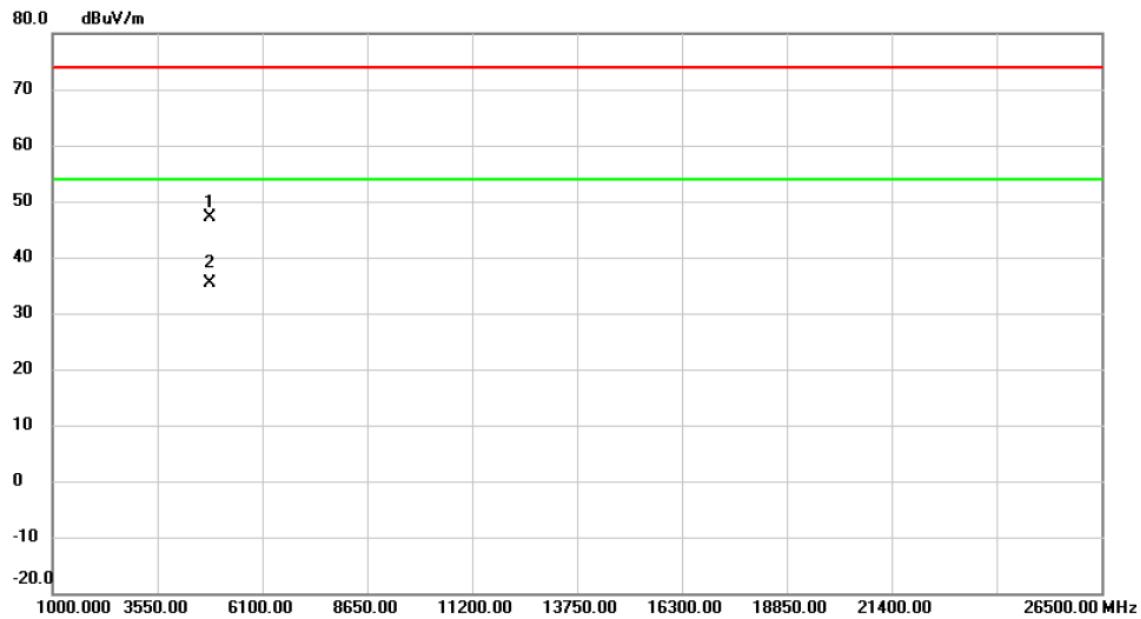
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4820.940	34.94	4.22	39.16	54.00	-14.84	AVG
2		4827.450	45.10	4.24	49.34	74.00	-24.66	peak

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2412 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

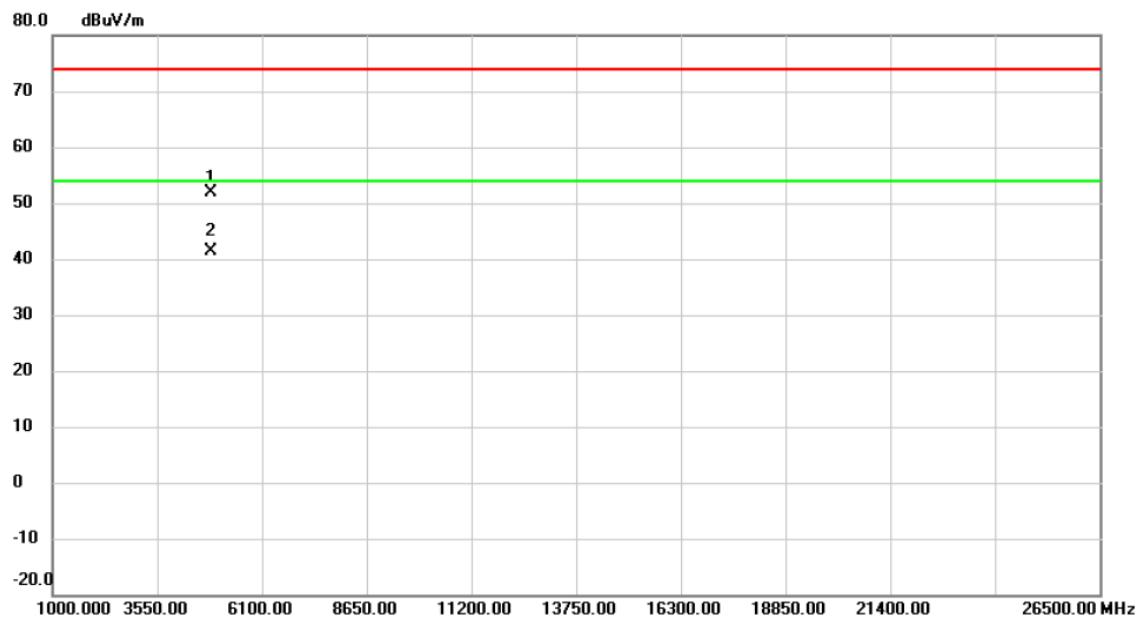
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4822.160	42.98	4.23	47.21	74.00	-26.79	peak
2	*	4826.560	31.20	4.24	35.44	54.00	-18.56	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2437 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

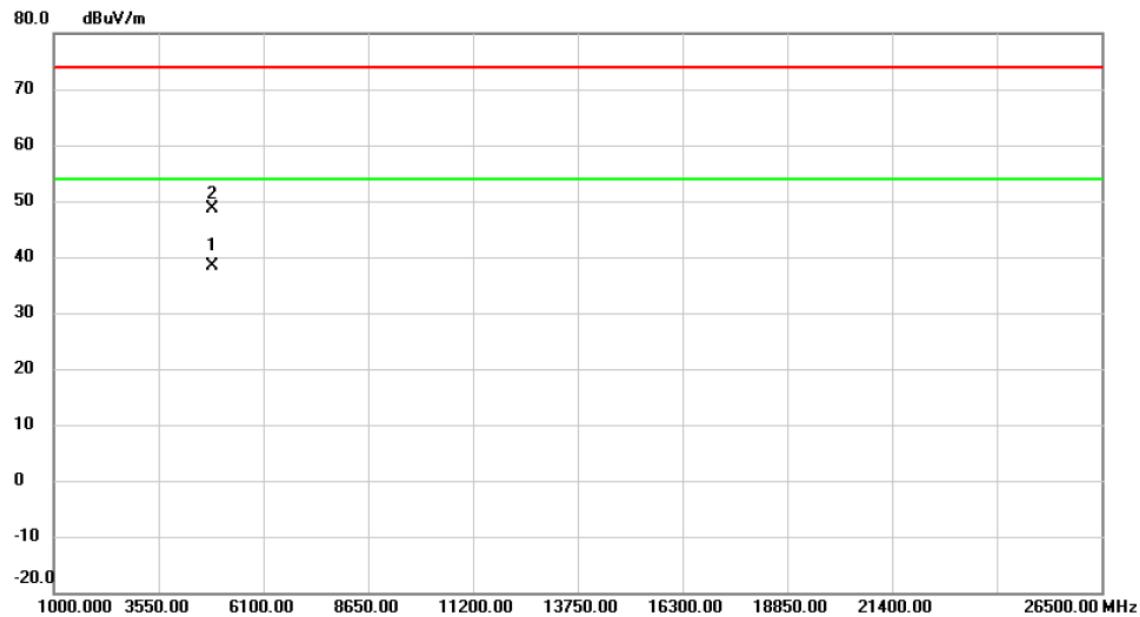
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4873.480	47.50	4.37	51.87	74.00	-22.13	peak
2	*	4874.420	36.91	4.38	41.29	54.00	-12.71	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2437 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

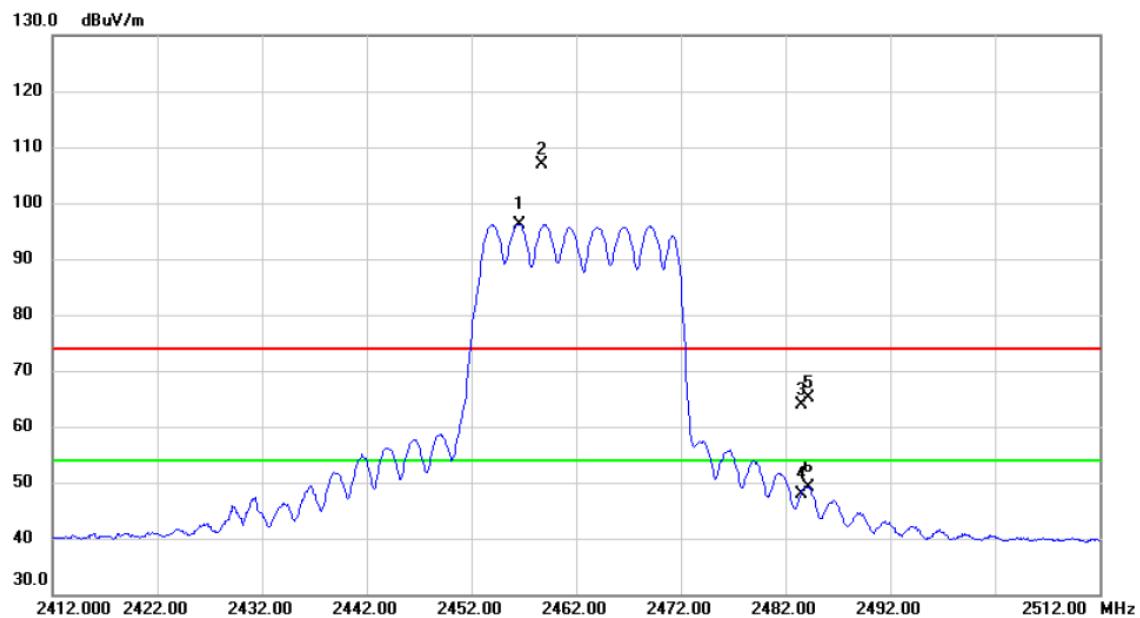
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4870.820	33.97	4.37	38.34	54.00	-15.66	AVG	
2		4871.220	44.35	4.37	48.72	74.00	-25.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2462 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

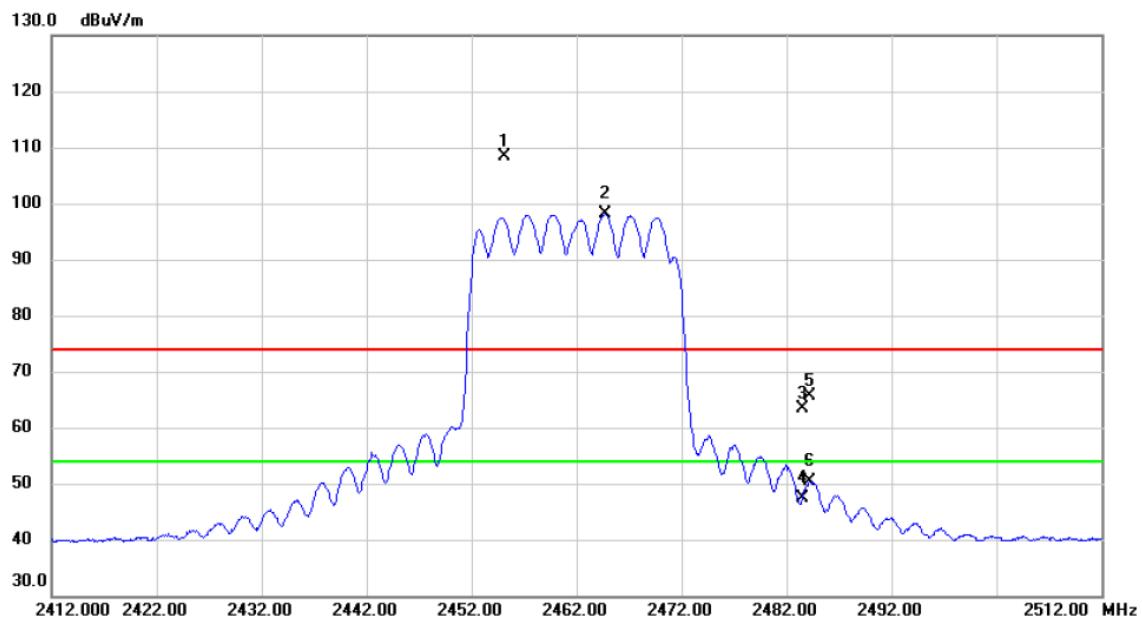
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2456.600	89.00	7.19	96.19	54.00	42.19	AVG	No Limit
2	X	2458.700	99.81	7.19	107.00	74.00	33.00	peak	No Limit
3		2483.500	56.62	7.20	63.82	74.00	-10.18	peak	
4		2483.500	40.57	7.20	47.77	54.00	-6.23	AVG	
5		2484.200	57.84	7.20	65.04	74.00	-8.96	peak	
6		2484.200	41.92	7.20	49.12	54.00	-4.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2462 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

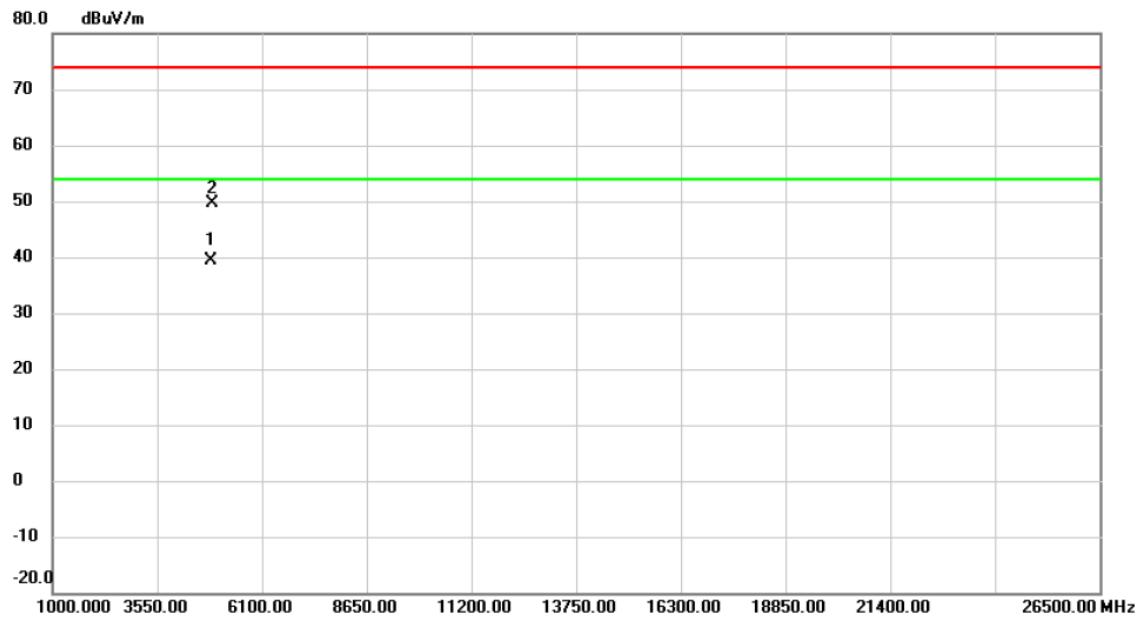
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	X	2455.100	101.1	7.18	108.29	74.00	34.29	peak No Limit
2	*	2464.700	90.84	7.18	98.02	54.00	44.02	AVG No Limit
3		2483.500	56.18	7.20	63.38	74.00	-10.62	peak
4		2483.500	40.10	7.20	47.30	54.00	-6.70	AVG
5		2484.200	58.45	7.20	65.65	74.00	-8.35	peak
6		2484.200	43.19	7.20	50.39	54.00	-3.61	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2462 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

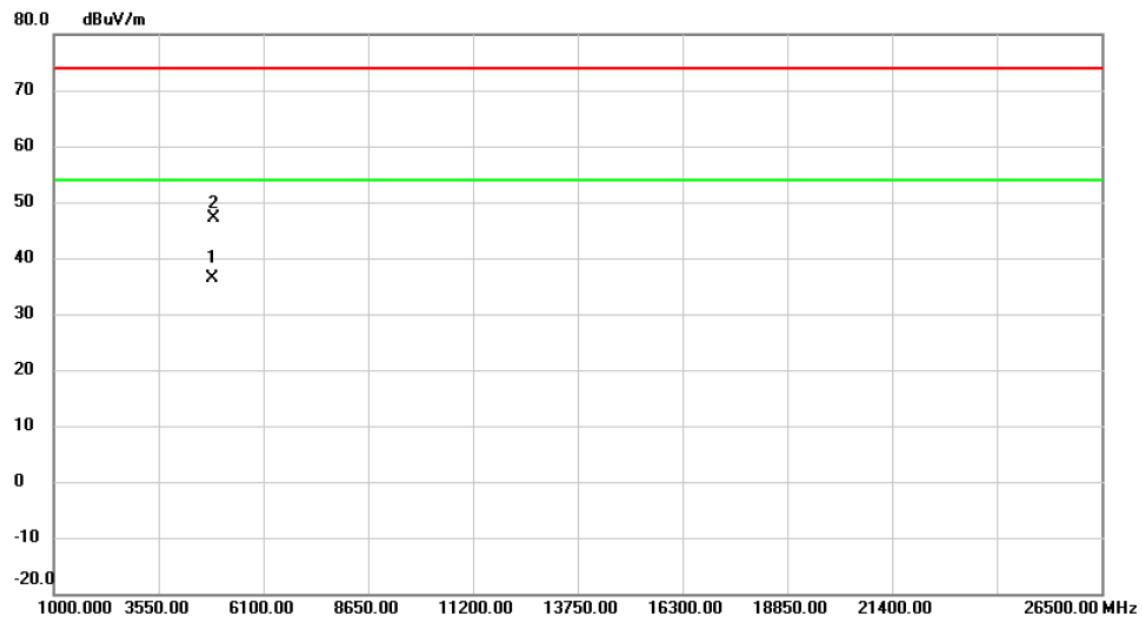
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4871.180	34.93	4.37	39.30	54.00	-14.70	AVG
2		4877.210	45.29	4.39	49.68	74.00	-24.32	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2462 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

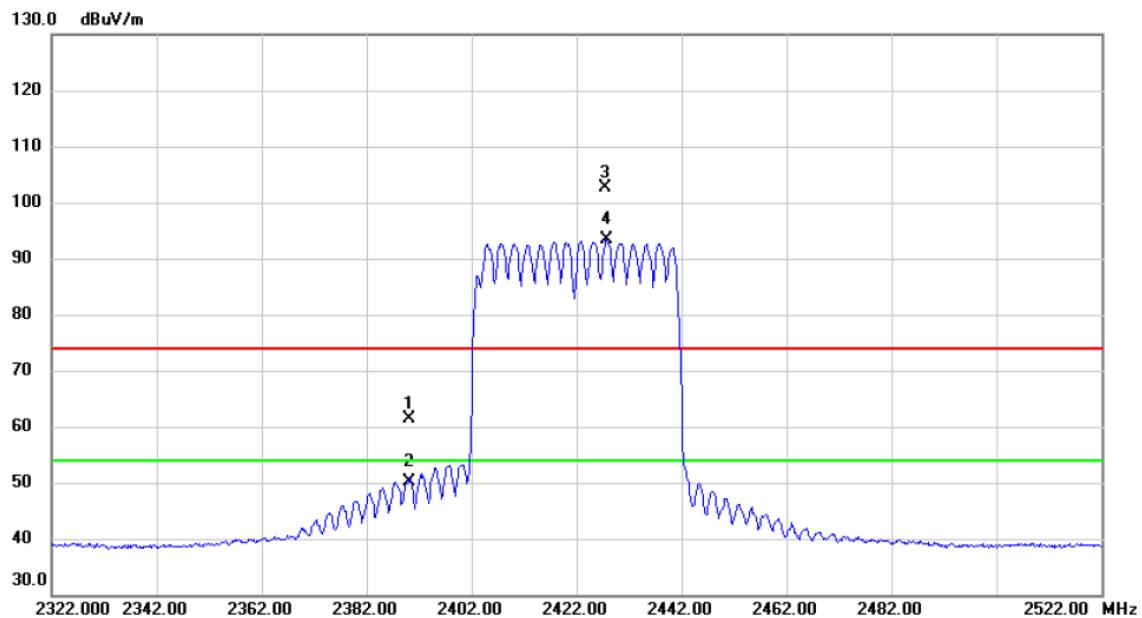
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4871.250	32.04	4.37	36.41	54.00	-17.59	AVG	
2		4876.100	42.78	4.39	47.17	74.00	-26.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2422 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

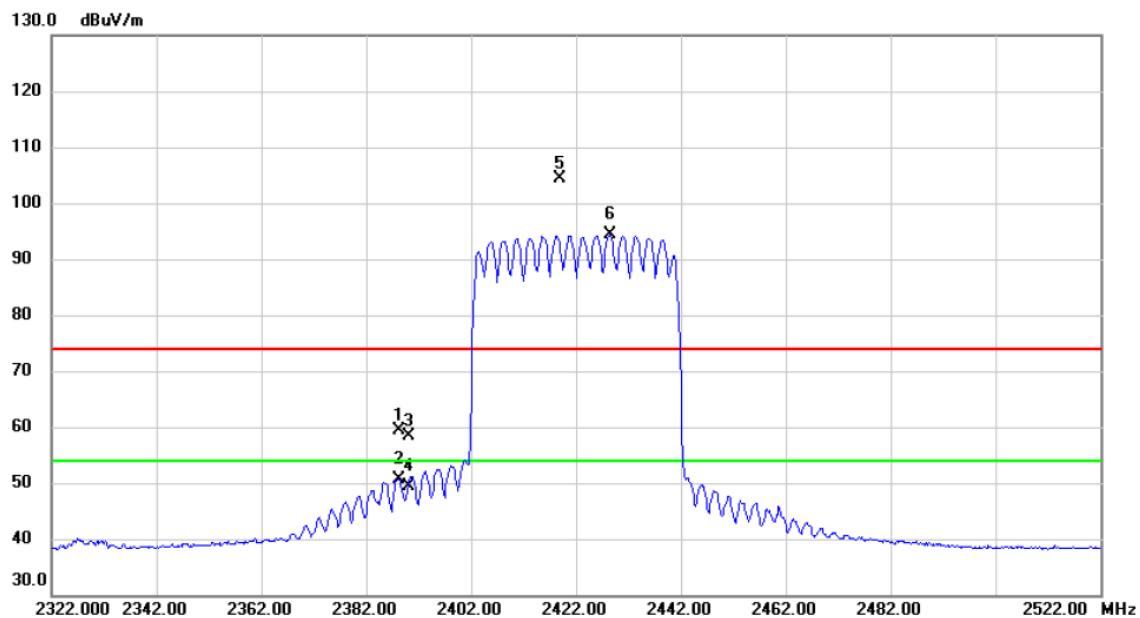
Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		2390.000	54.33	7.17	61.50	74.00	-12.50	peak
2		2390.000	43.06	7.17	50.23	54.00	-3.77	AVG
3	X	2427.600	95.43	7.18	102.61	74.00	28.61	peak No Limit
4	*	2427.800	86.21	7.18	93.39	54.00	39.39	AVG No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2422 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

Radiated Emission Measurement

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		2388.200	52.20	7.16	59.36	74.00	-14.64	peak
2		2388.200	43.58	7.16	50.74	54.00	-3.26	AVG
3		2390.000	51.17	7.17	58.34	74.00	-15.66	peak
4		2390.000	42.29	7.17	49.46	54.00	-4.54	AVG
5	X	2418.800	97.13	7.18	104.31	74.00	30.31	peak No Limit
6	*	2428.400	87.29	7.18	94.47	54.00	40.47	AVG No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.