


Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

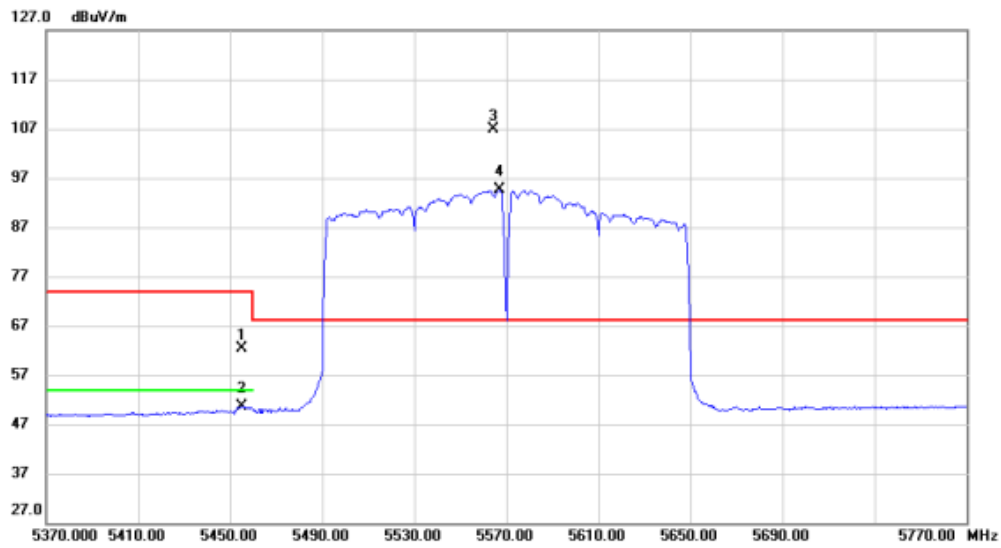


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5455.200	20.29	42.09	62.38	74.00	-11.62	peak	
2		5455.200	8.61	42.09	50.70	54.00	-3.30	AVG	
3	*	5564.200	64.56	42.25	106.81	68.20	38.61	peak	No Limit
4	X	5566.800	52.30	42.25	94.55	68.20	26.35	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

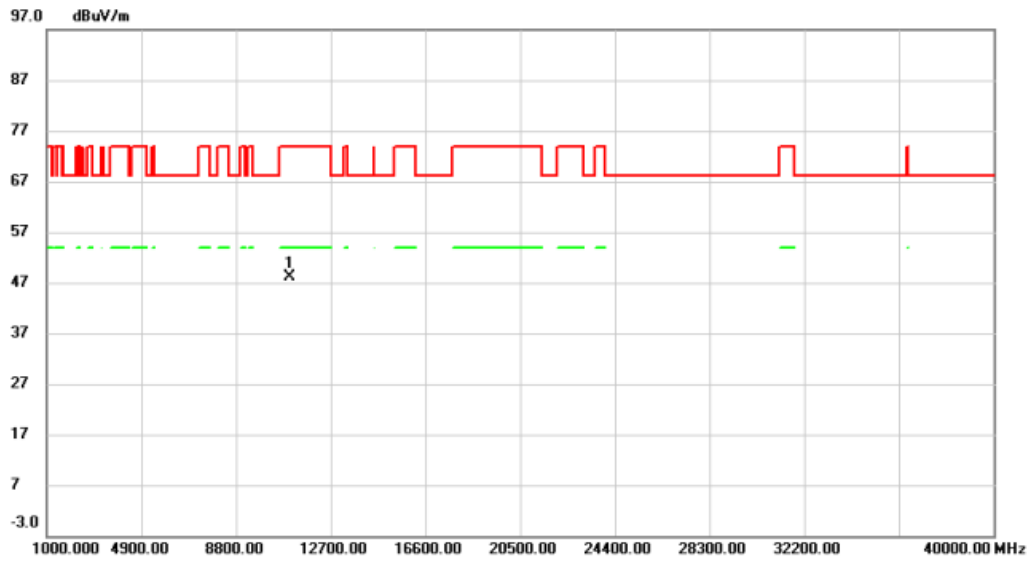


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11000.30	51.06	-2.83	48.23	74.00	-25.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

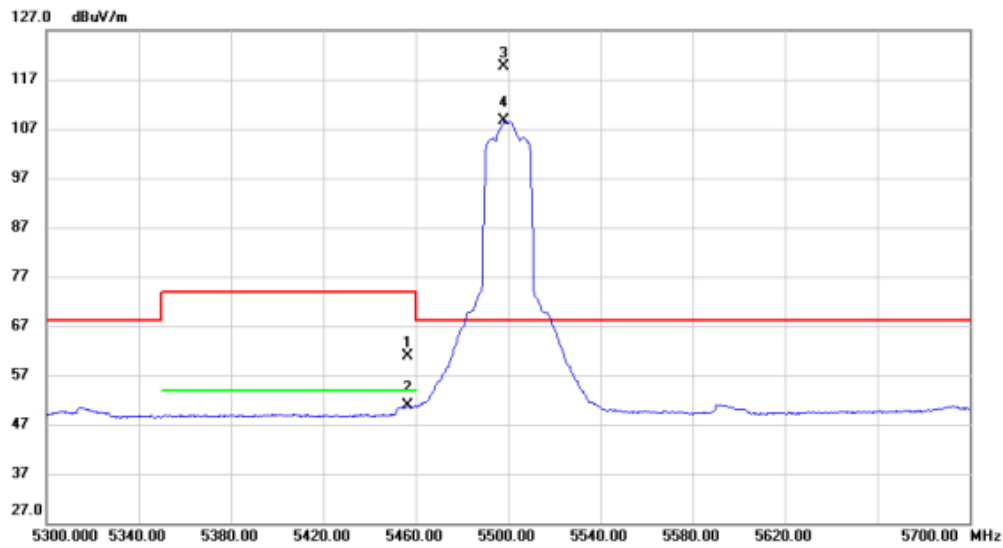


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5456.400	18.80	42.09	60.89	74.00	-13.11	peak	
2	5456.400	8.79	42.09	50.88	54.00	-3.12	AVG	
3 *	5498.400	77.46	42.17	119.63	68.20	51.43	peak	No Limit
4 X	5498.400	66.37	42.17	108.54	68.20	40.34	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

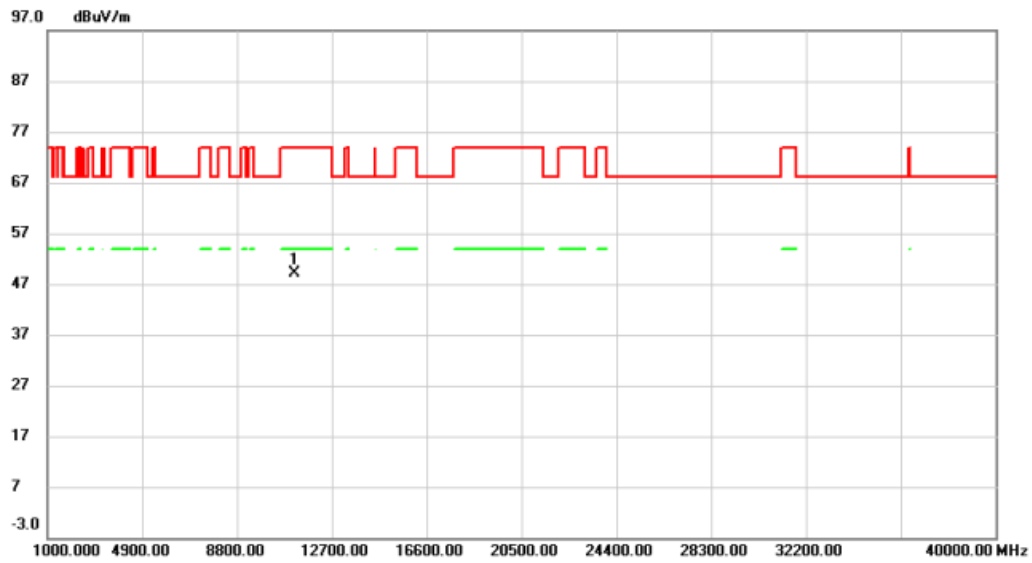


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11158.60	51.05	-2.03	49.02	74.00	-24.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

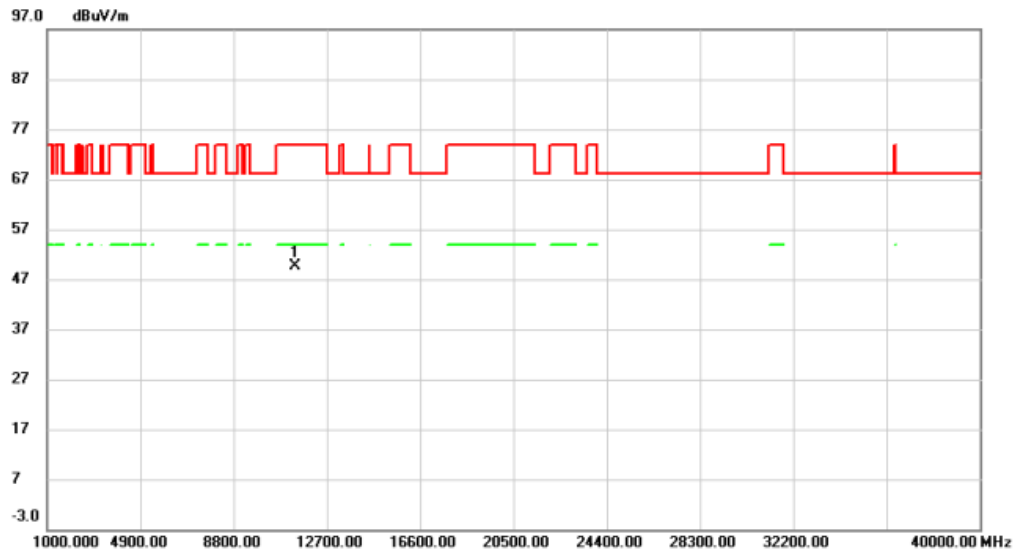


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11396.90	50.55	-0.83	49.72	74.00	-24.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

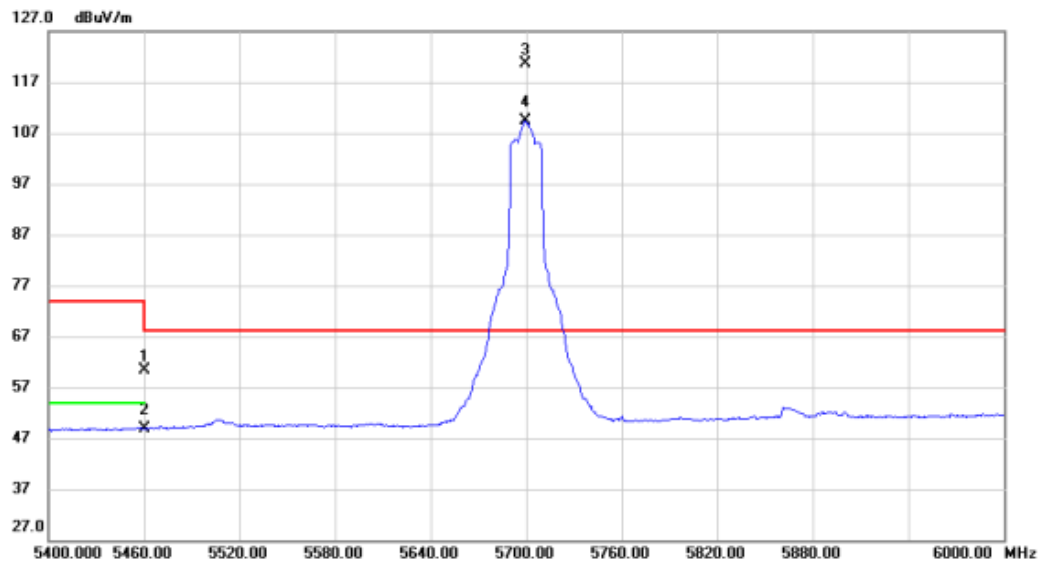


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	18.21	42.10	60.31	74.00	-13.69	peak	
2		5460.000	6.71	42.10	48.81	54.00	-5.19	AVG	
3	*	5699.400	78.19	42.42	120.61	68.20	52.41	peak	No Limit
4	X	5699.400	67.04	42.42	109.46	68.20	41.26	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

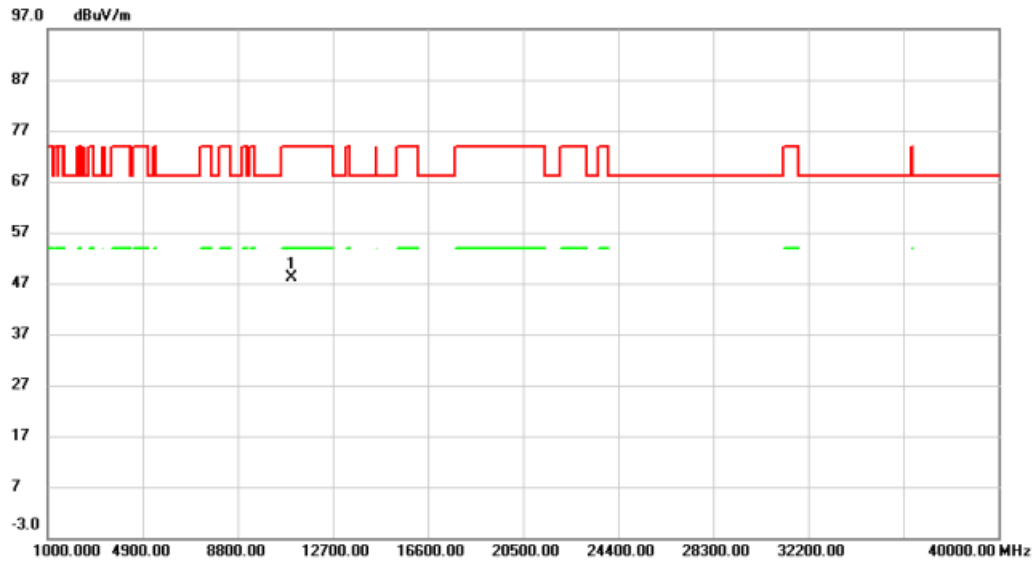


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11022.20	50.93	-2.72	48.21	74.00	-25.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

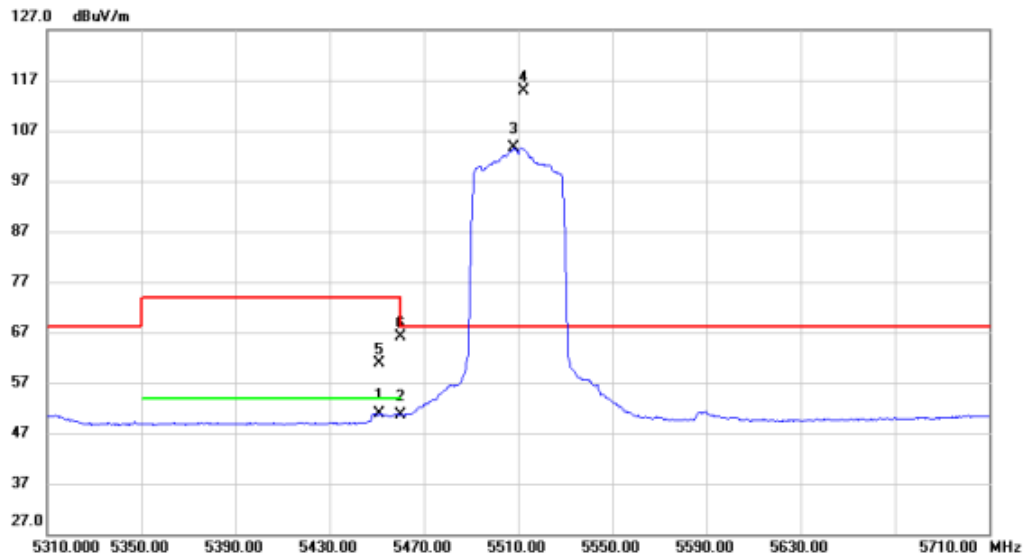


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5451.200	8.79	42.09	50.88	54.00	-3.12	AVG	
2		5460.000	8.62	42.10	50.72	54.00	-3.28	AVG	
3	X	5508.400	61.39	42.18	103.57	68.20	35.37	AVG	No Limit
4	*	5512.400	72.79	42.19	114.98	68.20	46.78	peak	No Limit
5		5451.000	18.76	42.08	60.84	74.00	-13.16	peak	
6		5460.000	24.03	42.10	66.13	74.00	-7.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

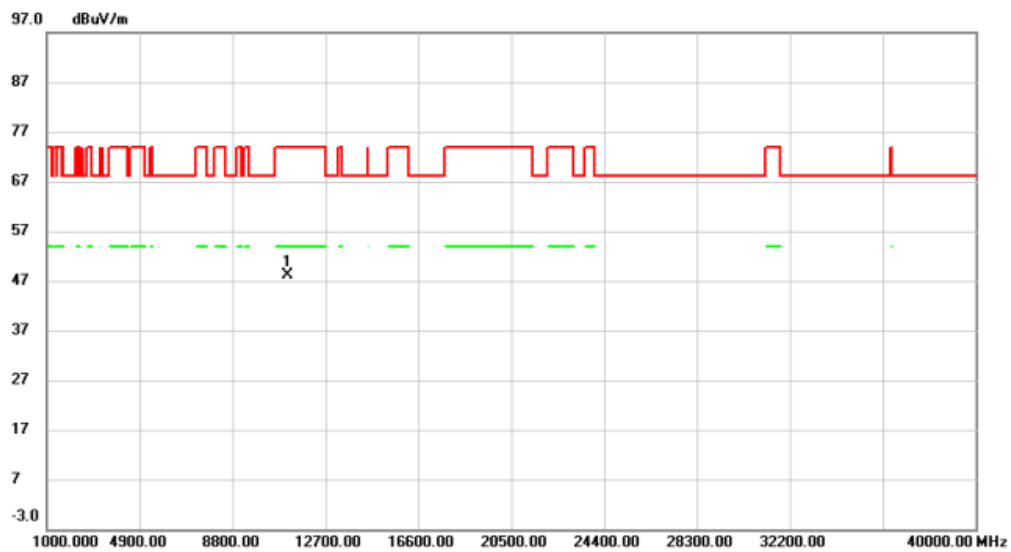


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11099.70	50.39	-2.33	48.06	74.00	-25.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

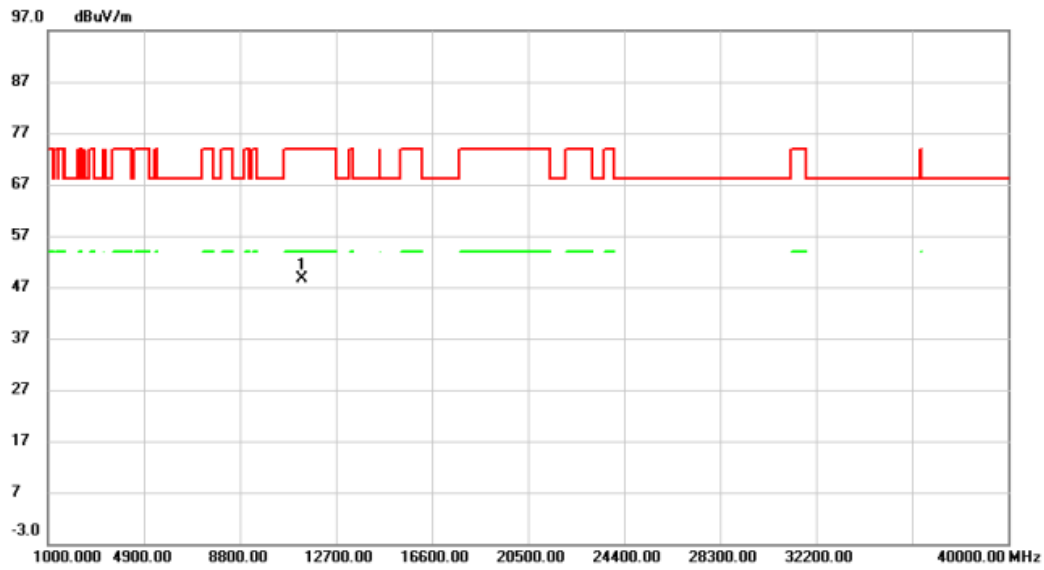


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11340.20	49.79	-1.12	48.67	74.00	-25.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

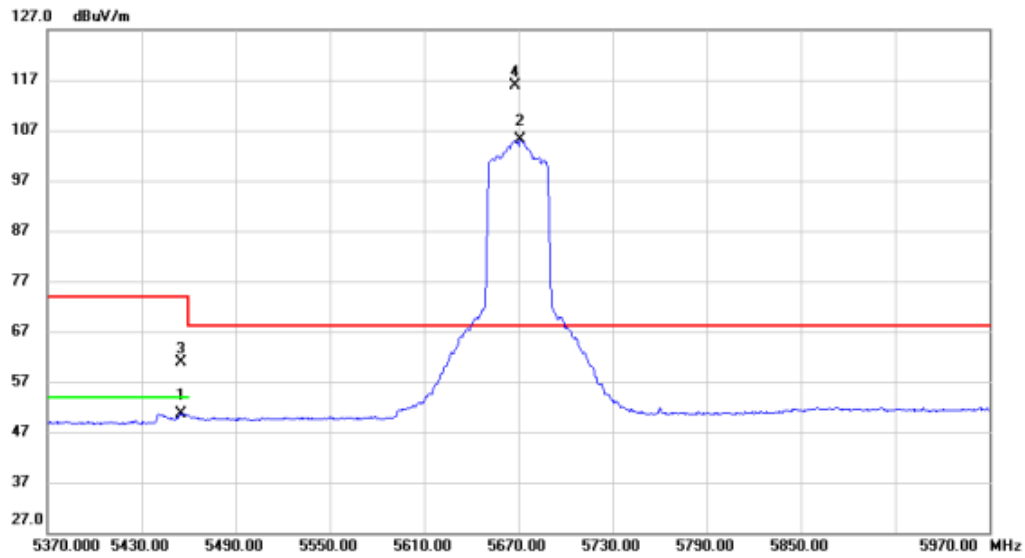


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5455.200	8.57	42.09	50.66	54.00	-3.34	AVG	
2	X	5671.200	62.79	42.39	105.18	68.20	36.98	AVG	No Limit
3		5455.200	18.70	42.09	60.79	74.00	-13.21	peak	
4	*	5668.200	73.46	42.38	115.84	68.20	47.64	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

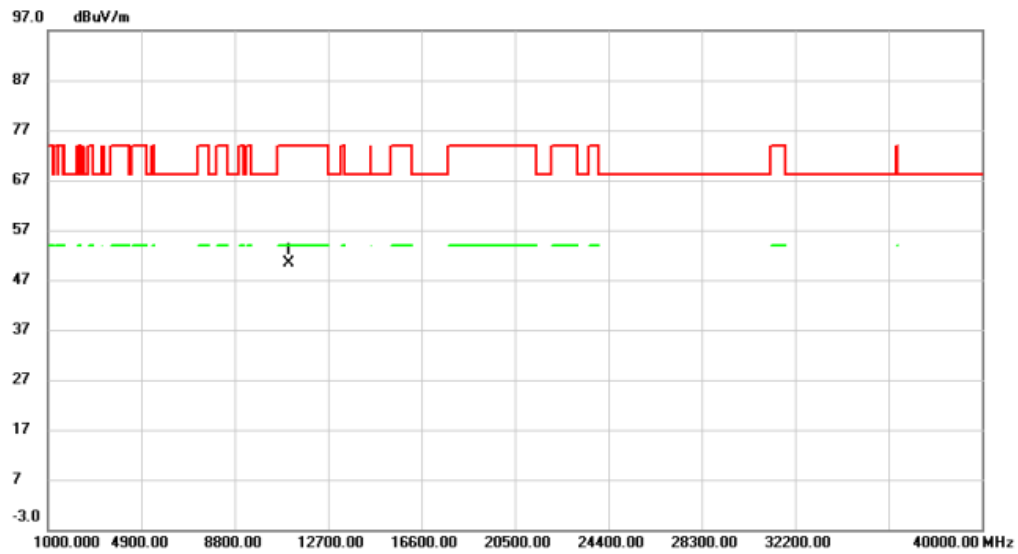


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11060.60	52.85	-2.52	50.33	74.00	-23.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

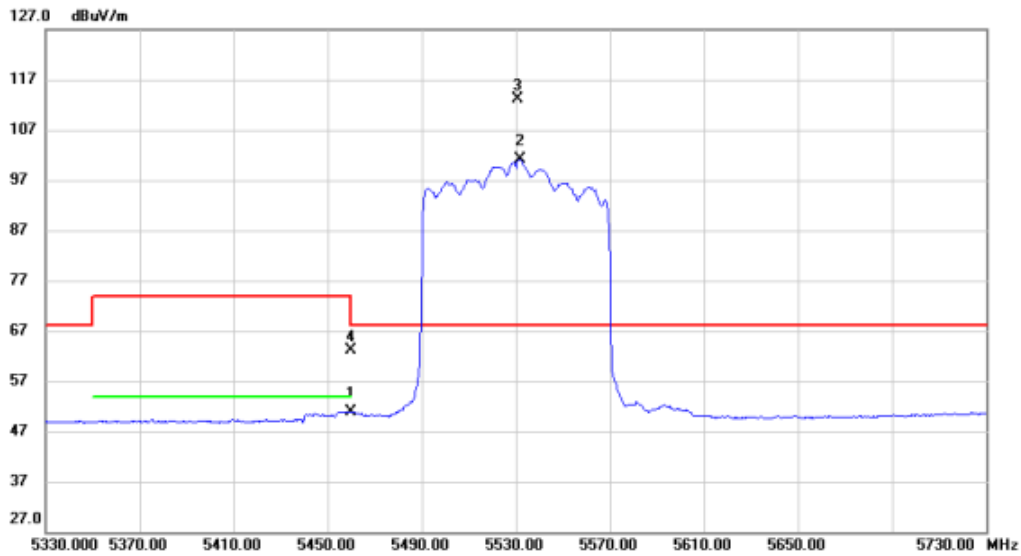


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	8.89	42.10	50.99	54.00	-3.01	AVG	
2	X	5531.600	59.01	42.21	101.22	68.20	33.02	AVG	No Limit
3	*	5530.800	70.92	42.21	113.13	68.20	44.93	peak	No Limit
4		5460.000	20.93	42.10	63.03	74.00	-10.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

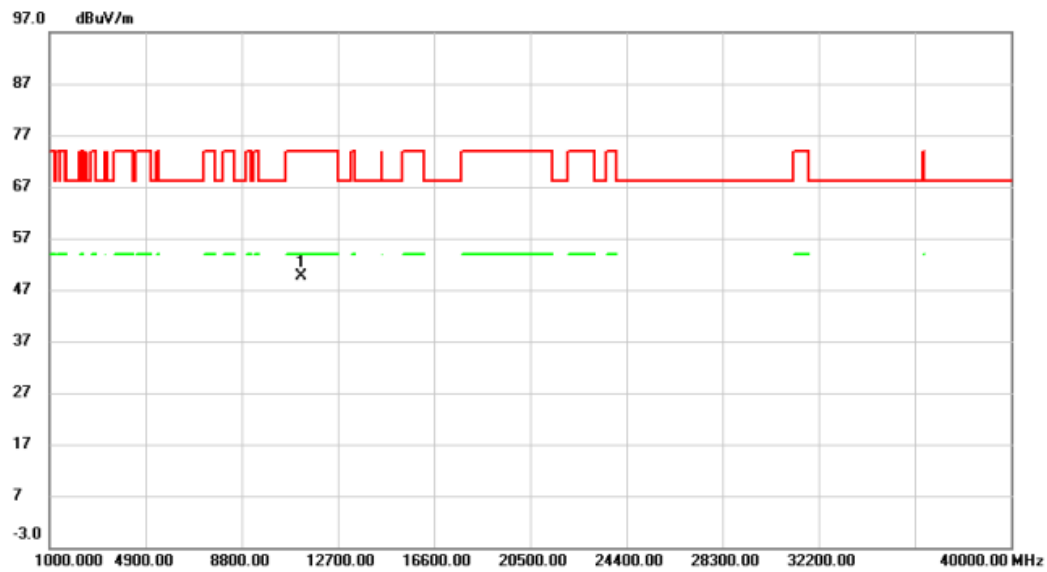


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11220.60	51.28	-1.72	49.56	74.00	-24.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

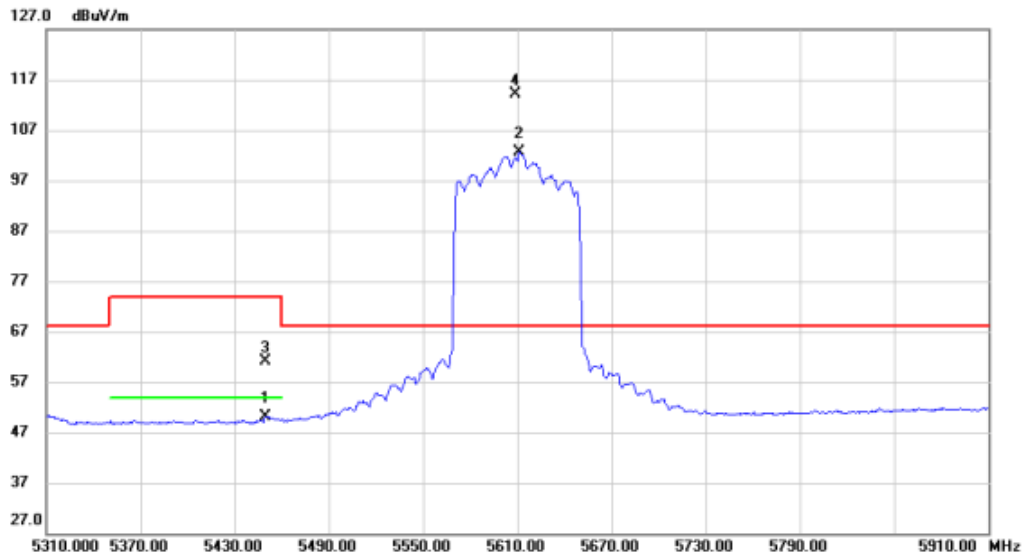


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5449.800	8.07	42.08	50.15	54.00	-3.85	AVG	
2 X	5611.200	60.36	42.31	102.67	68.20	34.47	AVG	No Limit
3	5449.800	19.17	42.08	61.25	74.00	-12.75	peak	
4 *	5608.800	71.73	42.31	114.04	68.20	45.84	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE160) Mode 5570 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

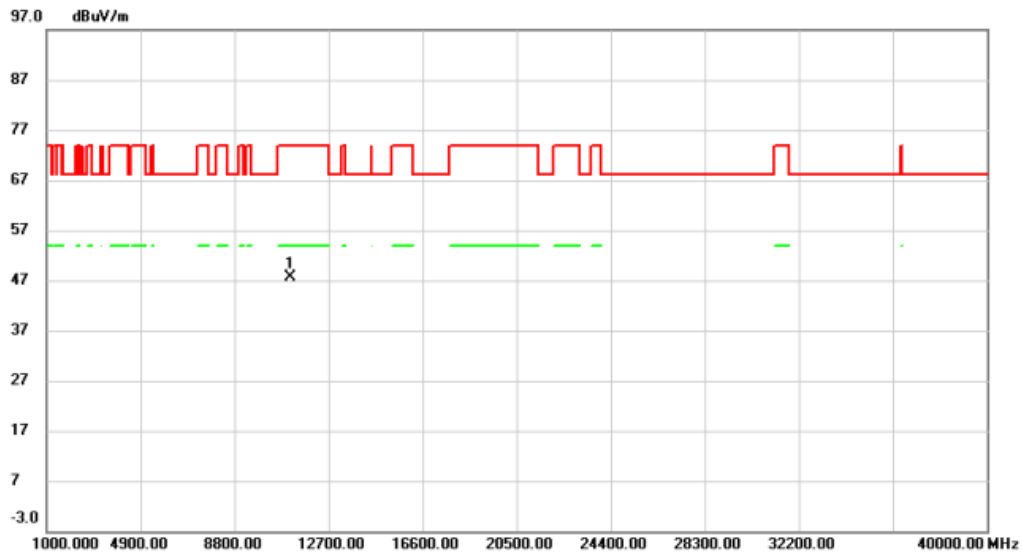


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11138.80	49.71	-2.13	47.58	74.00	-26.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE160) Mode 5570 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

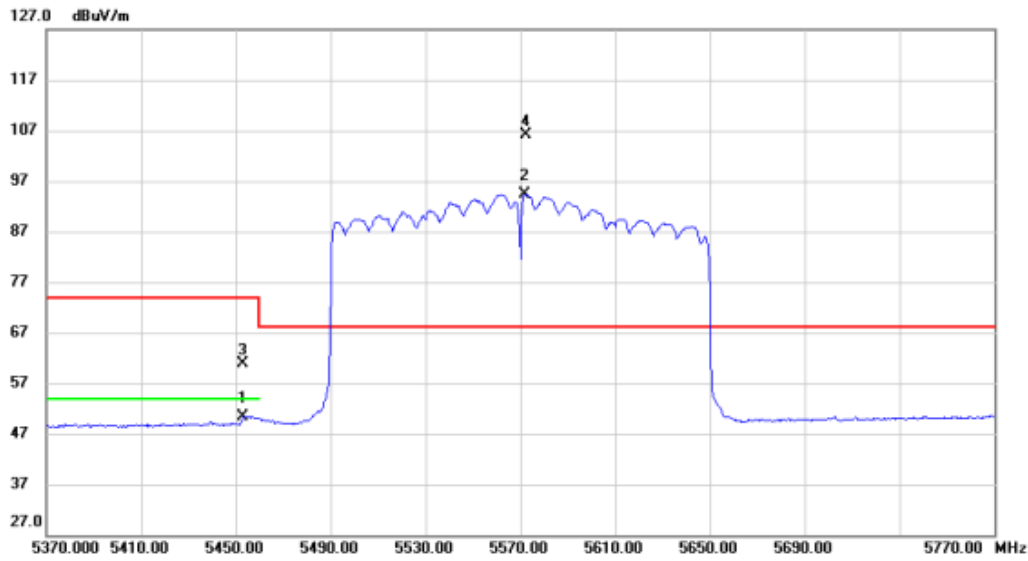


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5453.200	8.38	42.09	50.47	54.00	-3.53	AVG	
2	X	5571.600	52.08	42.26	94.34	68.20	26.14	AVG	No Limit
3		5453.200	18.71	42.09	60.80	74.00	-13.20	peak	
4	*	5572.400	63.95	42.26	106.21	68.20	38.01	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

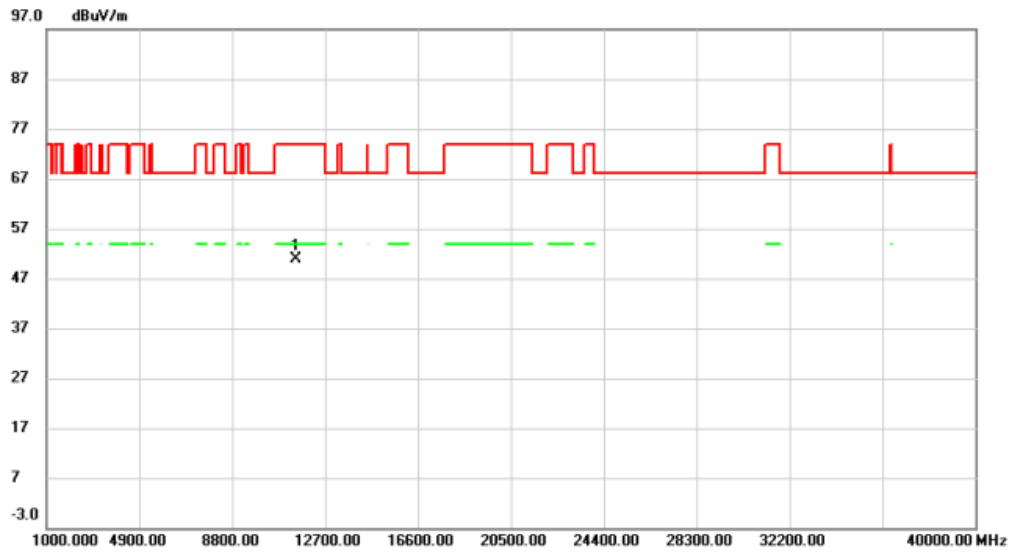


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11489.90	51.15	-0.36	50.79	74.00	-23.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

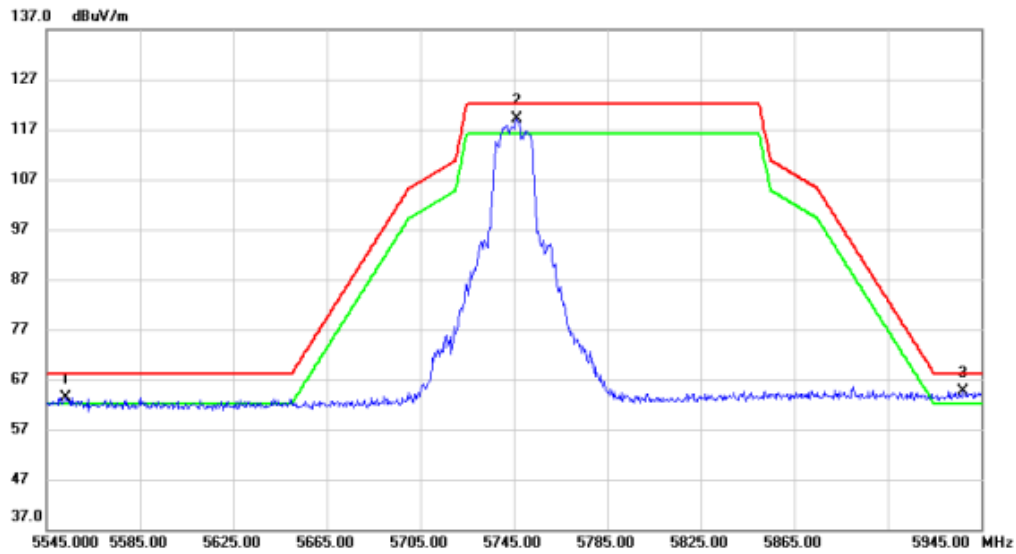


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5553.000	21.19	42.24	63.43	68.20	-4.77	AVG	
2	*	5746.200	76.66	42.48	119.14	122.2	-3.06	AVG	
3		5937.000	21.99	42.72	64.71	68.20	-3.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

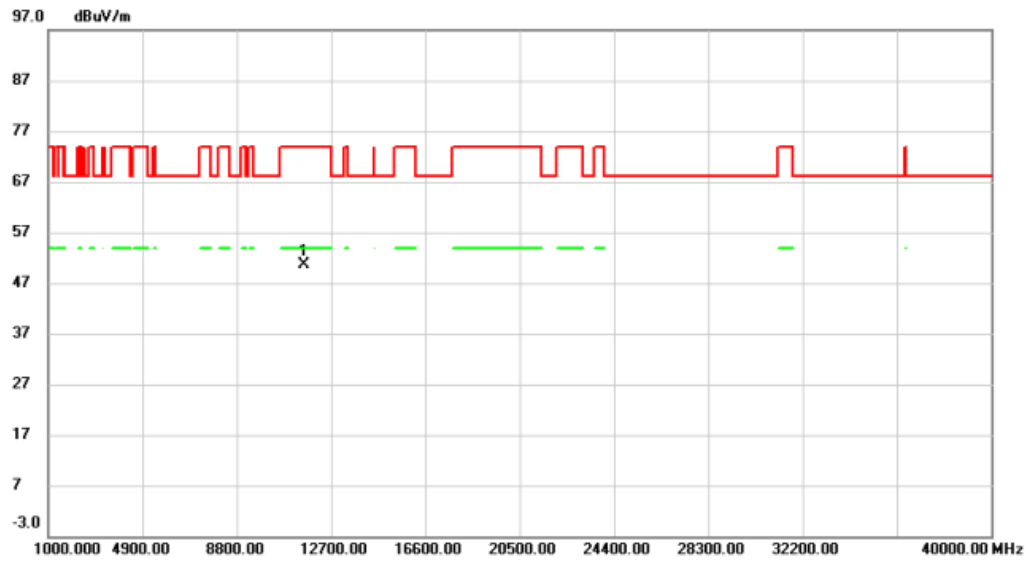


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11572.90	51.28	-0.58	50.70	74.00	-23.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

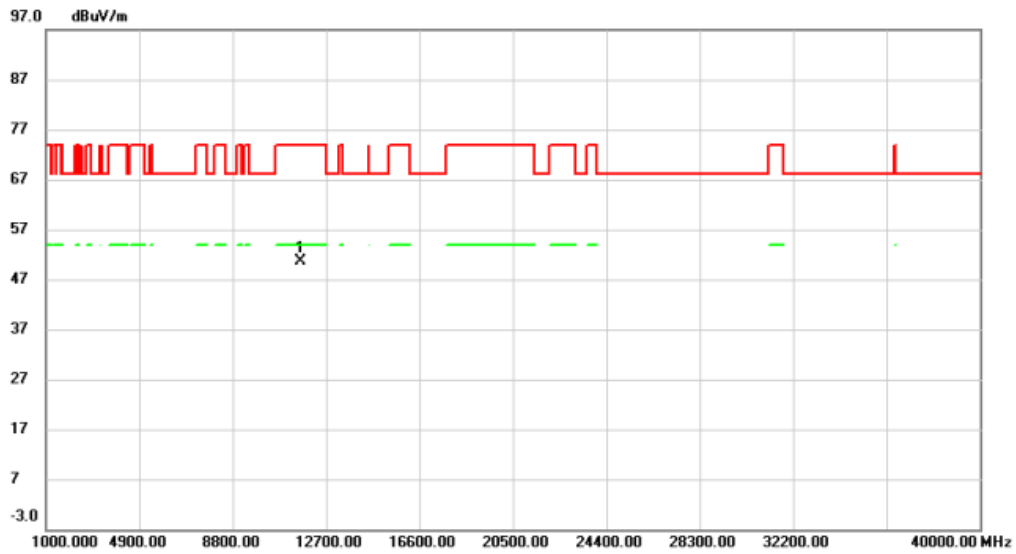


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11650.30	51.54	-0.86	50.68	74.00	-23.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

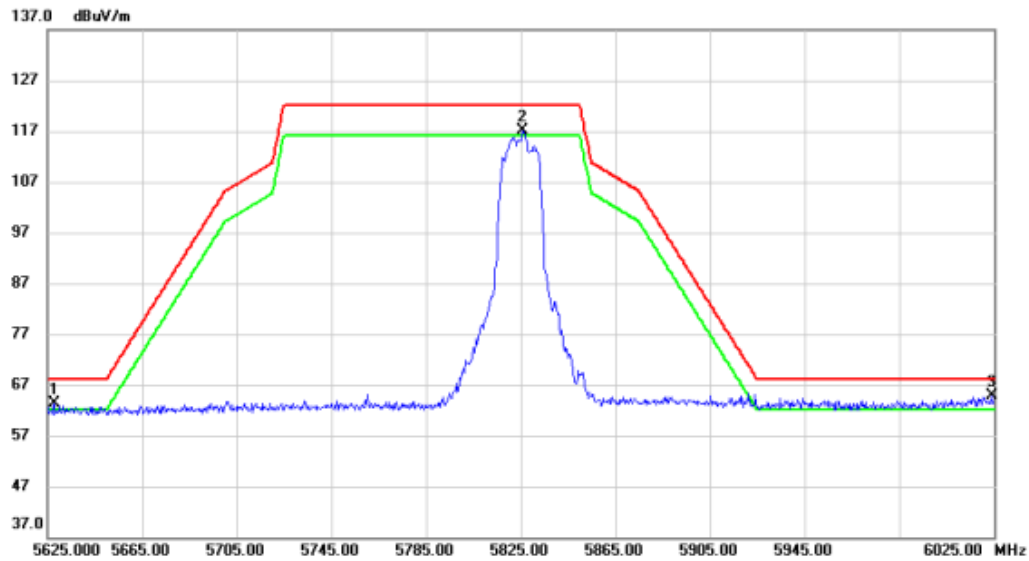


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	5627.800	20.97	42.33	63.30	68.20	-4.90	peak	
2	!	5825.800	74.43	42.58	117.01	122.2	-5.19	peak	
3	*	6024.200	22.05	42.89	64.94	68.20	-3.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

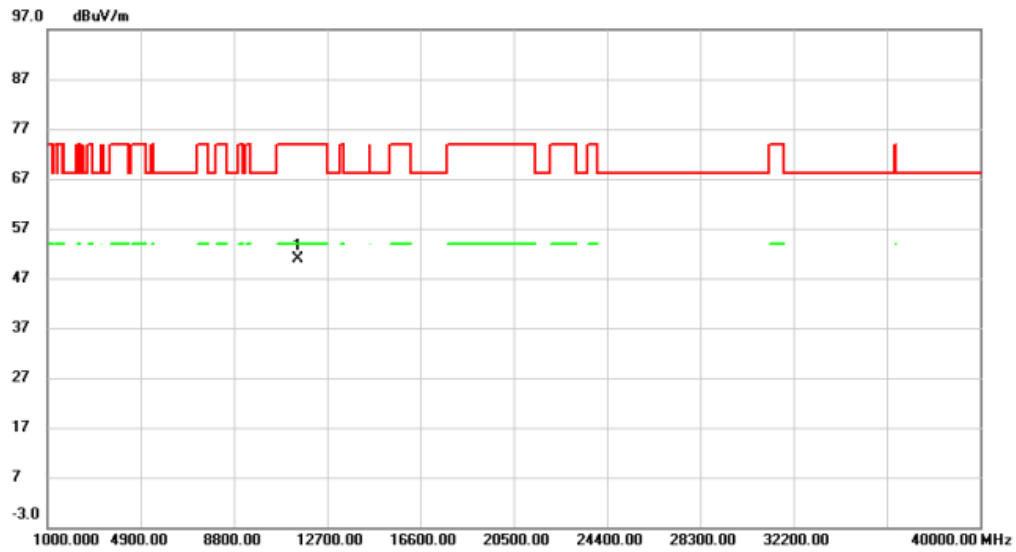


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11488.90	51.21	-0.37	50.84	74.00	-23.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

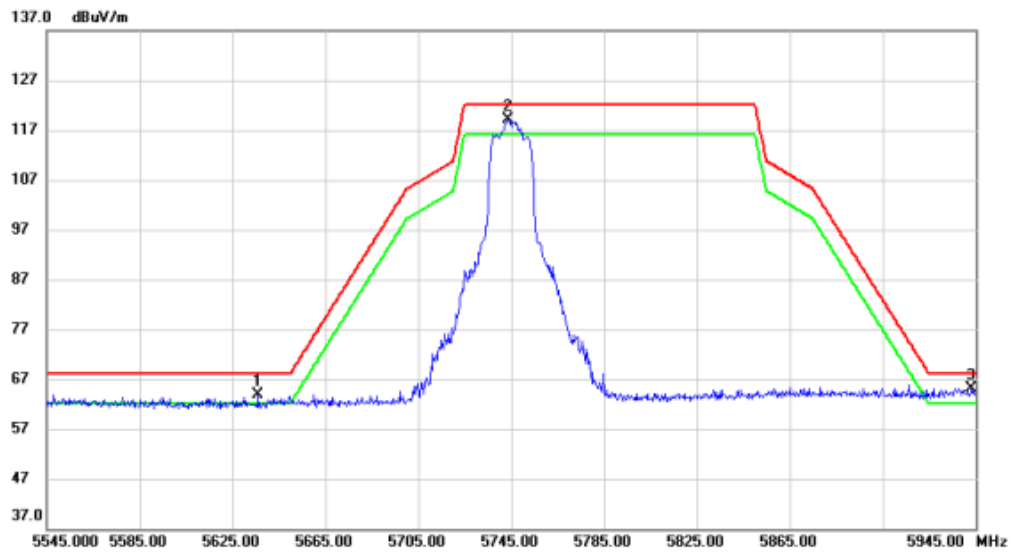


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	5636.200	21.60	42.34	63.94	68.20	-4.26	peak	
2	!	5743.800	76.53	42.48	119.01	122.2	-3.19	peak	
3	*	5943.400	22.35	42.73	65.08	68.20	-3.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

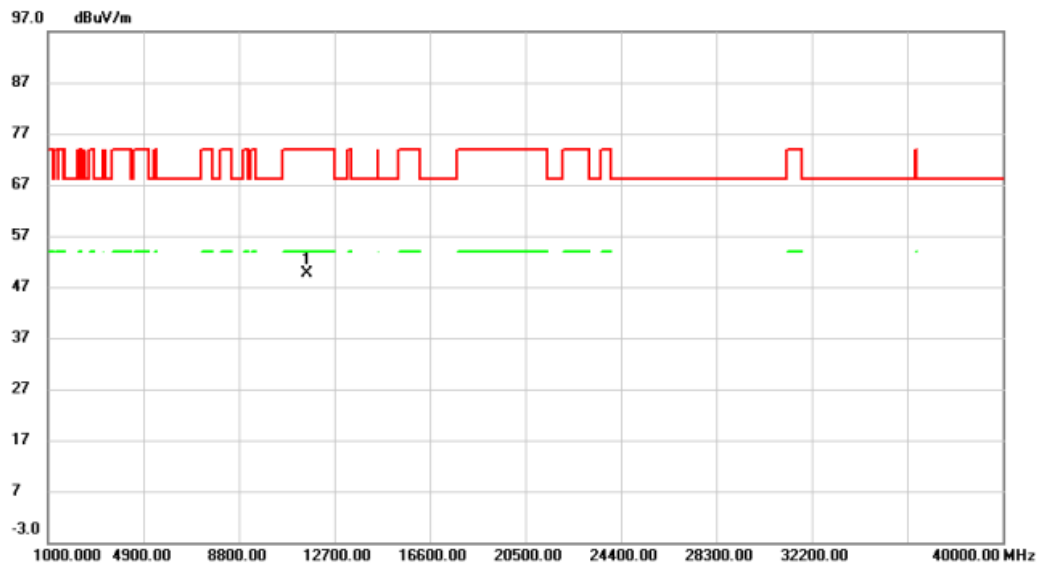


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11571.60	50.25	-0.57	49.68	74.00	-24.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

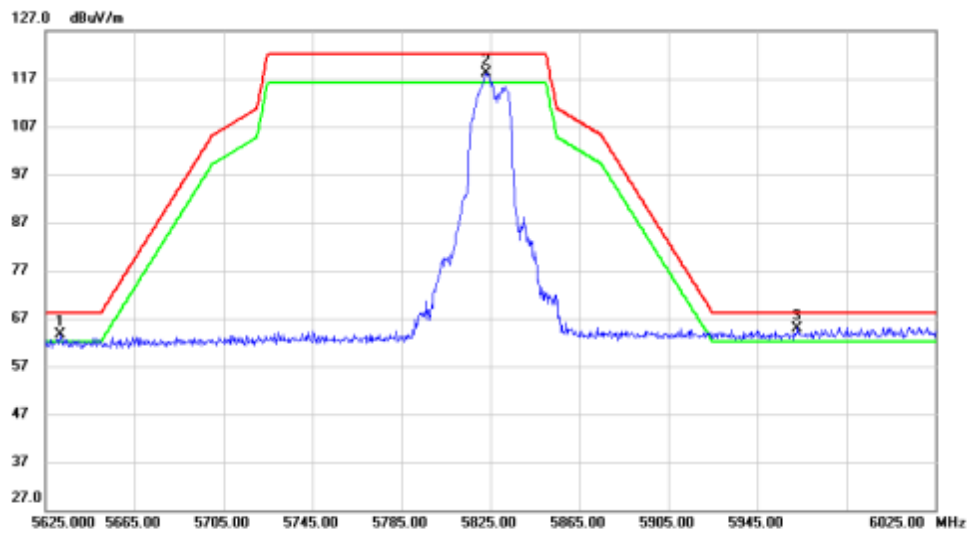


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	5631.800	21.29	42.34	63.63	68.20	-4.57	peak	
2	!	5823.000	75.57	42.58	118.15	122.2	-4.05	peak	
3	*	5963.000	22.20	42.75	64.95	68.20	-3.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

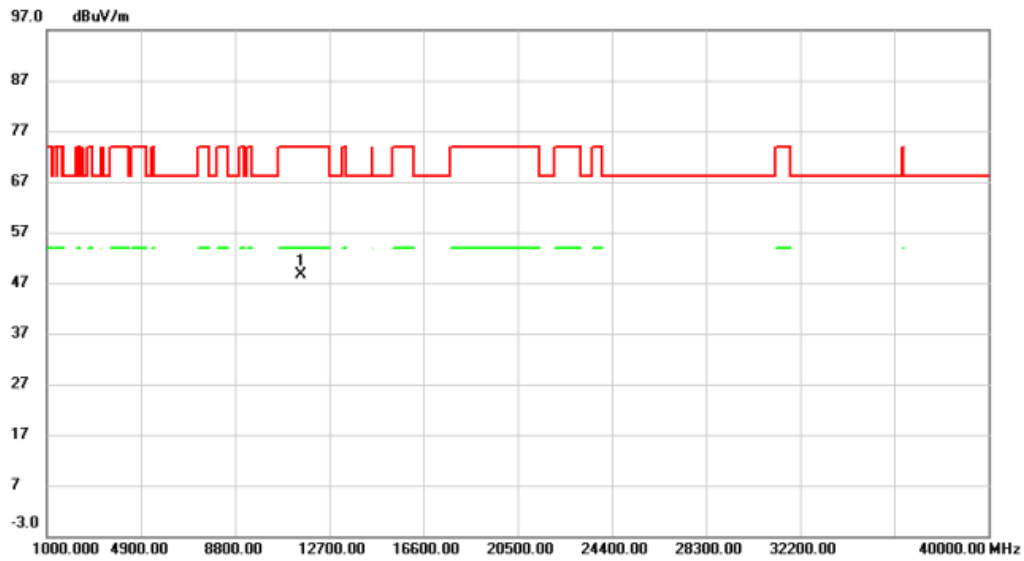


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11508.90	48.91	-0.34	48.57	74.00	-25.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

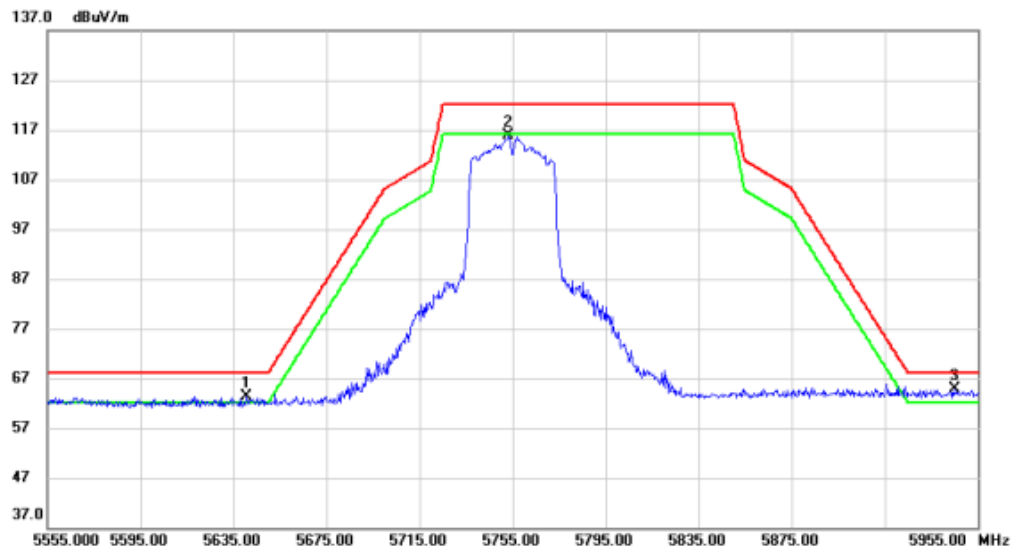


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 !	5640.600	21.07	42.35	63.42	68.20	-4.78	peak	
2	5753.400	73.32	42.49	115.81	122.2	-6.39	peak	
3 *	5945.000	22.13	42.73	64.86	68.20	-3.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

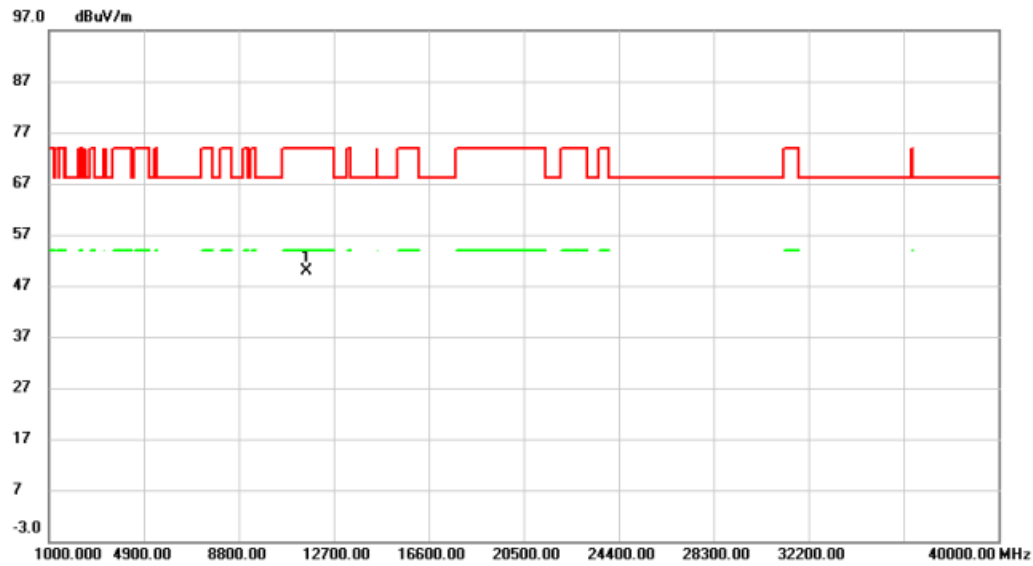


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11591.20	50.49	-0.64	49.85	74.00	-24.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

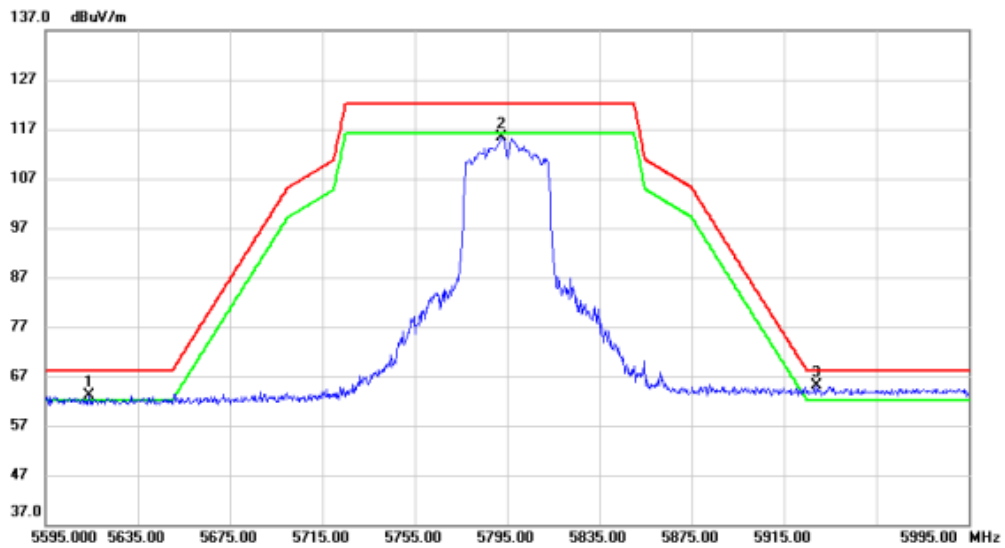


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 !	5614.200	20.83	42.31	63.14	68.20	-5.06	peak	
2	5792.600	72.85	42.54	115.39	122.2	-6.81	peak	
3 *	5929.400	22.44	42.71	65.15	68.20	-3.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

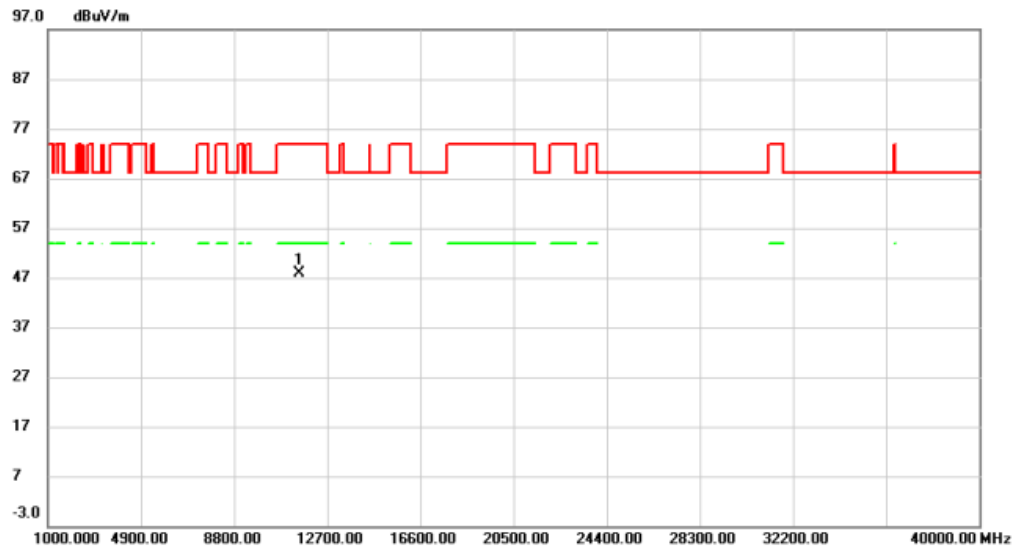


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	11549.70	48.36	-0.49	47.87	74.00	-26.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

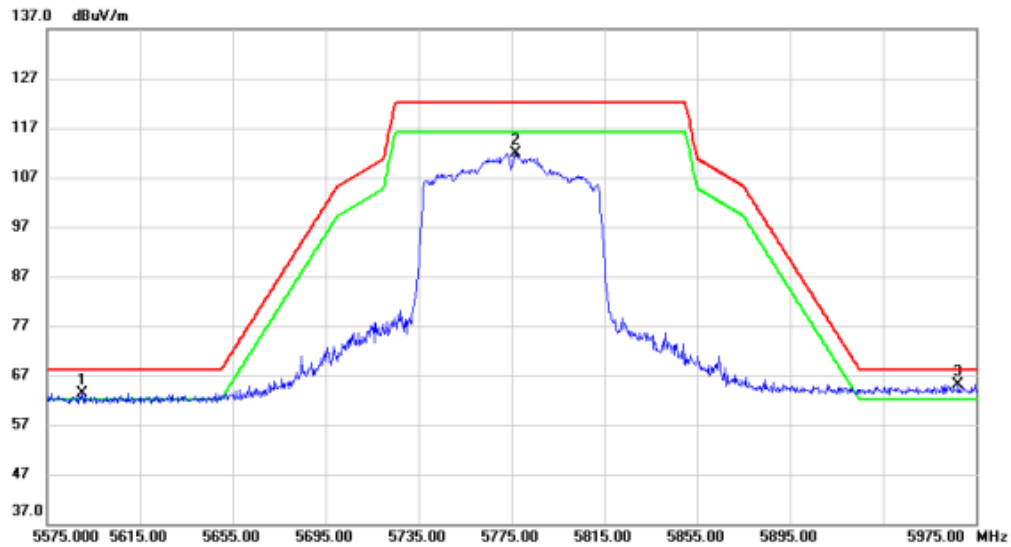


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	5590.200	21.22	42.28	63.50	68.20	-4.70	peak	
2		5776.600	69.40	42.52	111.92	122.2	-10.28	peak	
3	*	5967.400	22.42	42.76	65.18	68.20	-3.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

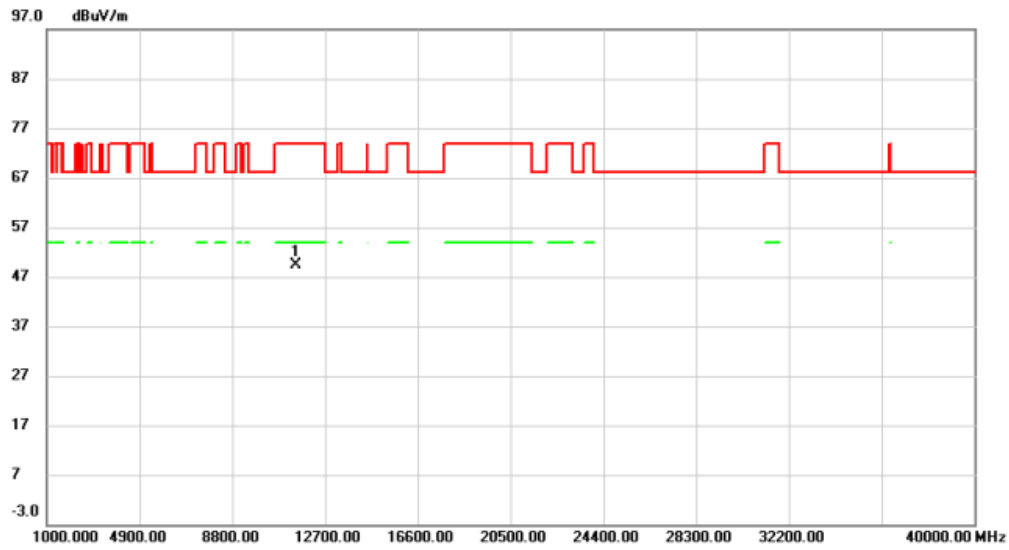


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11490.60	49.79	-0.36	49.43	74.00	-24.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

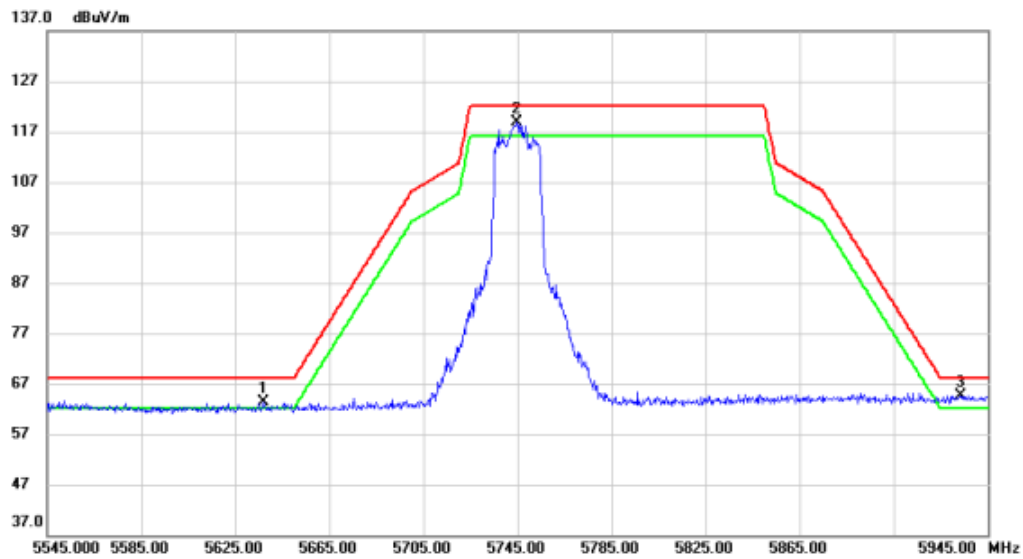


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	5637.000	20.99	42.34	63.33	68.20	-4.87	peak	
2	*	5744.600	76.47	42.48	118.95	122.20	-3.25	peak	
3	!	5933.400	22.02	42.72	64.74	68.20	-3.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

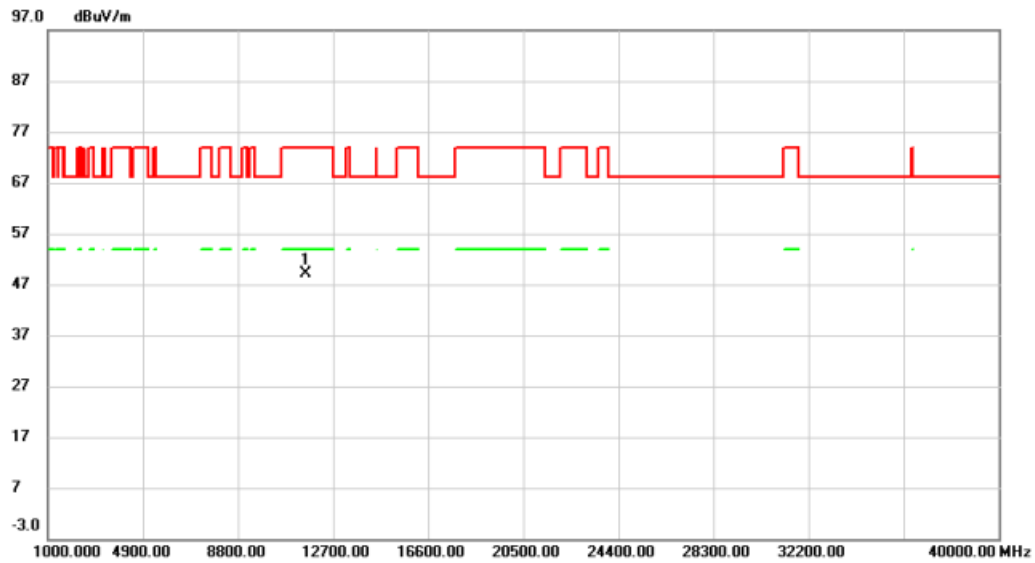


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11569.60	49.80	-0.56	49.24	74.00	-24.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

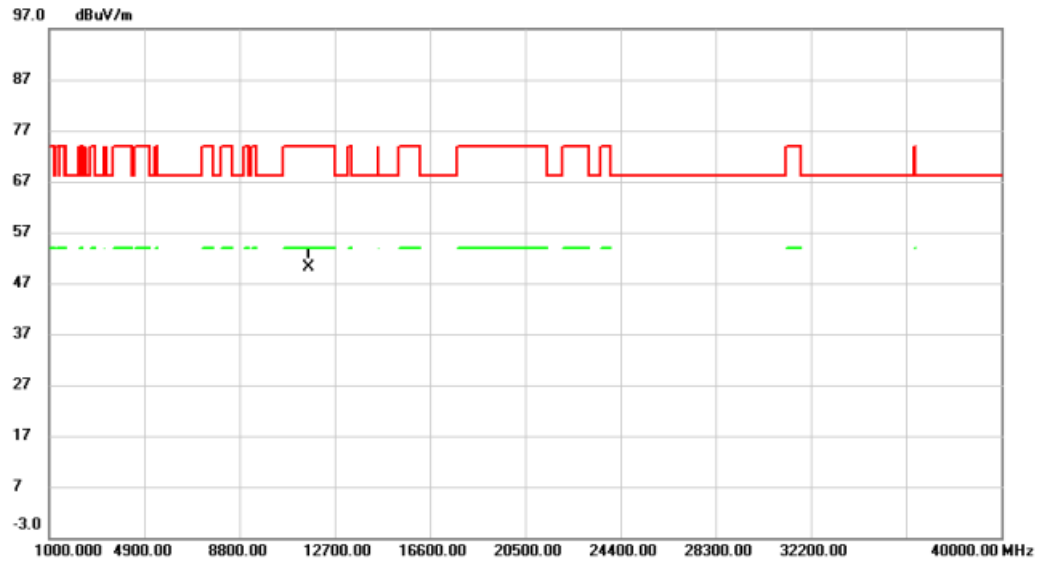


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11651.20	50.89	-0.86	50.03	74.00	-23.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

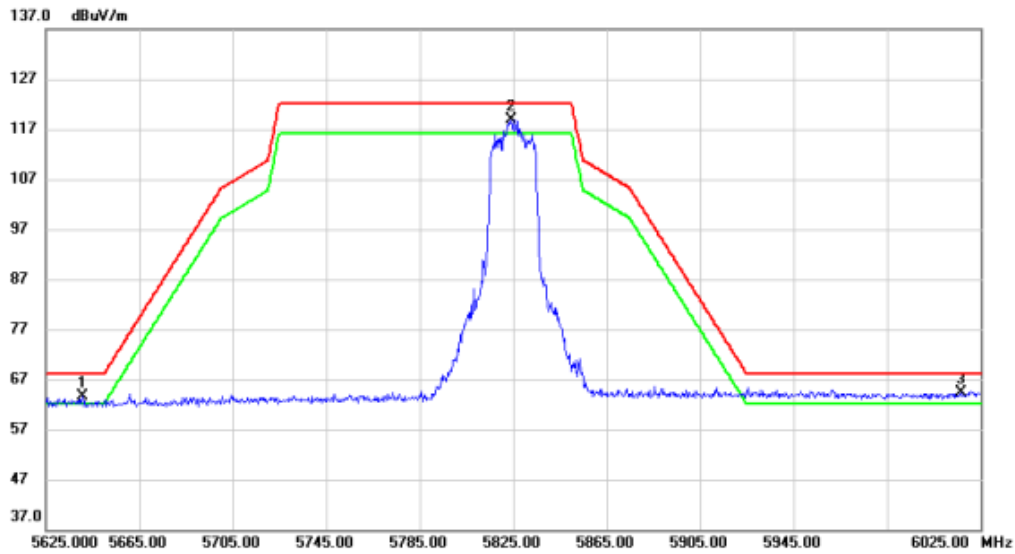


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	5640.600	21.25	42.35	63.60	68.20	-4.60	peak	
2	*	5824.200	76.31	42.58	118.89	122.2	-3.31	peak	
3	!	6016.600	21.42	42.86	64.28	68.20	-3.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

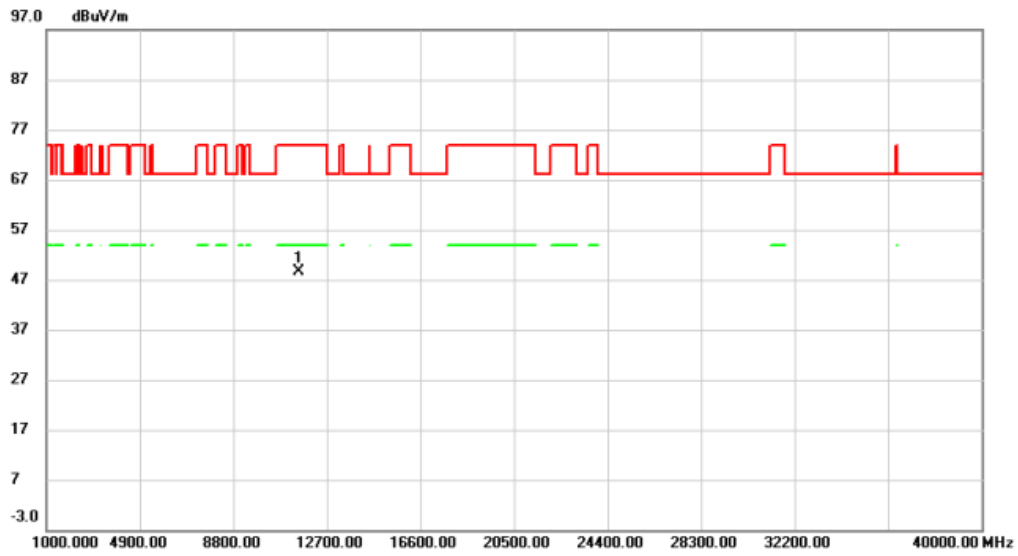


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11508.90	48.98	-0.34	48.64	74.00	-25.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

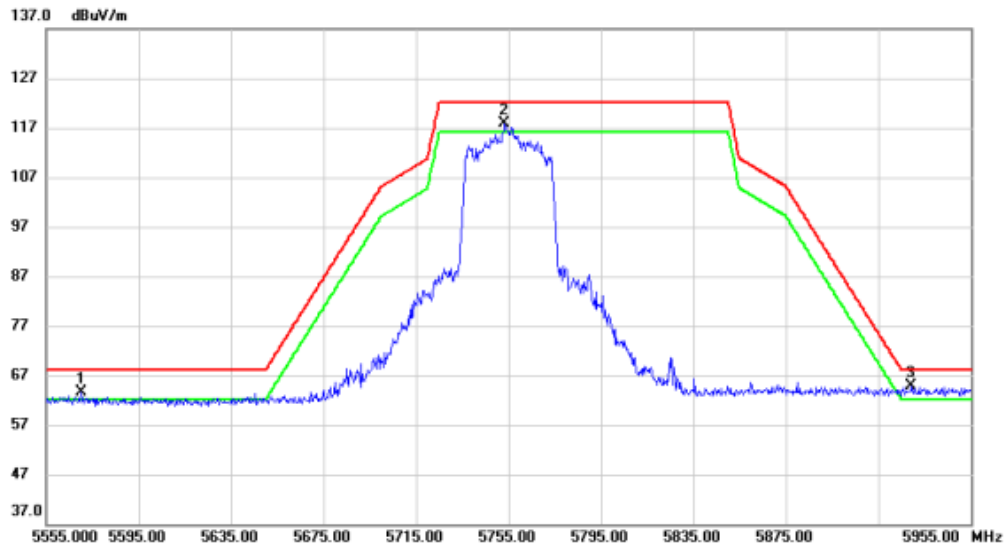


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	5570.200	21.33	42.26	63.59	68.20	-4.61	peak	
2	!	5753.400	75.47	42.49	117.96	122.2	-4.24	peak	
3	*	5929.400	22.07	42.71	64.78	68.20	-3.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

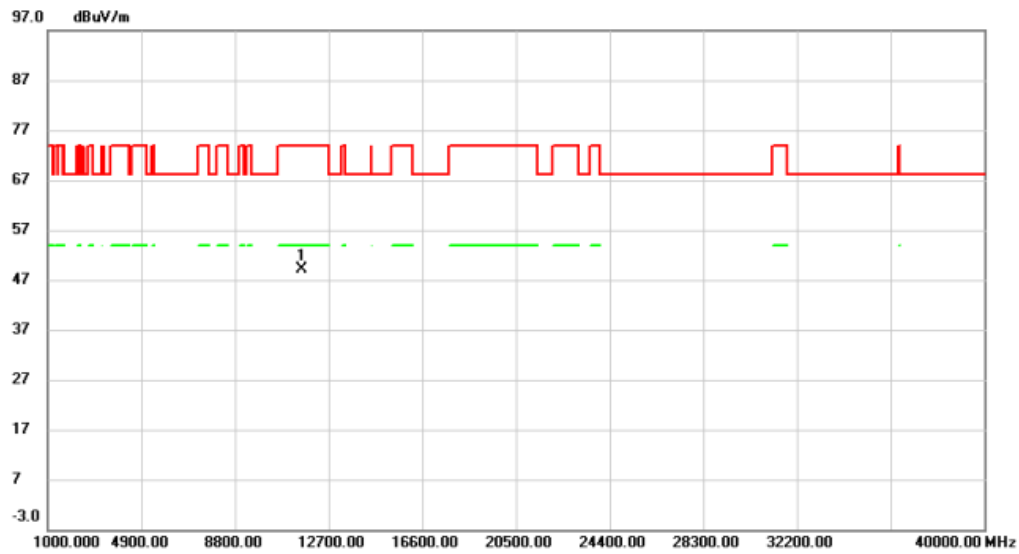


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11590.10	49.71	-0.64	49.07	74.00	-24.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

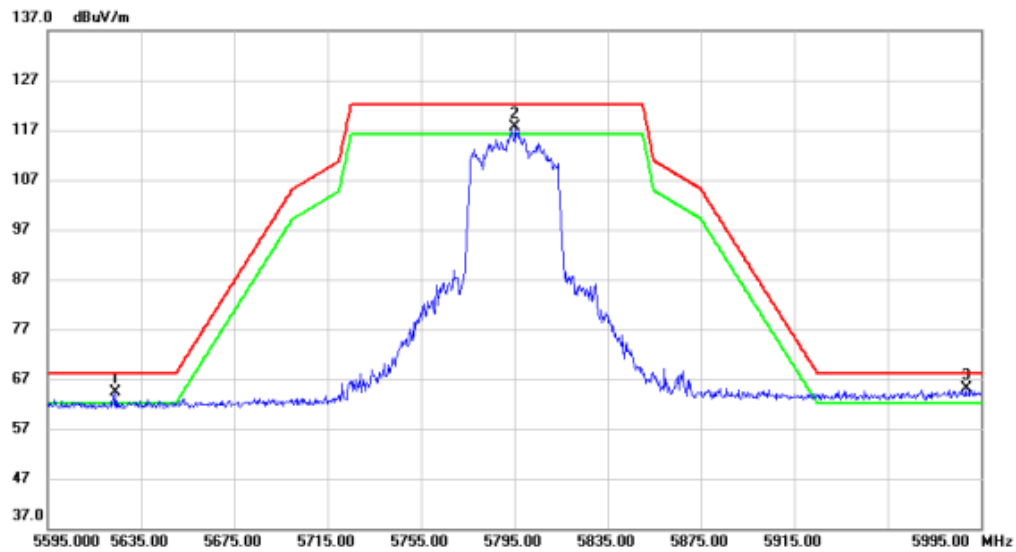


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	5624.200	22.09	42.33	64.42	68.20	-3.78	peak	
2	!	5795.400	75.01	42.54	117.55	122.2	-4.65	peak	
3	*	5988.600	22.41	42.79	65.20	68.20	-3.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

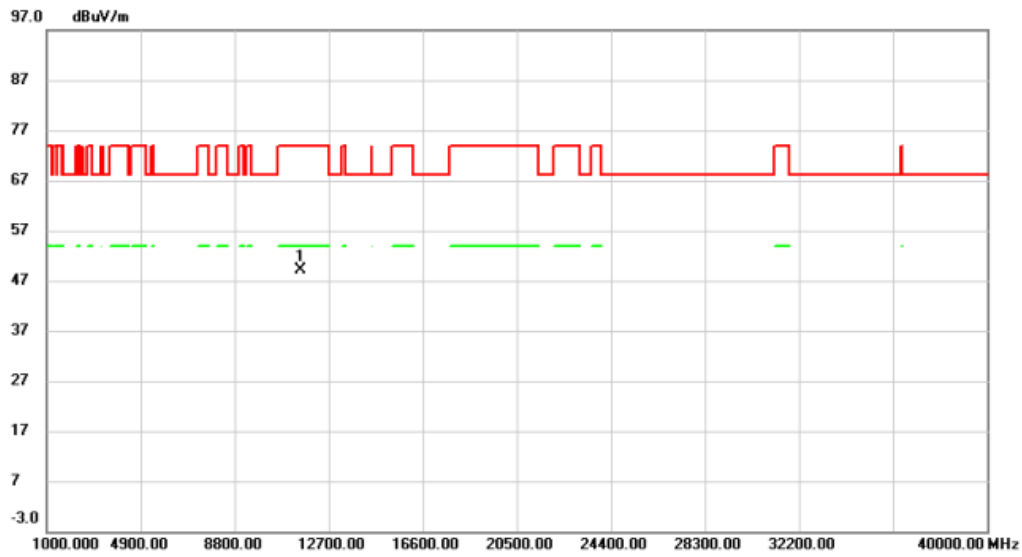


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11551.30	49.58	-0.50	49.08	74.00	-24.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

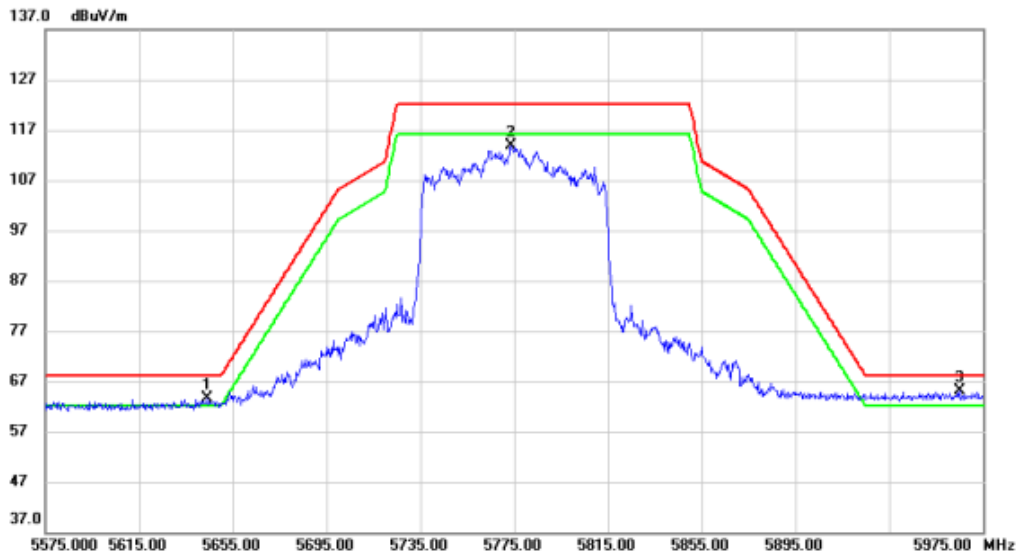


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	5644.200	21.19	42.35	63.54	68.20	-4.66	peak	
2		5773.800	71.30	42.51	113.81	122.2	-8.39	peak	
3	*	5965.000	22.29	42.76	65.05	68.20	-3.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Straddle Channel:

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

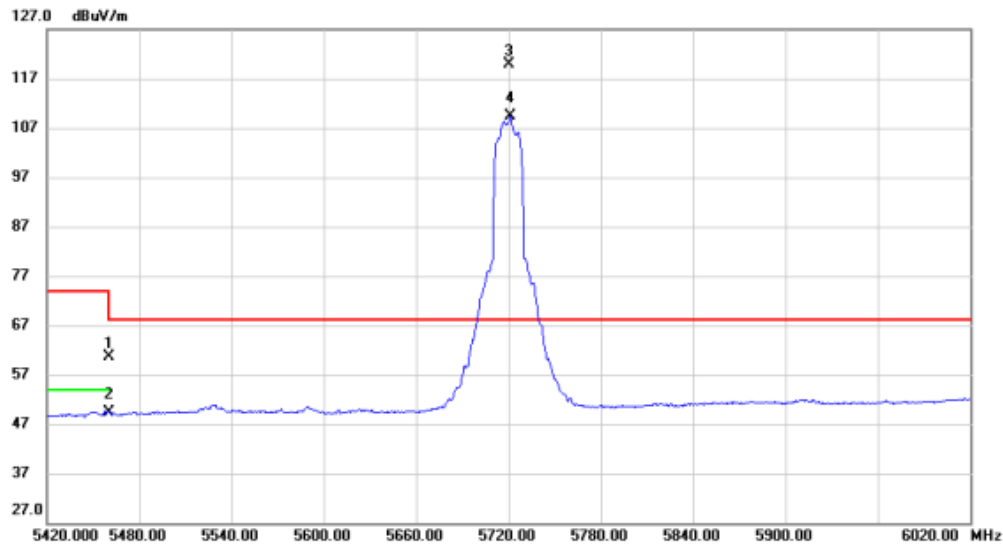


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	18.43	42.10	60.53	74.00	-13.47	peak	
2		5460.000	7.36	42.10	49.46	54.00	-4.54	AVG	
3	*	5720.500	77.54	42.45	119.99	68.20	51.79	peak	No Limit
4	X	5721.200	67.00	42.45	109.45	68.20	41.25	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3.
The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges.
The band edges are considered to be 5.47 GHz and 5.85 GHz. In addition, the actual limit of the U-NII-3's band edge 5.850GHz is 122.20dBuV/m, so the result of this item should be pass.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

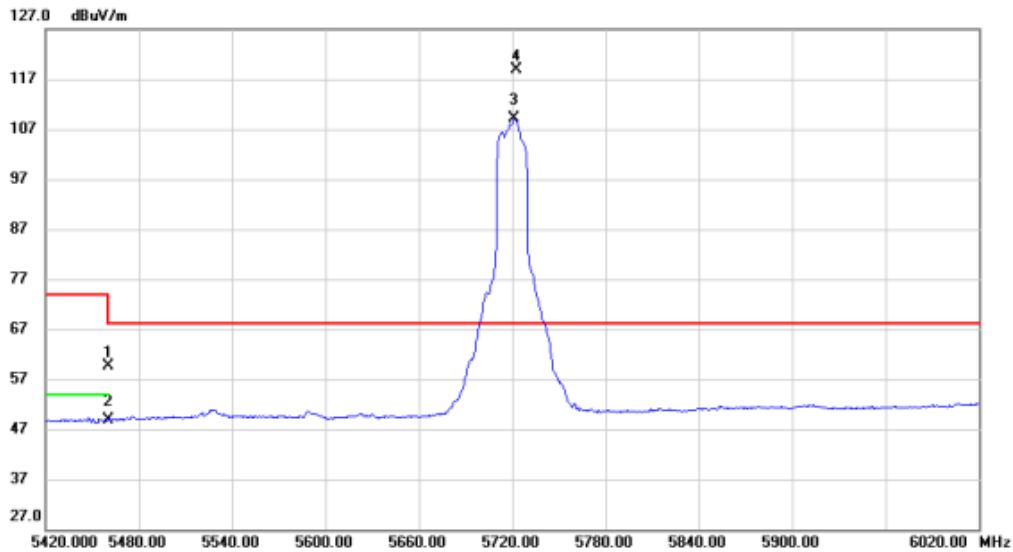


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	17.54	42.10	59.64	74.00	-14.36	peak	
2		5460.000	6.68	42.10	48.78	54.00	-5.22	AVG	
3	X	5721.200	66.58	42.45	109.03	68.20	40.83	AVG	No Limit
4	*	5722.800	76.45	42.45	118.90	68.20	50.70	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3.
The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges.
The band edges are considered to be 5.47 GHz and 5.85 GHz. In addition, the actual limit of the U-NII-3's band edge 5.850GHz is 122.20dBuV/m, so the result of this item should be pass.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

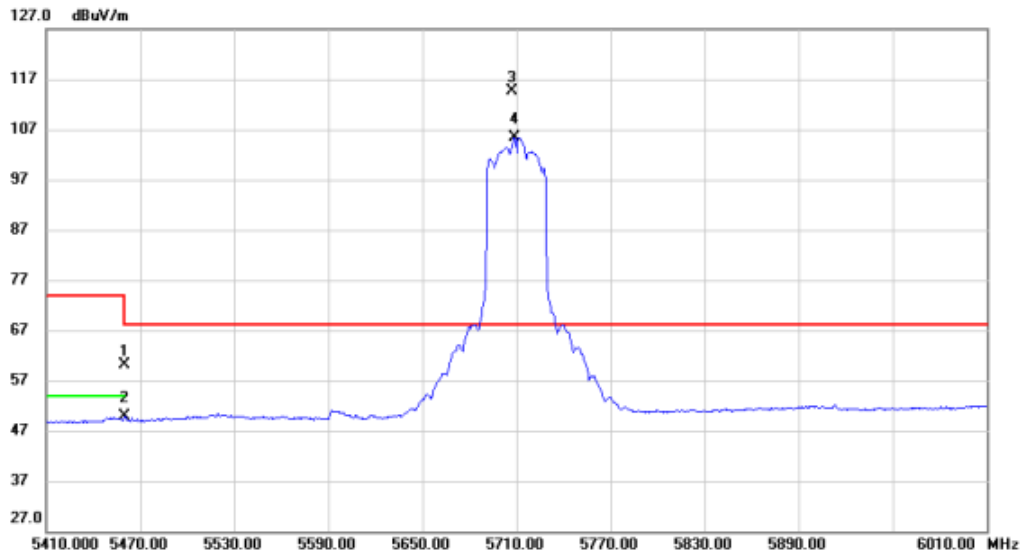


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.000	18.14	42.10	60.24	74.00	-13.76	peak	
2	5460.000	7.80	42.10	49.90	54.00	-4.10	AVG	
3 *	5707.100	72.15	42.43	114.58	68.20	46.38	peak	No Limit
4 X	5708.800	62.94	42.43	105.37	68.20	37.17	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3.
The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges.
The band edges are considered to be 5.47 GHz and 5.85 GHz. In addition, the actual limit of the U-NII-3's band edge 5.850GHz is 122.20dBuV/m, so the result of this item should be pass.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

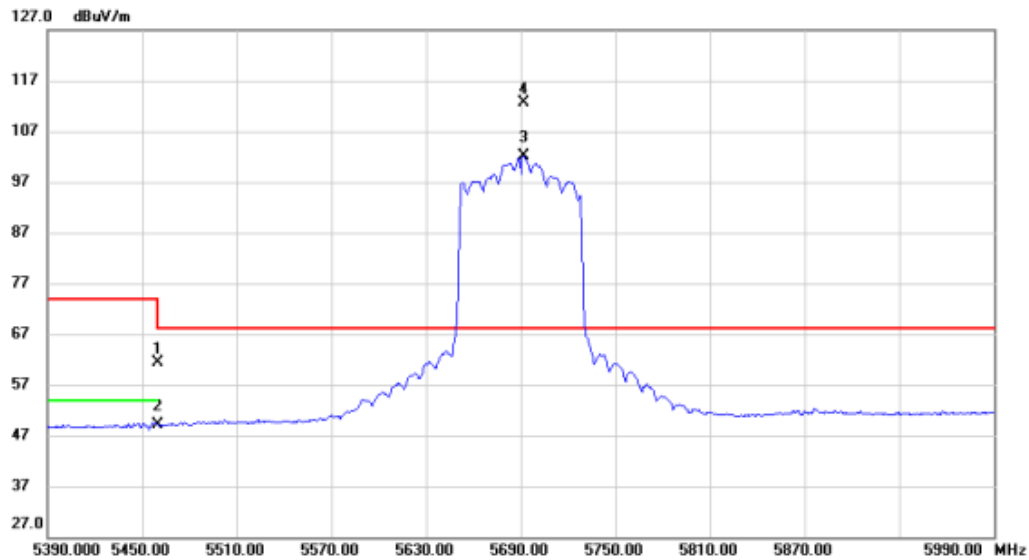


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.000	19.19	42.10	61.29	74.00	-12.71	peak	
2	5460.000	7.01	42.10	49.11	54.00	-4.89	AVG	
3 X	5691.800	59.77	42.41	102.18	68.20	33.98	AVG	No Limit
4 *	5692.185	70.15	42.41	112.56	68.20	44.36	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3.
The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges.
The band edges are considered to be 5.47 GHz and 5.85 GHz. In addition, the actual limit of the U-NII-3's band edge 5.850GHz is 122.20dBuV/m, so the result of this item should be pass.

Test Mode	UNII-2C_TX AX(HE20) Mode 5720 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

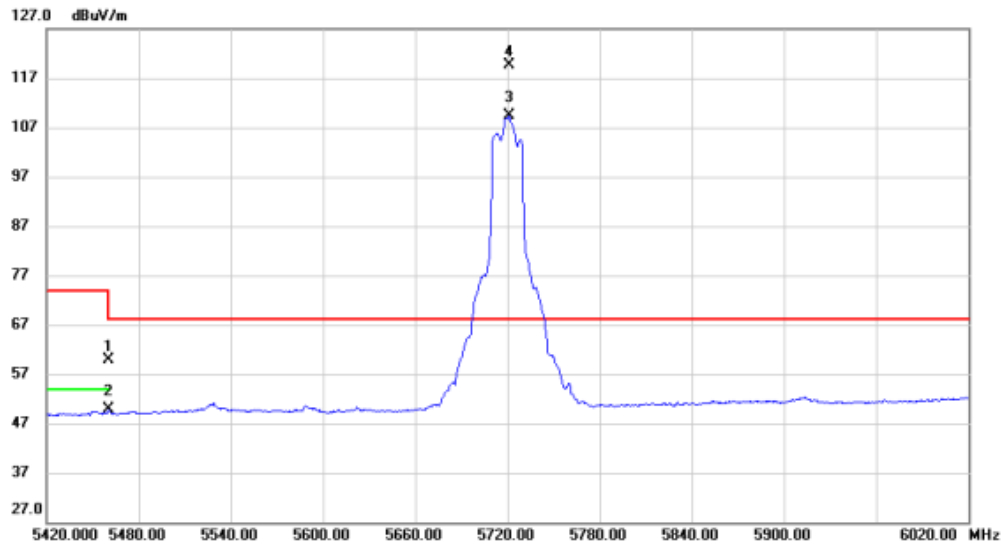


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	17.89	42.10	59.99	74.00	-14.01	peak	
2		5460.000	7.82	42.10	49.92	54.00	-4.08	AVG	
3	X	5721.200	66.81	42.45	109.26	68.20	41.06	AVG	No Limit
4	*	5721.000	77.15	42.45	119.60	68.20	51.40	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3.
The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges.
The band edges are considered to be 5.47 GHz and 5.85 GHz. In addition, the actual limit of the U-NII-3's band edge 5.850GHz is 122.20dBuV/m, so the result of this item should be pass.

Test Mode	UNII-2C_TX AX(HE40) Mode 5710 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

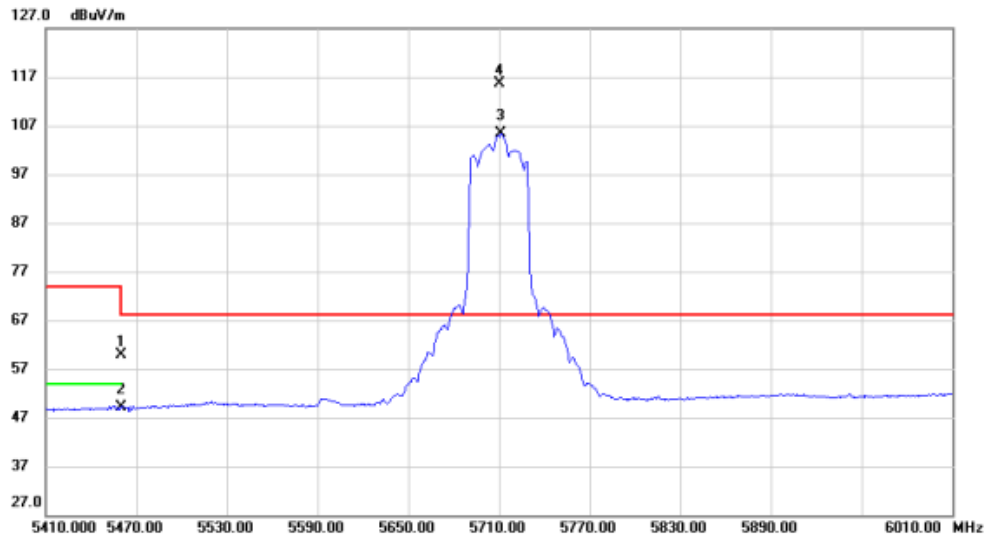


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	17.73	42.10	59.83	74.00	-14.17	peak	
2		5460.000	7.15	42.10	49.25	54.00	-4.75	AVG	
3	X	5711.200	63.00	42.44	105.44	68.20	37.24	AVG	No Limit
4	*	5710.090	73.16	42.43	115.59	68.20	47.39	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3.
The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges.
The band edges are considered to be 5.47 GHz and 5.85 GHz. In addition, the actual limit of the U-NII-3's band edge 5.850GHz is 122.20dBuV/m, so the result of this item should be pass.

Test Mode	UNII-2C_TX AX(HE80) Mode 5690 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

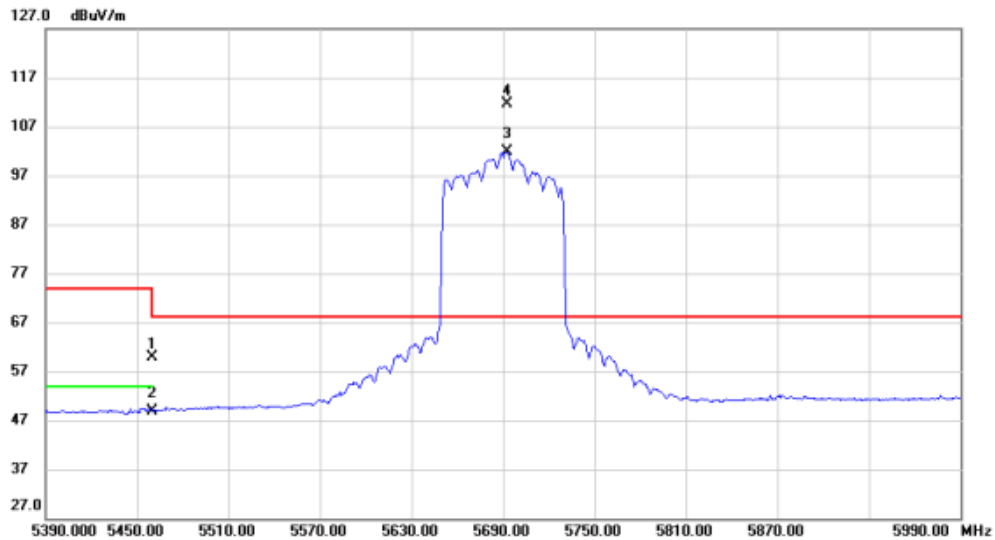


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5460.000	17.69	42.10	59.79	74.00	-14.21	peak	
2		5460.000	6.88	42.10	48.98	54.00	-5.02	AVG	
3	X	5693.000	59.42	42.41	101.83	68.20	33.63	AVG	No Limit
4	*	5693.000	69.15	42.41	111.56	68.20	43.36	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3.
The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges.
The band edges are considered to be 5.47 GHz and 5.85 GHz. In addition, the actual limit of the U-NII-3's band edge 5.850GHz is 122.20dBuV/m, so the result of this item should be pass.

Test Mode	TX A Mode 5720 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

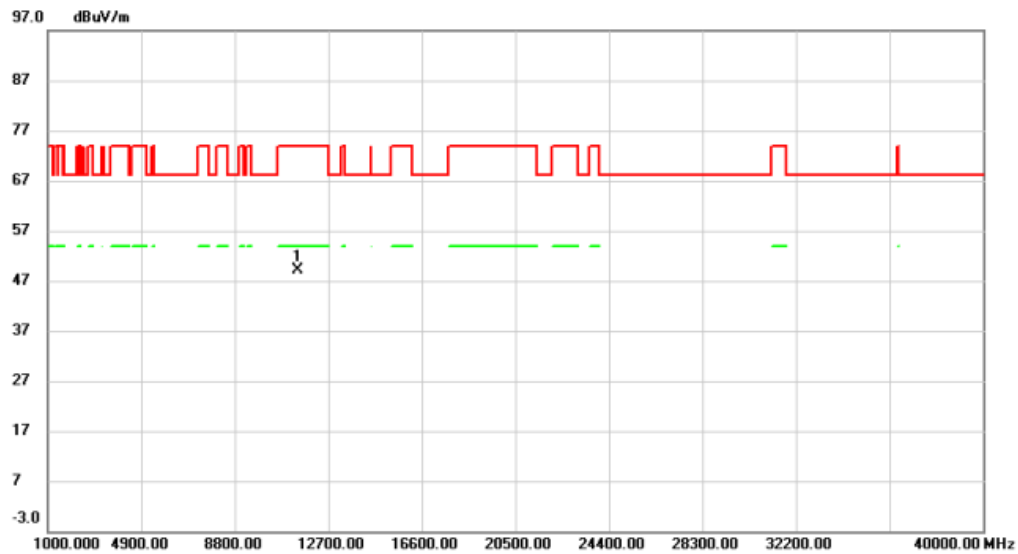


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11438.60	49.83	-0.62	49.21	74.00	-24.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

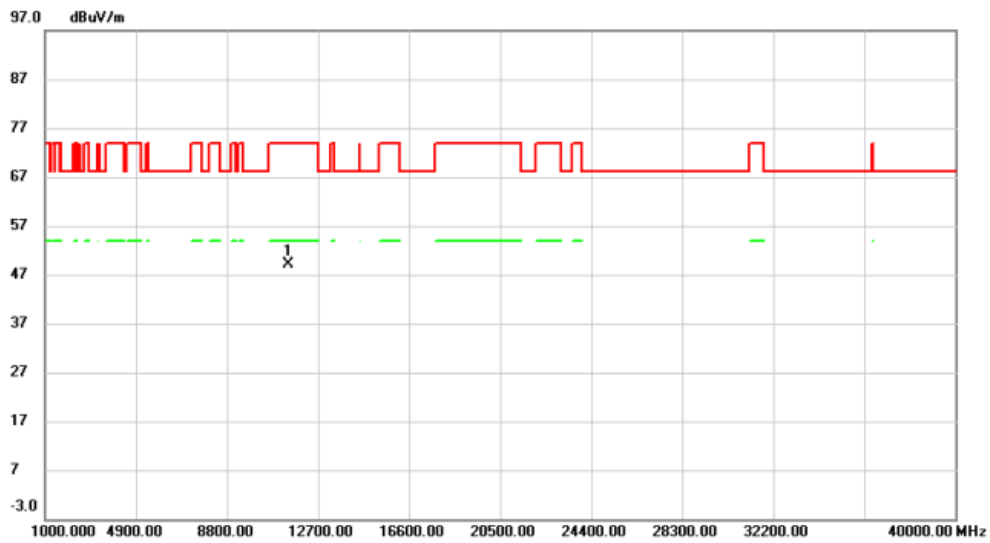


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11438.90	49.80	-0.62	49.18	74.00	-24.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

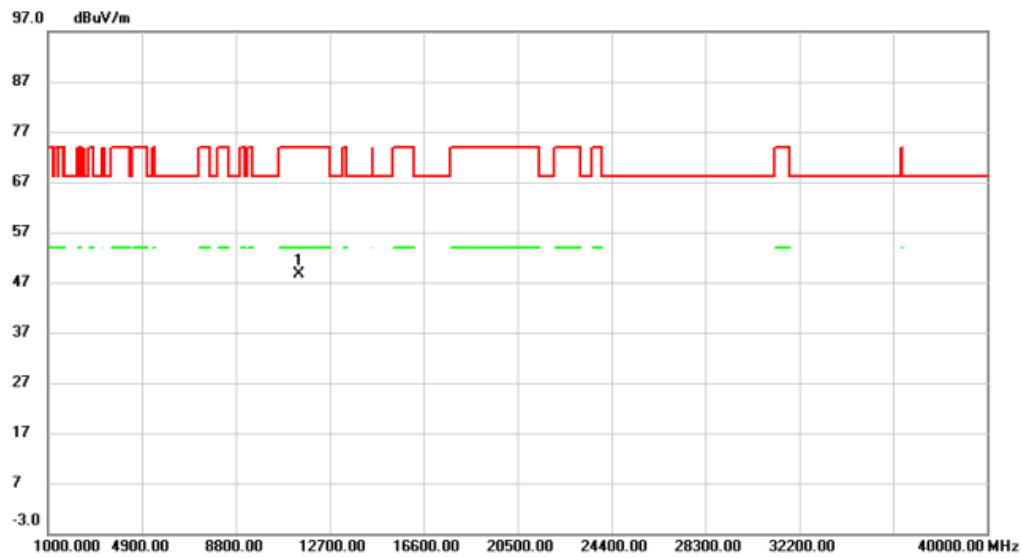


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11419.80	49.25	-0.71	48.54	74.00	-25.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT80) Mode 5690 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

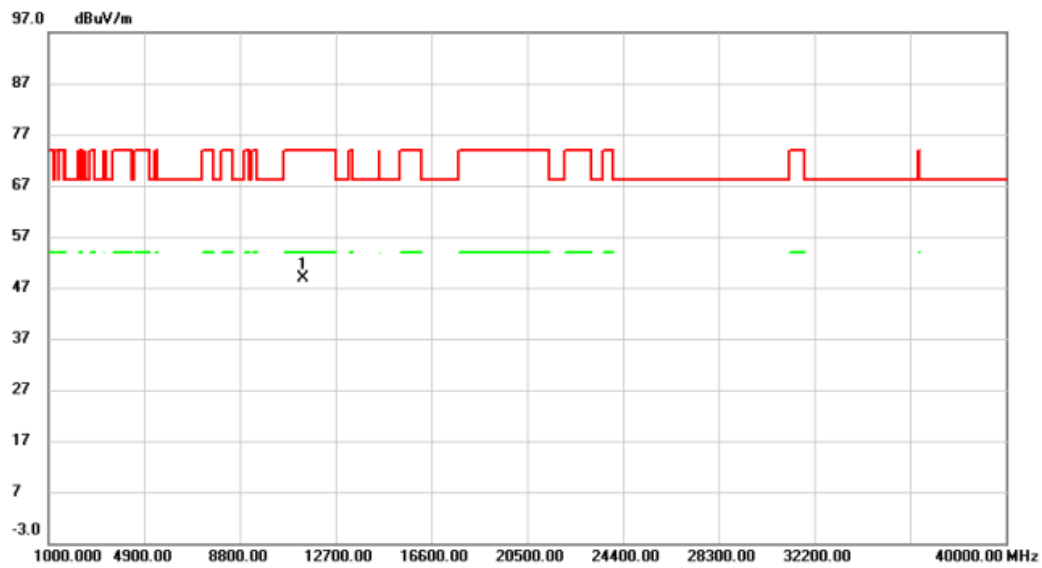


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11382.70	49.86	-0.90	48.96	74.00	-25.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 5720 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

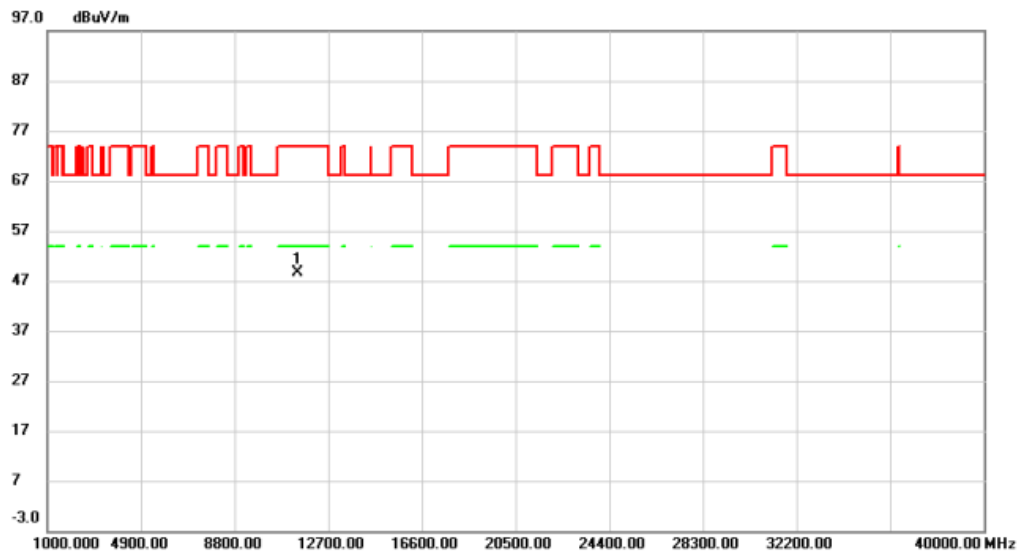


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11439.80	49.26	-0.61	48.65	74.00	-25.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 5710 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

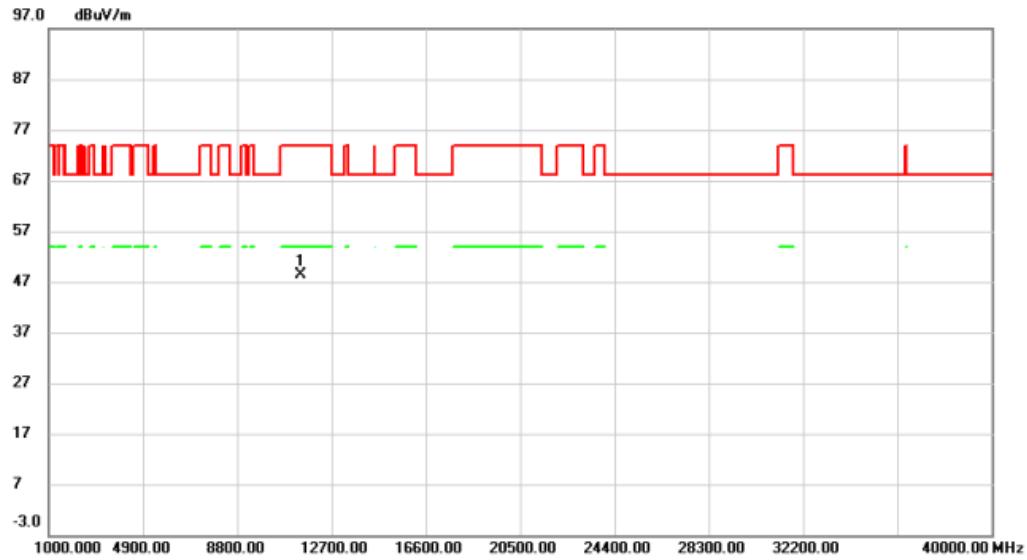


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11422.50	49.19	-0.70	48.49	74.00	-25.51	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE80) Mode 5690 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

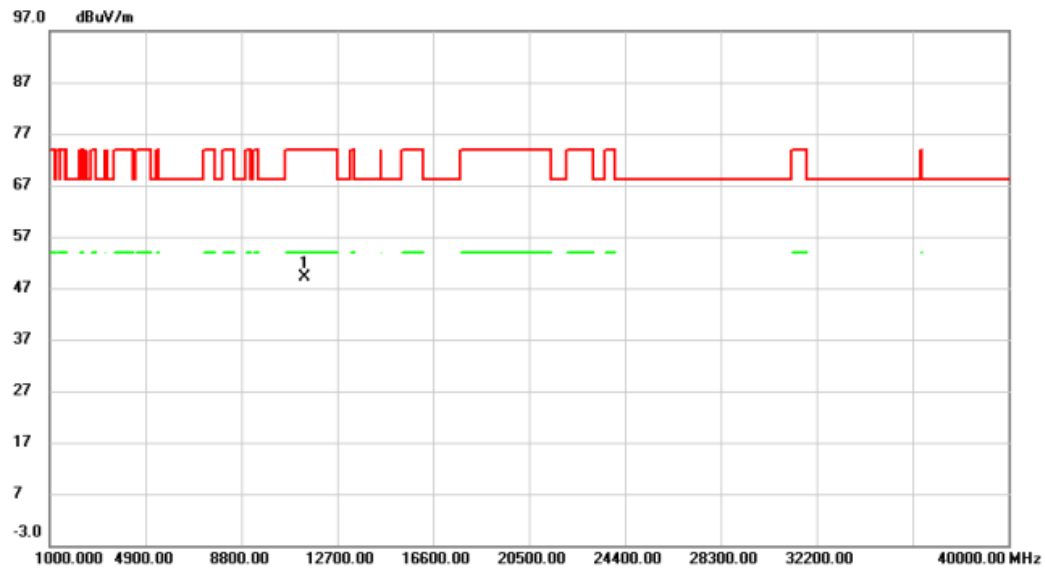

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11380.20	50.07	-0.91	49.16	74.00	-24.84	peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH


Test Mode	UNII-1_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	19.598	16.400
40	5200	20.998	16.500
48	5240	20.689	16.500

CH36

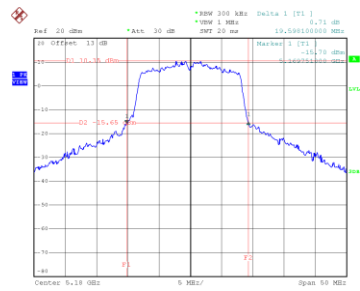


Date: 14.NOV.2022 13:40:53

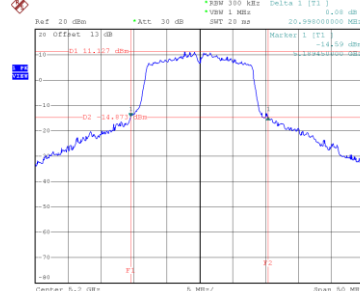CH40
26 dB Bandwidth


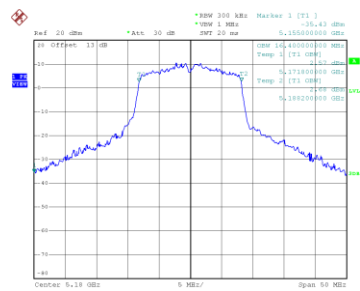
Date: 14.NOV.2022 13:42:02

CH48

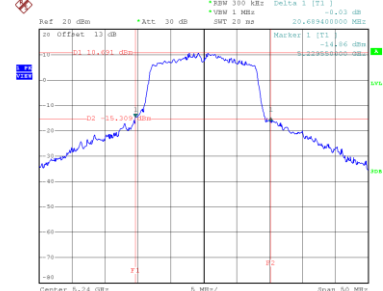


Date: 14.NOV.2022 13:43:09


99 % Occupied Bandwidth



Date: 14.NOV.2022 13:40:52

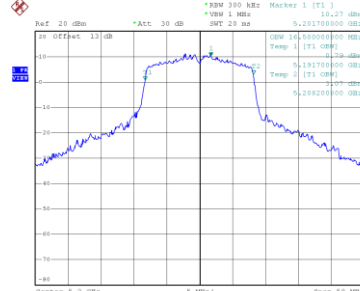

Date: 14.NOV.2022 13:41:15

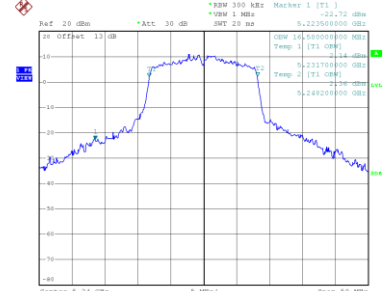


Date: 14.NOV.2022 13:42:25


Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.709	17.600
40	5200	20.950	17.600
48	5240	21.450	17.600

CH36

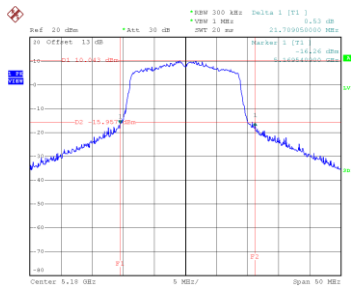


Date: 14.NOV.2022 13:58:45

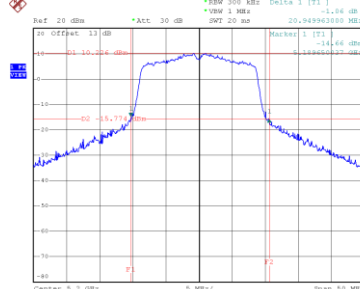CH40
26 dB Bandwidth


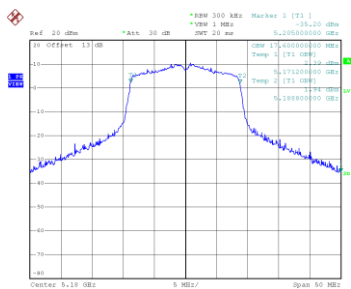
Date: 14.NOV.2022 13:59:59

CH48

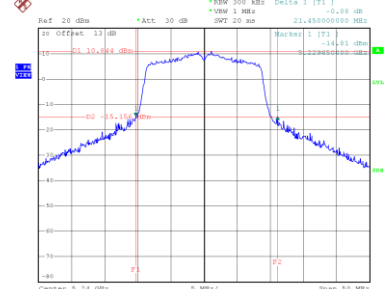


Date: 14.NOV.2022 14:01:10


99 % Occupied Bandwidth



Date: 14.NOV.2022 13:58:52

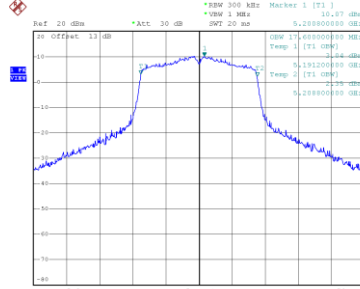

Date: 14.NOV.2022 13:59:13

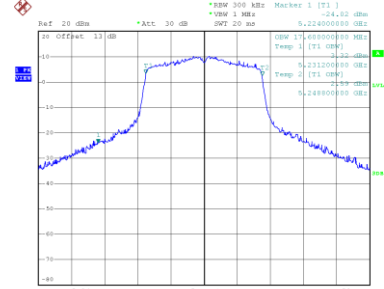


Date: 14.NOV.2022 14:00:23


Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	39.009	36.000
46	5230	39.000	36.000

CH38

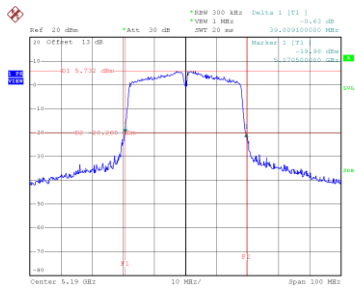


Date: 14.NOV.2022 14:15:13

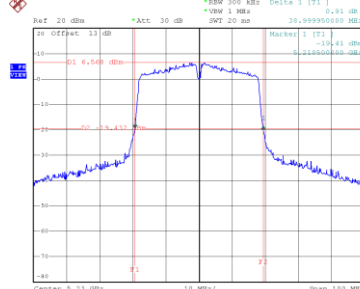
CH46
26 dB Bandwidth


Date: 14.NOV.2022 14:18:14

99 % Occupied Bandwidth

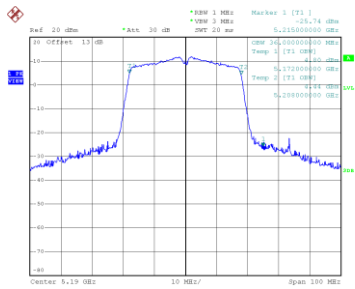

Date: 14.NOV.2022 14:16:27

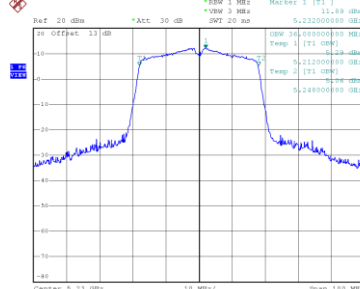


Date: 14.NOV.2022 14:17:30


Test Mode	UNII-1_TX AX(HE20) Mode
-----------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.100	19.000
40	5200	21.190	19.000
48	5240	20.750	18.900

CH36

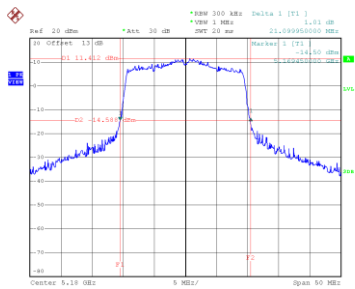


Date: 14.NOV.2022 15:27:39

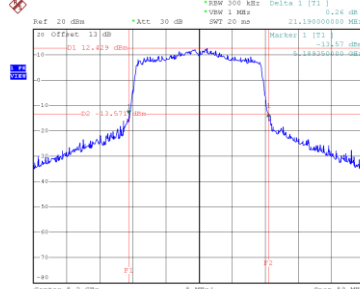CH40
26 dB Bandwidth


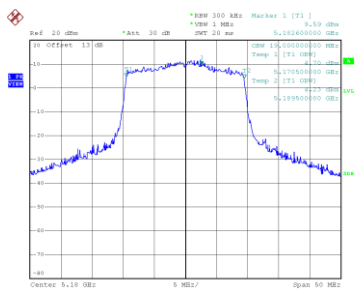
Date: 14.NOV.2022 15:28:58

CH48

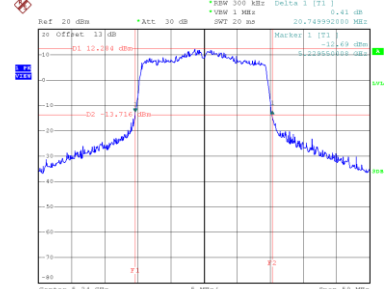


Date: 14.NOV.2022 15:30:42


99 % Occupied Bandwidth



Date: 14.NOV.2022 15:26:55

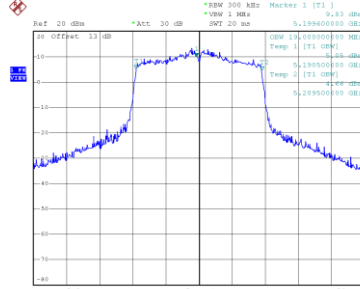

Date: 14.NOV.2022 15:28:13

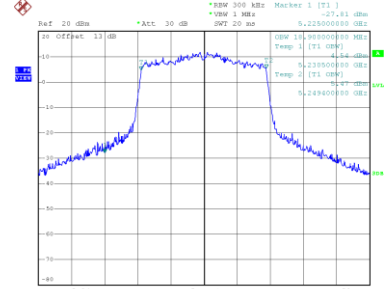


Date: 14.NOV.2022 15:29:58


Test Mode	UNII-1_TX AX(HE40) Mode
-----------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	39.609	37.800
46	5230	39.900	37.800

CH38

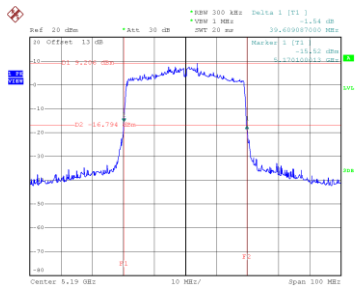


Date: 14.NOV.2022 15:47:08

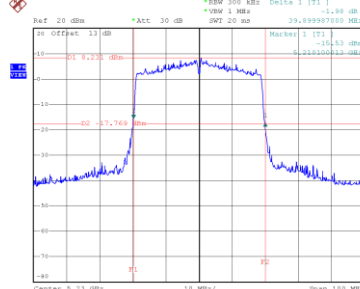
CH46
26 dB Bandwidth


Date: 14.NOV.2022 15:48:16

99 % Occupied Bandwidth

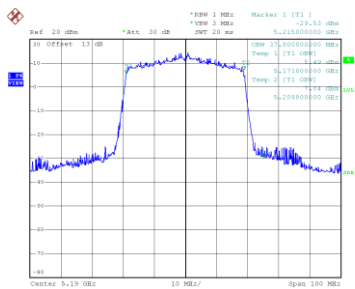

Date: 14.NOV.2022 15:46:23

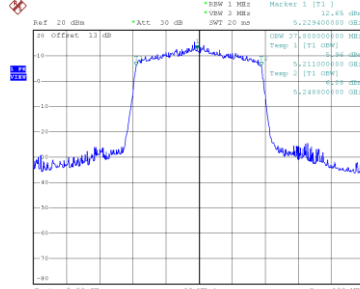


Date: 14.NOV.2022 15:47:32

Test Mode	UNII-1_TX AX(HE80) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	81.608	76.800

CH42 26 dB Bandwidth

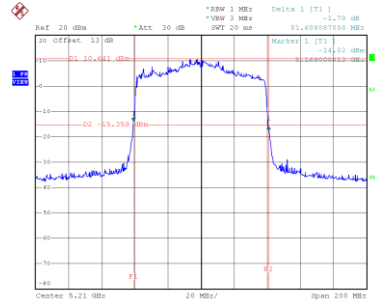

Date: 14.NOV.2022 15:59:43

99 % Occupied Bandwidth

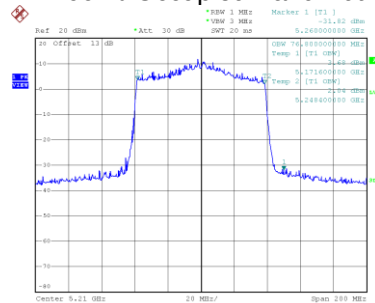


Date: 14.NOV.2022 15:59:46


Test Mode	UNII-2A_TX A Mode
-----------	-------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	18.709	16.400
60	5300	18.900	16.300
64	5320	18.690	16.400

CH52

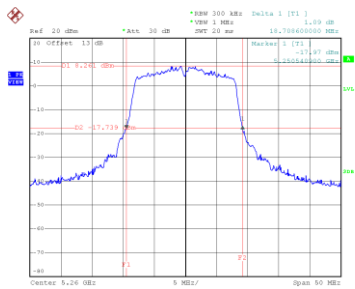


Date: 14.NOV.2022 13:44:28

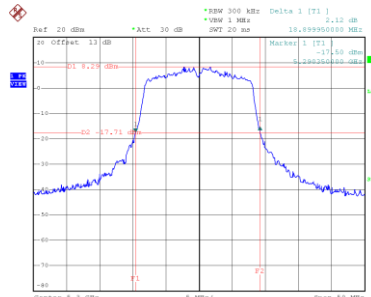CH60
26 dB Bandwidth


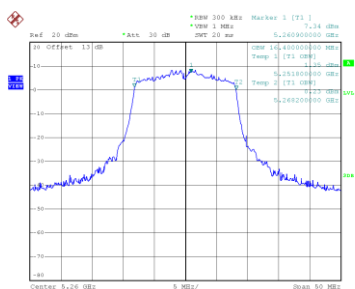
Date: 14.NOV.2022 13:45:36

CH64

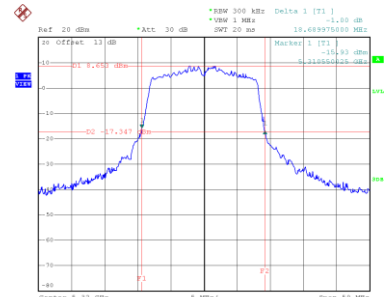


Date: 14.NOV.2022 13:46:40


99 % Occupied Bandwidth



Date: 14.NOV.2022 13:44:41

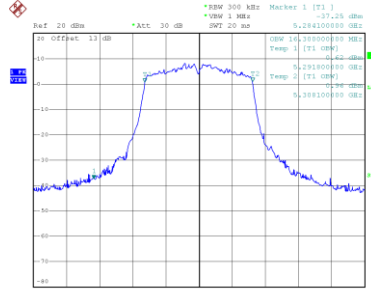

Date: 14.NOV.2022 13:44:48

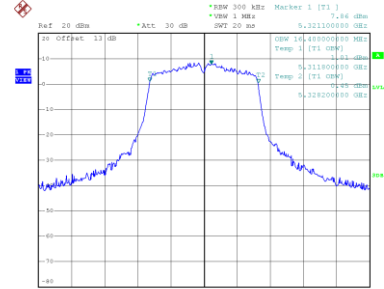


Date: 14.NOV.2022 13:45:51


Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	20.150	17.600
60	5300	20.259	17.600
64	5320	20.150	17.500

CH52

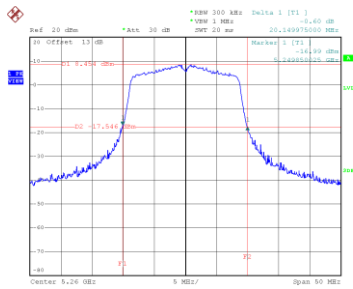


Date: 14.NOV.2022 14:02:25

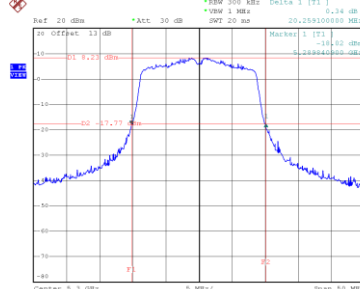CH60
26 dB Bandwidth


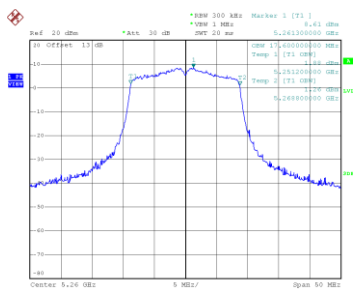
Date: 14.NOV.2022 14:03:32

CH64

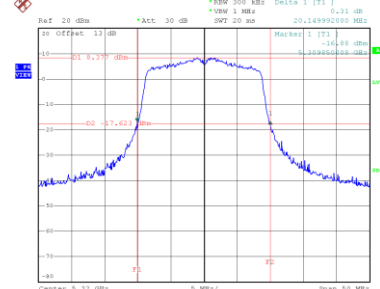


Date: 14.NOV.2022 14:04:54


99 % Occupied Bandwidth



Date: 14.NOV.2022 14:02:40

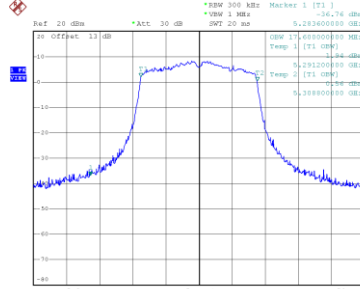

Date: 14.NOV.2022 14:02:47

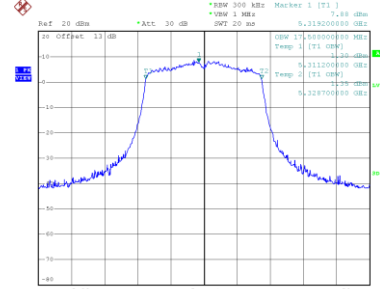


Date: 14.NOV.2022 14:04:09

Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	38.990	36.200
62	5310	38.800	36.200

CH54


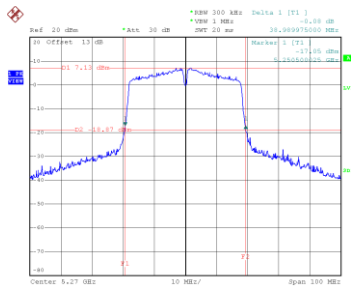


CH62

26 dB Bandwidth

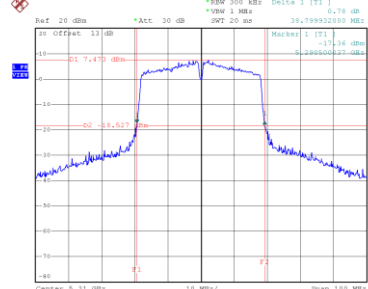


99 % Occupied Bandwidth

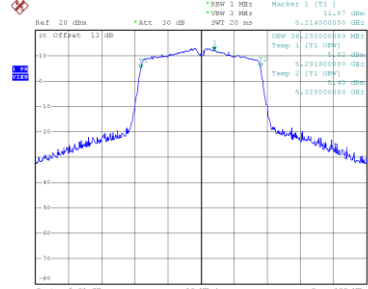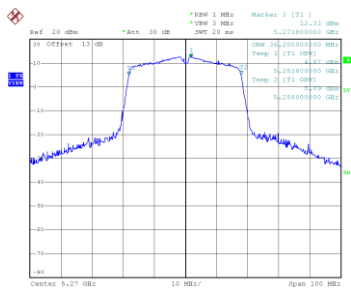


Test Mode	UNII-2A_TX AX(HE20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	20.850	19.000
60	5300	20.850	19.000
64	5320	21.400	19.000

CH52

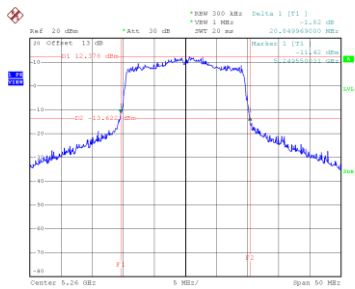


Date: 14.NOV.2022 15:34:46

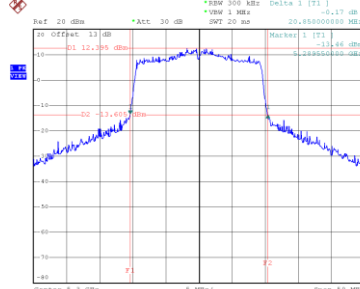CH60
26 dB Bandwidth


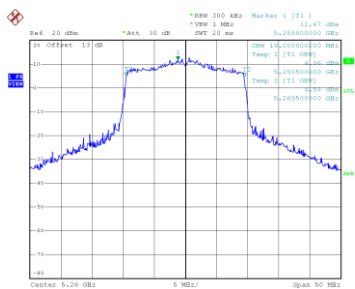
Date: 14.NOV.2022 15:36:03

CH64

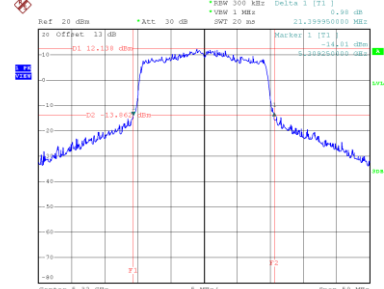


Date: 14.NOV.2022 15:37:10


99 % Occupied Bandwidth



Date: 14.NOV.2022 15:34:02

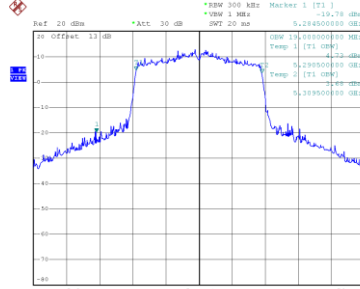

Date: 14.NOV.2022 15:35:20

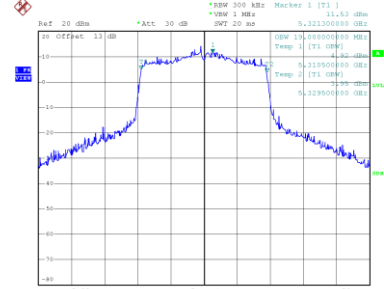


Date: 14.NOV.2022 15:36:25


Test Mode	UNII-2A_TX AX(HE40) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	39.800	38.000
62	5310	40.000	37.600

CH54

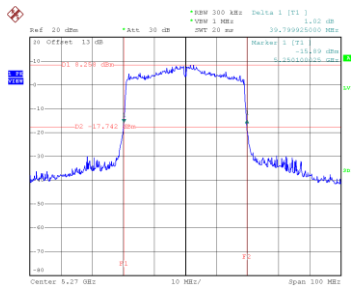


Date: 14.NOV.2022 15:49:32

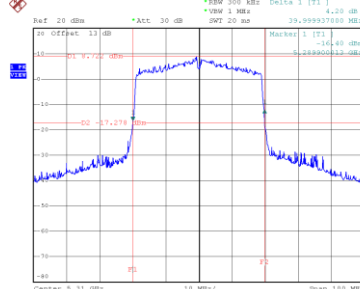
CH62
26 dB Bandwidth


Date: 14.NOV.2022 15:50:37

99 % Occupied Bandwidth

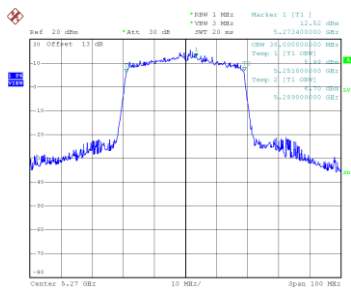

Date: 14.NOV.2022 15:49:47

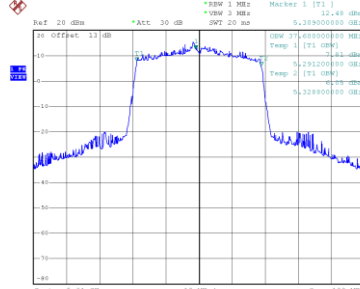


Date: 14.NOV.2022 15:49:53

Test Mode	UNII-2A_TX AX(HE80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	82.600	76.800

CH58 26 dB Bandwidth

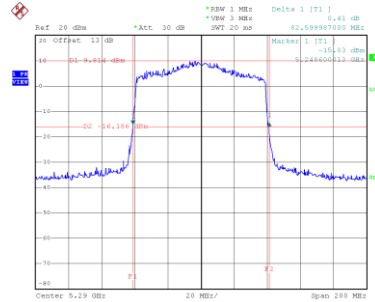

Date: 14.NOV.2022 16:01:20

99 % Occupied Bandwidth

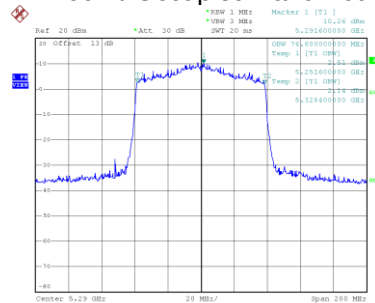


Date: 14.NOV.2022 16:00:24

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode
-----------	-----------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	162.800	154.400

CH50 26 dB Bandwidth

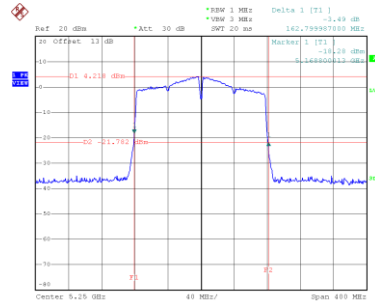

Date: 14.NOV.2022 14:59:44

99 % Occupied Bandwidth

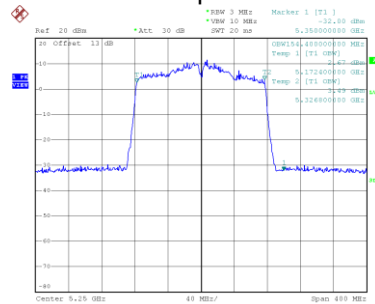


Date: 14.NOV.2022 14:58:52

Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode
-----------	----------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	162.000	156.000

CH50 26 dB Bandwidth

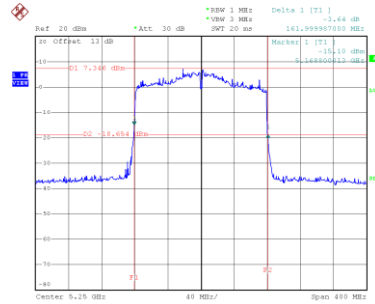

Date: 14.NOV.2022 16:07:24

99 % Occupied Bandwidth

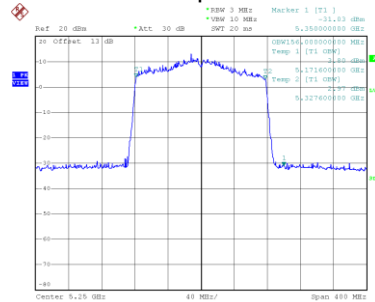


Date: 14.NOV.2022 16:06:32


Test Mode	UNII-2C_TX A Mode
-----------	-------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	18.890	16.400
116	5580	18.950	16.300
140	5700	18.990	16.400
144	5720	19.200	16.400

CH100

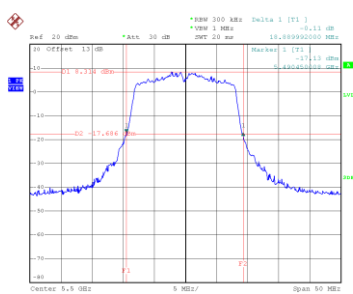


Date: 14.NOV.2022 13:47:52

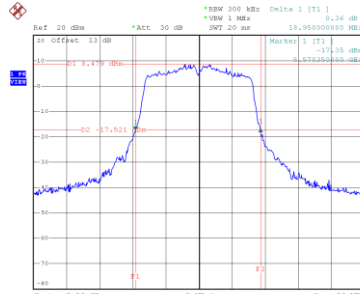CH116
26 dB Bandwidth


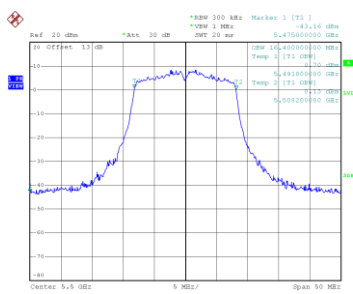
Date: 14.NOV.2022 13:49:11

CH140

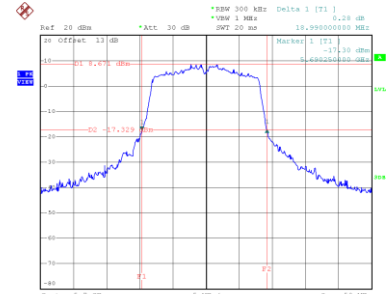


Date: 14.NOV.2022 13:52:32


99 % Occupied Bandwidth




Date: 14.NOV.2022 13:47:55

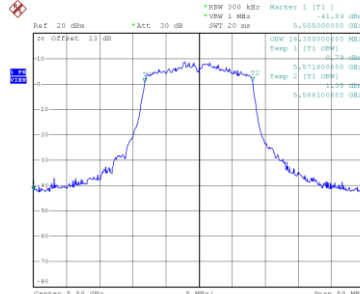


Date: 14.NOV.2022 13:48:27

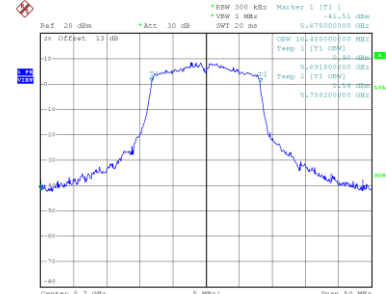

Date: 14.NOV.2022 13:51:45

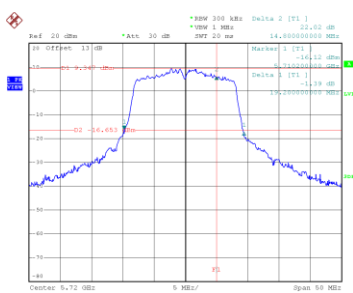CH144
26 dB Bandwidth


Date: 14.NOV.2022 21:40:10

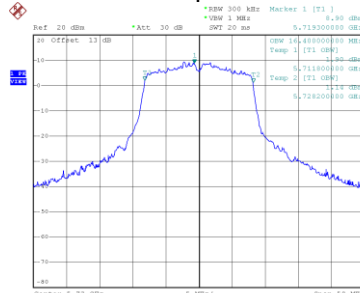
CH144
99 % Occupied Bandwidth


Date: 14.NOV.2022 21:38:18


Test Mode	UNII-2C_TX AC(VHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	20.000	17.500
116	5580	20.150	17.500
140	5700	20.150	17.600
144	5720	20.200	17.600

CH100

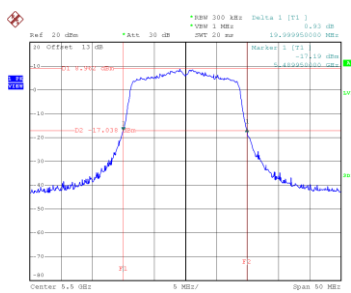


Date: 14.NOV.2022 14:06:56

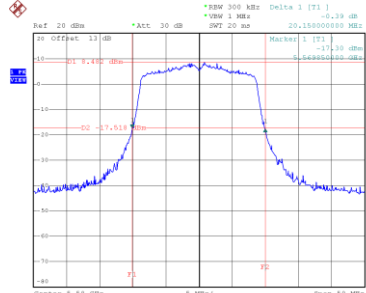CH116
26 dB Bandwidth


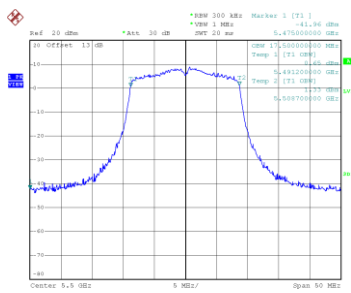
Date: 14.NOV.2022 14:07:10

CH140

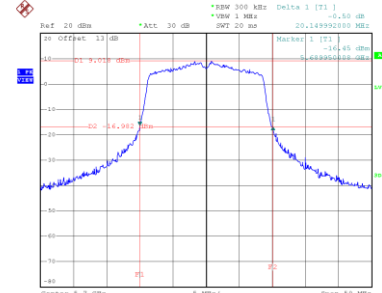


Date: 14.NOV.2022 14:08:27


99 % Occupied Bandwidth




Date: 14.NOV.2022 14:05:20

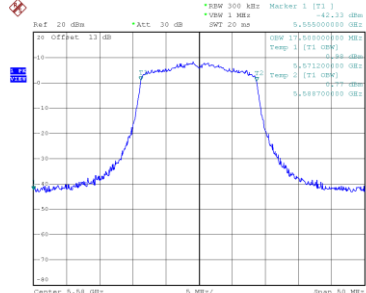


Date: 14.NOV.2022 14:06:27

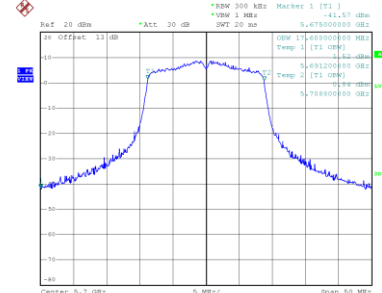

Date: 14.NOV.2022 14:07:42

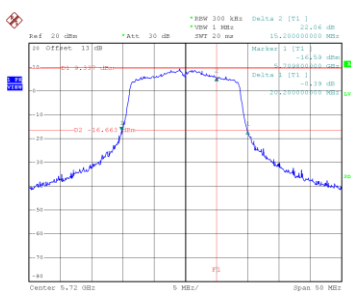CH144
26 dB Bandwidth


Date: 14.NOV.2022 21:44:10

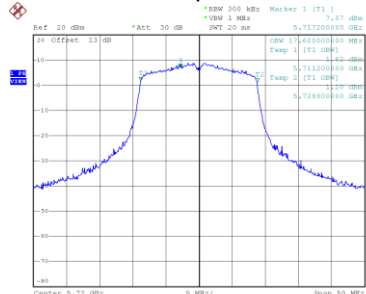
CH144
99 % Occupied Bandwidth


Date: 14.NOV.2022 21:43:28


Test Mode	UNII-2C_TX AC(VHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	39.190	36.200
110	5550	39.200	36.200
134	5670	39.508	36.400
142	5710	39.400	36.200

CH102

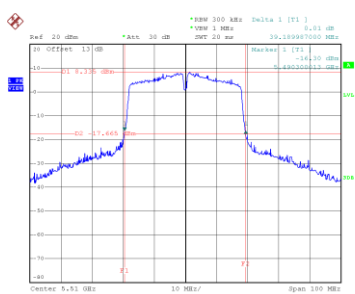


Date: 14.NOV.2022 14:22:00

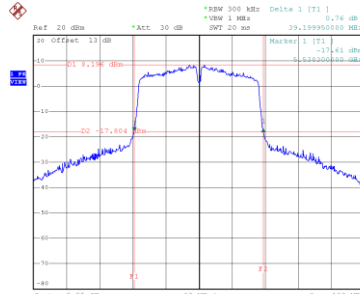CH110
26 dB Bandwidth


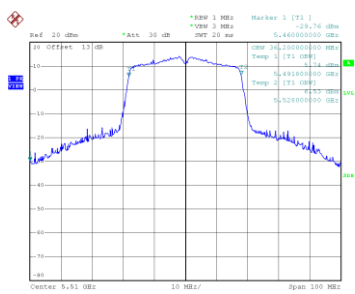
Date: 14.NOV.2022 14:23:14

CH134

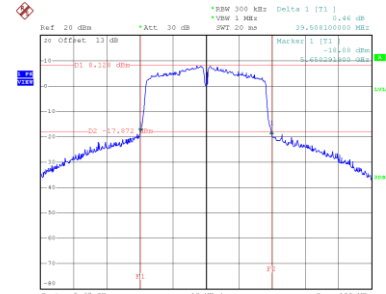


Date: 14.NOV.2022 14:24:21


99 % Occupied Bandwidth




Date: 14.NOV.2022 14:22:12

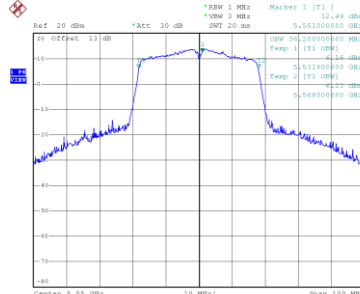


Date: 14.NOV.2022 14:22:29

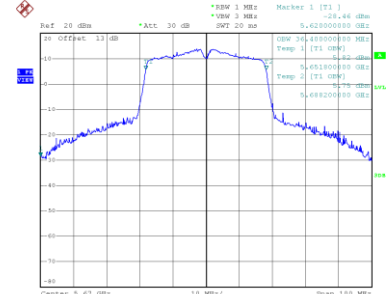

Date: 14.NOV.2022 14:23:38

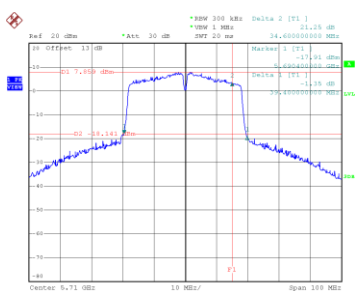CH142
26 dB Bandwidth


Date: 14.NOV.2022 21:51:26

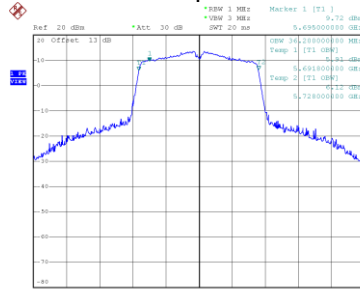
CH144
99 % Occupied Bandwidth


Date: 14.NOV.2022 21:50:40


Test Mode	UNII-2C_TX AC(VHT80) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
106	5530	81.000	75.200
122	5610	81.200	75.200
138	5690	82.000	75.200

CH106

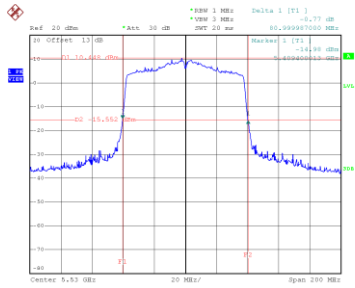


Date: 14.NOV.2022 14:54:54

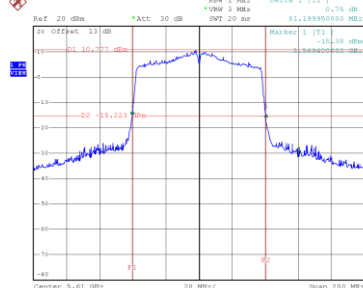CH122
26 dB Bandwidth


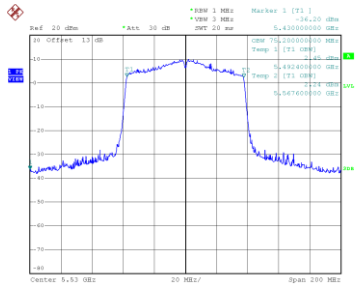
Date: 14.NOV.2022 14:56:18

CH138

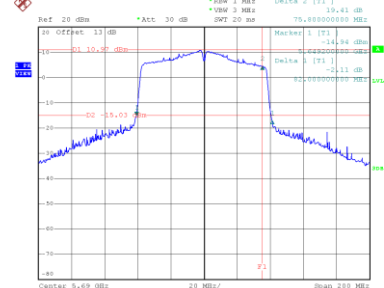


Date: 14.NOV.2022 21:58:40


99 % Occupied Bandwidth



Date: 14.NOV.2022 14:55:58

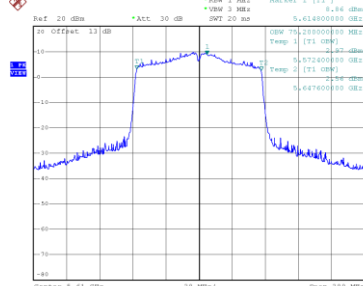

Date: 14.NOV.2022 14:55:21

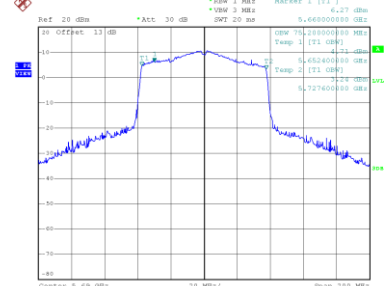


Date: 14.NOV.2022 21:57:47

Test Mode	UNII-2C_TX AC(VHT160) Mode
-----------	----------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
114	5570	162.000	154.400

CH114
26 dB Bandwidth

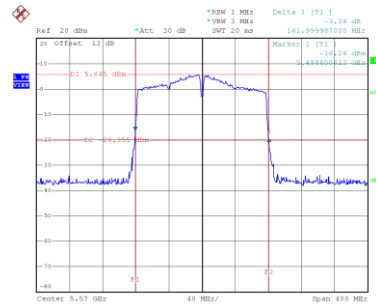

Date: 14.NOV.2022 15:00:49

99 % Occupied Bandwidth

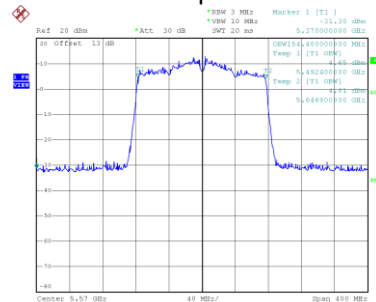


Date: 14.NOV.2022 14:59:57


Test Mode	UNII-2C_TX AX(HE20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	20.790	18.900
116	5580	20.750	18.900
140	5700	20.650	18.900
144	5720	20.800	18.900

CH100

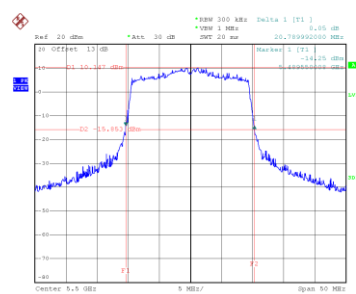


Date: 14.NOV.2022 15:38:28

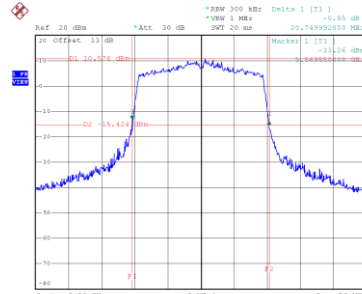CH116
26 dB Bandwidth


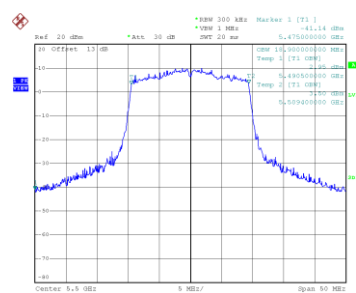
Date: 14.NOV.2022 15:39:28

CH140

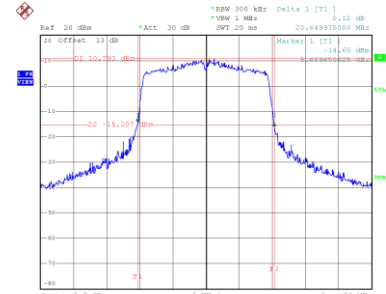


Date: 14.NOV.2022 15:40:37


99 % Occupied Bandwidth




Date: 14.NOV.2022 15:37:43

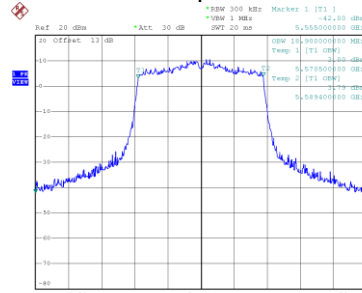


Date: 14.NOV.2022 15:38:44

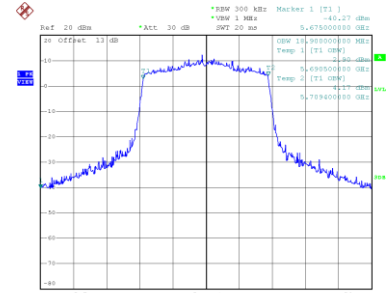

Date: 14.NOV.2022 15:39:52

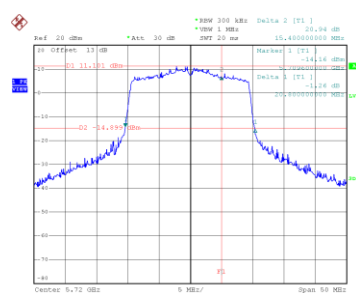CH144
26 dB Bandwidth


Date: 14.NOV.2022 21:47:40

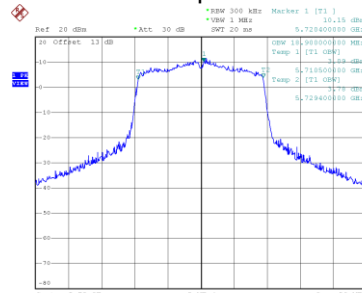
CH144
99 % Occupied Bandwidth


Date: 14.NOV.2022 21:46:48


Test Mode	UNII-2C_TX AX(HE40) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	39.799	38.000
110	5550	39.800	37.800
134	5670	39.990	38.000
142	5710	40.200	38.000

CH102

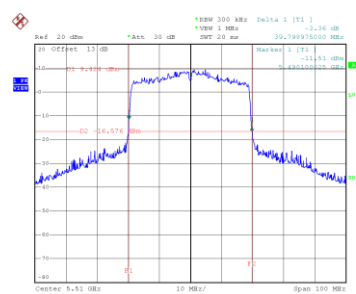


Date: 14.NOV.2022 15:52:55

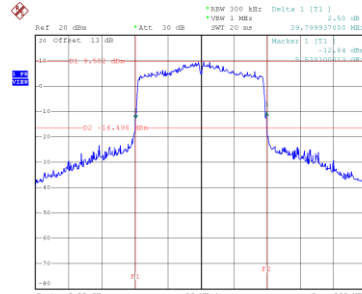CH110
26 dB Bandwidth


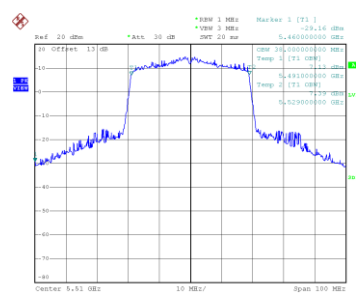
Date: 14.NOV.2022 15:54:05

CH134

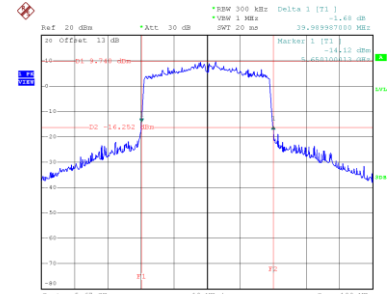


Date: 14.NOV.2022 15:55:15


99 % Occupied Bandwidth




Date: 14.NOV.2022 15:52:59

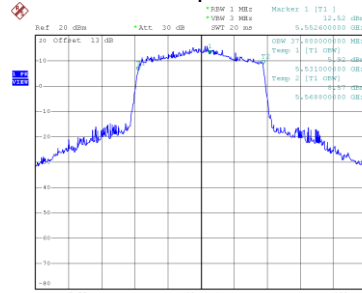


Date: 14.NOV.2022 15:53:21

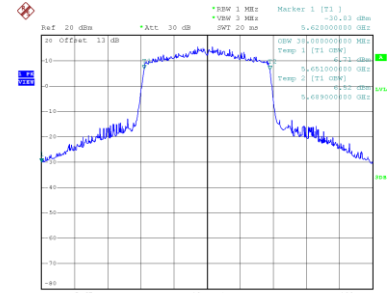

Date: 14.NOV.2022 15:54:31

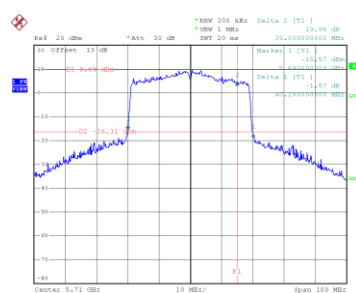CH142
26 dB Bandwidth


Date: 14.NOV.2022 21:54:17


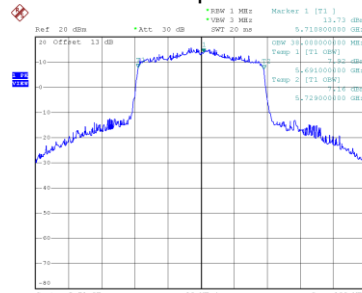
CH142
99 % Occupied Bandwidth


Date: 14.NOV.2022 21:53:28


Test Mode	UNII-2C_TX AX(HE80) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
106	5530	82.400	77.200
122	5610	82.400	76.800
138	5690	82.800	77.200




CH106

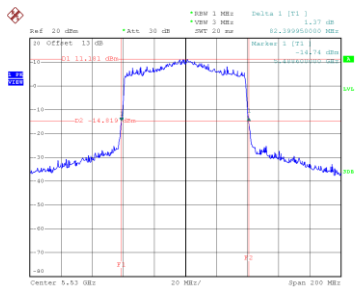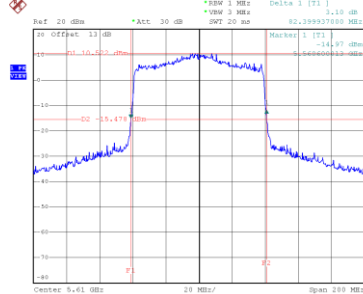
CH122
26 dB Bandwidth


CH138

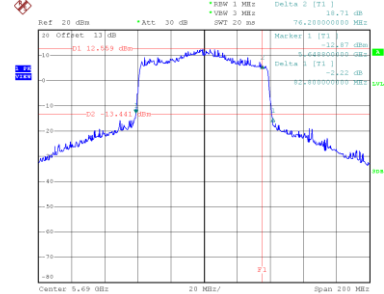


99 % Occupied Bandwidth

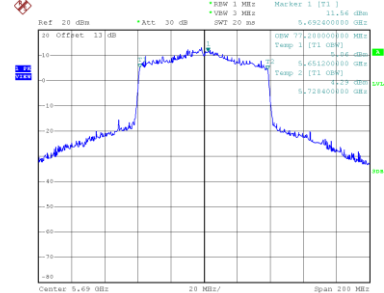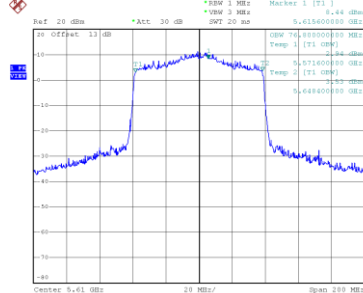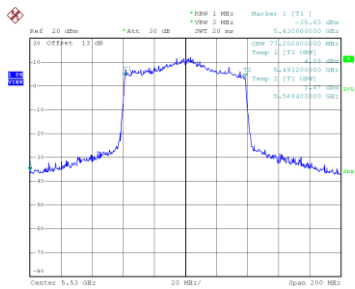

Test Mode	UNII-2C_TX AX(HE160) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
114	5570	162.000	156.000

CH114 26 dB Bandwidth

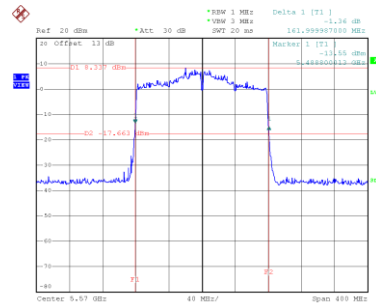

Date: 14.NOV.2022 16:06:32

99 % Occupied Bandwidth

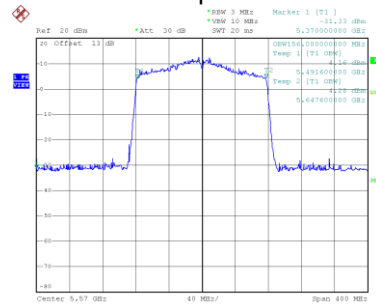

Date: 14.NOV.2022 16:07:40