



ZiGPET

Manufacturer: Quanzhou Ice-cream Technology Co.

Address: No.41 Wanrong Street, Luojiang District, Quanzhou City, Fujian Province, China


Version : PT-TC02mini(V1.0) 20211028

 MADE IN CHINA

Dog Training Collar

User Manual

PT-TC02mini

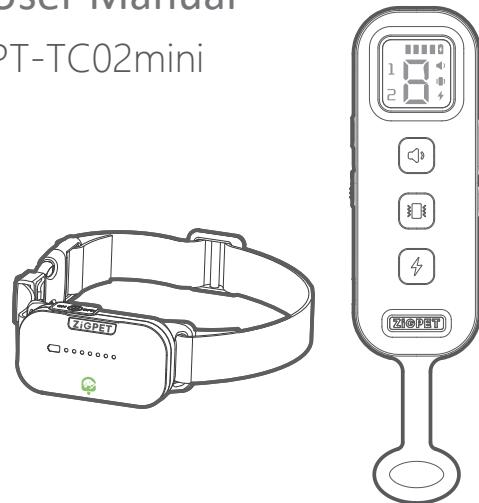

Zigpet is designed to cultivate pet's good habits, not to punish them. Please do not overuse this product on pets.



NOTE: Please read the user guide before using this product and keep the user guide properly.

Content



	Specification Parameters & Parts Description	1~4
	Important Statement	5~7
	PT-TC02 Instructions	8~10
	PT-RC01 Instructions	11~15
	Setting guide	16
	Assemble the Bark Collar	17
	Function Test & How to Wear	18~19
	Q&A	20
	Certification Statements	21~22
	Terms of Use & Liability	23~24


Specification Parameters

Product Name	Bark Collar	Product Model	PT-TC02
Battery	300mAh/3.7V lithium battery	Input voltage	DC5V/1A
Standby Time	55 days (triggered 20 times a day)	Collar length	25in/62cm
Waterproof Rating	IP67	Wireless Frequency	433.92MHz
Net Weight	72g	Operating Temperature	-10°C~+50°C
Product Dimension	74mm*36mm*36mm	Storage Temperature	-20°C~+50°C

Product Name	Remote Control	Product Model	PT-RC01
Battery	300mAh/3.7V lithium battery	Input Voltage	DC5V/1A
Standby Time	90 days (triggered 20 times a day)	Controllable Distance	300 meters
Waterproof Rating	Not waterproof	Wireless Frequency	433.92MHz
Net weight	70g	Operating Temperature	-10°C~+50°C
Product Dimension	178.5mm*46.8mm*20.6mm	Storage Temperature	-20°C~+50°C

Packing List

Composition

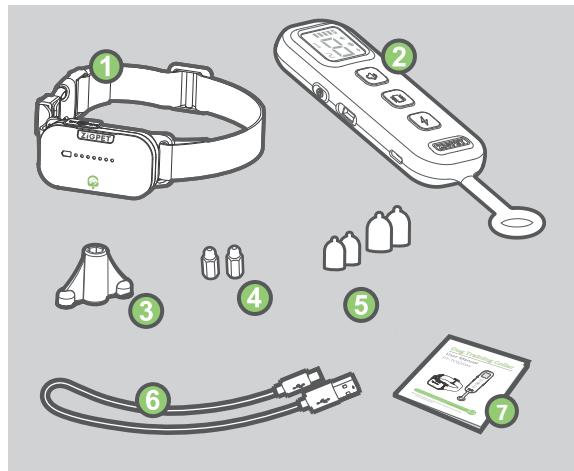

1.Bark Collar * 1

2.Remote Control * 1

3.Test Board & Mounting Board * 1

4.Electric Shock Contactor * 1set


5.Silicone Protective Sleeve * 2set

6.TYPES-C Charging Cable * 1

7.User Guide * 1

PT-TC02 Bark Collar


Parts Description

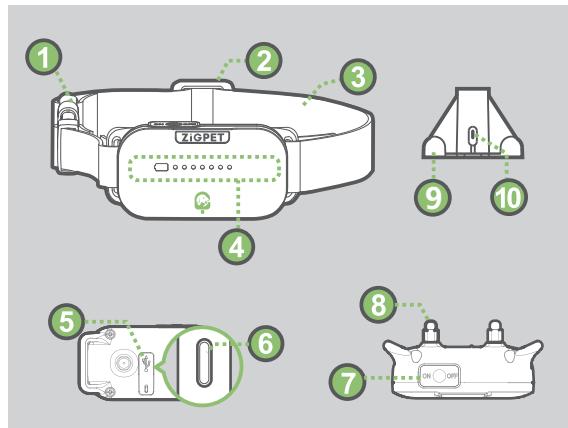

1.Lock	2.Slide Buckle	3.Neck Strap
4.Battery display	5.Silicone Plug	6.TYPES-C charging port
7.On/off Button	8.Electric shock contact	
9.Test Contactor	10.Test Light	

PT-RC01 Remote Control

Parts Description

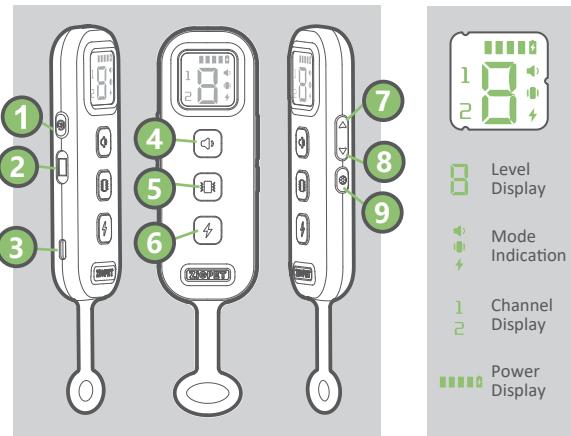

1.Channel Switching Button	2.Turn On/Off	3.TYPES-C Charging Port
4.Sound Button	5.Vibration Button	6.Electric Shock Button
7.Level + Button	8.Level - Button	9.Setting Button

Important Statement

Safe use statement



1. It is forbidden to use this product for aggressive dogs. Aggressive dogs can cause serious injury or even death to others. If you are not sure whether the product is suitable for your dog, please consult a professional dog training instructor.
2. It is forbidden for children to play with this product, please place the product out of reach of children.

Electric shock safety statement



1. Before using the bark collar, please make sure your dog is healthy. If you are not sure about this, please consult the veterinarian.
2. When the bark collar is in the power-on state, the human body should avoid touching the electric shock contactors of the product.
3. If you find rashes and sores on the wearing part of your pet, please stop using this product until pet's skin returns to health.

Important Statement

⚠ WARN



1. Your pet needs a firm leash to prevent violent reactions during training. You can hold the leash to prevent your pet from running around. The safety of you and your pet is very important.



2. Pets should not wear the bark collar for more than 12 hours a day, and please adjust the wearing position every 1-2 hours.

3. Zippet bark collar is suitable for dogs who weigh more than 3.6 kg and are older than 6 months.

4. It is forbidden to use bark collar as a matching collar for a pet leash.



5. It is very important to check the shock vibration contact area on the pet's neck every day for rashes and sores.

6. We recommend that you cut the long hair around the dog's throat appropriately, but it is not recommended to shave the hair completely.

7. Before playing with your pet, please remove the collar to avoid false triggering.

Important Statement


Waterproof Operation Statement

How to tighten the USB rubber plug

1. In order to obtain a good waterproof effect, please make sure to plug the silicone plug before each use.



2. When the pet is playing in the water or swimming for a long time, please remove the bark collar. Otherwise, it may affect the product performance of the silicone plug and may cause false triggering.



The IP67 standard means that the equipment can be placed in water up to one meter deep for half an hour without water entering the product and it is also dust-proof.



Note: The IP67 standard is a static test result of the laboratory.

PT-TC02 Bark Collar

Turn on/off

Turn on

Press 3S



Light up



"beep..beep"
vibration for twice

Press and hold  for 3 seconds, the indicators are all on, and you'll hear "beep..beep" and vibration for twice. It indicates the bark collar is successful turn on. After the bark collar turns on, the current battery level will be displayed for 2 seconds, and then it will enter the standby state after 2 seconds.

Turn off

Press




"beep..."
vibration once

Press and hold , the bark collar will beep and vibrate.


PT-TC02 Bark Collar

Pairing mode

1 Within 30 seconds of restarting, press  three times continuously to enter the pairing mode, and the level indicator light will flash slowly.



2 Press the  key and  key of the remote control at the same time for 3 seconds. The remote control will transmit a pairing signal to the bark collar, and the channel number of the remote control will flash 5 times quickly.



3 After the pairing is successful, the bark collar will beeps "beep..beep", and the battery level indicator lights will be displayed one by one.




4 In the pairing mode, if the pairing is not successful for more than 30 seconds, the bark collar will automatically exit the pairing mode.


PT-TC02 Bark Collar

Battery and charging

1 In the standby state of the bark collar, press  to check the current battery level.




2 When the battery level is low, the low battery and power icons will flash once every 5 seconds. After 10 minutes, the bark collar will automatically turn off.



3 When the battery power is lower than level 2, please start charging.



4 During the charging, the bark collar will stop working and indicate the current charged battery level. The normal charging time of the bark collar is 2 hours.




PT-RC01 Remote Control

Turn on/off


Turn On

Push the power switch upwards, the remote control is turned on, and the current battery level and the channel number used are displayed.



Turn Off

Push the power switch downwards, the current battery level and the channel number indicator lights are off, indicating that the remote control has been turned off successfully.



PT-RC01 Remote Control

Sound, vibration and electric shock training

Sound mode training

- When the remote control is in standby state, short press the button, the bark collar will long beep once.
- When the remote control is in standby state, long press the remote control's button, the bark collar will long beep once every second.

Vibration mode training

- When the remote control is in standby state, short press the button, and the bark collar vibrates.
- When the remote control is in standby state, long press the button, and the bark collar vibrates every second.

Shock mode training

- When the remote control is in standby state, short press the button, the bark collar starts to electric shock
- When the remote control is in standby state, long press the button, the bark collar will output electric shocks and long beep once every second.

PT-RC01 Remote Control

Set the vibration/electric shock level



- 1 When the remote control is in standby state, short press the button. It will switch between vibration and electric shock modes, and display the current vibration or electric shock level.
- 2 Short press the left key or key to adjust the vibration or electric shock level.
- 3 The level of vibration and electric shock is adjustable among 1-9.

Channel settings

When the remote control is in standby state, short press the key, the remote control will switch between channel 1 and channel 2. The bark collar will display a running water light to indicate that the remote control has been correctly switched to the corresponding channel.


Each channel can be paired with one bark collar.

PT-RC01 Remote Control

Battery and charging




- 1 When the battery level is low, the low battery icon flashes once every 5 seconds until the battery is exhausted.
- 2 When the battery power is lower than level 1, please start charging.



- 3 The remote control will display the current charged battery level during charging, and the normal charging time of the remote control is 2 hours.

PT-RC01 Remote Control

Factory Reset

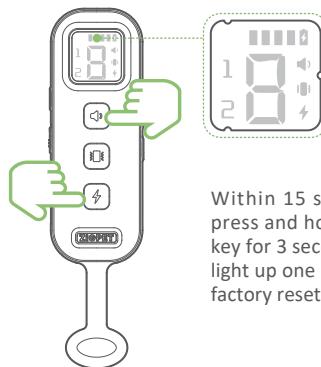

Within 15 seconds of restarting, press and hold the key and key for 3 seconds, and the lights will light up one by one. It indicates that factory reset successfully.

The factory settings



channel 1



vibration level is 3



electric shock
level is 1

Setting Guide

Setting guide

Set the appropriate level according to the dog's temper and the degree of endurance to electric shocks. Please start training from the lowest level.

For example, the dog responds to the level of electric shock with ear shaking, tongue licking, neck tightening, etc. This is the appropriate level. The level of electric shock varies according to the training conditions. If the dog's attention is highly distracted, a strong level is needed to stimulate it.

	5-10kg	10-15kg	15-25kg	25-35kg	35-50kg
	Default				
	1~2	2~3	3~4	4~6	7~9
	OFF	OFF	1+	1+	2+

Assemble the Bark Collar


How to install electric shock contactors

The shorter contactors have been installed. If it is not long enough, please replace the long contactors.



How to install the skin protector


The silicone protector can effectively reduce the damage to the dog's skin by the electric shock contactors

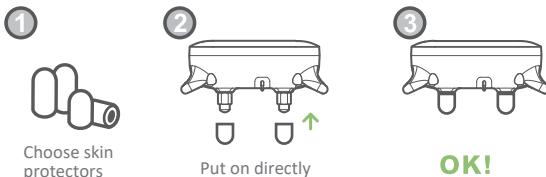

Function Test

After the assembly is successful, it is recommended to perform a functional test. Please follow the steps below to test.


1 Short press or long press the button on the remote control to test the sound, the bark collar will make "beep...beep" sound.



2 Short press or long press the button on the remote control to perform vibration test, the bark collar will vibrate according to different vibration levels.



3 Press the test board on the electric shock pole of the bark collar, short press or long press the remote control's button to perform the electric shock test, the light on the test board will be lighted up. The higher the shock level, the brighter the light.



How to Wear

The range of the dog's neck circumference is between 20cm-62cm (8 inches-25 inches). Please adjust the collar and modes before putting it on.

1 Determine the length of the collar, and adjust the lock slider and bark collar to the position shown in the picture.



2 Insert the extra collar into the slider.



3 Wear it on the dog's neck and adjust to the proper tightness.



4 Adjust the bark collar to the position of the dog's throat, adjust the tightness of the collar to the best position, and ensure that the contactors head are in contact with the skin.



Q&A

Q Why the bark collar does not work when the remote control is operated by electric shock?

A: There may be three reasons. The first is that the remote control and the bark collar are not paired, so please try to pair again. Secondly, the electric shock contactors do not touch the skin, so please try to adjust the tightness of the collar to ensure good contact between the contactors and the skin. Third, the level setting is not high enough, so please try to increase the level of the electric shock mode.

Q Are the sensors safe and humane?

A: All the bark training modes will not cause any direct harm to the pet, but it will make them feel very uncomfortable. Even so, please do not overuse this product on pets. Please refer to all safety statements in the user manual.

Q: The bark collar and remote control do not work?

A: There may be two reasons. First of all, the remote control and the bark collar are not turned on, please refer to the manual on the turn-on operation. Secondly, the batteries of the remote control and the bark collar are exhausted. Please charge the bark collar and the remote control. The charging time is about 2 hours.

Certification Statements



FCC STATEMENT :

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Certification Statements



from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.



The company declares under its own responsibility that this product complies with the basic requirements of CE (2014/30/EU) and RoHS (2011/65/EU). Without the approval of our company or the distributor, unauthorized changes or modifications to the equipment may violate the CE regulations, may cause the user to lose the right to operate the equipment, and invalidate the warranty.



Recycling Information&Battery Disposal

Please observe the regulations for electronic and electrical devices to be disposed of in the respective country. In some countries or regions, this device must be recycled. If this device is no longer required, it must not be disposed of with normal municipal waste. Separate collection of spent batteries is required in many regions; check the regulations in your area before discarding spent batteries. For more recycling information, please refer to local regulations.

Terms of Use & Liability

Terms of Use & Liability

1.Terms of Use

When you start using the product, it means that you have accepted all the terms, conditions and statements in this user guide.

2.Use it correctly

This product is designed for pets that need training. Please use this product correctly and include reading the user guide and any specific "safety" and "caution" statements.

3.Illegal use is forbidden

This product is suitable for pets. This device is not designed to harm pets. Using this product not in accordance with the user guide may violate local laws.

4.Scope of Responsibility


The manufacturer is not responsible for any direct, indirect, punitive, non-significant losses and other indirect losses caused by incorrect use or abuse of this product. The buyer assumes all risks and responsibilities of using this product.

5.Modification of terms and conditions

The manufacturer reserves the right to change the terms, conditions and declarations related to the products.

Thank You Very Much.

Thanks for Trusting Zigpet

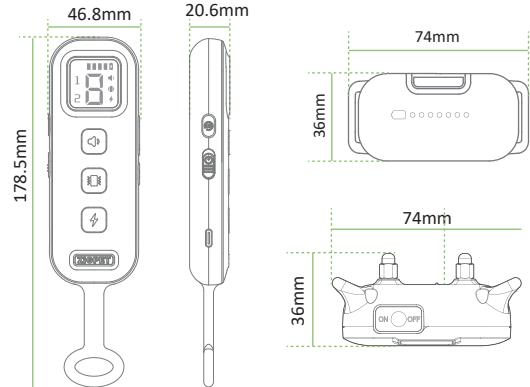

This product is intended for pets.



This product is suitable for pets. This device is not designed to harm pets. Using this product not in accordance with the user guide may violate local laws.

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.