

TEST REPORT

Product Name: Wireless network card
FCC ID: 2A42N-YV52
Trademark: N/A
Model Number: YV52 WIFI Network card 2.4G 70Mbps
Prepared For: Jian Wu Trading Company Ltd.
Address: Tonghuimen Court Rm. 2101 Block 12 Yiwu Zhejiang 322000
Manufacturer: SAITE CAIYIN
Address: Industrial Park, Suxi Town, Yiwu City, Jinhua City, Zhejiang Province, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China
Sample Received Date: Feb. 22, 2022
Sample tested Date: Mar. 03, 2022 to Mar. 04, 2022
Issue Date: Mar. 04, 2022
Report No.: CTB220224031RF
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. This report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSION	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	41
8.1 Block Diagram Of Test Setup	41
8.2 Limit	41
8.3 Test procedure	41
8.4 Test Result	42
9. CONDUCTED OUTPUT POWER	58
9.1 Block Diagram Of Test Setup	58
9.2 Limit	58
9.3 Test procedure	58
9.4 Test Result	59
10. 6DB OCCUPIED BANDWIDTH	68
10.1 Block Diagram Of Test Setup	68
10.2 Limit	68
10.3 Test procedure	68
10.4 Test Result	69
11. POWER SPECTRAL DENSITY	78
11.1 Block Diagram Of Test Setup	78
11.2 Limit	78
11.3 Test procedure	78



11.4	Test Result	79
12.	ANTENNA REQUIREMENT	88
13.	EUT PHOTOGRAPHS	89
14.	EUT TEST SETUP PHOTOGRAPHS	90

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB220224031RF	Mar. 04, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/ part 2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted Emission (150KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	YV52 WIFI Network card 2.4G 70Mbps
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 9.54dBm
Type of Modulation:	WiFi: DSSS, OFDM, CCK
Antenna installation:	WiFi: External Antenna
Antenna Gain:	WiFi (2.4G) : ANT1 :1.0dBi, ANT2 :1.0dBi
Ratings:	Input: AC 100-240V, 50~60Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	Lenovo	Lenovo Group Co.	B1	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: DutyCycle>98%.

Test mode	rate
802.11b	11M
802.11g	54M
802.11n20	65M
802.11n40	65M

EUT has two external antennas with Max gain GANT 1dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3dB,

So the directional gain for PSD is 4dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1dBi

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05


	software					
16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.09.27	2022.08.05
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.09.27	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

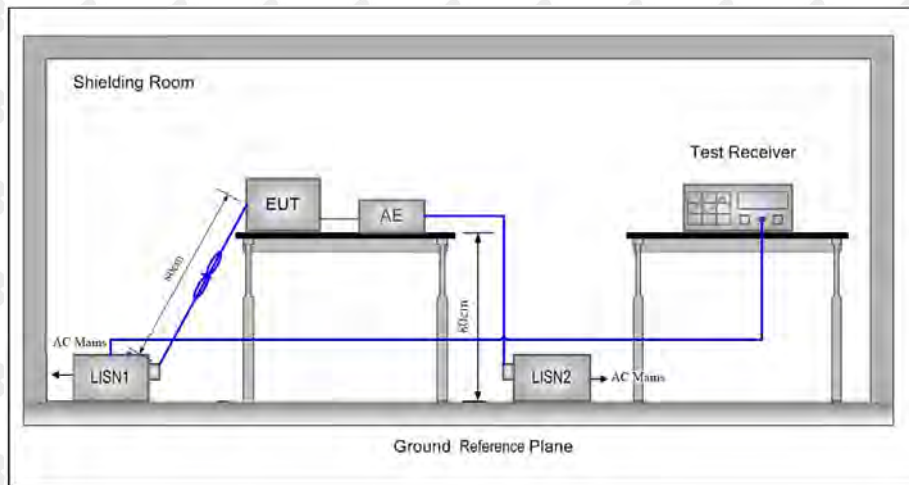

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed


0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line
AC 120V 60Hz

80.0 dBuV

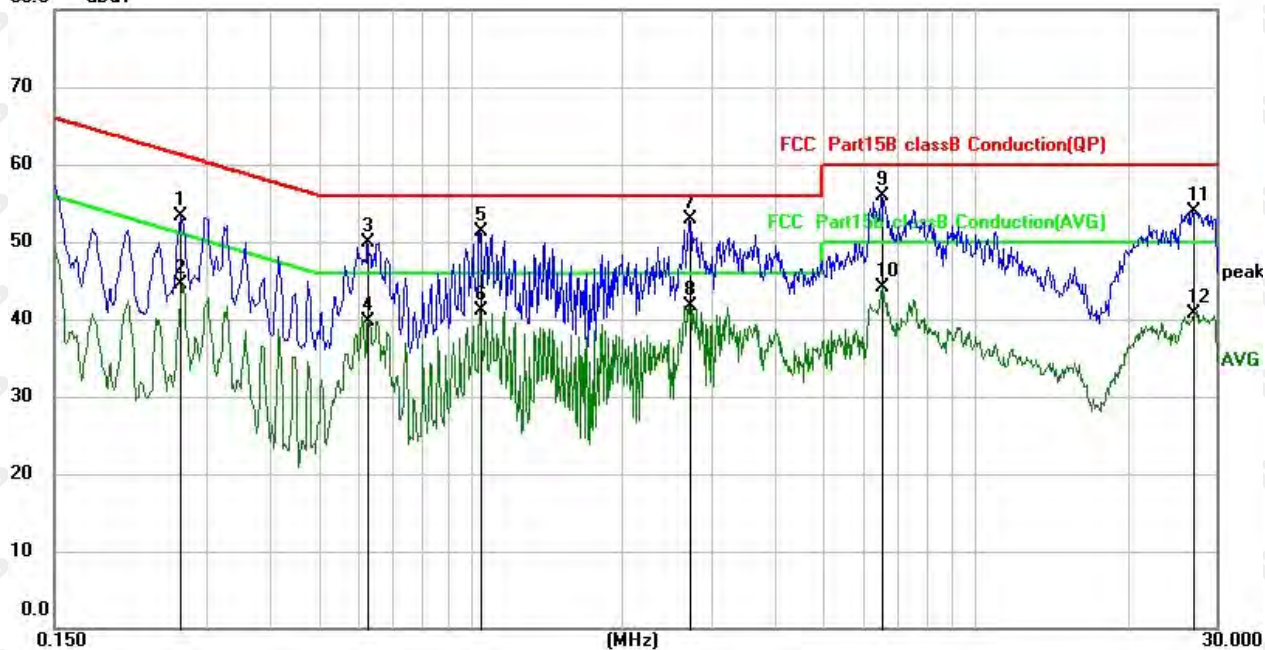


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	dBuV	Factor	ment	dBuV	dB	Detector
1		0.2660	42.60	10.65	53.25	61.24	-7.99	QP
2		0.2660	33.76	10.65	44.41	51.24	-6.83	AVG
3		0.6260	39.43	10.54	49.97	56.00	-6.03	QP
4		0.6260	29.26	10.54	39.80	46.00	-6.20	AVG
5		1.0460	40.67	10.62	51.29	56.00	-4.71	QP
6		1.0460	30.50	10.62	41.12	46.00	-4.88	AVG
7	*	2.7139	42.31	10.63	52.94	56.00	-3.06	QP
8		2.7139	31.08	10.63	41.71	46.00	-4.29	AVG
9		6.5100	45.21	10.70	55.91	60.00	-4.09	QP
10		6.5100	33.35	10.70	44.05	50.00	-5.95	AVG
11		26.8460	42.96	11.02	53.98	60.00	-6.02	QP
12		26.8460	29.75	11.02	40.77	50.00	-9.23	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

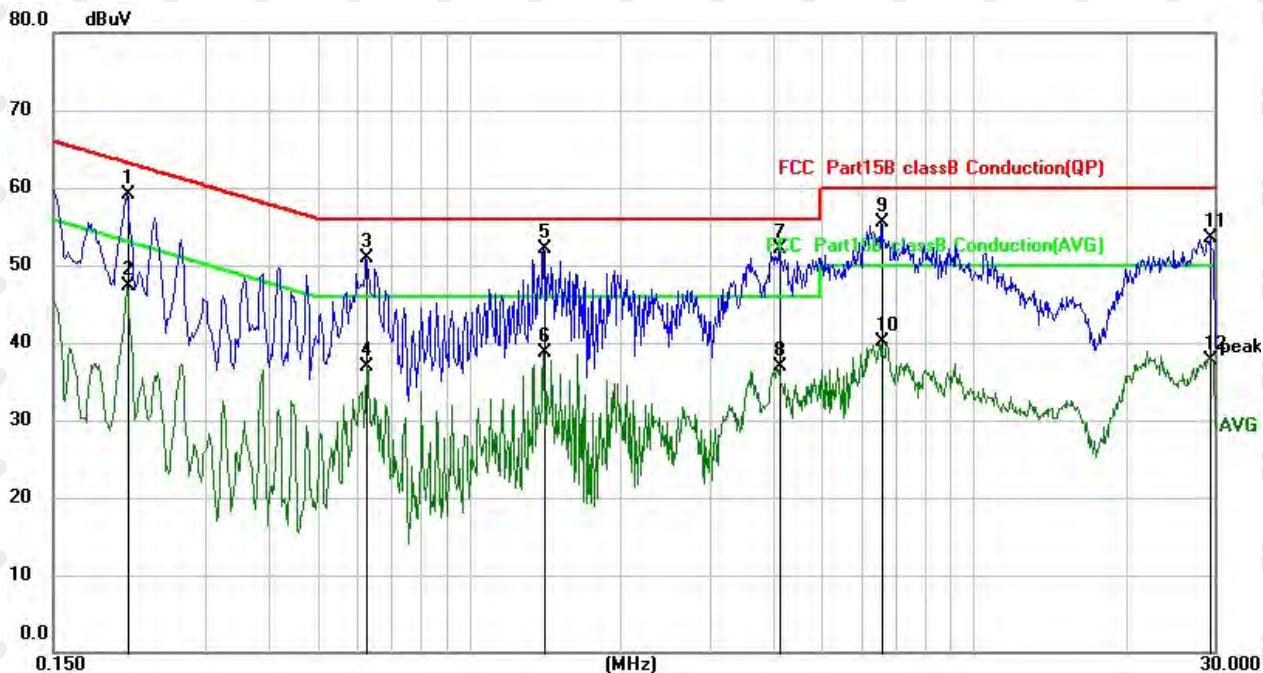

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.2100	48.41	10.69	59.10	63.21	-4.11	QP
2		0.2100	36.69	10.69	47.38	53.21	-5.83	AVG
3		0.6260	40.35	10.54	50.89	56.00	-5.11	QP
4		0.6260	26.46	10.54	37.00	46.00	-9.00	AVG
5	*	1.4060	41.55	10.62	52.17	56.00	-3.83	QP
6		1.4060	28.13	10.62	38.75	46.00	-7.25	AVG
7		4.1300	41.51	10.64	52.15	56.00	-3.85	QP
8		4.1300	26.31	10.64	36.95	46.00	-9.05	AVG
9		6.5660	44.74	10.70	55.44	60.00	-4.56	QP
10		6.5660	29.34	10.70	40.04	50.00	-9.96	AVG
11		29.5020	42.39	11.03	53.42	60.00	-6.58	QP
12		29.5020	26.60	11.03	37.63	50.00	-12.37	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

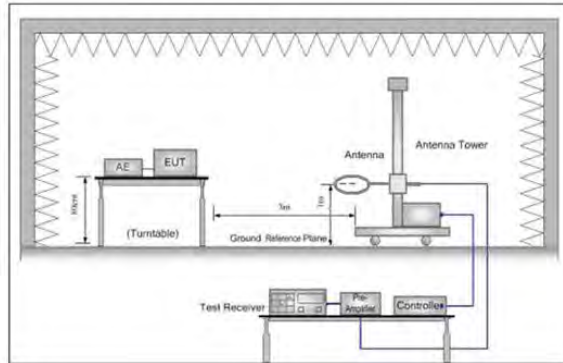


Figure 1. Below 30MHz

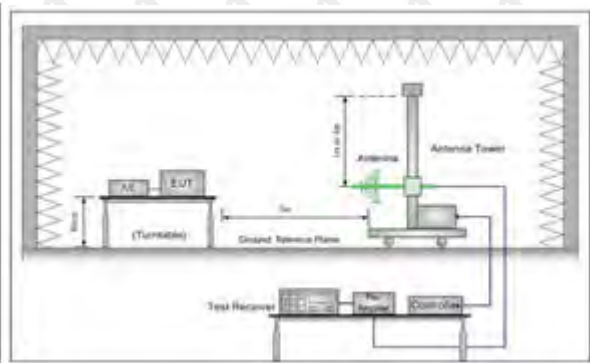


Figure 2. 30MHz to 1GHz

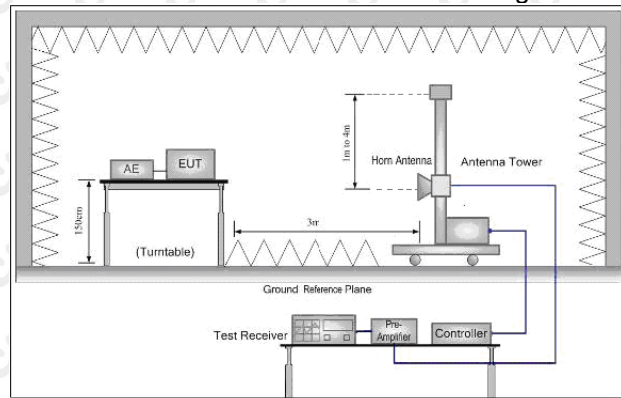


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

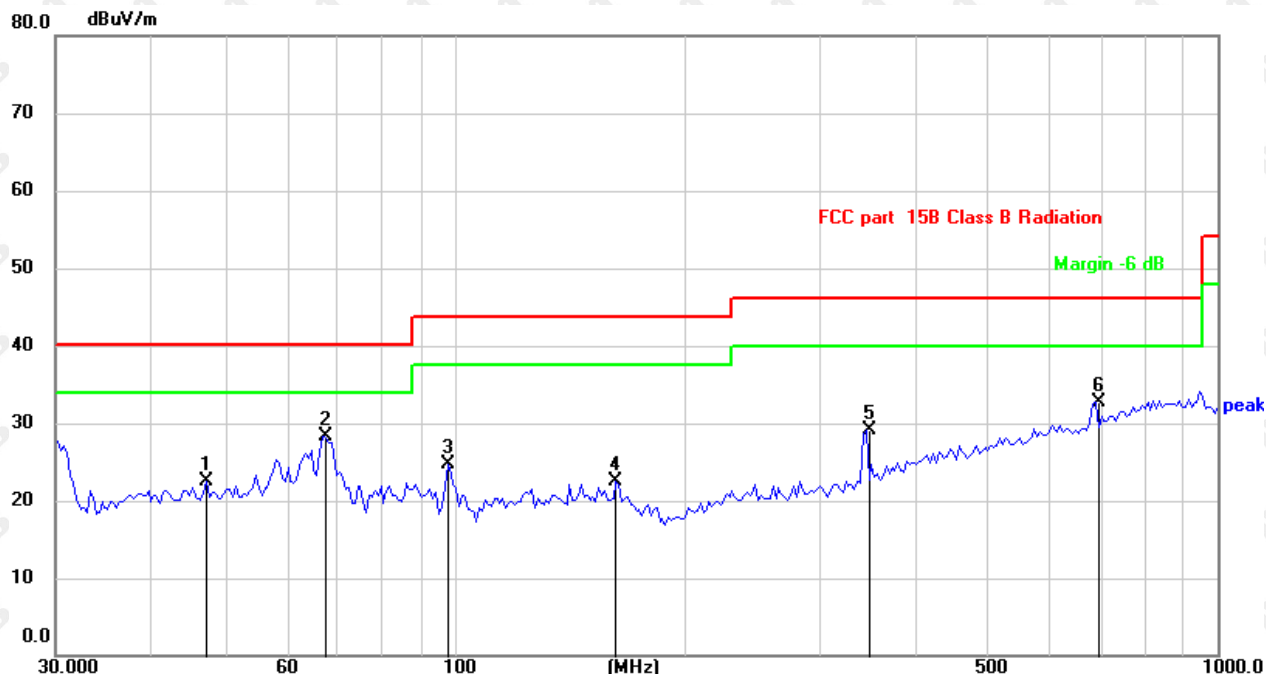

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		47.3255	28.03	-5.54	22.49	40.00	-17.51	QP
2	*	67.2022	35.77	-7.44	28.33	40.00	-11.67	QP
3		97.9699	33.47	-8.86	24.61	43.50	-18.89	QP
4		162.8959	28.27	-5.74	22.53	43.50	-20.97	QP
5		346.2017	32.76	-3.58	29.18	46.00	-16.82	QP
6		691.9867	28.79	3.86	32.65	46.00	-13.35	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

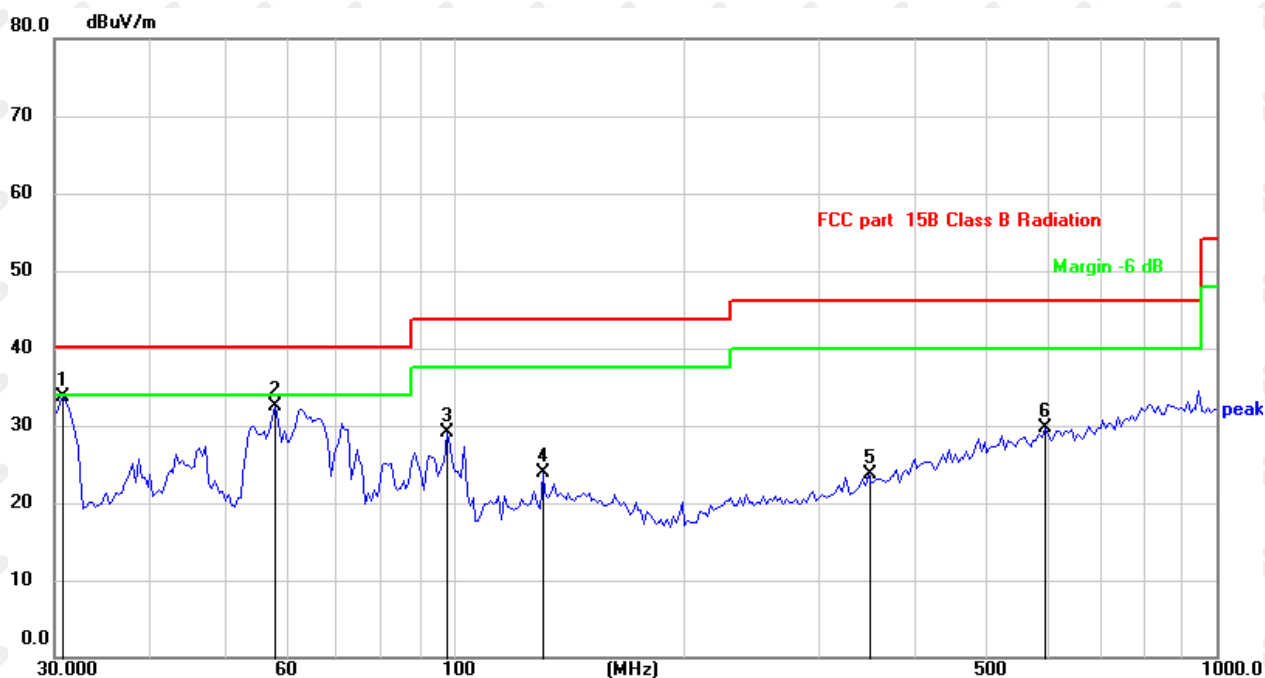

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	30.7994	41.01	-7.37	33.64	40.00	-6.36	QP
2		58.4074	38.53	-6.09	32.44	40.00	-7.56	QP
3		97.9699	38.03	-8.86	29.17	43.50	-14.33	QP
4		130.8369	30.01	-6.09	23.92	43.50	-19.58	QP
5		349.2500	27.27	-3.48	23.79	46.00	-22.21	QP
6		596.1772	27.30	2.50	29.80	46.00	-16.20	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: MIMO (the worst)
2. All modes have been tested, and the test results show that n20-mode data is the worst, only n20-mode test chart is put. Test Mode: MIMO (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: MIMO (the worst)

Above 1 GHz Test Results:

ANT 1 (the worst)
LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.69	-3.64	61.05	74	-12.95	peak
4824	49.50	-3.64	45.86	54	-8.14	AVG
7236	59.37	-0.95	58.42	74	-15.58	peak
7236	45.16	-0.95	44.21	54	-9.79	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.31	-3.64	62.67	74	-11.33	peak
4824	47.48	-3.64	43.84	54	-10.16	AVG
7236	58.11	-0.95	57.16	74	-16.84	peak
7236	45.44	-0.95	44.49	54	-9.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT 1 (the worst)
MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.93	-3.51	62.42	74	-11.58	peak
4874	49.77	-3.51	46.26	54	-7.74	AVG
7311	60.14	-0.82	59.32	74	-14.68	peak
7311	45.62	-0.82	44.80	54	-9.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.02	-3.51	59.51	74	-14.49	peak
4874	49.34	-3.51	45.83	54	-8.17	AVG
7311	59.68	-0.82	58.86	74	-15.14	peak
7311	44.70	-0.82	43.88	54	-10.12	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT 1 (the worst)
HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.05	-3.43	60.62	74	-13.38	peak
4924	46.69	-3.43	43.26	54	-10.74	AVG
7386	57.95	-0.75	57.20	74	-16.80	peak
7386	45.18	-0.75	44.43	54	-9.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.62	-3.43	61.19	74	-12.81	peak
4924	46.71	-3.43	43.28	54	-10.72	AVG
7386	57.58	-0.75	56.83	74	-17.17	peak
7386	41.31	-0.75	40.56	54	-13.44	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT 1 (the worst)
LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.35	-3.64	61.71	74	-12.29	peak
4824	49.03	-3.64	45.39	54	-8.61	AVG
7236	56.92	-0.95	55.97	74	-18.03	peak
7236	46.03	-0.95	45.08	54	-8.92	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.43	-3.64	60.79	74	-13.21	peak
4824	47.41	-3.64	43.77	54	-10.23	AVG
7236	59.97	-0.95	59.02	74	-14.98	peak
7236	44.05	-0.95	43.10	54	-10.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT 1 (the worst)
MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.00	-3.51	60.49	74	-13.51	peak
4874	49.22	-3.51	45.71	54	-8.29	AVG
7311	60.20	-0.82	59.38	74	-14.62	peak
7311	43.93	-0.82	43.11	54	-10.89	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.83	-3.51	59.32	74	-14.68	peak
4874	48.00	-3.51	44.49	54	-9.51	AVG
7311	56.29	-0.82	55.47	74	-18.53	peak
7311	42.57	-0.82	41.75	54	-12.25	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT 1 (the worst)
HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.07	-3.43	61.64	74	-12.36	peak
4924	47.77	-3.43	44.34	54	-9.66	AVG
7386	58.37	-0.75	57.62	74	-16.38	peak
7386	43.73	-0.75	42.98	54	-11.02	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.66	-3.43	60.23	74	-13.77	peak
4924	46.99	-3.43	43.56	54	-10.44	AVG
7386	57.91	-0.75	57.16	74	-16.84	peak
7386	42.40	-0.75	41.65	54	-12.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT+ANT 2
LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.34	-3.64	60.70	74	-13.30	peak
4824	49.17	-3.64	45.53	54	-8.47	AVG
7236	59.55	-0.95	58.60	74	-15.40	peak
7236	44.50	-0.95	43.55	54	-10.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.19	-3.64	58.55	74	-15.45	peak
4824	47.54	-3.64	43.90	54	-10.10	AVG
7236	60.98	-0.95	60.03	74	-13.97	peak
7236	45.99	-0.95	45.04	54	-8.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT+ANT 2
MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.50	-3.51	60.99	74.00	-13.01	peak
4874.00	49.04	-3.51	45.53	54.00	-8.47	AVG
7311.00	58.98	-0.82	58.16	74.00	-15.84	peak
7311.00	42.79	-0.82	41.97	54.00	-12.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.38	-3.51	60.87	74.00	-13.13	peak
4874.00	46.78	-3.51	43.27	54.00	-10.73	AVG
7311.00	57.05	-0.82	56.23	74.00	-17.77	peak
7311.00	43.87	-0.82	43.05	54.00	-10.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT+ANT 2
HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.32	-3.43	59.89	74	-14.11	peak
4924	47.65	-3.43	44.22	54	-9.78	AVG
7386	57.35	-0.75	56.60	74	-17.40	peak
7386	42.45	-0.75	41.70	54	-12.30	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.50	-3.43	60.07	74	-13.93	peak
4924	46.02	-3.43	42.59	54	-11.41	AVG
7386	56.27	-0.75	55.52	74	-18.48	peak
7386	42.03	-0.75	41.28	54	-12.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT+ANT 2

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.03	-3.63	61.40	74	-12.60	peak
4844	47.19	-3.63	43.56	54	-10.44	AVG
7266	58.87	-0.94	57.93	74	-16.07	peak
7266	45.54	-0.94	44.60	54	-9.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.56	-3.63	60.93	74	-13.07	peak
4844	49.52	-3.63	45.89	54	-8.11	AVG
7266	59.50	-0.94	58.56	74	-15.44	peak
7266	43.98	-0.94	43.04	54	-10.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT+ANT 2

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	64.04	-3.51	60.53	74	-13.47	peak
4874	48.58	-3.51	45.07	54	-8.93	AVG
7311	59.68	-0.82	58.86	74	-15.14	peak
7311	44.45	-0.82	43.63	54	-10.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.29	-3.51	58.78	74	-15.22	peak
4874	46.51	-3.51	43.00	54	-11.00	AVG
7311	56.68	-0.82	55.86	74	-18.14	peak
7311	43.32	-0.82	42.50	54	-11.50	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT+ANT 2

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	64.10	-3.43	60.67	74	-13.33	peak
4904	47.50	-3.43	44.07	54	-9.93	AVG
7356	57.26	-0.75	56.51	74	-17.49	peak
7356	43.52	-0.75	42.77	54	-11.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	63.16	-3.43	59.73	74	-14.27	peak
4904	47.23	-3.43	43.80	54	-10.20	AVG
7356	57.87	-0.75	57.12	74	-16.88	peak
7356	44.11	-0.75	43.36	54	-10.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)-ANT1 (the worst)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.97	-5.81	51.16	74	-22.84	peak
2390	/	-5.81	/	54	/	AVG
2399	65.21	-5.84	59.37	74	-14.63	peak
2399	48.91	-5.84	43.07	54	-10.93	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.19	-5.81	50.38	74	-23.62	peak
2390	/	-5.81	/	54	/	AVG
2399	62.47	-5.84	56.63	74	-17.37	peak
2399	47.08	-5.84	41.24	54	-12.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz) -ANT1 (the worst)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.36	-5.65	51.71	74	-22.29	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.49	-5.65	50.84	74	-23.16	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz) -ANT1 (the worst)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.14	-5.81	52.33	74	-21.67	peak
2390	/	-5.81	/	54	/	AVG
2399	62.69	-5.84	56.85	74	-17.15	peak
2399	46.98	-5.84	41.14	54	-12.86	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.01	-5.81	50.20	74	-23.80	peak
2390	/	-5.81	/	54	/	AVG
2399	62.55	-5.84	56.71	74	-17.29	peak
2399	46.44	-5.84	40.60	54	-13.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz) -ANT1 (the worst)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.18	-5.65	51.53	74	-22.47	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.40	-5.65	50.75	74	-23.25	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz) -ANT1+ANT 2

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.26	-5.81	51.45	74	-22.55	
2390	/	-5.81	/	54	/	AVG
2399	62.21	-5.84	56.37	74	-17.63	peak
2399	47.46	-5.84	41.62	54	-12.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.64	-5.81	50.83	74	-23.17	
2390	/	-5.81	/	54	/	AVG
2399	60.82	-5.84	54.98	74	-19.02	peak
2399	47.62	-5.84	41.78	54	-12.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)- ANT1+ANT 2

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.24	-5.65	50.59	74	-23.41	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.39	-5.65	49.74	74	-24.26	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz) -ANT1+ANT 2

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.99	-5.81	52.18	74	-21.82	
2390	/	-5.81	/	54	/	AVG
2399	64.12	-5.84	58.28	74	-15.72	peak
2399	47.00	-5.84	41.16	54	-12.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	58.87	-5.81	53.06	74	-20.94	
2390	/	-5.81	/	54	/	AVG
2399	60.99	-5.84	55.15	74	-18.85	peak
2399	46.66	-5.84	40.82	54	-13.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2452MHz)- ANT1+ANT 2

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.45	-5.65	51.80	74	-22.20	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.55	-5.65	50.90	74	-23.10	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

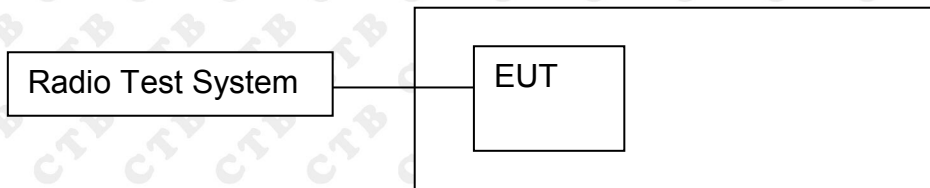

8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold


8.4 Test Result

ANT 1:

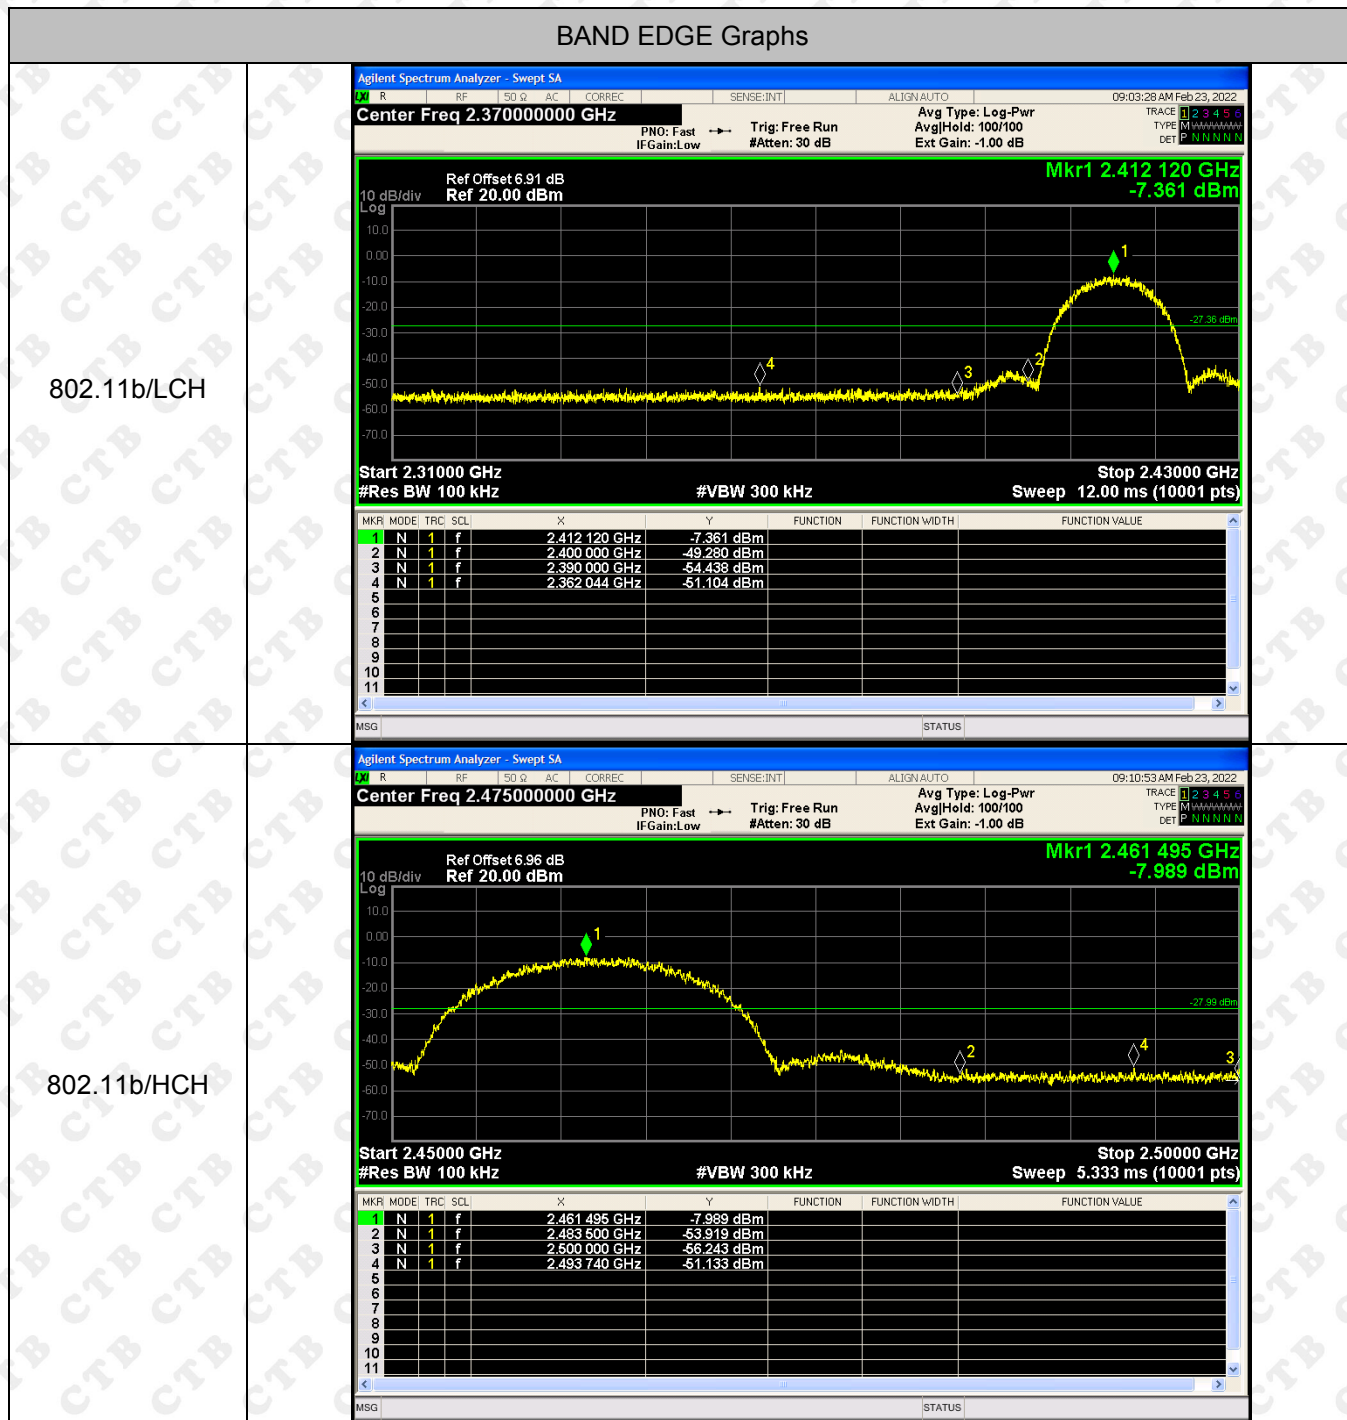


BAND EDGE Graphs

802.11g/LCH

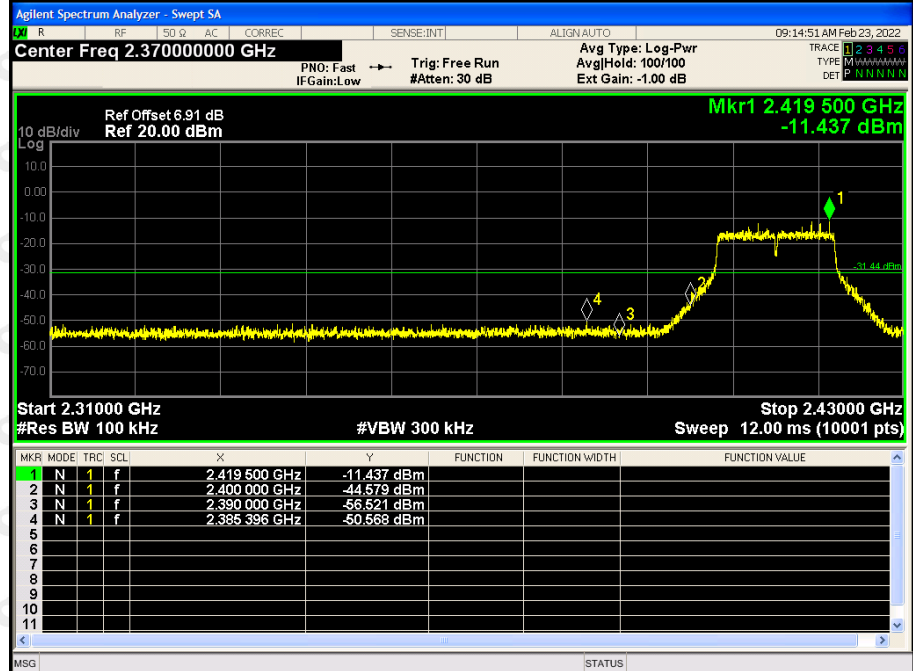


802.11g/HCH

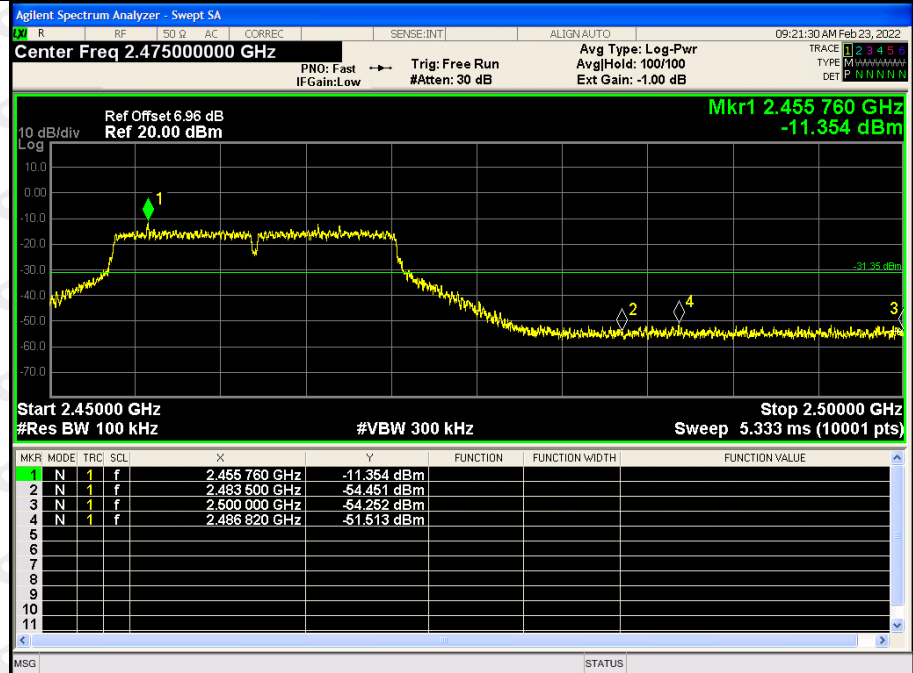




BAND EDGE Graphs

802.11n(HT20)/L
CH



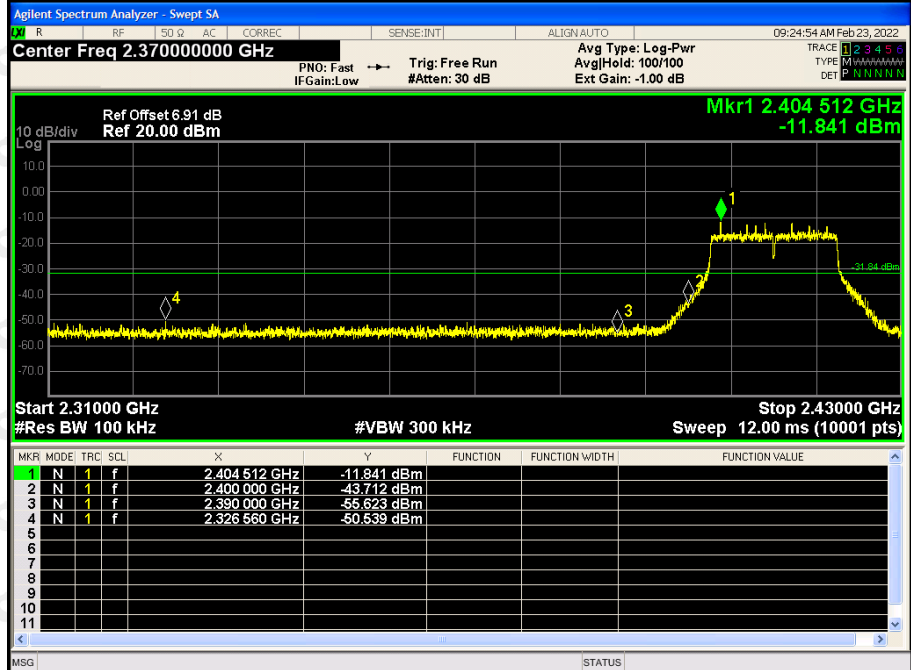


802.11n(HT20)/H
CH

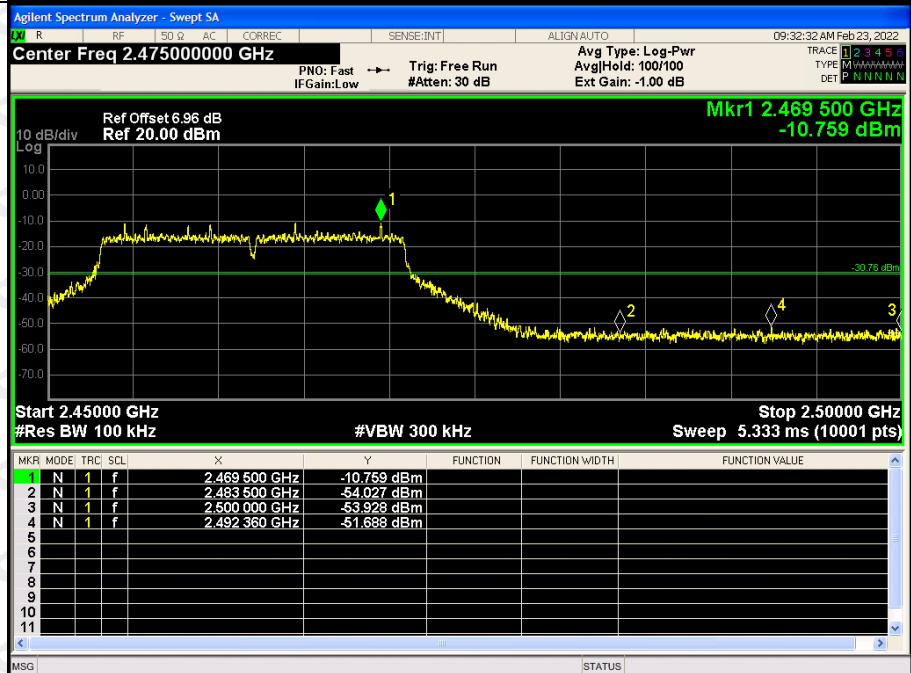


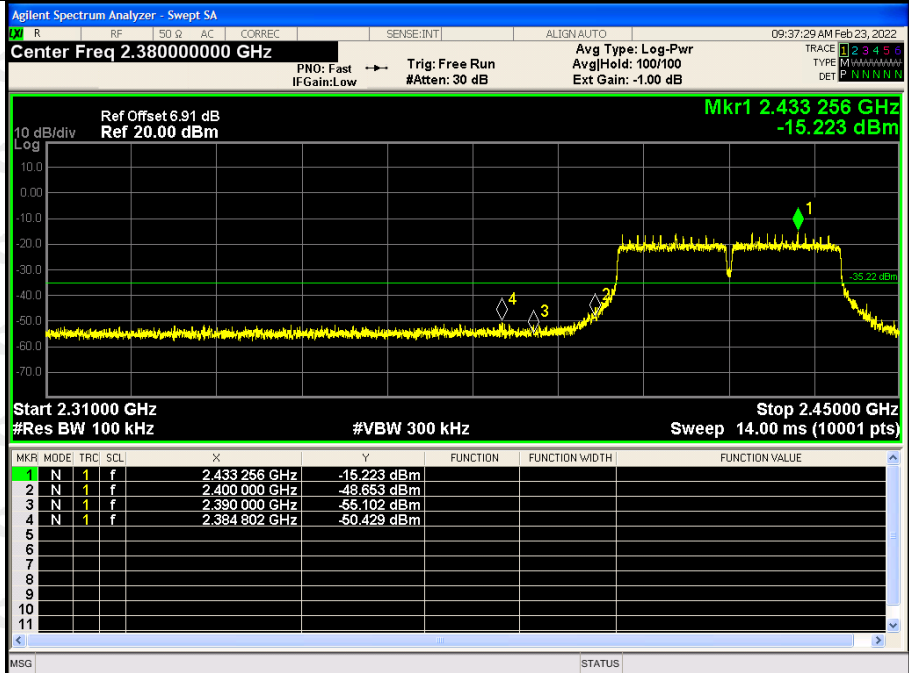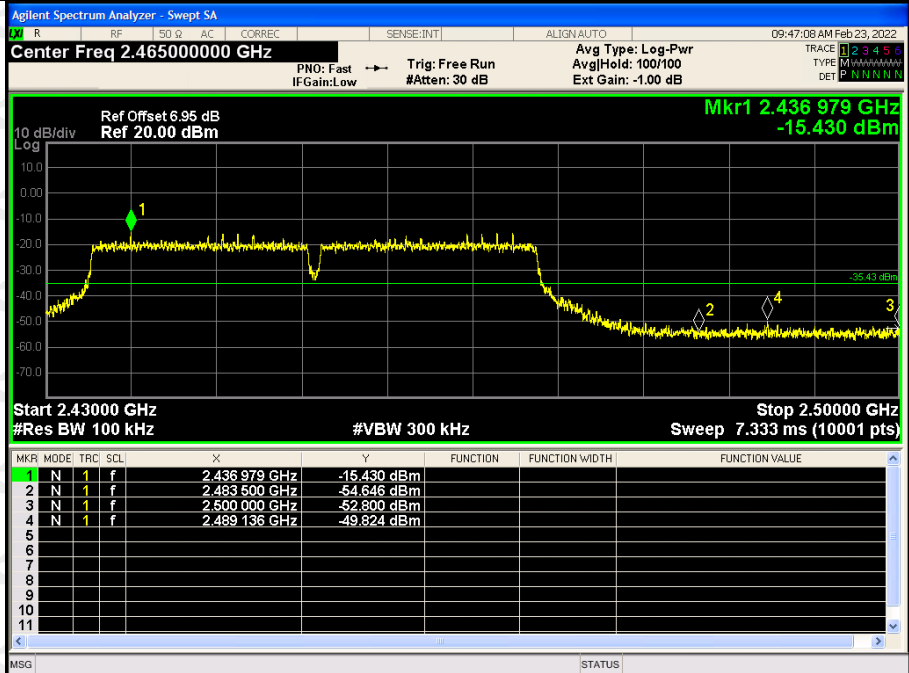802.11n(HT40)/L
CH

802.11n(HT40)/H
CH

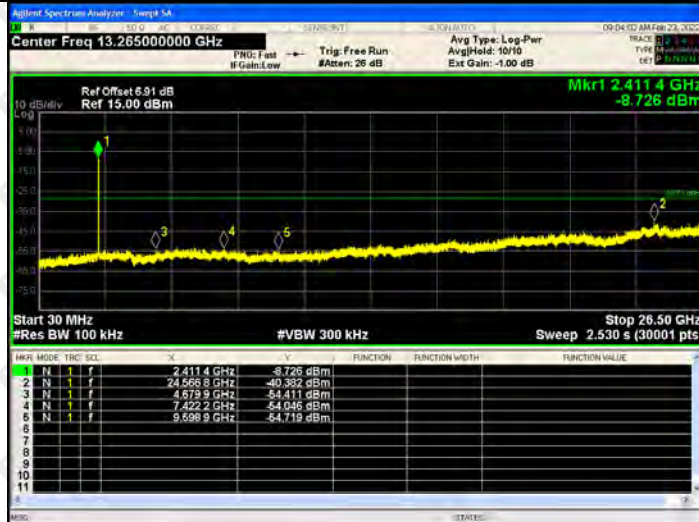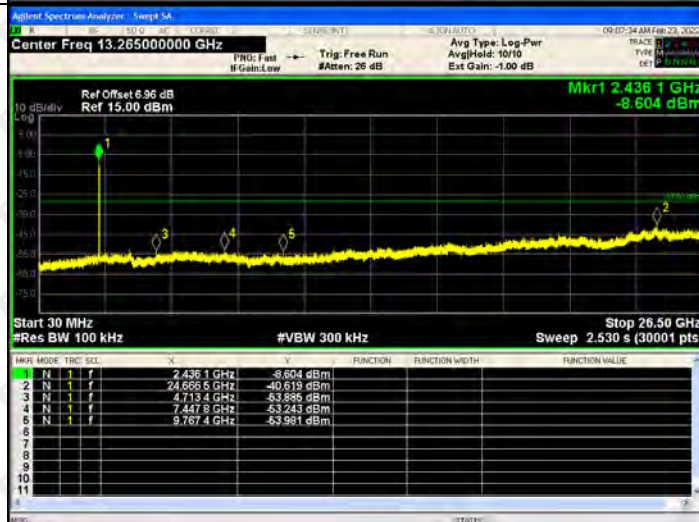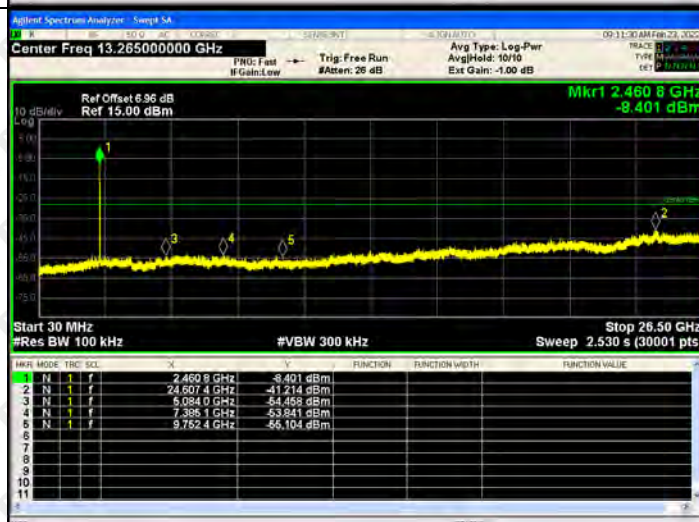
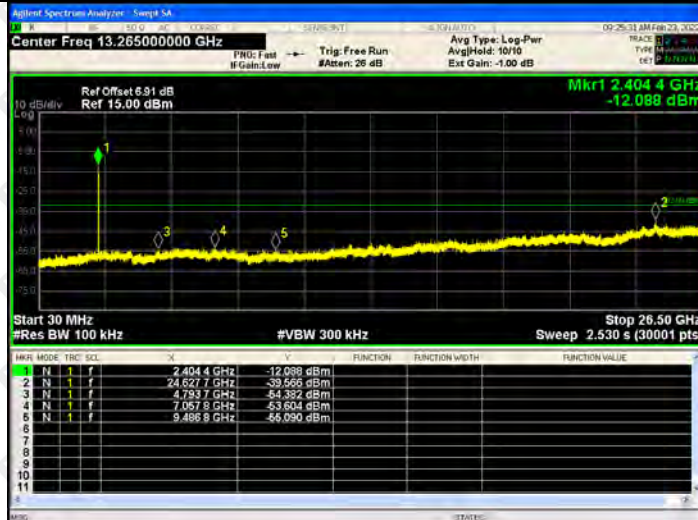
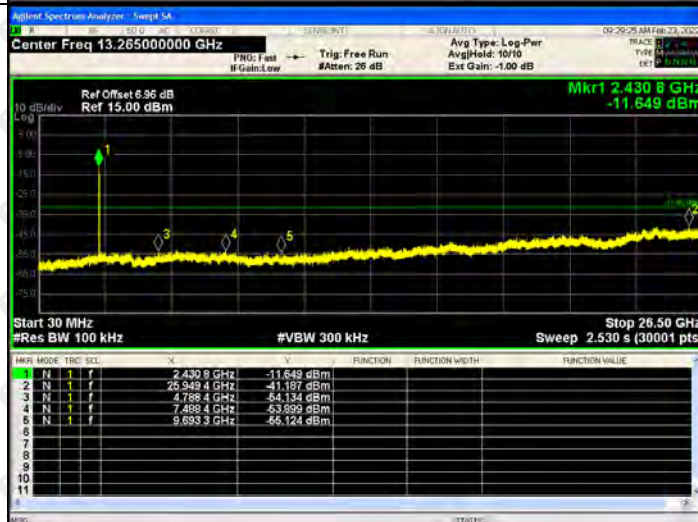
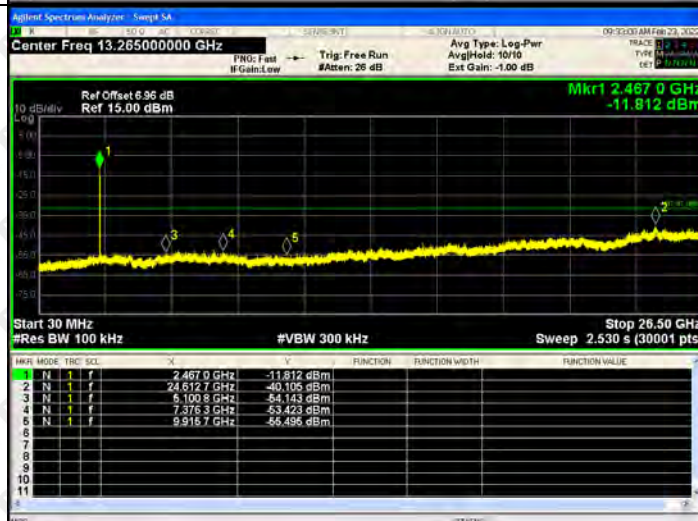
RF Conducted Spurious Emissions Graphs




802.11b
/LCH

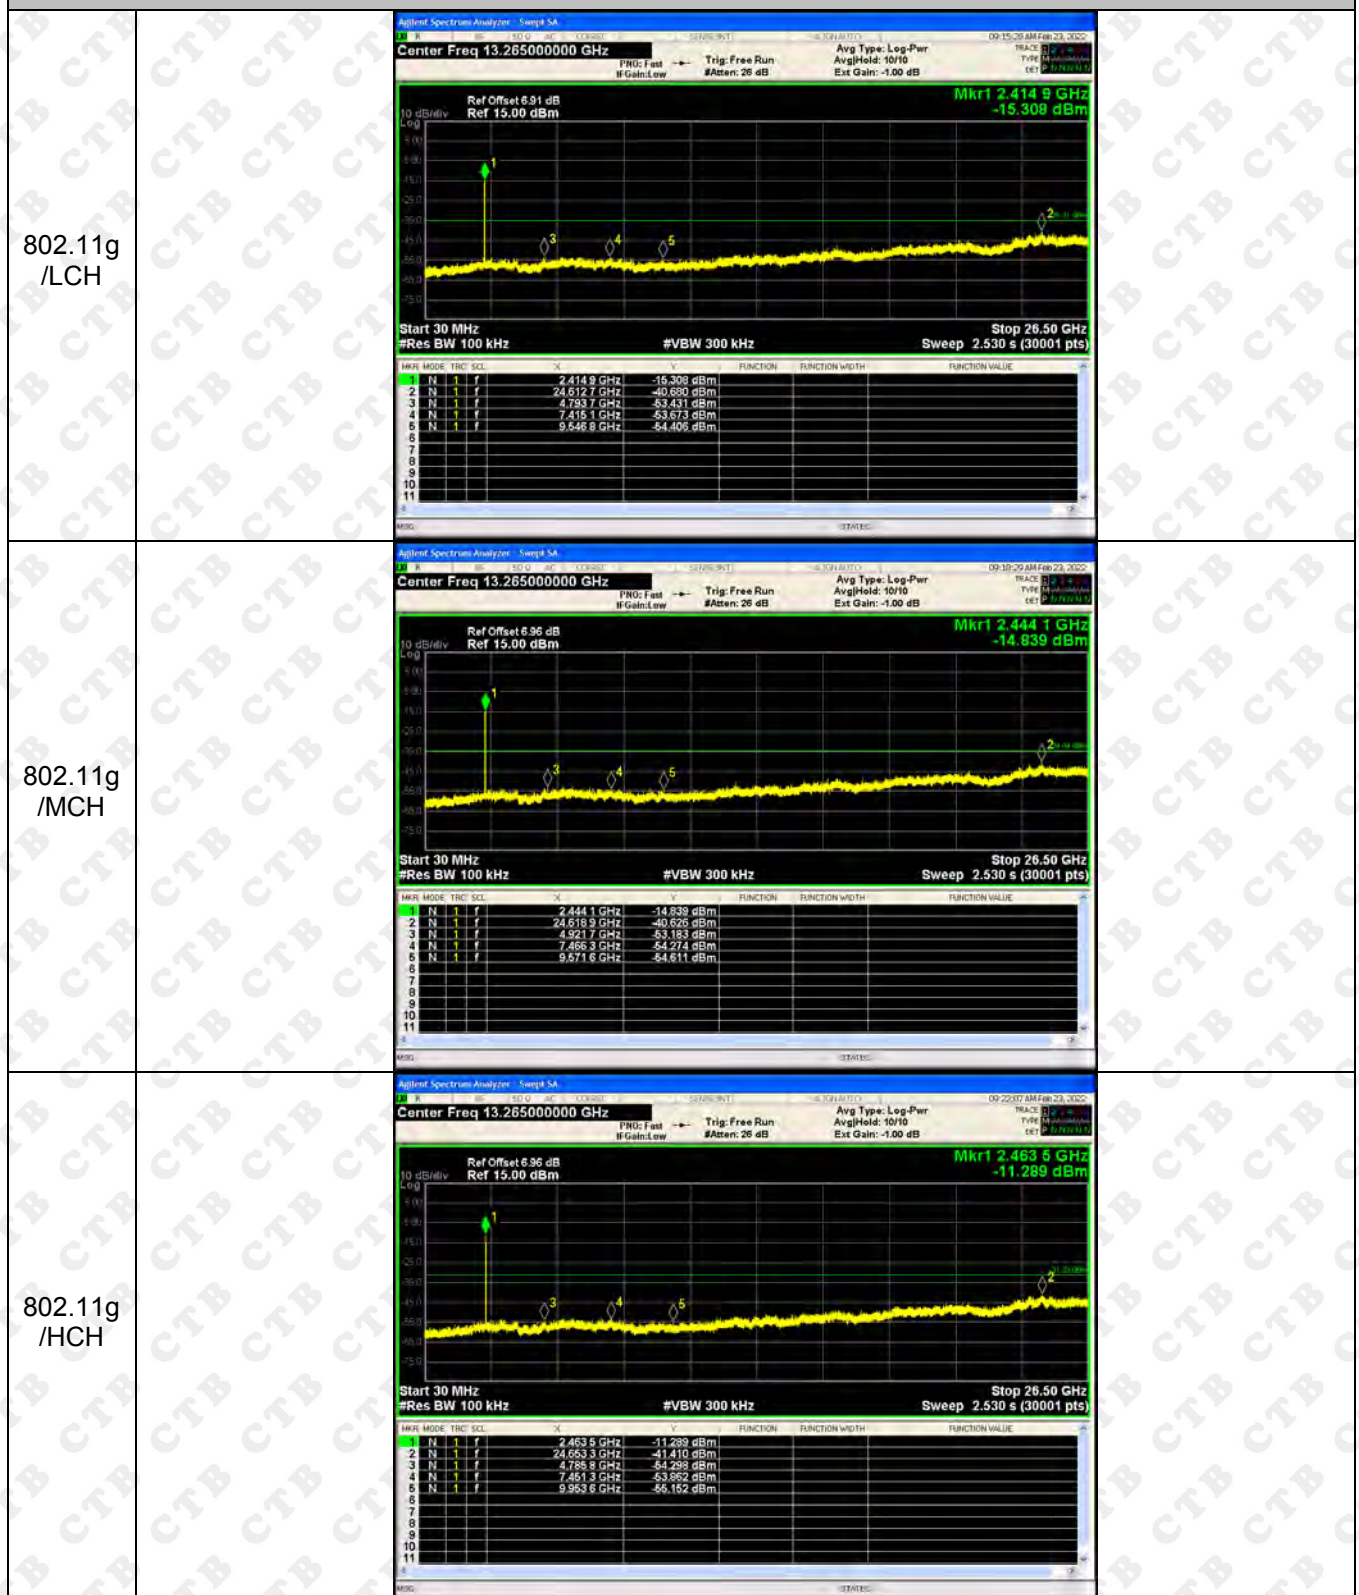802.11b
/MCH

802.11b
/HCH


RF Conducted Spurious Emissions Graphs

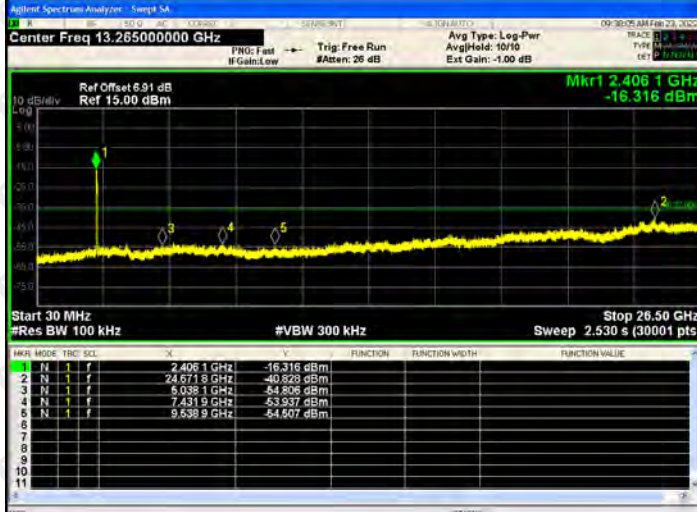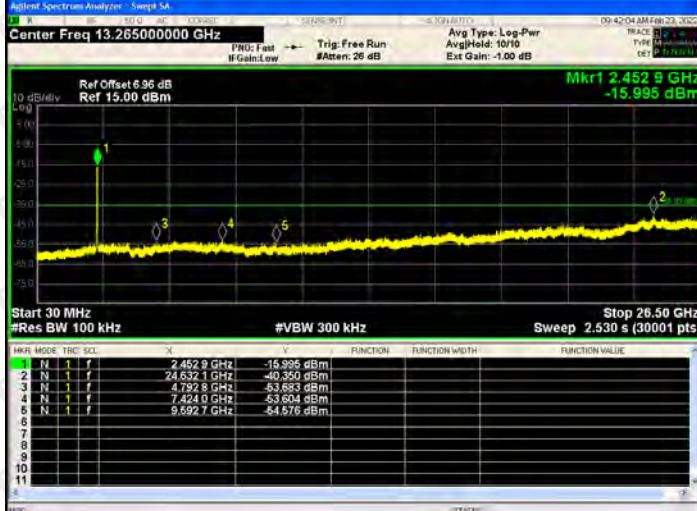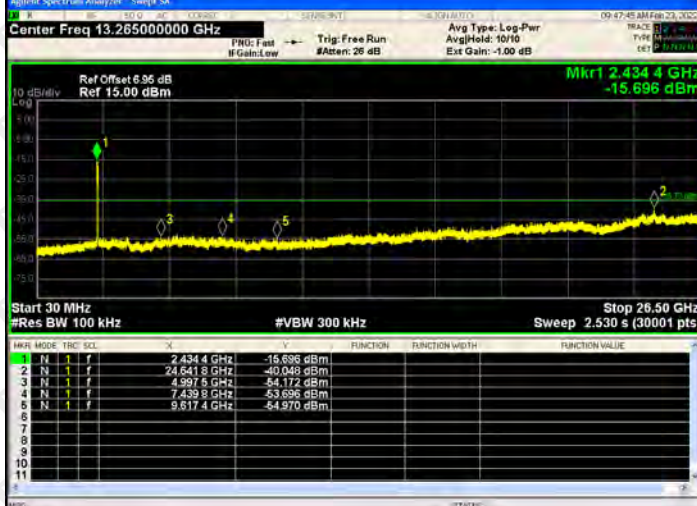

RF Conducted Spurious Emissions Graphs


802.11n
(HT20)/
LCH

802.11
n(HT20)
/MCH

802.11
n(HT20)
/HCH


802.11n (HT40)/ LCH	 <table><tr><th>HR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4061 GHz</td><td>-16.316 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.46718 GHz</td><td>-40.828 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0381 GHz</td><td>-54.808 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4319 GHz</td><td>-53.937 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6389 GHz</td><td>-54.507 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4061 GHz	-16.316 dBm				2	N	1	f	2.46718 GHz	-40.828 dBm				3	N	1	f	5.0381 GHz	-54.808 dBm				4	N	1	f	7.4319 GHz	-53.937 dBm				5	N	1	f	9.6389 GHz	-54.507 dBm			
HR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4061 GHz	-16.316 dBm																																																		
2	N	1	f	2.46718 GHz	-40.828 dBm																																																		
3	N	1	f	5.0381 GHz	-54.808 dBm																																																		
4	N	1	f	7.4319 GHz	-53.937 dBm																																																		
5	N	1	f	9.6389 GHz	-54.507 dBm																																																		
802.11 n(HT40) /MCH	 <table><tr><th>HR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4529 GHz</td><td>-15.995 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.46321 GHz</td><td>-40.350 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7928 GHz</td><td>-53.853 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4240 GHz</td><td>-53.804 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6927 GHz</td><td>-54.576 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4529 GHz	-15.995 dBm				2	N	1	f	2.46321 GHz	-40.350 dBm				3	N	1	f	4.7928 GHz	-53.853 dBm				4	N	1	f	7.4240 GHz	-53.804 dBm				5	N	1	f	9.6927 GHz	-54.576 dBm			
HR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4529 GHz	-15.995 dBm																																																		
2	N	1	f	2.46321 GHz	-40.350 dBm																																																		
3	N	1	f	4.7928 GHz	-53.853 dBm																																																		
4	N	1	f	7.4240 GHz	-53.804 dBm																																																		
5	N	1	f	9.6927 GHz	-54.576 dBm																																																		
802.11 n(HT40) /HCH	 <table><tr><th>HR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4344 GHz</td><td>-15.696 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.46418 GHz</td><td>-40.048 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9975 GHz</td><td>-54.172 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4339 GHz</td><td>-53.696 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6174 GHz</td><td>-54.970 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4344 GHz	-15.696 dBm				2	N	1	f	2.46418 GHz	-40.048 dBm				3	N	1	f	4.9975 GHz	-54.172 dBm				4	N	1	f	7.4339 GHz	-53.696 dBm				5	N	1	f	9.6174 GHz	-54.970 dBm			
HR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4344 GHz	-15.696 dBm																																																		
2	N	1	f	2.46418 GHz	-40.048 dBm																																																		
3	N	1	f	4.9975 GHz	-54.172 dBm																																																		
4	N	1	f	7.4339 GHz	-53.696 dBm																																																		
5	N	1	f	9.6174 GHz	-54.970 dBm																																																		


ANT 2:

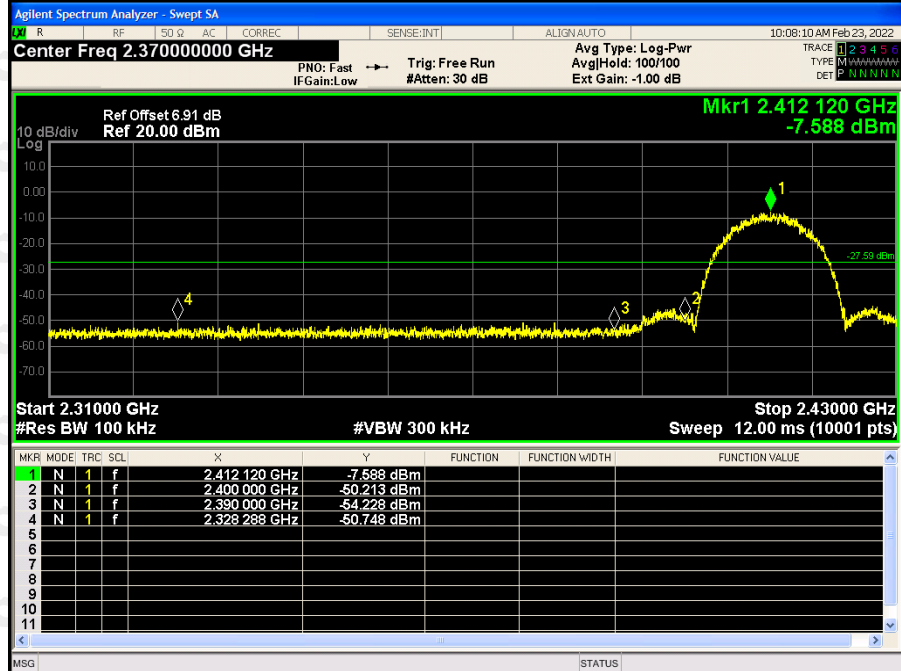BAND EDGE Graphs

802.11b/LCH




802.11b/HCH

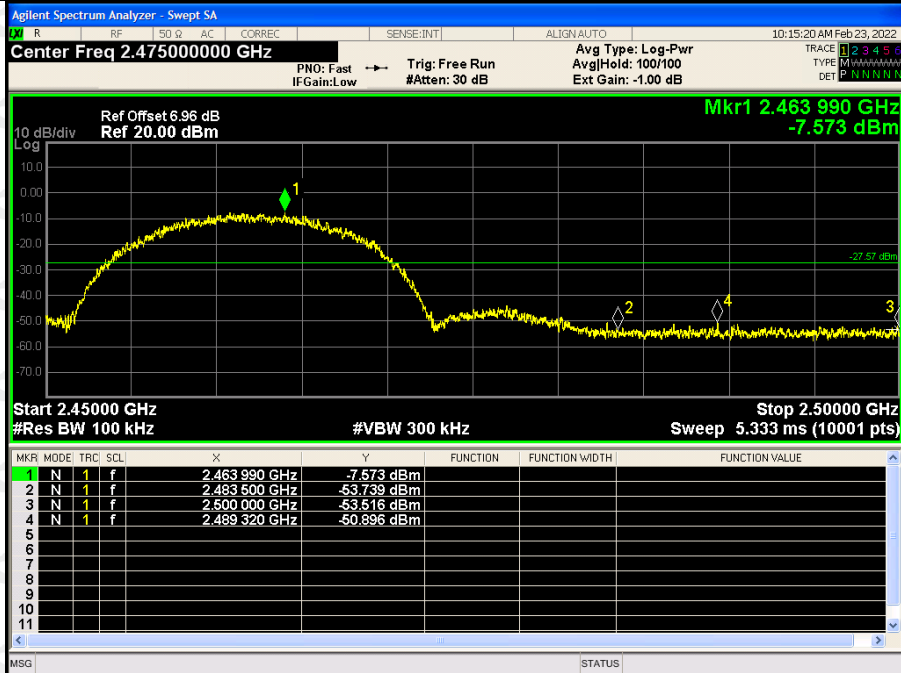


BAND EDGE Graphs



802.11g/LCH


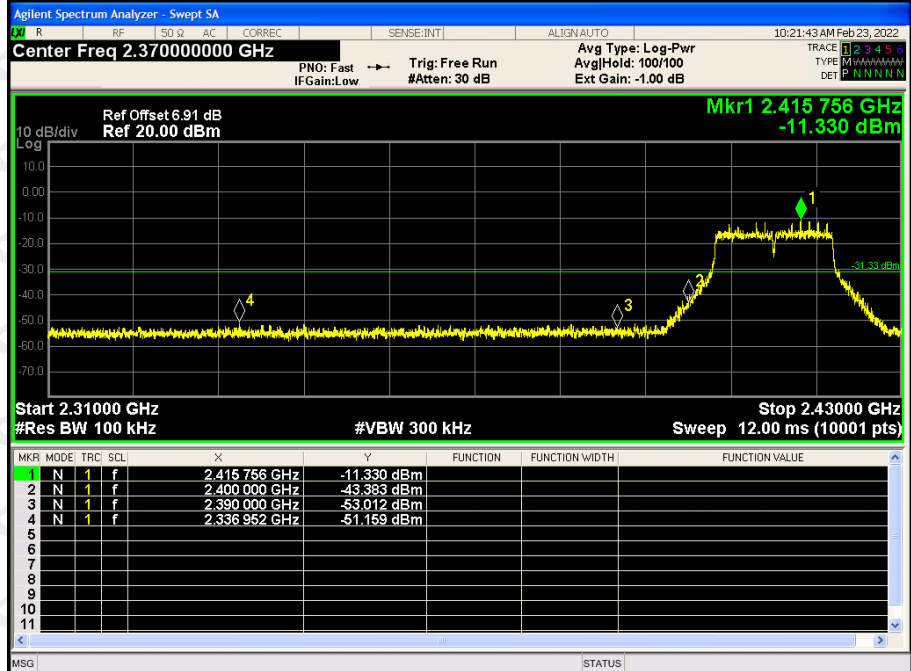


802.11g/HCH



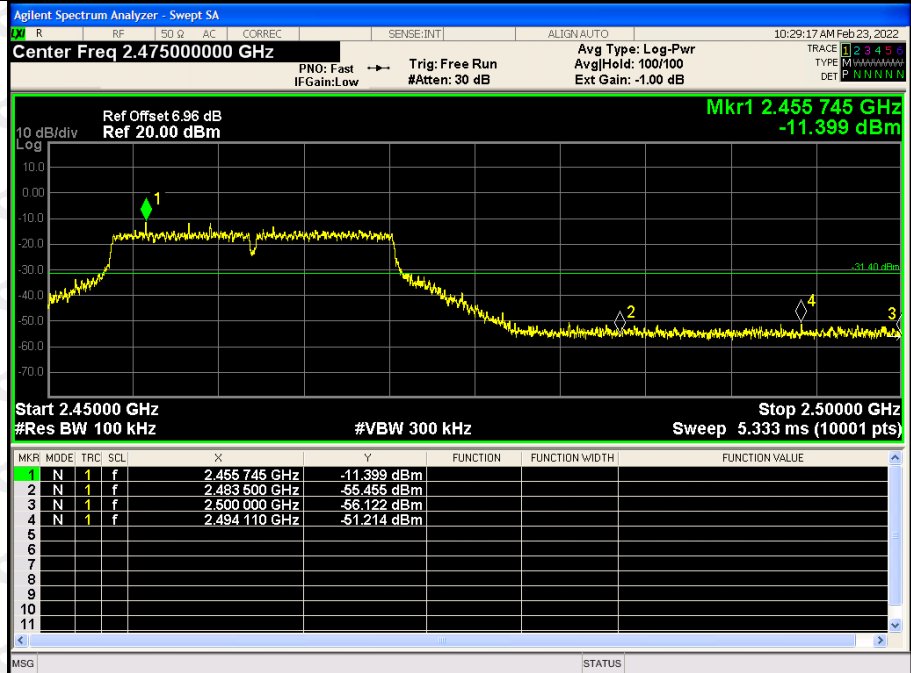


BAND EDGE Graphs

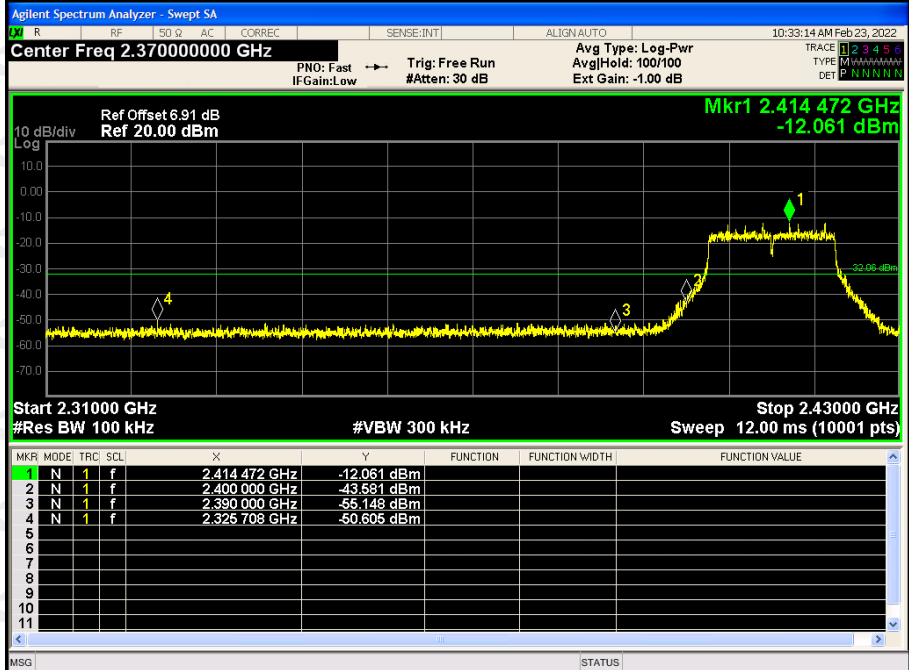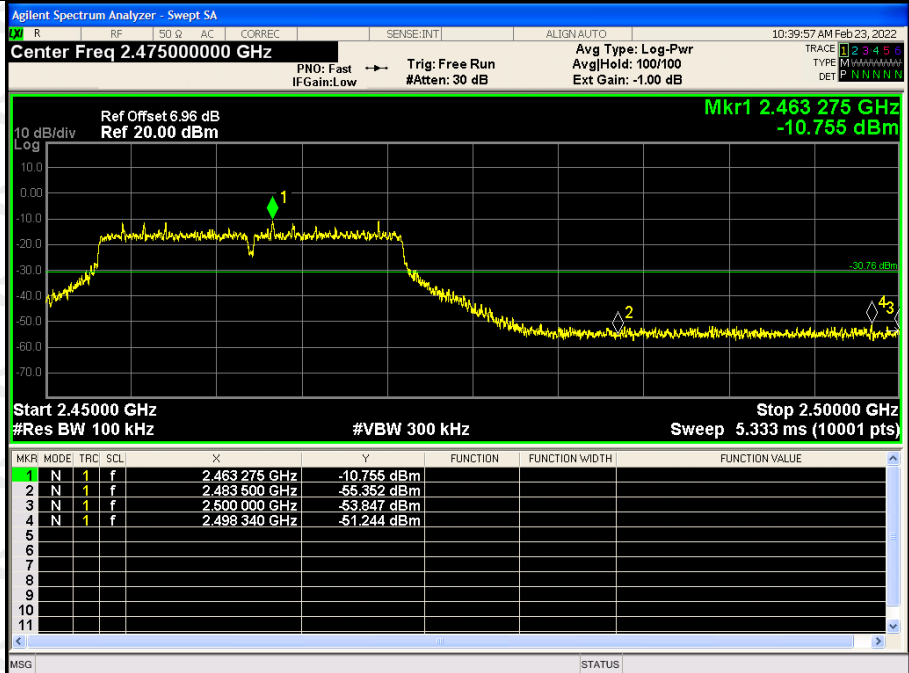
802.11n(HT20)/L
CH

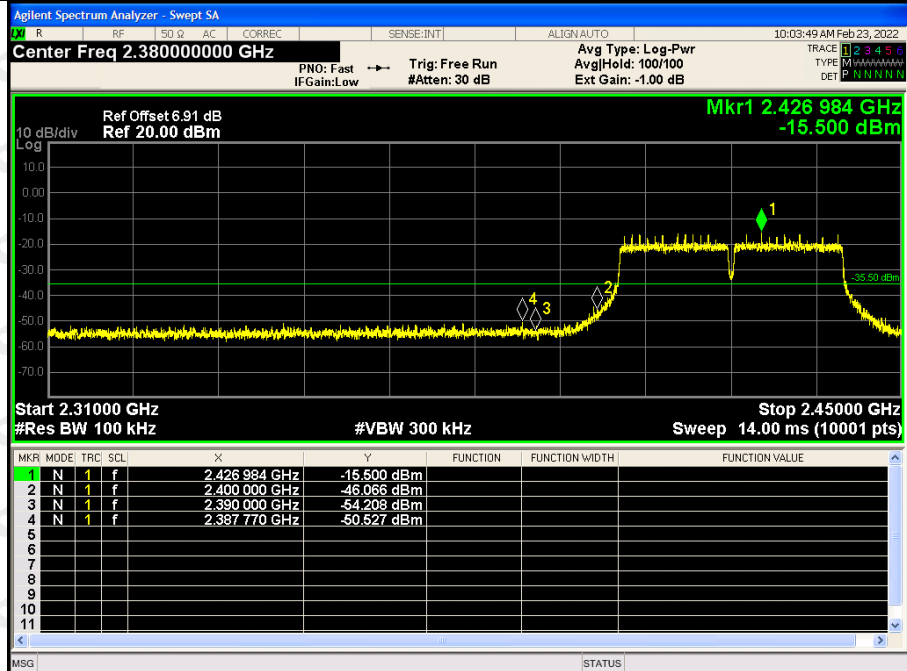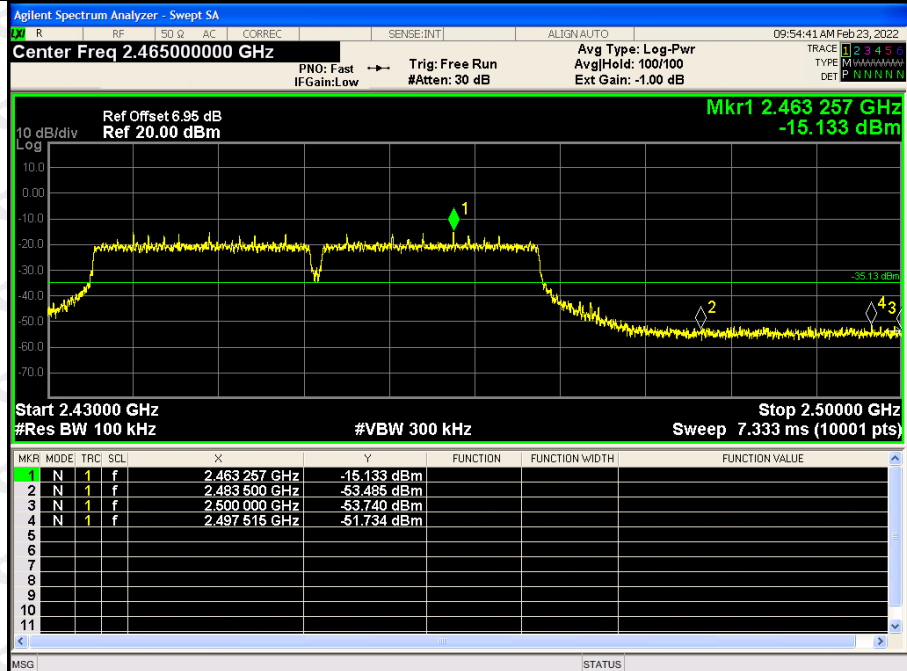802.11n(HT20)/H
CH


802.11n(HT40)/L
CH

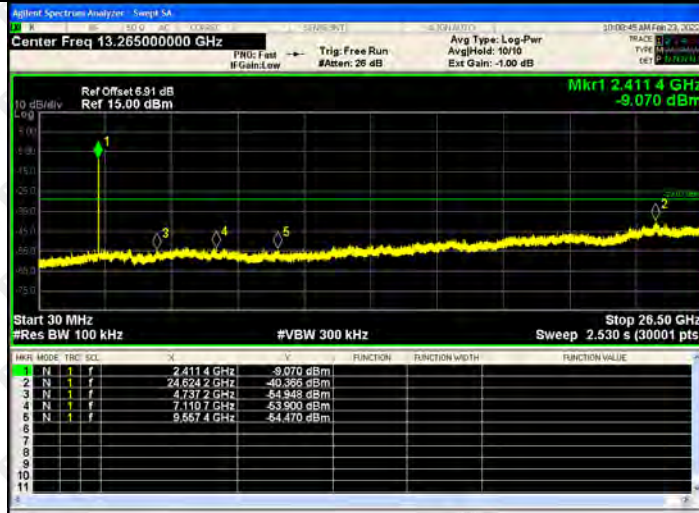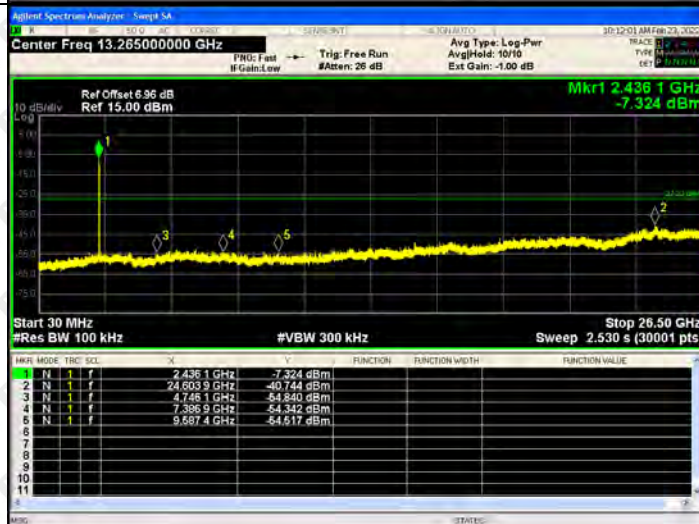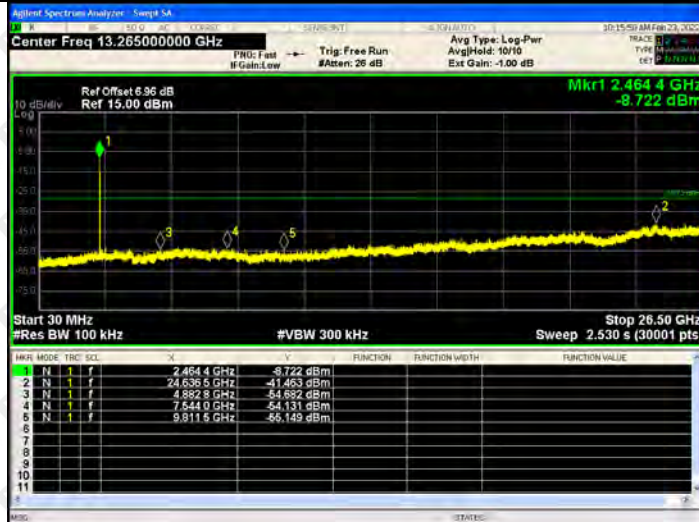802.11n(HT40)/H
CH


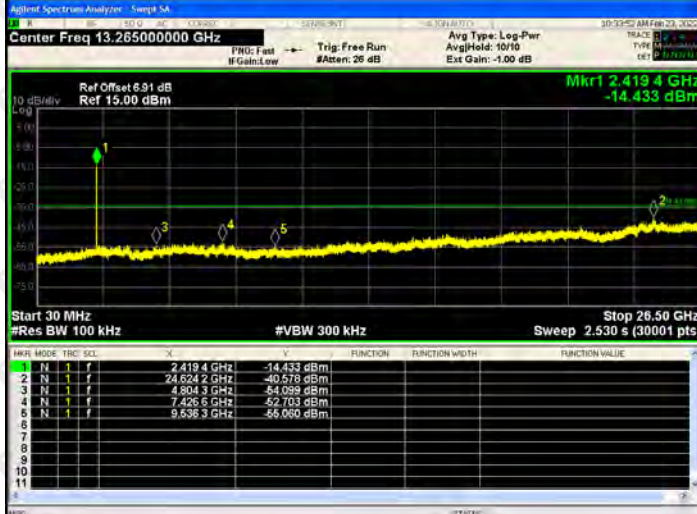
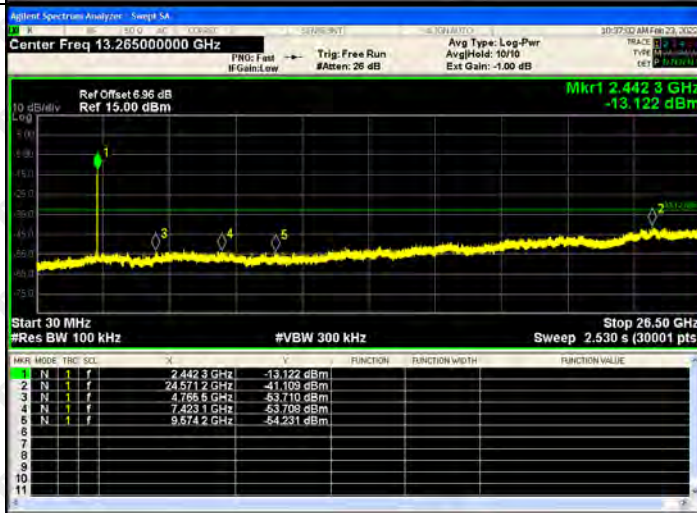
RF Conducted Spurious Emissions Graphs

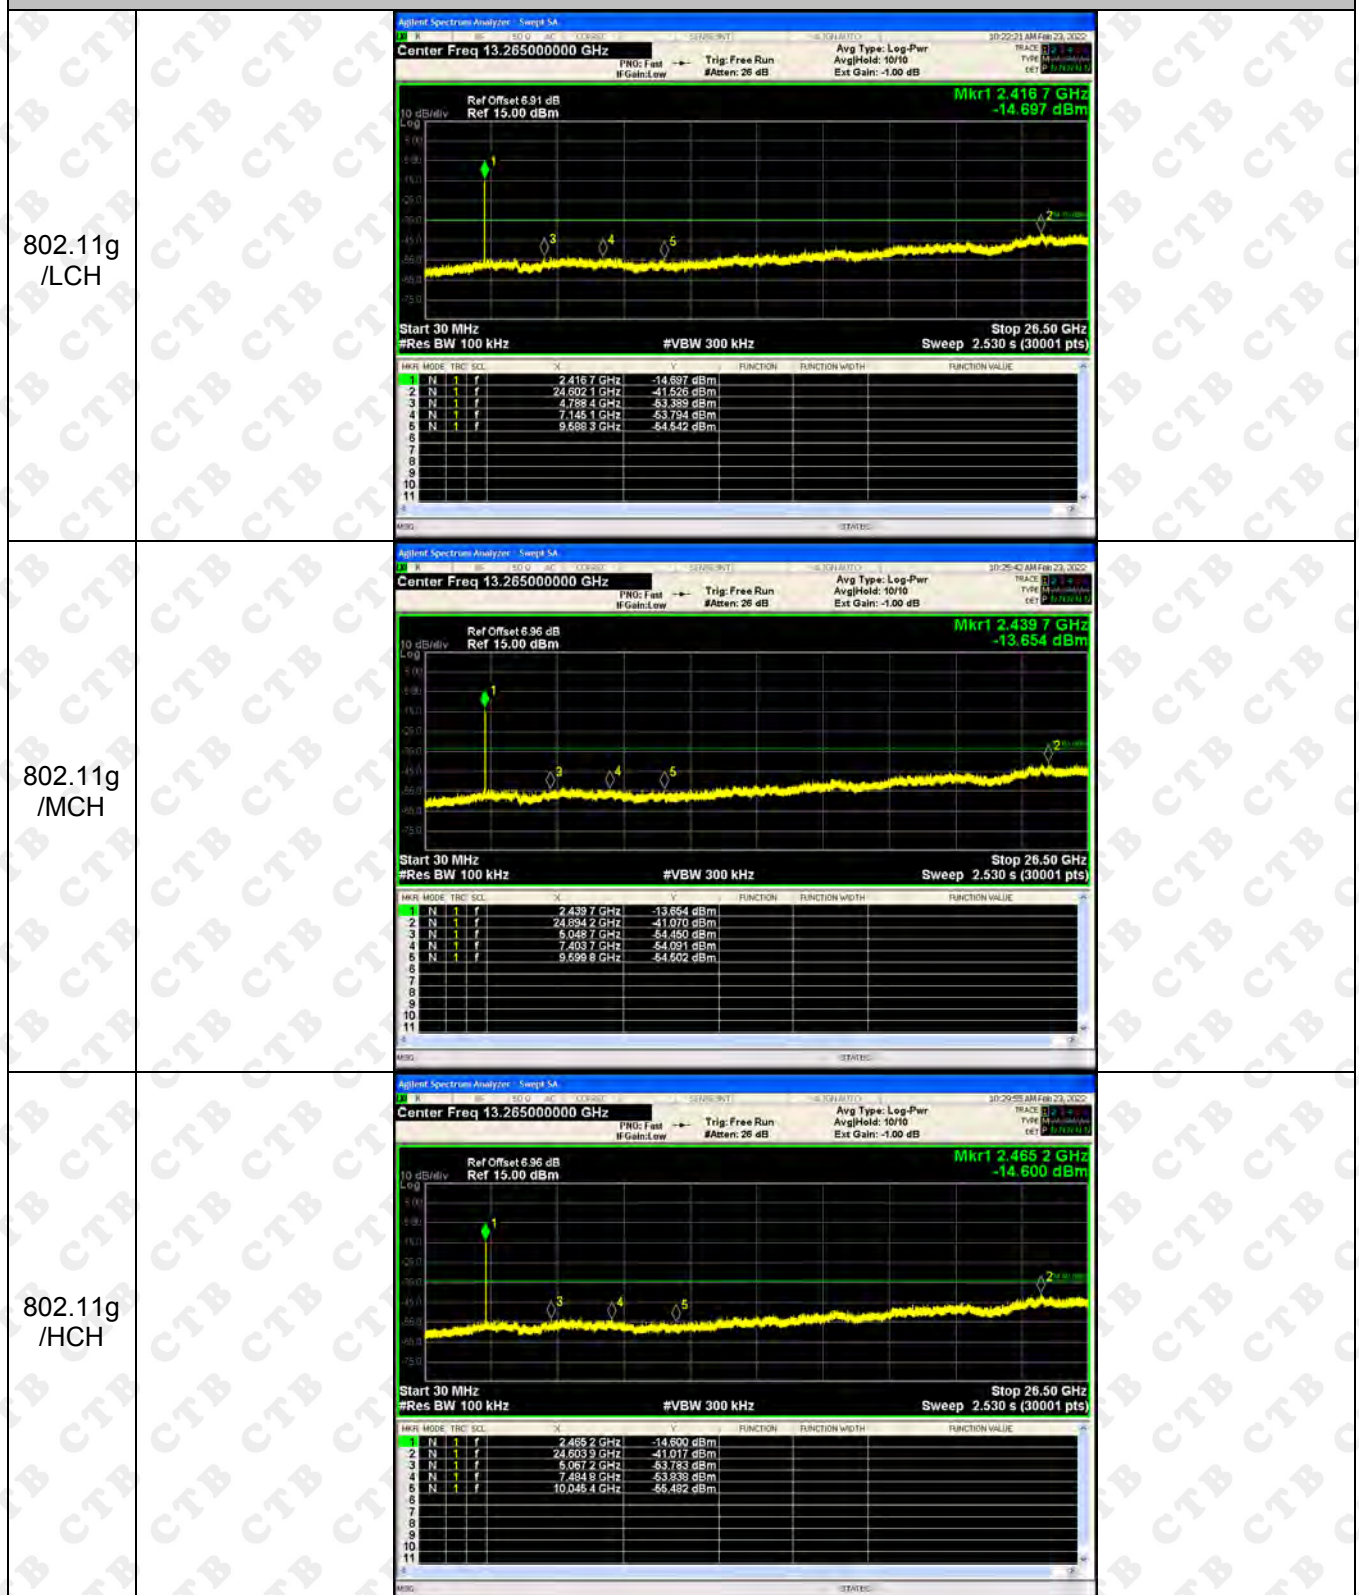
802.11b
/LCH

802.11b
/MCH

802.11b
/HCH


RF Conducted Spurious Emissions Graphs

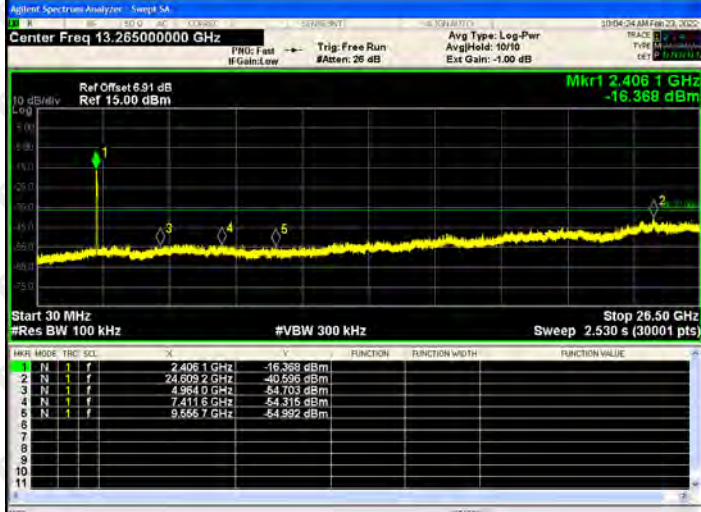


RF Conducted Spurious Emissions Graphs

802.11n (HT20)/ LCH	 <table><tr><th>HR</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4194 GHz</td><td>-14.433 dBm</td></tr><tr><td>2</td><td>N</td><td>24.6242 GHz</td><td>-40.578 dBm</td></tr><tr><td>3</td><td>N</td><td>4.8043 GHz</td><td>-54.039 dBm</td></tr><tr><td>4</td><td>N</td><td>7.4266 GHz</td><td>-52.703 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6363 GHz</td><td>-55.060 dBm</td></tr></table>	HR	MODE	FREQ	POWER	1	N	2.4194 GHz	-14.433 dBm	2	N	24.6242 GHz	-40.578 dBm	3	N	4.8043 GHz	-54.039 dBm	4	N	7.4266 GHz	-52.703 dBm	5	N	9.6363 GHz	-55.060 dBm
HR	MODE	FREQ	POWER																						
1	N	2.4194 GHz	-14.433 dBm																						
2	N	24.6242 GHz	-40.578 dBm																						
3	N	4.8043 GHz	-54.039 dBm																						
4	N	7.4266 GHz	-52.703 dBm																						
5	N	9.6363 GHz	-55.060 dBm																						
802.11 n(HT20) /MCH	 <table><tr><th>HR</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4423 GHz</td><td>-13.122 dBm</td></tr><tr><td>2</td><td>N</td><td>24.5712 GHz</td><td>-41.109 dBm</td></tr><tr><td>3</td><td>N</td><td>4.7655 GHz</td><td>-53.710 dBm</td></tr><tr><td>4</td><td>N</td><td>7.4231 GHz</td><td>-53.708 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6742 GHz</td><td>-54.231 dBm</td></tr></table>	HR	MODE	FREQ	POWER	1	N	2.4423 GHz	-13.122 dBm	2	N	24.5712 GHz	-41.109 dBm	3	N	4.7655 GHz	-53.710 dBm	4	N	7.4231 GHz	-53.708 dBm	5	N	9.6742 GHz	-54.231 dBm
HR	MODE	FREQ	POWER																						
1	N	2.4423 GHz	-13.122 dBm																						
2	N	24.5712 GHz	-41.109 dBm																						
3	N	4.7655 GHz	-53.710 dBm																						
4	N	7.4231 GHz	-53.708 dBm																						
5	N	9.6742 GHz	-54.231 dBm																						
802.11 n(HT20) /HCH	 <table><tr><th>HR</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4573 GHz</td><td>-13.228 dBm</td></tr><tr><td>2</td><td>N</td><td>24.6383 GHz</td><td>-39.698 dBm</td></tr><tr><td>3</td><td>N</td><td>4.7955 GHz</td><td>-53.806 dBm</td></tr><tr><td>4</td><td>N</td><td>7.3349 GHz</td><td>-53.617 dBm</td></tr><tr><td>5</td><td>N</td><td>9.7904 GHz</td><td>-54.756 dBm</td></tr></table>	HR	MODE	FREQ	POWER	1	N	2.4573 GHz	-13.228 dBm	2	N	24.6383 GHz	-39.698 dBm	3	N	4.7955 GHz	-53.806 dBm	4	N	7.3349 GHz	-53.617 dBm	5	N	9.7904 GHz	-54.756 dBm
HR	MODE	FREQ	POWER																						
1	N	2.4573 GHz	-13.228 dBm																						
2	N	24.6383 GHz	-39.698 dBm																						
3	N	4.7955 GHz	-53.806 dBm																						
4	N	7.3349 GHz	-53.617 dBm																						
5	N	9.7904 GHz	-54.756 dBm																						

802.11n (HT40)/ LCH	 <table><tr><th>HR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4081 GHz</td><td>-16.368 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6092 GHz</td><td>-40.595 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9840 GHz</td><td>-54.703 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4116 GHz</td><td>-54.315 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5567 GHz</td><td>-54.992 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4081 GHz	-16.368 dBm				2	N	1	f	24.6092 GHz	-40.595 dBm				3	N	1	f	4.9840 GHz	-54.703 dBm				4	N	1	f	7.4116 GHz	-54.315 dBm				5	N	1	f	9.5567 GHz	-54.992 dBm			
HR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4081 GHz	-16.368 dBm																																																		
2	N	1	f	24.6092 GHz	-40.595 dBm																																																		
3	N	1	f	4.9840 GHz	-54.703 dBm																																																		
4	N	1	f	7.4116 GHz	-54.315 dBm																																																		
5	N	1	f	9.5567 GHz	-54.992 dBm																																																		
802.11 n(HT40) /MCH	 <table><tr><th>HR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4485 GHz</td><td>-15.389 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6330 GHz</td><td>-40.720 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7875 GHz</td><td>-53.858 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4451 GHz</td><td>-53.352 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5574 GHz</td><td>-53.606 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4485 GHz	-15.389 dBm				2	N	1	f	24.6330 GHz	-40.720 dBm				3	N	1	f	4.7875 GHz	-53.858 dBm				4	N	1	f	7.4451 GHz	-53.352 dBm				5	N	1	f	9.5574 GHz	-53.606 dBm			
HR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4485 GHz	-15.389 dBm																																																		
2	N	1	f	24.6330 GHz	-40.720 dBm																																																		
3	N	1	f	4.7875 GHz	-53.858 dBm																																																		
4	N	1	f	7.4451 GHz	-53.352 dBm																																																		
5	N	1	f	9.5574 GHz	-53.606 dBm																																																		
802.11 n(HT40) /HCH	 <table><tr><th>HR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4494 GHz</td><td>-16.058 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6347 GHz</td><td>-40.873 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7954 GHz</td><td>-53.186 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4910 GHz</td><td>-53.934 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6086 GHz</td><td>-54.644 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4494 GHz	-16.058 dBm				2	N	1	f	24.6347 GHz	-40.873 dBm				3	N	1	f	4.7954 GHz	-53.186 dBm				4	N	1	f	7.4910 GHz	-53.934 dBm				5	N	1	f	9.6086 GHz	-54.644 dBm			
HR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4494 GHz	-16.058 dBm																																																		
2	N	1	f	24.6347 GHz	-40.873 dBm																																																		
3	N	1	f	4.7954 GHz	-53.186 dBm																																																		
4	N	1	f	7.4910 GHz	-53.934 dBm																																																		
5	N	1	f	9.6086 GHz	-54.644 dBm																																																		

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

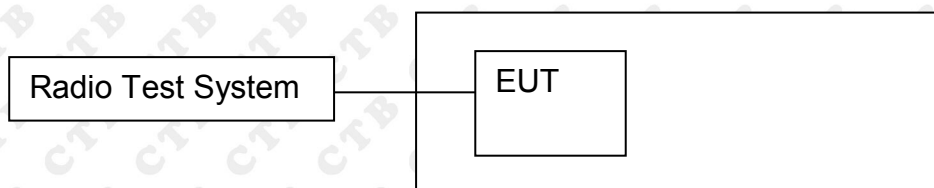

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS




9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result



Mode	Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	7.49	7.34	/	30
	MCH	7.65	7.67	/	30
	HCH	7.52	7.62	/	30
802.11g	LCH	6.16	6.42	/	30
	MCH	6.60	6.88	/	30
	HCH	6.86	6.55	/	30
802.11n(HT20)	LCH	6.17	6.23	9.21	30
	MCH	6.64	6.62	9.64	30
	HCH	6.75	6.82	9.80	30
802.11n(HT40)	LCH	5.57	5.44	8.52	30
	MCH	5.85	5.66	8.77	30
	HCH	5.79	5.81	8.81	30

ANT1

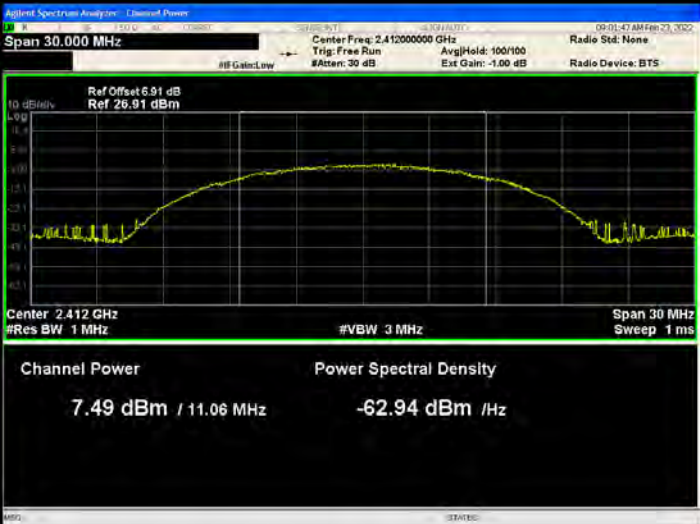
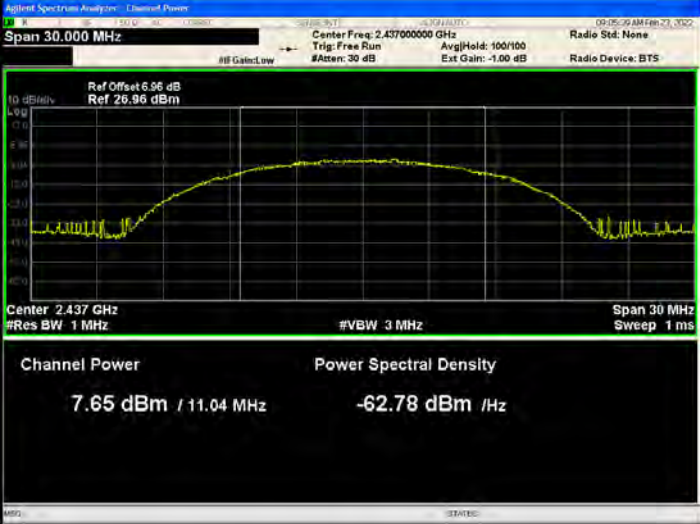
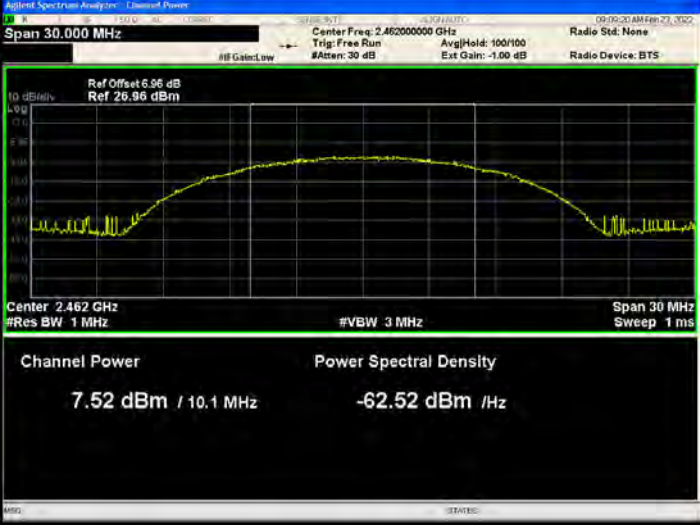
Mode	Channel.	Maximum Output Power [dBm]
802.11b	LCH	 Channel Power: 7.49 dBm / 11.06 MHz Power Spectral Density: -62.94 dBm / Hz
	MCH	 Channel Power: 7.65 dBm / 11.04 MHz Power Spectral Density: -62.78 dBm / Hz
	HCH	 Channel Power: 7.52 dBm / 10.1 MHz Power Spectral Density: -62.52 dBm / Hz



	LCH	
802.11g	MCH	
	HCH	

	LCH	 Agilent Spectrum Analyzer: Channel Power Span 30.000 MHz Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Ref Offset: 6.91 dB Ref: 26.91 dBm Channel Power: 6.17 dBm / 17.63 MHz Power Spectral Density: -66.30 dBm / Hz
802.11n(HT20)	MCH	 Agilent Spectrum Analyzer: Channel Power Span 30.000 MHz Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Ref Offset: 6.96 dB Ref: 26.96 dBm Channel Power: 6.64 dBm / 17.67 MHz Power Spectral Density: -65.81 dBm / Hz
	HCH	 Agilent Spectrum Analyzer: Channel Power Span 30.000 MHz Center Freq: 2.46200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Ref Offset: 6.96 dB Ref: 26.96 dBm Channel Power: 6.75 dBm / 17.6 MHz Power Spectral Density: -65.71 dBm / Hz


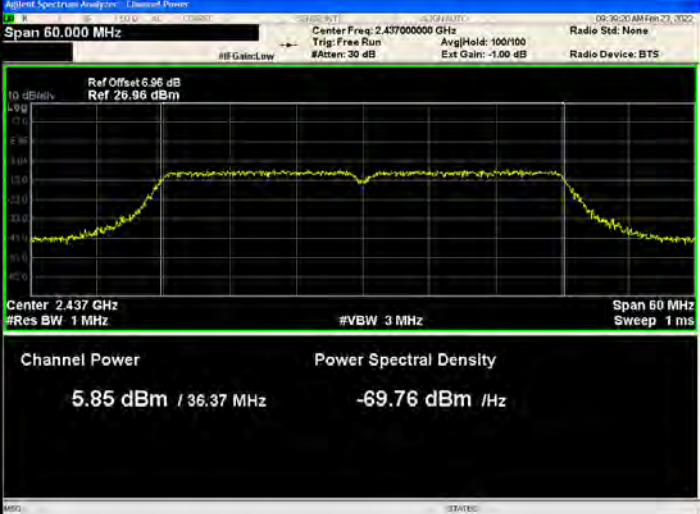
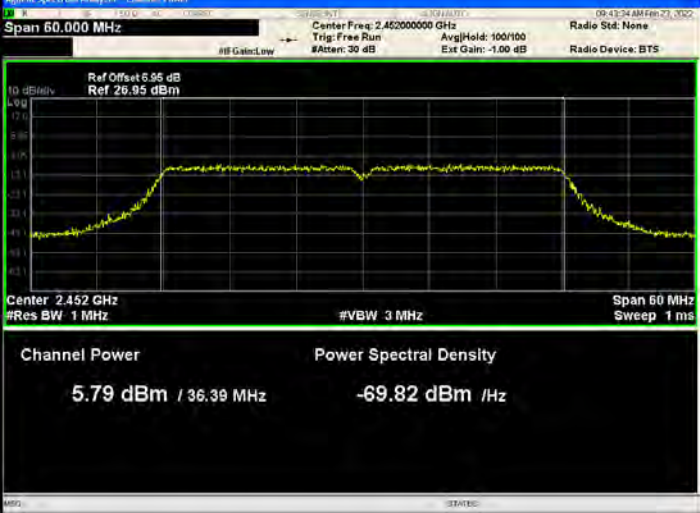
	LCH	
802.11n(HT40)	MCH	
	HCH	

ANT 2:

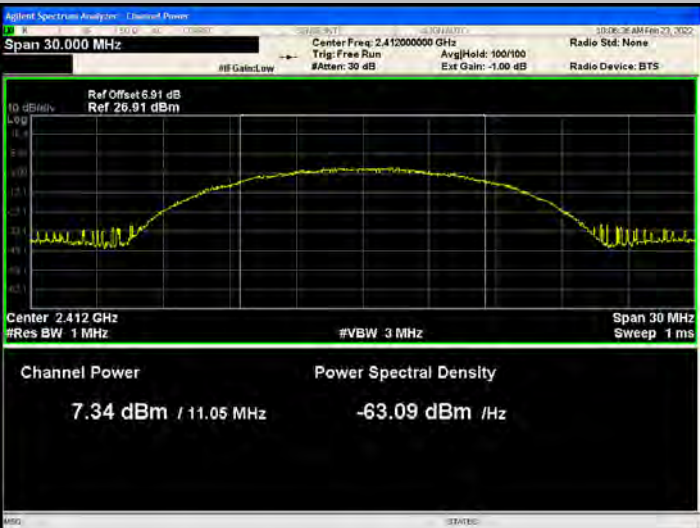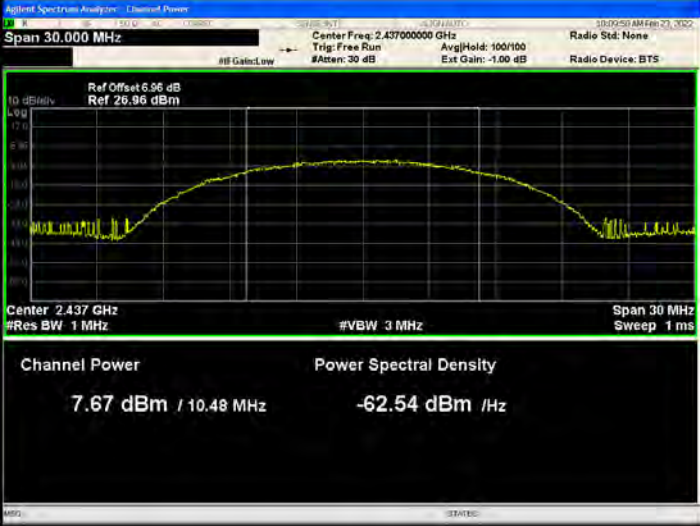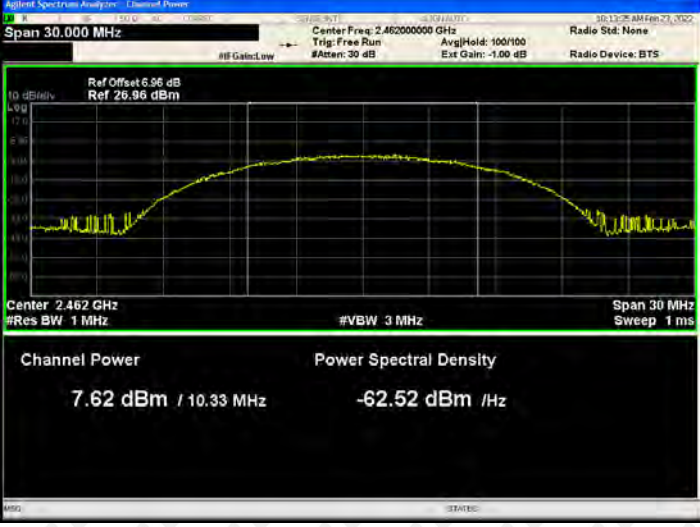Mode	Channel.	Maximum Output Power [dBm]
802.11b	LCH	 Channel Power: 7.34 dBm / 11.05 MHz Power Spectral Density: -63.09 dBm / Hz
	MCH	 Channel Power: 7.67 dBm / 10.48 MHz Power Spectral Density: -62.54 dBm / Hz
	HCH	 Channel Power: 7.62 dBm / 10.33 MHz Power Spectral Density: -62.52 dBm / Hz

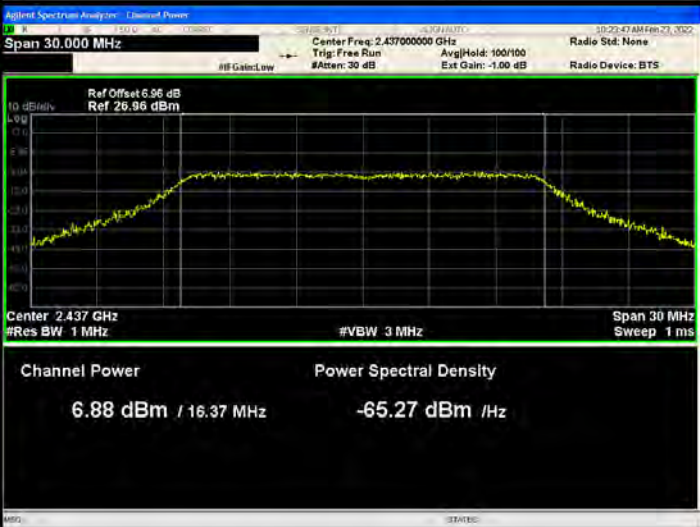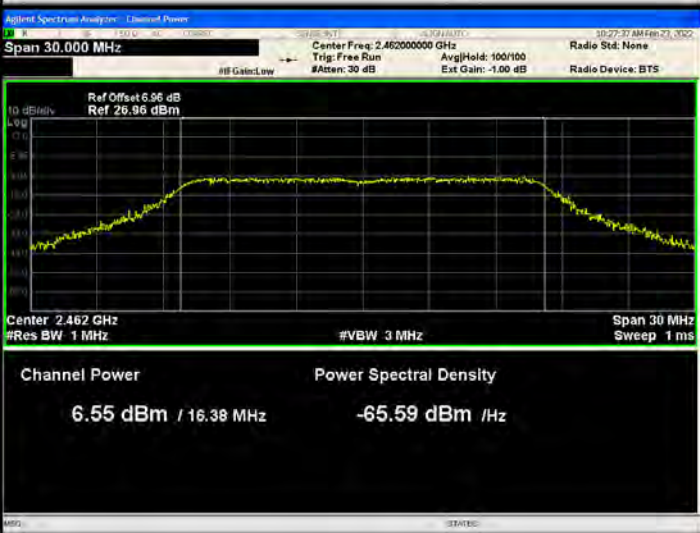
	LCH	
802.11g	MCH	
	HCH	

	LCH	
802.11n(HT20)	MCH	
	HCH	

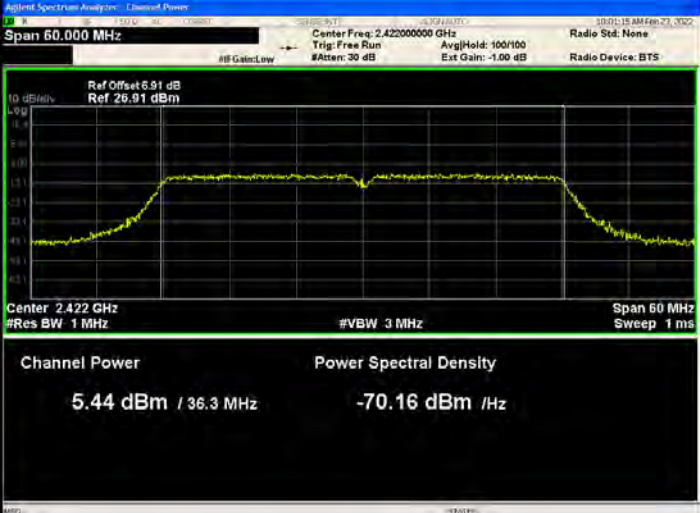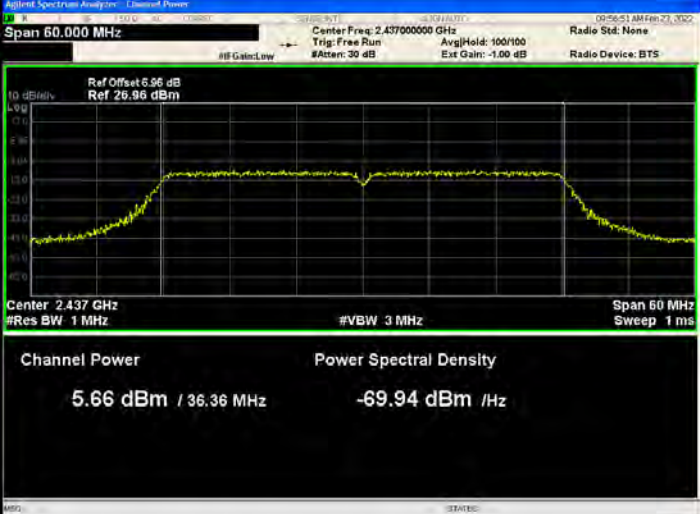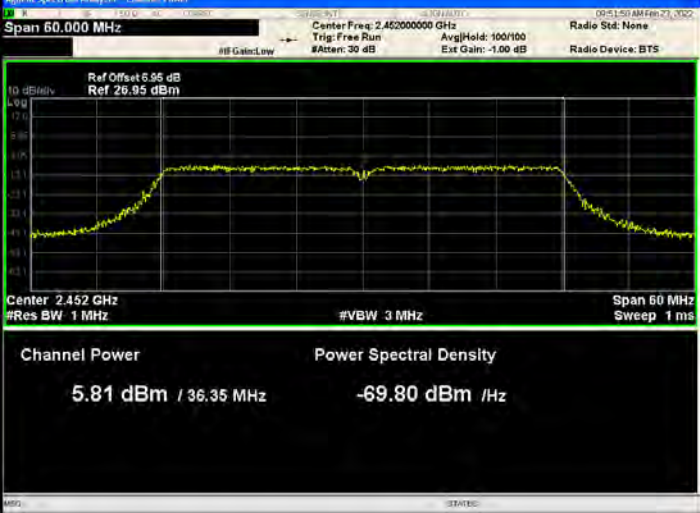	LCH	 Agilent Spectrum Analyzer - Channel Power Span 60.000 MHz Center 2.422 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 1 ms Channel Power: 5.44 dBm / 36.3 MHz Power Spectral Density: -70.16 dBm / Hz
802.11n(HT40)	MCH	 Agilent Spectrum Analyzer - Channel Power Span 60.000 MHz Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 1 ms Channel Power: 5.66 dBm / 36.36 MHz Power Spectral Density: -69.94 dBm / Hz
	HCH	 Agilent Spectrum Analyzer - Channel Power Span 60.000 MHz Center 2.452 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 1 ms Channel Power: 5.81 dBm / 36.35 MHz Power Spectral Density: -69.80 dBm / Hz

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

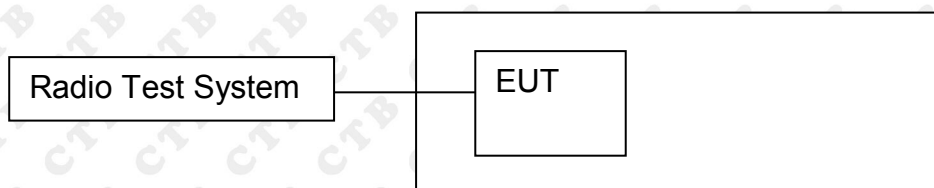

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	11.058	500	PASS
	MCH	11.036	500	PASS
	HCH	10.101	500	PASS
802.11g	LCH	16.355	500	PASS
	MCH	16.341	500	PASS
	HCH	16.385	500	PASS
802.11n(HT20)	LCH	17.627	500	PASS
	MCH	17.57	500	PASS
	HCH	17.602	500	PASS
802.11n(HT40)	LCH	36.323	500	PASS
	MCH	36.375	500	PASS
	HCH	36.394	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	11.052	500	PASS
	MCH	10.479	500	PASS
	HCH	10.326	500	PASS
802.11g	LCH	16.436	500	PASS
	MCH	16.366	500	PASS
	HCH	16.381	500	PASS
802.11n(HT20)	LCH	17.595	500	PASS
	MCH	17.575	500	PASS
	HCH	17.606	500	PASS
802.11n(HT40)	LCH	36.297	500	PASS
	MCH	36.359	500	PASS
	HCH	36.351	500	PASS

Test Graph: ANT 1:

Graphs

802.11b /LCH




802.11b /MCH



802.11b/HCH



802.11g/LCH


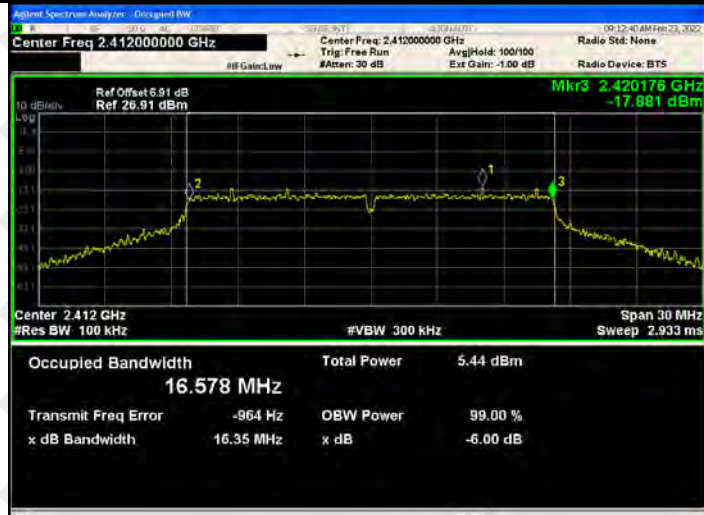




802.11g/MCH



802.11g/HCH

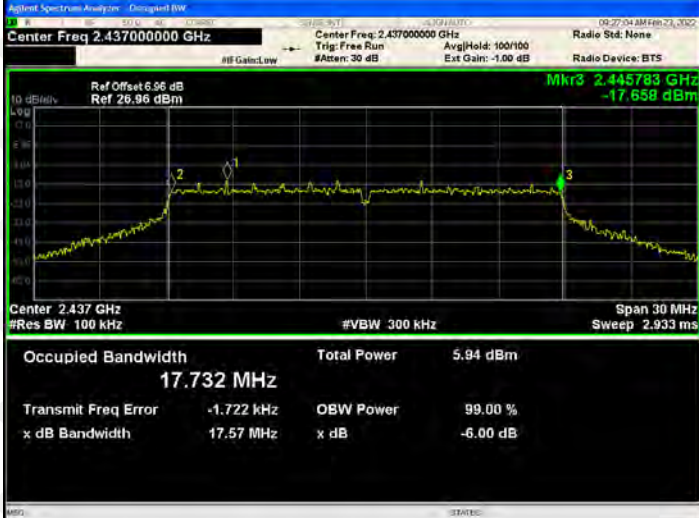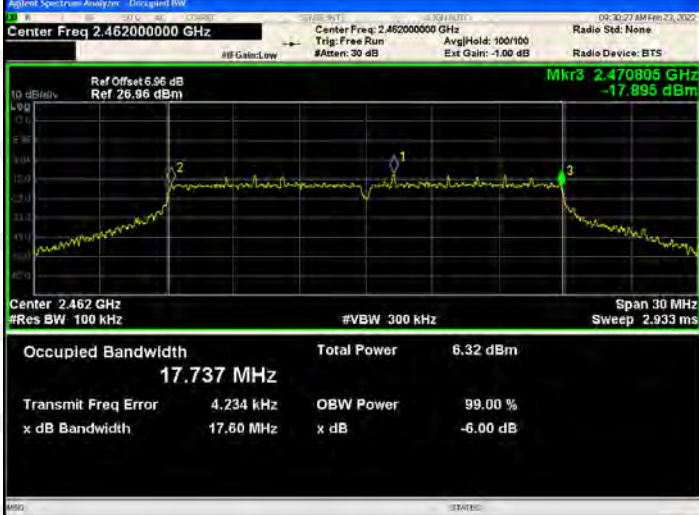

802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Ref Offset: 6.91 dB Ref: 29.91 dBm Mkr3: 2.420822 GHz -18.577 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table><tr><td>Occupied Bandwidth</td><td colspan="2">17.759 MHz</td><td>Total Power</td><td>5.40 dBm</td></tr><tr><td>Transmit Freq Error</td><td>7.960 kHz</td><td>OBW Power</td><td>99.00 %</td><td></td></tr><tr><td>x dB Bandwidth</td><td>17.63 MHz</td><td>x dB</td><td>-6.00 dB</td><td></td></tr></table>	Occupied Bandwidth	17.759 MHz		Total Power	5.40 dBm	Transmit Freq Error	7.960 kHz	OBW Power	99.00 %		x dB Bandwidth	17.63 MHz	x dB	-6.00 dB	
Occupied Bandwidth	17.759 MHz		Total Power	5.40 dBm												
Transmit Freq Error	7.960 kHz	OBW Power	99.00 %													
x dB Bandwidth	17.63 MHz	x dB	-6.00 dB													
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.96 dB Ref: 29.96 dBm Mkr3: 2.445783 GHz -17.658 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table><tr><td>Occupied Bandwidth</td><td colspan="2">17.732 MHz</td><td>Total Power</td><td>5.94 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-1.722 kHz</td><td>OBW Power</td><td>99.00 %</td><td></td></tr><tr><td>x dB Bandwidth</td><td>17.57 MHz</td><td>x dB</td><td>-6.00 dB</td><td></td></tr></table>	Occupied Bandwidth	17.732 MHz		Total Power	5.94 dBm	Transmit Freq Error	-1.722 kHz	OBW Power	99.00 %		x dB Bandwidth	17.57 MHz	x dB	-6.00 dB	
Occupied Bandwidth	17.732 MHz		Total Power	5.94 dBm												
Transmit Freq Error	-1.722 kHz	OBW Power	99.00 %													
x dB Bandwidth	17.57 MHz	x dB	-6.00 dB													
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Ref Offset: 6.96 dB Ref: 29.96 dBm Mkr3: 2.470805 GHz -17.895 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table><tr><td>Occupied Bandwidth</td><td colspan="2">17.737 MHz</td><td>Total Power</td><td>6.32 dBm</td></tr><tr><td>Transmit Freq Error</td><td>4.234 kHz</td><td>OBW Power</td><td>99.00 %</td><td></td></tr><tr><td>x dB Bandwidth</td><td>17.60 MHz</td><td>x dB</td><td>-6.00 dB</td><td></td></tr></table>	Occupied Bandwidth	17.737 MHz		Total Power	6.32 dBm	Transmit Freq Error	4.234 kHz	OBW Power	99.00 %		x dB Bandwidth	17.60 MHz	x dB	-6.00 dB	
Occupied Bandwidth	17.737 MHz		Total Power	6.32 dBm												
Transmit Freq Error	4.234 kHz	OBW Power	99.00 %													
x dB Bandwidth	17.60 MHz	x dB	-6.00 dB													

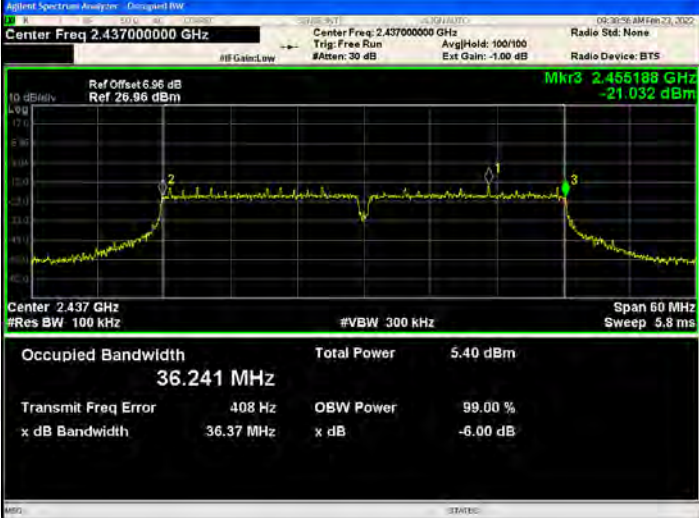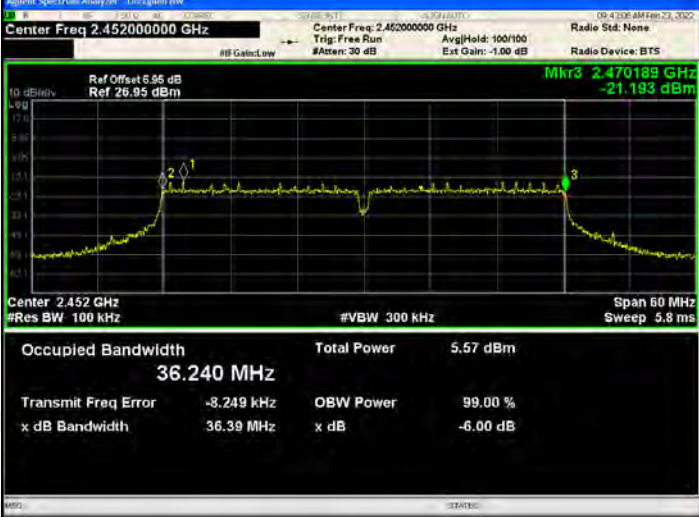802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.422000000 GHz Ref Offset: 6.91 dB Ref: 29.91 dBm Mkr3: 2.440188 GHz -21.703 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.224 MHz Total Power: 5.11 dBm Transmit Freq Error: 6.685 kHz OBW Power: 99.00 % x dB Bandwidth: 36.32 MHz x dB: -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.96 dB Ref: 29.96 dBm Mkr3: 2.455188 GHz -21.032 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.241 MHz Total Power: 5.40 dBm Transmit Freq Error: 408 Hz OBW Power: 99.00 % x dB Bandwidth: 36.37 MHz x dB: -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.452000000 GHz Ref Offset: 6.96 dB Ref: 29.96 dBm Mkr3: 2.470188 GHz -21.193 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.240 MHz Total Power: 5.57 dBm Transmit Freq Error: -8.249 kHz OBW Power: 99.00 % x dB Bandwidth: 36.39 MHz x dB: -6.00 dB

ANT 2:

Graphs

802.11b /LCH



802.11b /MCH




802.11b/HCH



802.11g/LCH







802.11g/MCH

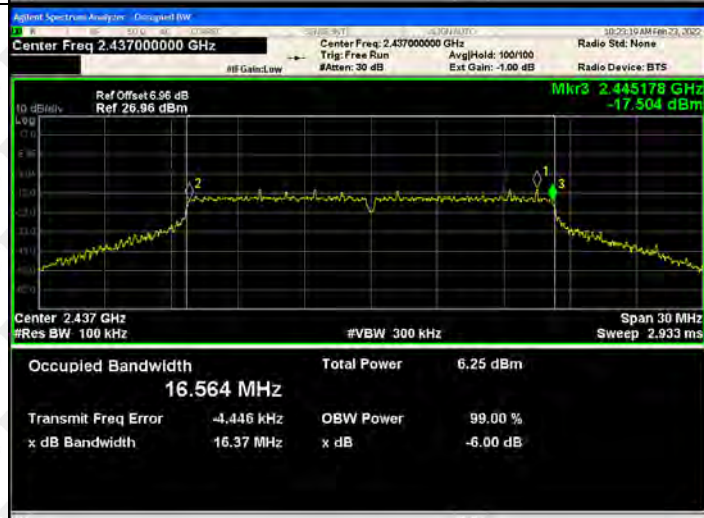

802.11g/HCH

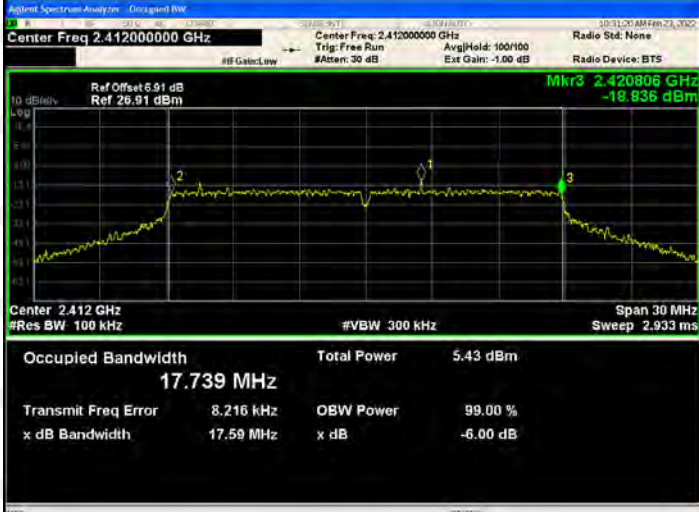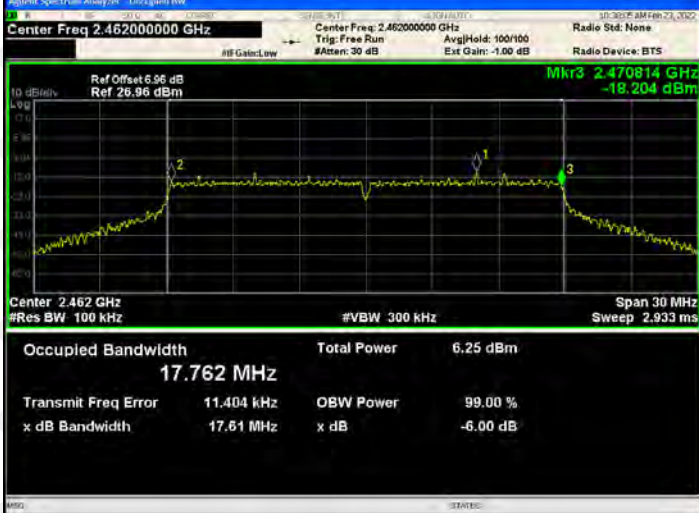


802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 6.91 dB Ref 29.91 dBm Mkr3 2.420806 GHz -18.936 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms <table><tr><td>Occupied Bandwidth</td><td colspan="2">17.739 MHz</td><td>Total Power</td><td>5.43 dBm</td></tr><tr><td>Transmit Freq Error</td><td>8.216 kHz</td><td>OBW Power</td><td>99.00 %</td><td></td></tr><tr><td>x dB Bandwidth</td><td>17.59 MHz</td><td>x dB</td><td>-6.00 dB</td><td></td></tr></table>	Occupied Bandwidth	17.739 MHz		Total Power	5.43 dBm	Transmit Freq Error	8.216 kHz	OBW Power	99.00 %		x dB Bandwidth	17.59 MHz	x dB	-6.00 dB	
Occupied Bandwidth	17.739 MHz		Total Power	5.43 dBm												
Transmit Freq Error	8.216 kHz	OBW Power	99.00 %													
x dB Bandwidth	17.59 MHz	x dB	-6.00 dB													
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 6.96 dB Ref 29.96 dBm Mkr3 2.445781 GHz -18.961 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms <table><tr><td>Occupied Bandwidth</td><td colspan="2">17.749 MHz</td><td>Total Power</td><td>5.97 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-6.635 kHz</td><td>OBW Power</td><td>99.00 %</td><td></td></tr><tr><td>x dB Bandwidth</td><td>17.58 MHz</td><td>x dB</td><td>-6.00 dB</td><td></td></tr></table>	Occupied Bandwidth	17.749 MHz		Total Power	5.97 dBm	Transmit Freq Error	-6.635 kHz	OBW Power	99.00 %		x dB Bandwidth	17.58 MHz	x dB	-6.00 dB	
Occupied Bandwidth	17.749 MHz		Total Power	5.97 dBm												
Transmit Freq Error	-6.635 kHz	OBW Power	99.00 %													
x dB Bandwidth	17.58 MHz	x dB	-6.00 dB													
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 6.96 dB Ref 29.96 dBm Mkr3 2.470814 GHz -18.204 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms <table><tr><td>Occupied Bandwidth</td><td colspan="2">17.762 MHz</td><td>Total Power</td><td>6.25 dBm</td></tr><tr><td>Transmit Freq Error</td><td>11.404 kHz</td><td>OBW Power</td><td>99.00 %</td><td></td></tr><tr><td>x dB Bandwidth</td><td>17.61 MHz</td><td>x dB</td><td>-6.00 dB</td><td></td></tr></table>	Occupied Bandwidth	17.762 MHz		Total Power	6.25 dBm	Transmit Freq Error	11.404 kHz	OBW Power	99.00 %		x dB Bandwidth	17.61 MHz	x dB	-6.00 dB	
Occupied Bandwidth	17.762 MHz		Total Power	6.25 dBm												
Transmit Freq Error	11.404 kHz	OBW Power	99.00 %													
x dB Bandwidth	17.61 MHz	x dB	-6.00 dB													

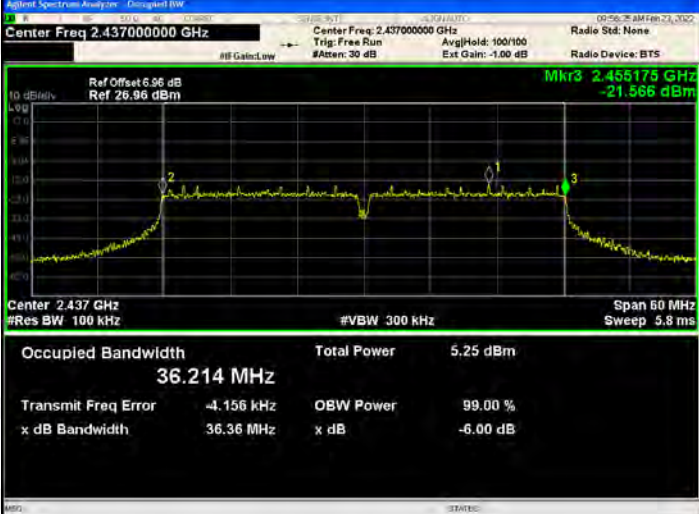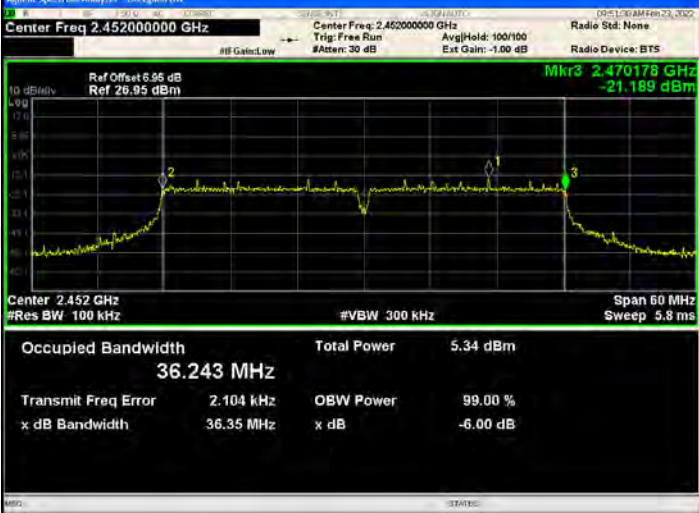802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.422000000 GHz Ref Offset: 6.91 dB Ref: 29.91 dBm Mkr3: 2.44015 GHz -21.178 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.192 MHz Total Power: 5.03 dBm Transmit Freq Error: 1.738 kHz OBW Power: 99.00 % x dB Bandwidth: 36.30 MHz x dB: -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.96 dB Ref: 29.96 dBm Mkr3: 2.455175 GHz -21.566 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.214 MHz Total Power: 5.25 dBm Transmit Freq Error: -4.156 kHz OBW Power: 99.00 % x dB Bandwidth: 36.36 MHz x dB: -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.452000000 GHz Ref Offset: 6.95 dB Ref: 29.95 dBm Mkr3: 2.470178 GHz -21.189 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 36.243 MHz Total Power: 5.34 dBm Transmit Freq Error: 2.104 kHz OBW Power: 99.00 % x dB Bandwidth: 36.35 MHz x dB: -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

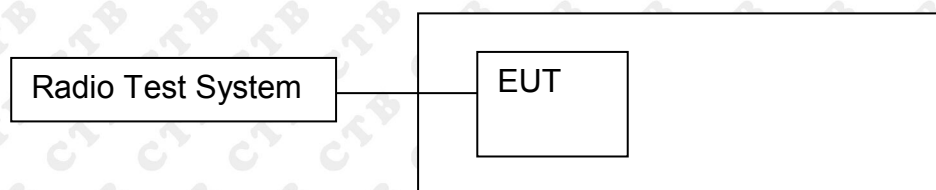

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	-21.796	-21.99	/	8
	MCH	-21.529	-22.065	/	8
	HCH	-21.171	-21.999	/	8
802.11g	LCH	-26.818	-25.93	/	8
	MCH	-26.078	-25.618	/	8
	HCH	-26.2	-26.068	/	8
802.11n(H T20)	LCH	-26.273	-26.31	-23.28	8
	MCH	-24.754	-25.395	-22.05	8
	HCH	-26.419	-24.956	-22.62	8
802.11n(H T40)	LCH	-29.941	-29.634	-26.78	8
	MCH	-29.487	-29.882	-26.66	8
	HCH	-28.527	-29.343	-25.91	8

Test Graph

ANT 1:

Graphs

802.11b /LCH




802.11b /MCH




802.11b/HCH




802.11g/LCH



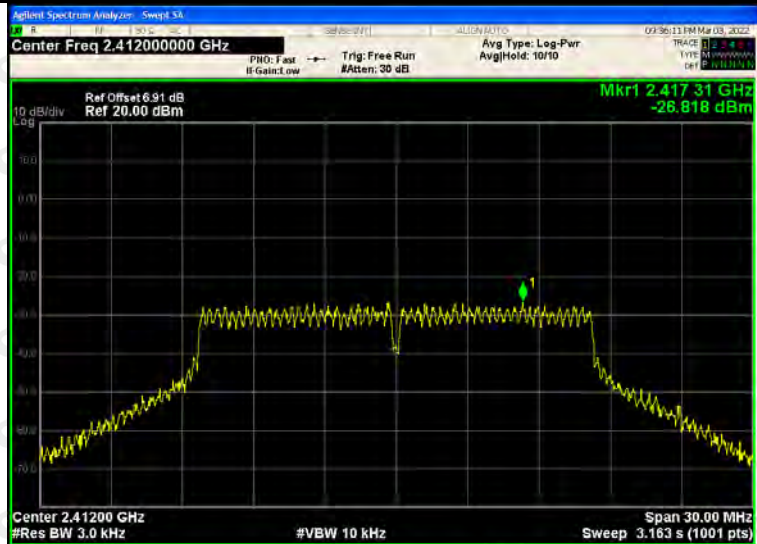



802.11g/MCH

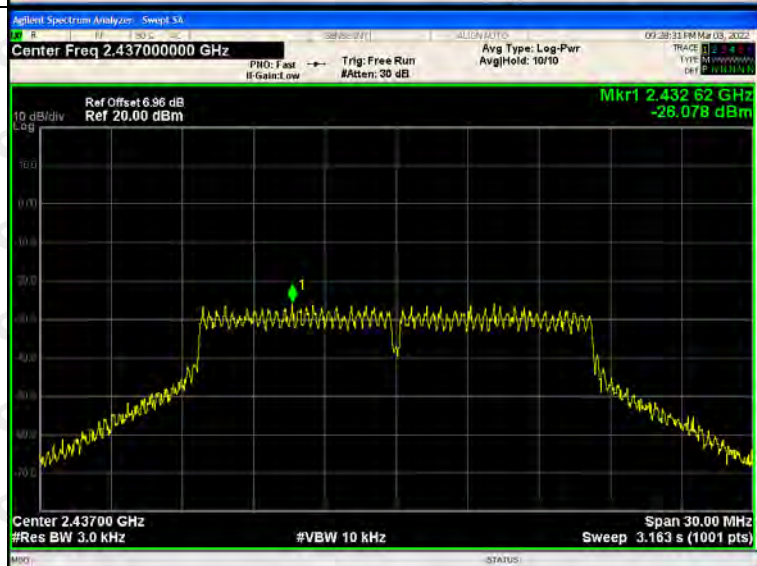

802.11g/HCH

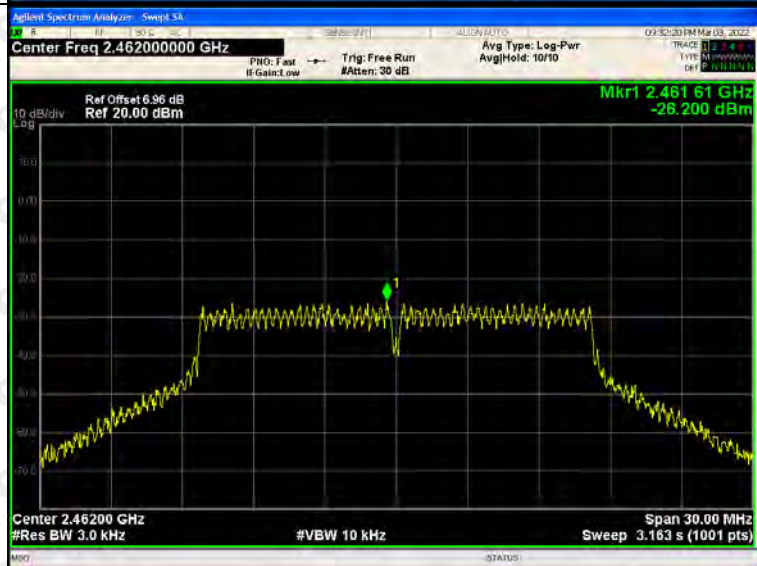

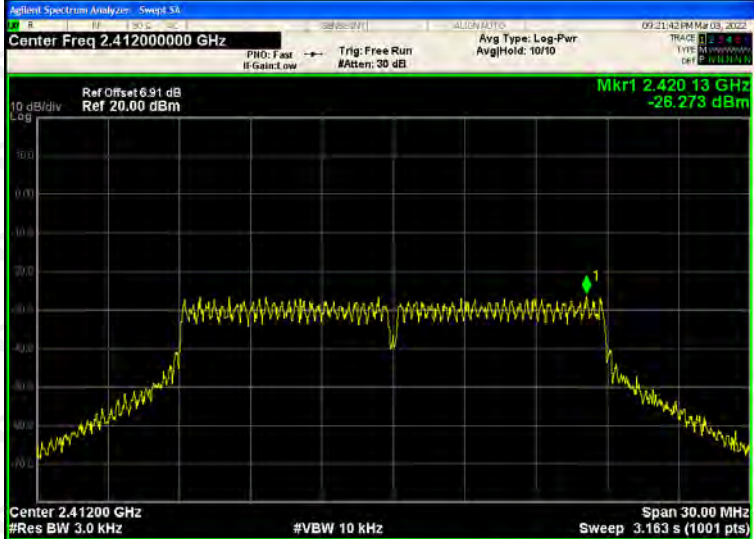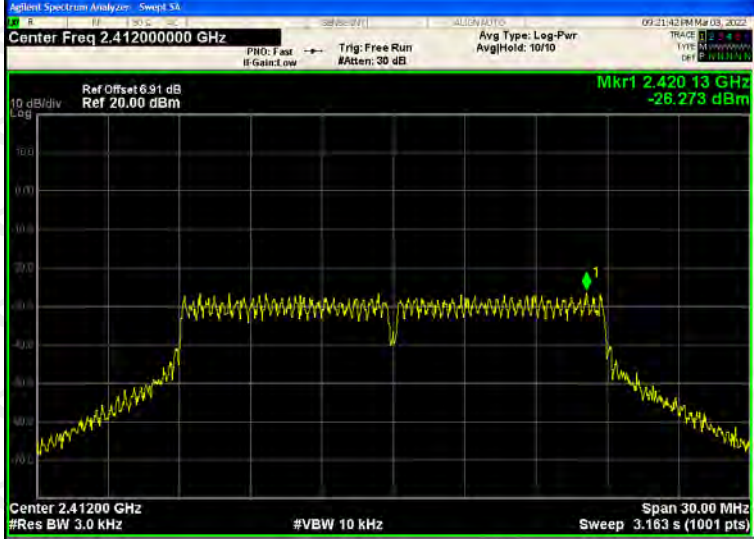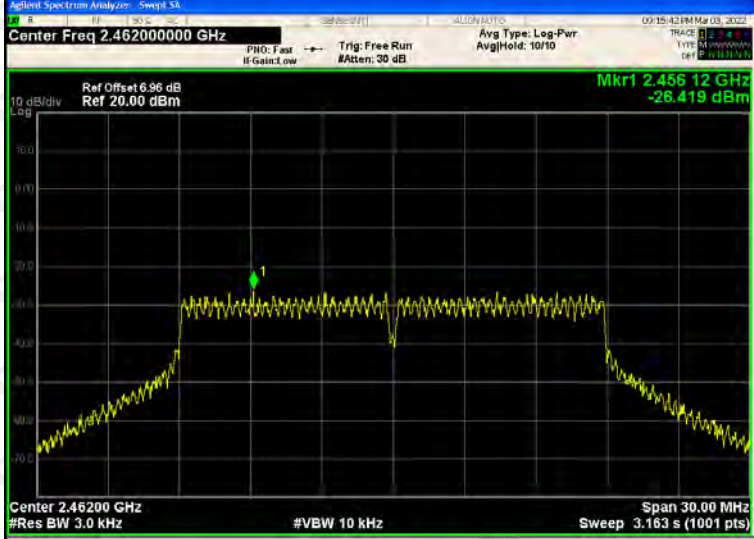802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

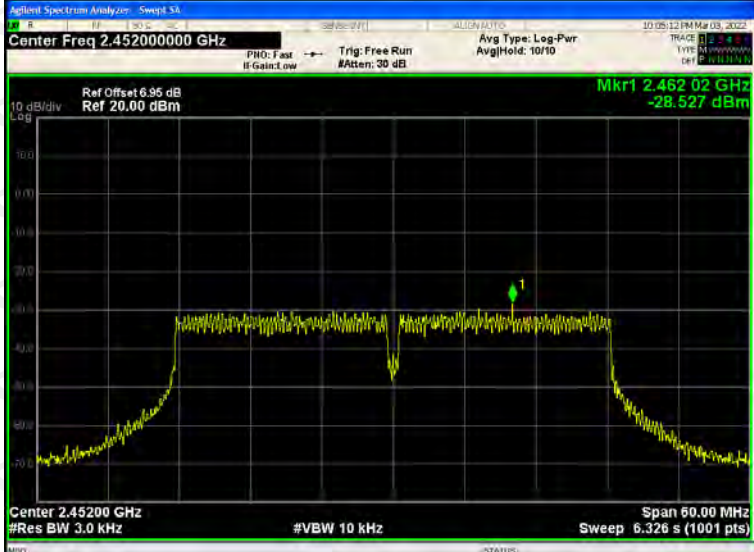802.11n(HT40)/LC H	 Agilent Spectrum Analyzer: Sweep SA Center Freq 2.422000000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.416 96 GHz -29.941 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer: Sweep SA Center Freq 2.437000000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.439 62 GHz -29.487 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer: Sweep SA Center Freq 2.452000000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.462 02 GHz -28.527 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)


ANT 2:

Graphs

802.11b /LCH




802.11b /MCH

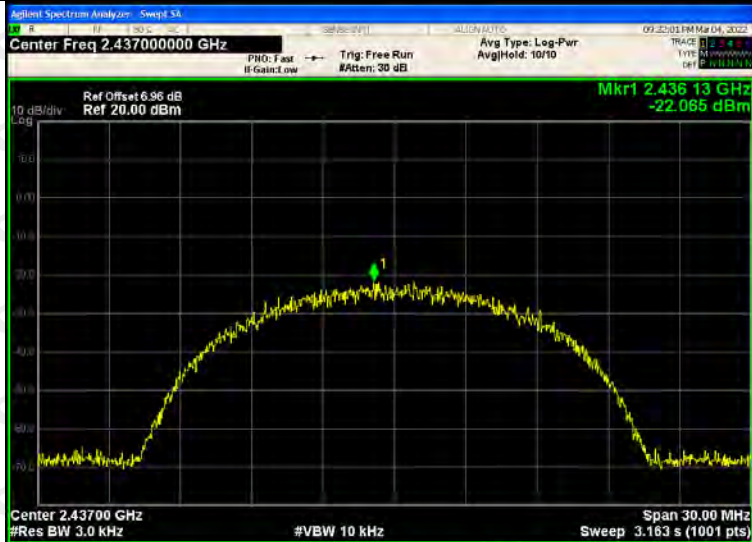


802.11b/HCH




802.11g/LCH

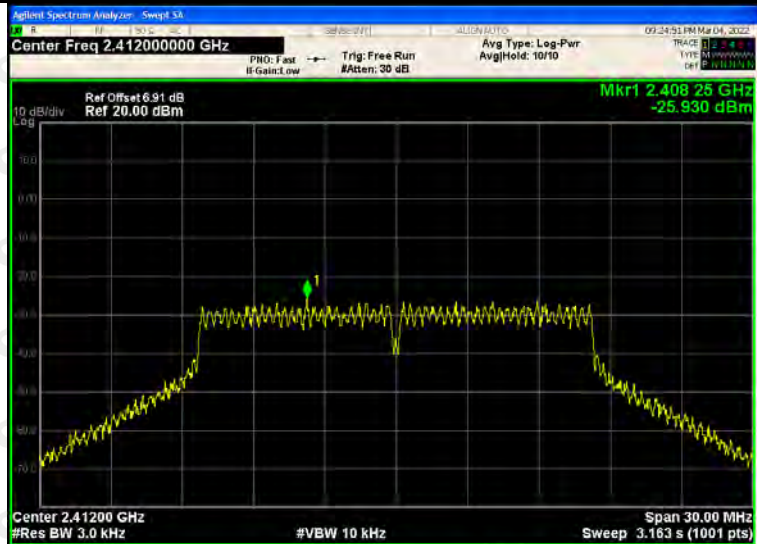


802.11g/MCH

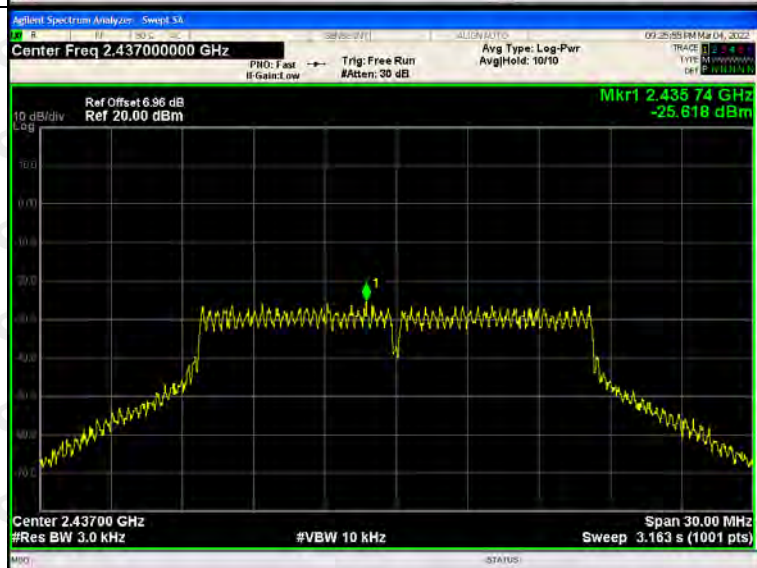

802.11g/HCH

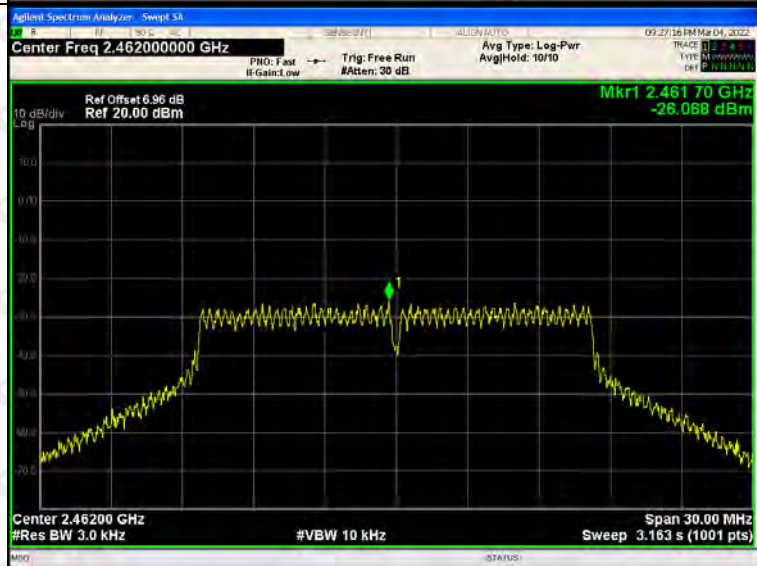

802.11n(HT20)/LC
H

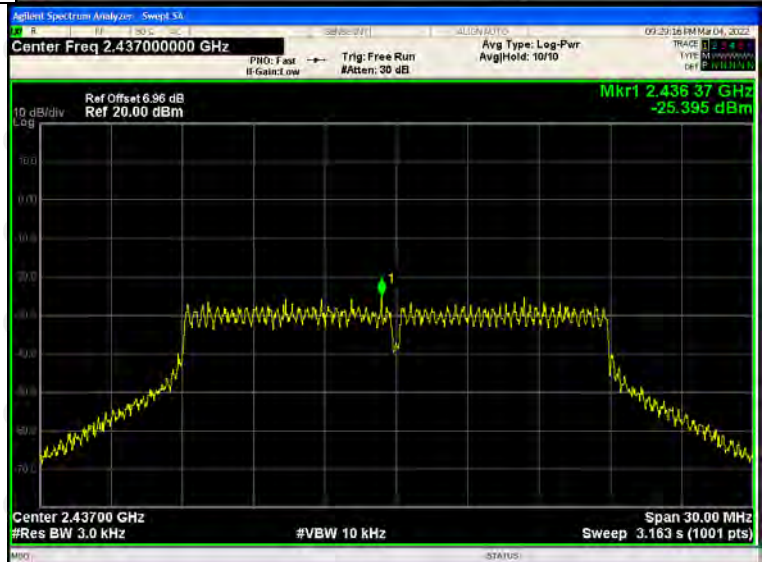802.11n(HT20)/MC
H

802.11n(HT20)/HC
H


802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.422000000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.418 82 GHz -29.834 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.439 52 GHz -29.882 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.452000000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.458 00 GHz -29.343 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:


The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is External Antenna and no consideration of replacement. The best case gain of the antenna is 1.0dBi.

13. EUT PHOTOGRAPHS

EUT Photo 1

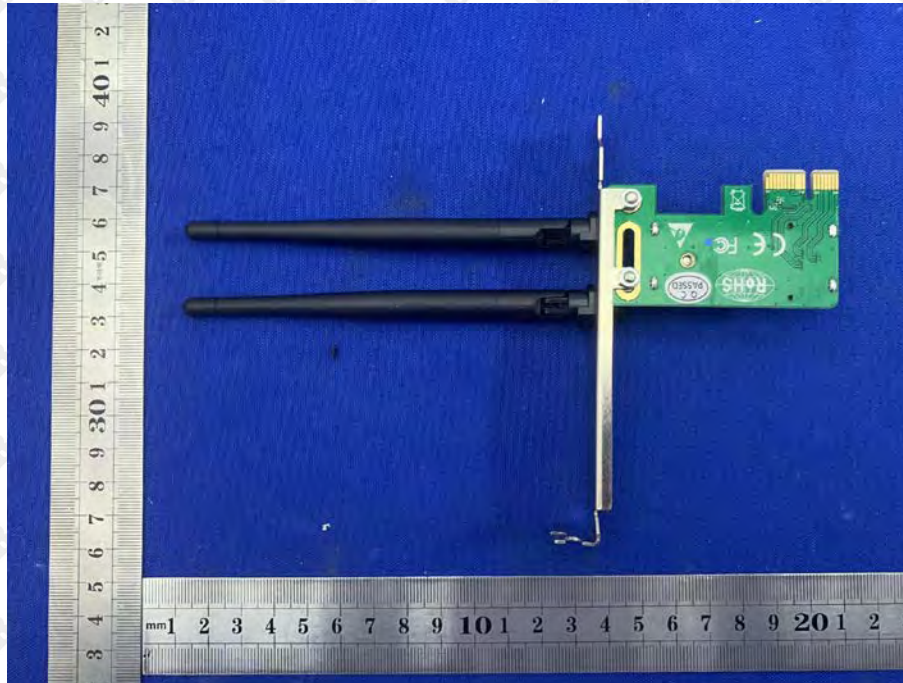

14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G



Above 1G



Conducted Emission

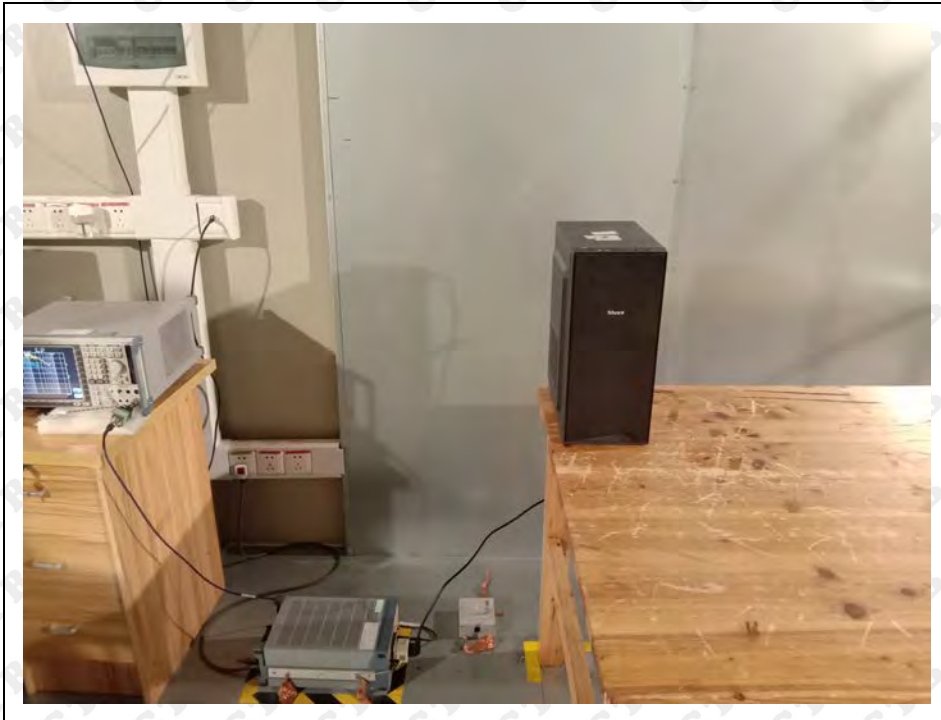

***** END OF REPORT *****