

FCC TEST REPORT

Client Information:

Applicant: Shenzhenshixiangqingkejifazhanyouxiangongsi
Applicant add.: Longhuaqudalangjiedaogaofengshequyuanfengongyequ9dongchangfang2ce
ngB206,shenzhen shi guangdong shen
Manufacturer: Shenzhenshixiangqingkejifazhanyouxiangongsi
Manufacturer add.: Longhuaqudalangjiedaogaofengshequyuanfengongyequ9dongchangfang2ce
ngB206,shenzhen shi guangdong shen

Product Information:

Product Name: TWS wireless headphones

Model No.: T11

Serial Model: m20,m30,m50,m60,k23,k21,f02,i12,HW,s08,g30,s11,s15,p11,v8,t30,k06,A10,
X7,YY520,k08,T001,f600,f901,m9,m9-18,m9-17,l12,l8,n26,k20,fc-6,Air2,v3,F
C-7,Q9S,I9S

Brand Name: Xqcreativity

FCC ID: 2A2ZV-T11

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Prepared By:

Dongguan Yaxu (AiT) Technology Limited

No.22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan,
Guangdong, China

Tel.: +86-769-8202 0499 Fax.: +86-769-8202 0495

Date of Receipt: Jun. 08, 2021 Date of Test: Jun. 08, 2021~Aug. 19, 2021

Date of Issue: Aug. 20, 2021 Test Result: Pass

This device described above has been tested by Dongguan Yaxu (AiT) Technology Limited and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Dongguan Yaxu (AiT) Technology Limited, this document may be altered or revised by Dongguan Yaxu (AiT) Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Reviewed by:


Simba Huang

Approved by:


Seal.chen

1 Contents

	Page
COVER PAGE	
1 CONTENTS.....	2
2 TEST SUMMARY	4
2.1 Statement of the Measurement Uncertainty	4
2.2 Measurement Uncertainty	4
3 TEST FACILITY.....	5
3.1 Deviation from standard	5
3.2 Abnormalities from standard conditions.....	5
3.3 Test Location	5
4 GENERAL INFORMATION	6
4.1 Test frequencies	7
4.2 Description of Test setup	9
4.3 EUT Peripheral List	9
4.4 Test Peripheral List.....	9
5 EQUIPMENT USED DURING TEST	10
6 TEST RESULTS AND MEASUREMENT DATA	11
6.1 Antenna requirement.....	11
6.2 Conducted Emissions.....	12
6.3 Conducted Peak Output Power.....	15
6.4 20dB Emission Bandwidth.....	19
6.5 Carrier Frequencies Separation.....	22
6.6 Hopping Channel Number.....	25
6.7 Dwell Time	27
6.8 Band Edge.....	31
6.8.1 Conducted Emission Method.....	31
6.8.2 Radiated Emission Method.....	34
6.9 Spurious Emission.....	37
6.9.1 Conducted Emission Method.....	37
6.9.2 Radiated Emission Method.....	40
7 TEST SETUP PHOTO	48
8 EUT CONSTRUCTIONAL DETAILS.....	48

Revision History

Revision	Issue Date	Revisions	Revised By
000	Aug. 20, 2021	Initial Issue	Seal Chen

2 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203	Pass
AC Power Line Conducted Emission	15.207(a)	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)(iii)	Pass
Dwell Time	15.247 (a)(1)(iii)	Pass
Radiated Emission and Restrict Bands	15.205/15.209	Pass
Conducted Unwanted emissions and Band Edge	15.247(d)	Pass

Note The measurement uncertainty is not included in the test result.

2.1 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the AiT quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.2 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	0.009MHz-30MHz	3.10dB	(1)
Radiated Emission	30MHz-1GHz	3.75dB	(1)
Radiated Emission	1GHz-18GHz	3.75dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	1.20dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

3 Test Facility

The test facility is recognized, certified or accredited by the following organizations:

CNAS- Registration No: L6177

FCC Designation Number:CN1313

FCC Test Firm Registration Number:703111

3.1 Deviation from standard

None

3.2 Abnormalities from standard conditions

None

3.3 Environmental conditions

RF Conducted Testing:	
Temperature:	25.3 °C
Humidity:	53.5%
Atmospheric pressure:	101kPa
Test by:	Simba Huang

3.4 Test Location

Dongguan Yaxu (AiT) Technology Limited

Address: No.22, Jinqianling 3rd Street, Jitigang, Huangjiang, Dongguan, Guangdong, China

Tel.: +86-769-8202 0499

Fax.: +86-769-8202 0495

4 General Information

EUT Name:	TWS wireless headphones
Model No:	T11
Serial Model:	m20,m30,m50,m60,k23,k21,f02,i12,HW,s08,g30,s11,s15,p11,v8,t30,k06,A10,X7,YY520,k08,T001,f600,f901,m9,m9-18,m9-17,l12,l8,n26,k20,fc-6,Air2,v3,FC-7,Q9S,I9S
Model Declaration:	PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
Brand Name:	Xqcreativity
Test sample(s) ID:	21070803-1
Sample(s) Status:	Engineer sample
Serial No.:	N/A
Operation frequency:	2402MHz~2480MHz
Channel Number:	79
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Modulation Technology:	DSSS
Antenna Type:	Chip Antenna
Antenna Gain:	1.0dBi
H/W No.:	N/A
S/W No.:	N/A
Power supply:	DC5V (Charging Case) or DC3.7V from battery (Earphones)
Battery:	DC 3.7V Li Battery
Model different:	N/A
Note:	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

4.1 Test frequencies

EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454	--	--
26	2428	53	2455	--	--

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Transmitting mode	Keep the EUT in continuously transmitting mode.		
Test software:	BT_Tool V1.1.0		
Frequency	2402 MHz	2440 MHz	2480 MHz
Parameters(1Mbps)	Default	Default	Default
Parameters(2Mbps)	Default	Default	Default
Parameters(2Mbps)	Default	Default	Default

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

4.2 Description of Test setup

EUT was tested in normal configuration (Please See following Block diagrams)

1. Block diagram of EUT configuration (TX Mode)


4.3 EUT Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	Signal cord
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

4.4 Test Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	Signal cord
1	Adapter	Nokia	FCC	AD-10W U	N/A	N/A	N/A

5 Equipment Used during Test


No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	R&S	FSV40	101470	2020.08.28	2021.08.27
2	EMI Measuring Receiver	R&S	ESR	101160	2020.08.28	2021.08.27
3	Low Noise Pre Amplifier	HP	HP8447E	1937A01855	2020.08.28	2021.08.27
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2020.08.28	2021.08.27
5	Passive Loop	ETS	6512	00165355	2020.09.05	2022.09.04
6	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2020.07.25	2023.07.24
7	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2020.07.25	2023.07.24
8	SHF-EHF Horn Antenna 15-40GHz	SCHWARZBECK	BBHA9170	BBHA917036 7d	2020.11.24	2023.11.23
9	EMI Test Receiver	R&S	ESCI	100124	2020.08.28	2021.08.27
10	LISN	Kyoritsu	KNW-242	8-837-4	2020.08.28	2021.08.27
11	LISN	R&S	ESH3-Z2	0357.8810.54-101161-S2	2020.08.28	2021.08.27
12	Pro.Temp&Humi.chamber	MENTEK	MHP-150-1C	MAA0811250 1	2020.08.28	2021.08.27
13	RF Automatic Test system	MW	MW100-RFCB	21033016	2020.08.28	2021.08.27
14	Signal Generator	Agilent	N5182A	MY50143009	2020.08.28	2021.08.27
15	Wideband Radio communication tester	R&S	CMW500	1201.0002K5 0	2020.08.28	2021.08.27
16	RF Automatic Test system	MW	MW100-RFCB	21033016	2020.08.28	2021.08.27
17	DC power supply	ZHAOXIN	RXN-305D-2	2807000255 9	N/A	N/A
18	RE Software	EZ	EZ-EMC_RE	Ver.AIT-03A	N/A	N/A
19	CE Software	EZ	EZ-EMC_CE	Ver.AIT-03A	N/A	N/A
20	RF Software	MW	MTS 8310	2.0.0.0	N/A	N/A
21	temporary antenna connector(Note)	NTS	R001	N/A	N/A	N/A
Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.						

6 Test results and Measurement Data

6.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna: <i>The antenna is chip antenna, the best case gain of the is 1.0dBi, reference to the appendix II for details</i>	


6.2 Conducted Emissions

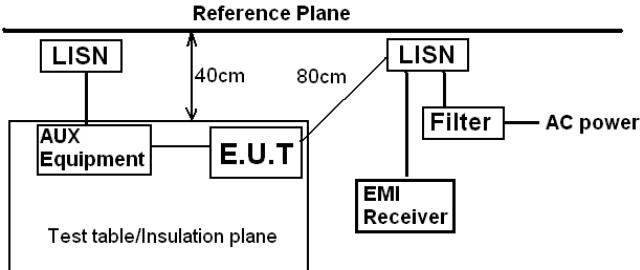Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
* Decreases with the logarithm of the frequency.						
Test setup:	 <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>					
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 					
Test Instruments:	Refer to section 5.0 for details					
Test mode:	Refer to section 4.1 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mba r
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

Measurement data:

Pre-scan all test modes, found worst case at GFSK 2480MHz, and so only show the test result of GFSK 2480MHz

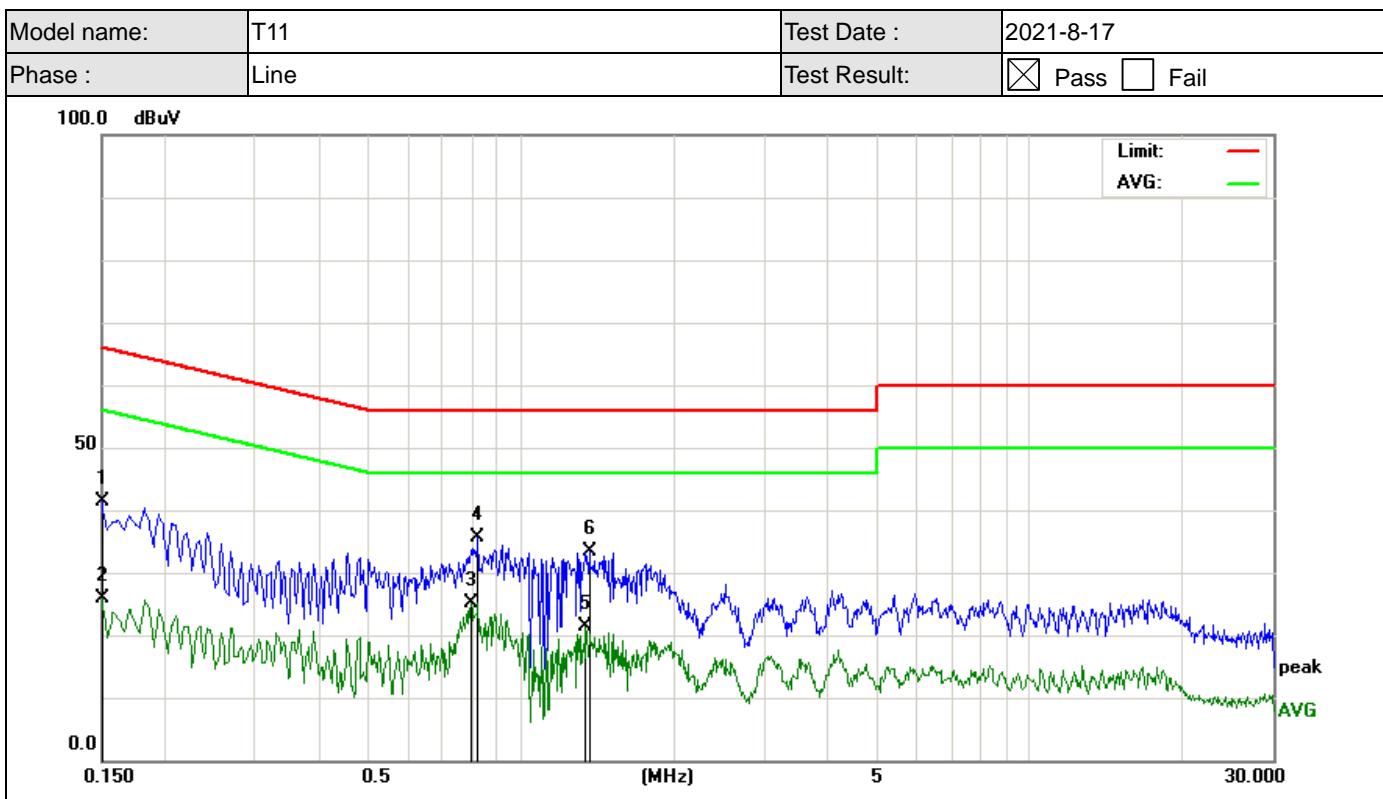


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Measurement Result=Reading Level +Correct Factor;

Over Limit= Measurement Result- Limit;

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1500	29.35	11.94	41.29	65.99	-24.70	QP
2		0.1500	13.96	11.94	25.90	55.99	-30.09	AVG
3		0.7980	15.15	9.96	25.11	46.00	-20.89	AVG
4	*	0.8220	25.73	9.96	35.69	56.00	-20.31	QP
5		1.3380	11.52	9.96	21.48	46.00	-24.52	AVG
6		1.3619	23.36	9.96	33.32	56.00	-22.68	QP

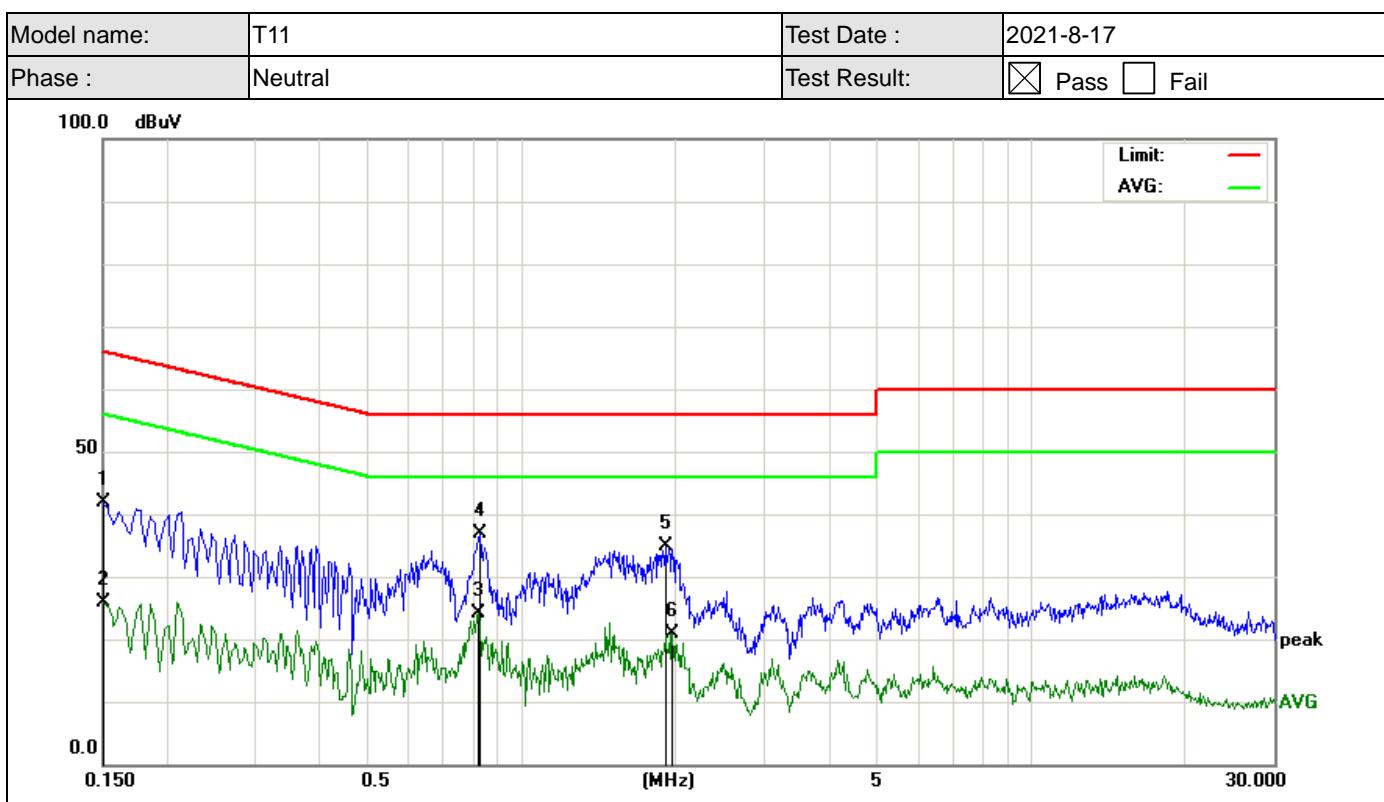

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Measurement Result=Reading Level +Correct Factor;


Over Limit= Measurement Result- Limit;

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1500	29.82	11.94	41.76	65.99	-24.23	QP
2		0.1500	13.93	11.94	25.87	55.99	-30.12	AVG
3		0.8180	14.19	9.96	24.15	46.00	-21.85	AVG
4	*	0.8300	26.89	9.96	36.85	56.00	-19.15	QP
5		1.9140	24.79	9.99	34.78	56.00	-21.22	QP
6		1.9740	10.99	9.99	20.98	46.00	-25.02	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

6.3 Conducted Peak Output Power

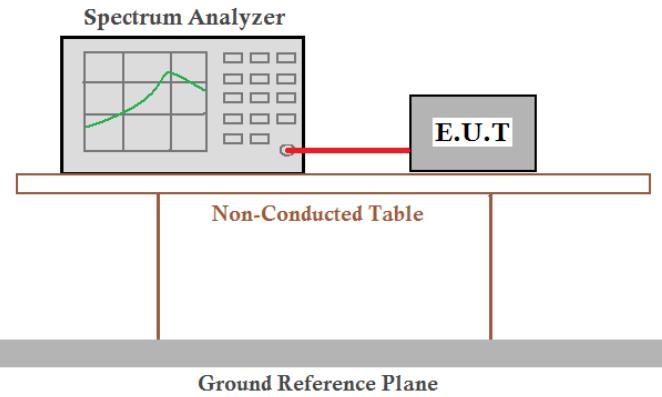Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Limit:	30dBm(for GFSK),20.97dBm(for EDR)
Test setup:	
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	1.16	30.00	Pass
	Middle	1.08		
	Highest	0.88		
π/4-DQPSK	Lowest	2.55	20.97	Pass
	Middle	2.8		
	Highest	2.58		
8-DPSK	Lowest	2.92	20.97	Pass
	Middle	3.39		
	Highest	2.96		

Test plot as follows:

Test mode:

GFSK mode



Lowest channel




Middle channel



Highest channel

Test mode:

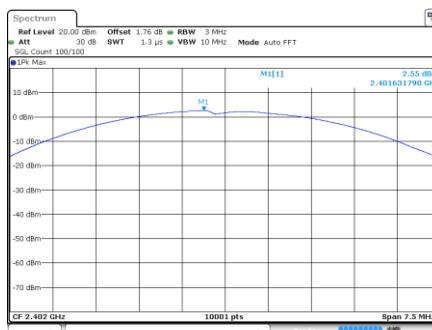 $\pi/4$ -DQPSK mode


Lowest channel




Middle channel




Highest channel

Test mode:


8-DPSK mode

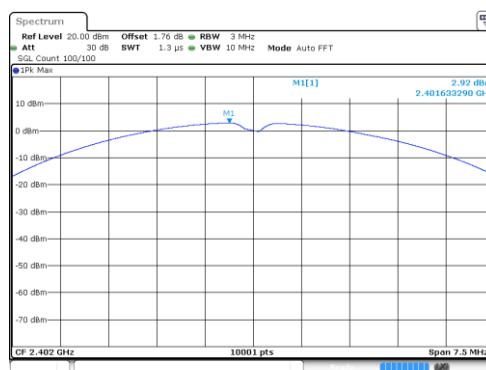

Lowest channel

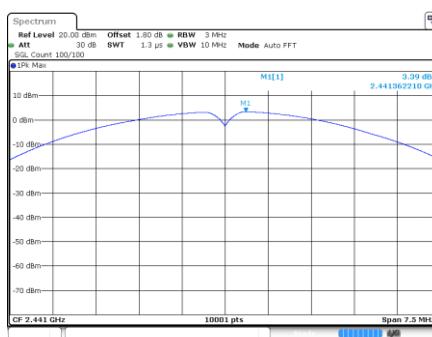


Middle channel

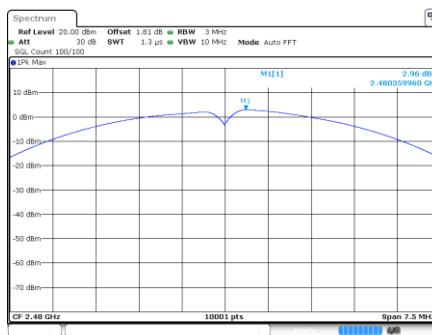

Highest channel

6.4 20dB Emission Bandwidth

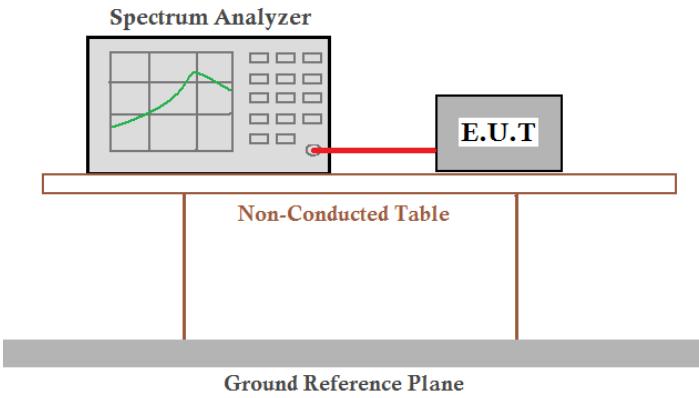Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.865	Pass
	Middle	0.947	
	Highest	0.846	
8-DPSK	Lowest	1.295	Pass
	Middle	1.223	
	Highest	1.236	

Note:

- During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, found the GFSK& 8-DPSK modulation which it is worse case, and show in this report.


Test plot as follows:

Test mode:

GFSK mode



Lowest channel

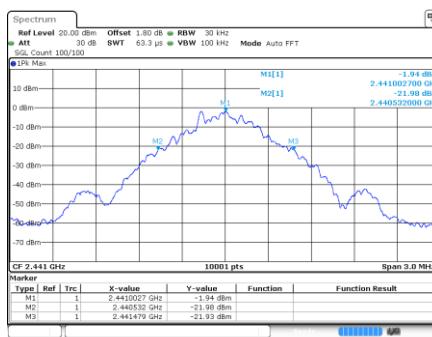

Middle channel



Highest channel

Test mode:


8-DPSK mode



Lowest channel




Middle channel

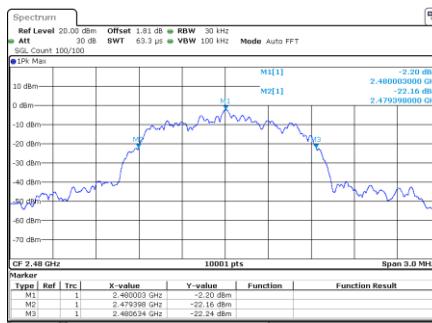

Highest channel

6.5 Carrier Frequencies Separation

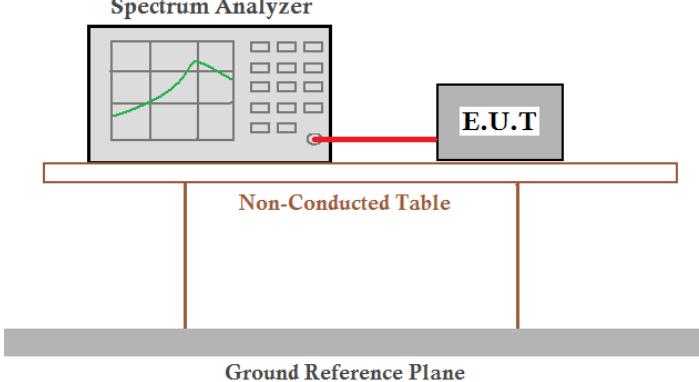Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data

Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
GFSK	Lowest	1.011	576.67	Pass
	Middle	1	631.33	Pass
	Highest	1.001	564.00	Pass
8-DPSK	Lowest	1.035	863.33	Pass
	Middle	1.001	815.33	Pass
	Highest	0.994	824.00	Pass

According to section 6.4


Note:

- During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, found the GFSK& 8-DPSK modulation which it is worse case, and show in this report.


Test plot as follows:

Modulation mode:


GFSK

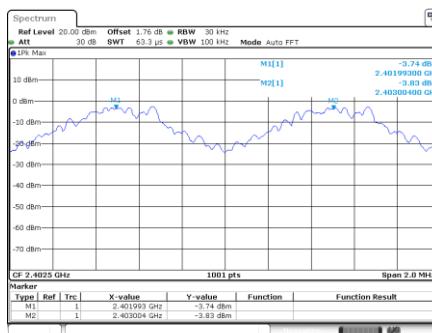

Lowest channel

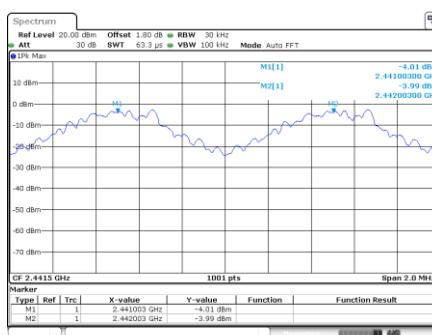


Middle channel

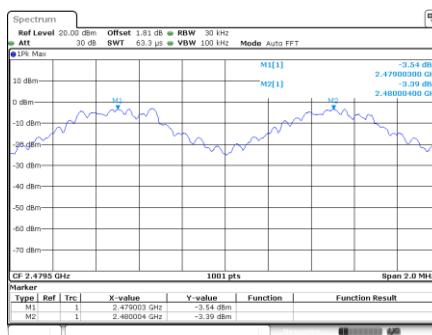


Highest channel

Test mode:


8-DPSK

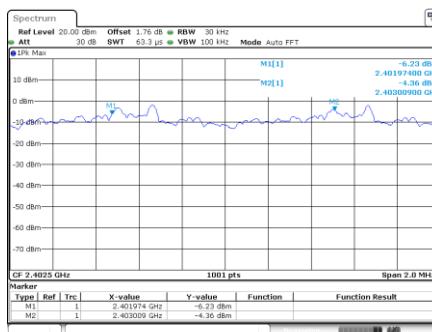

Lowest channel

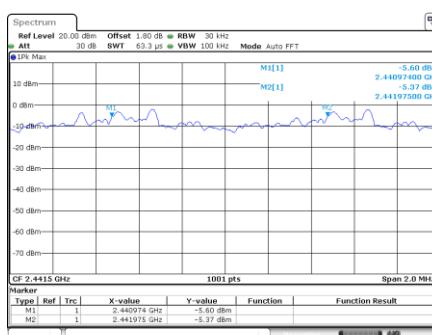


Middle channel

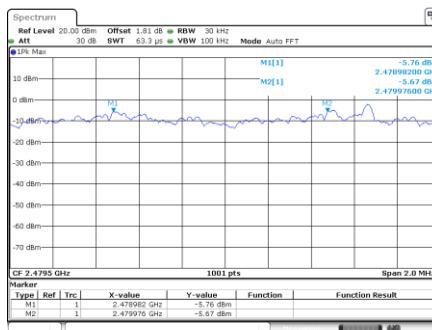

Highest channel

6.6 Hopping Channel Number

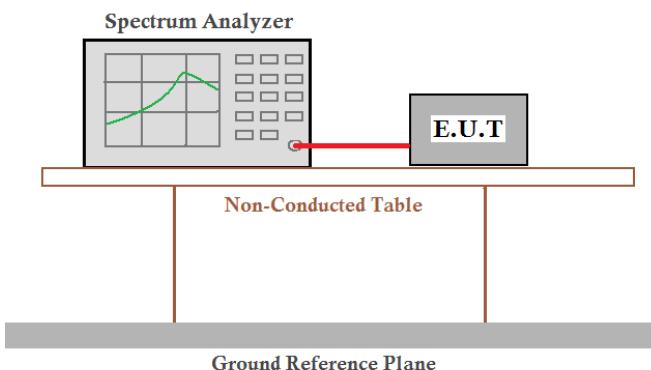Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK	79	≥15CH	Pass
8-DPSK	79	≥15CH	Pass


Note:

1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, found the GFSK& 8-DPSK modulation which it is worse case, and show in this report.

Test plot as follows:


Test mode:

GFSK

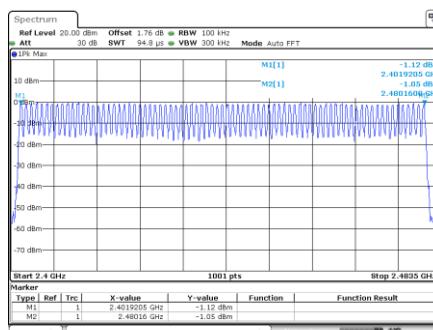


Test mode:

8-DPSK

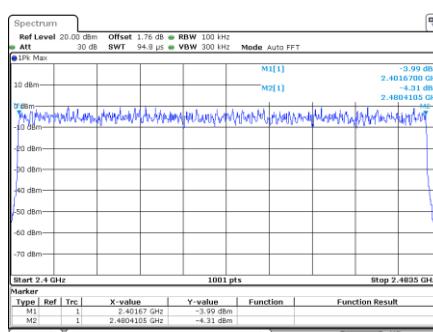

6.7 Dwell Time

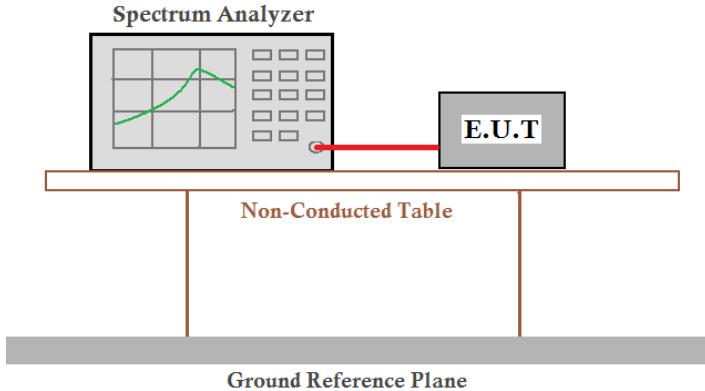Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Note:

1. *During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, found the GFSK& 8-DPSK modulation which it is worse case, and show in this report.*

Measurement Data**GFSK mode:**

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2402MHz	DH1	122.496	400	Pass
2402MHz	DH3	260.76	400	Pass
2402MHz	DH5	308.909	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: 2402MHz as blow

DH1 time slot=0.3817(ms)*(1600/ (2*79))*31.6=122.14ms

DH3 time slot=1.635(ms)*(1600/ (4*79))*31.6=261.60ms

DH5 time slot=2.883(ms)*(1600/ (6*79))*31.6=307.52ms

8-DPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2402MHz	3DH1	125.686	400	Pass
2402MHz	3DH3	261.237	400	Pass
2402MHz	3DH5	306.764	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: 2402MHz as blow

DH1 time slot=0.390(ms)*(1600/ (2*79))*31.6=124.80ms

DH3 time slot=1.64(ms)*(1600/ (4*79))*31.6=262.40ms


DH5 time slot=2.892(ms)*(1600/ (6*79))*31.6=308.48ms

Test plot as follows:


GFSK mode:

Test channel:


2402MHz

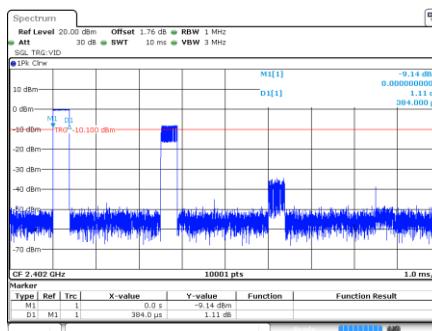

DH1

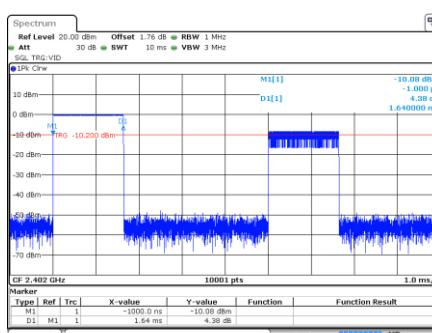

DH3



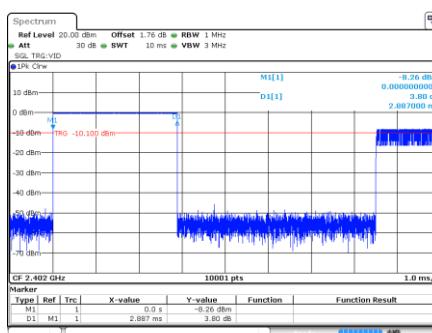


DH5

8-DPSK mode:


Test channel:

2402MHz

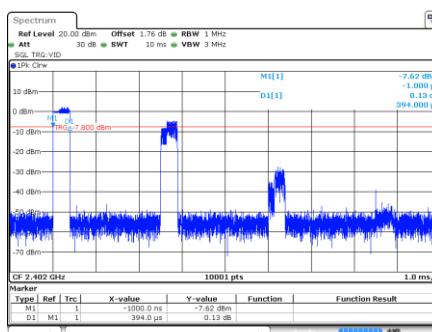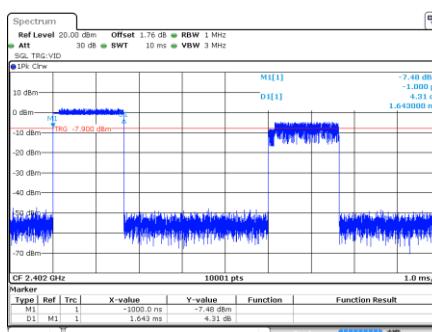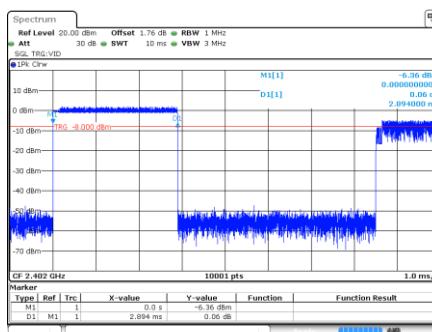
DH1

DH3

DH5

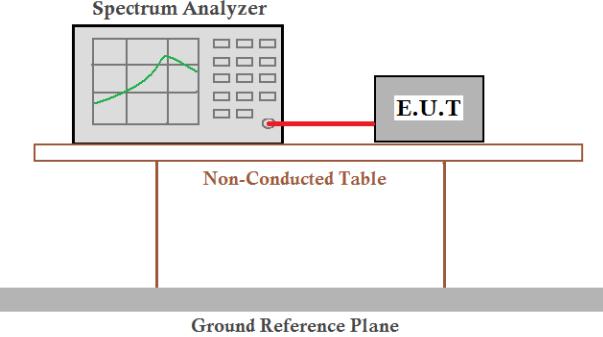6.8 Band Edge

6.8.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass




Note:

1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, found the GFSK& 8-DPSK modulation which it is worse case, and show in this report.

Test plot as follows:

Test channel:

Lowest channel


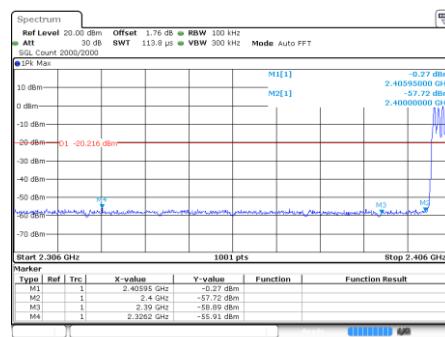
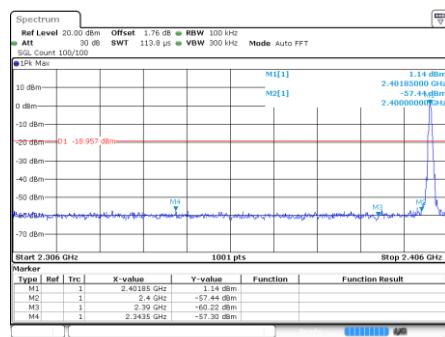
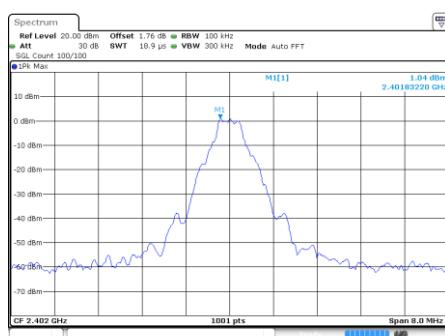


No-hopping mode

Hopping mode








Test channel:

Highest channel

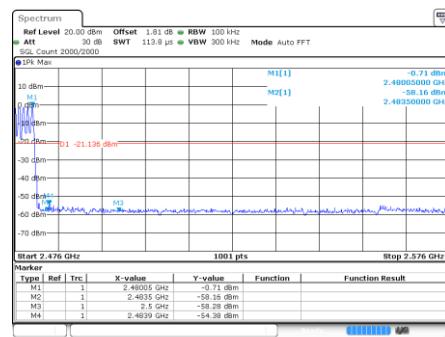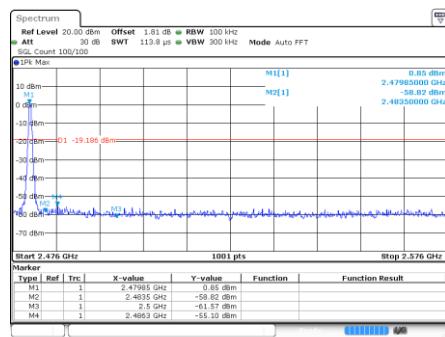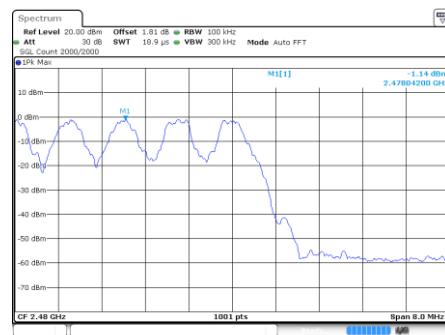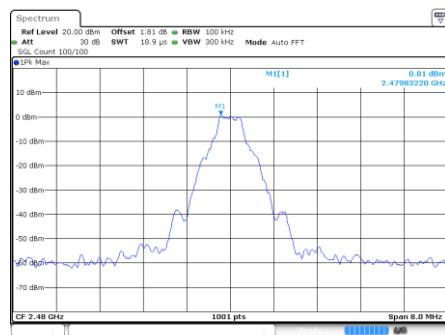


No-hopping mode

Hopping mode

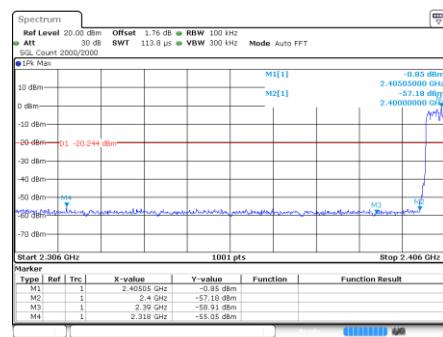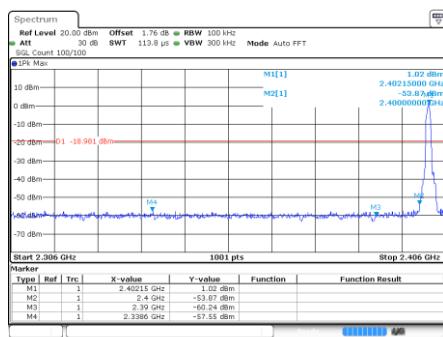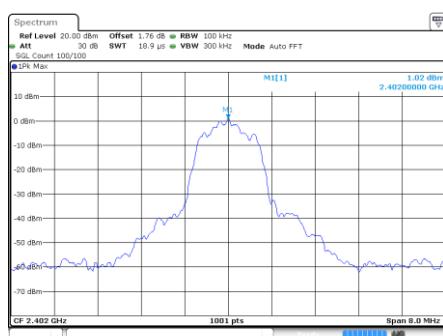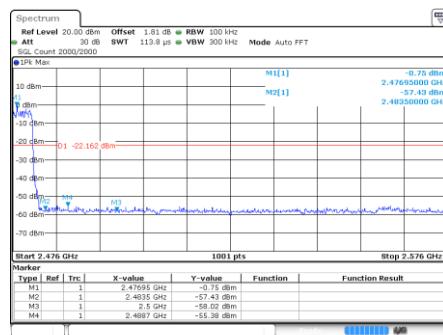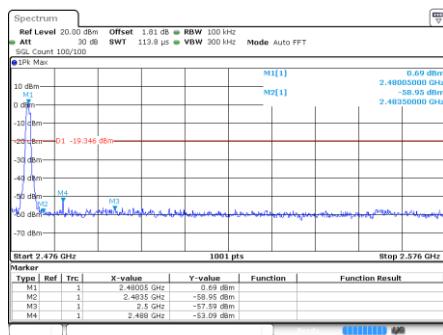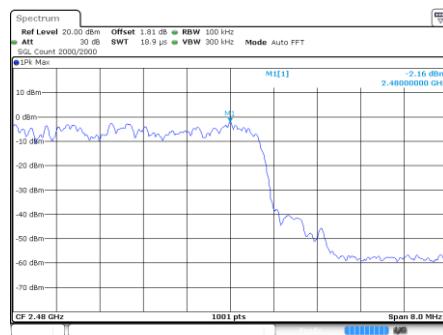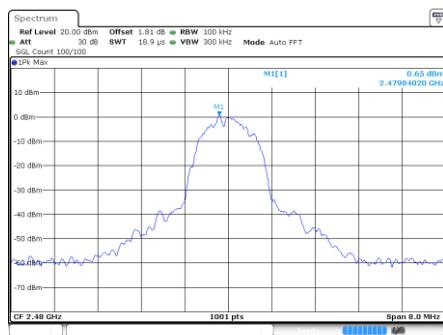8-DPSK Mode:
Test channel:
Lowest channel

No-hopping mode
Hopping mode
Test channel:
Highest channel

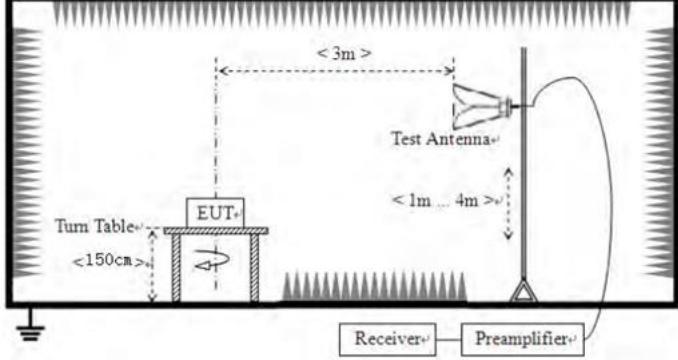No-hopping mode
Hopping mode

6.8.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test Method:	ANSI C63.10:2013								
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
		Peak	1MHz	10Hz	Average Value				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark					
	Above 1GHz	54.00		Average Value					
		74.00		Peak Value					
Test setup:									
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a 								

	data sheet.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Test channel:	Lowest channel
---------------	----------------

Vertical :

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390.000	42.20	-5.70	36.50	74.00	-37.50	
2390.000	31.89	-5.70	26.19	54.00	-27.81	peak
						AVG

Horizontal :

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390.000	42.85	-5.70	37.15	74.00	-36.85	
2390.000	32.75	-5.70	27.05	54.00	-26.95	peak
						AVG

Test channel:	Highest channel
---------------	-----------------

Vertical :

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.500	40.78	-4.98	35.80	74.00	-38.20	
2483.500	31.62	-4.98	26.64	54.00	-27.36	peak
						AVG

Horizontal :


Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.500	42.49	-4.98	37.51	74.00	-36.49	
2483.500	31.82	-4.98	26.84	54.00	-27.16	peak
						AVG

Remarks:

2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
5. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.

6.9 Spurious Emission

6.9.1 Conducted Emission Method

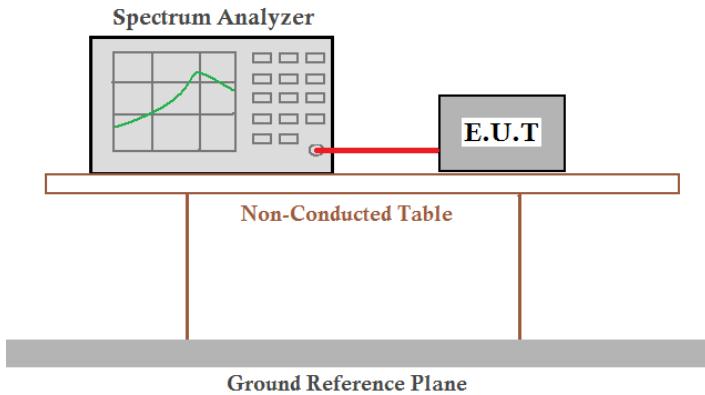Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass


Note:

1. *During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, found the GFSK& 8-DPSK modulation which it is worse case, and show in this report.*

GFSK mode:

Test channel:


Lowest channel

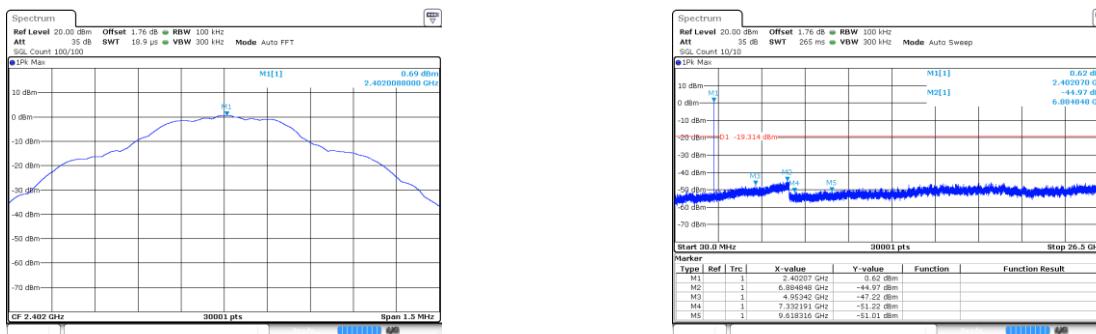

30MHz~25GHz

Test channel:


Middle channel

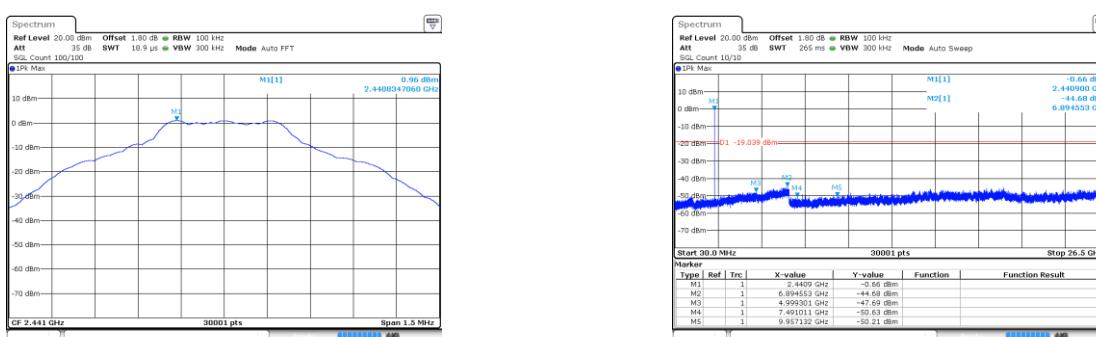

30MHz~25GHz

Test channel:

Highest channel


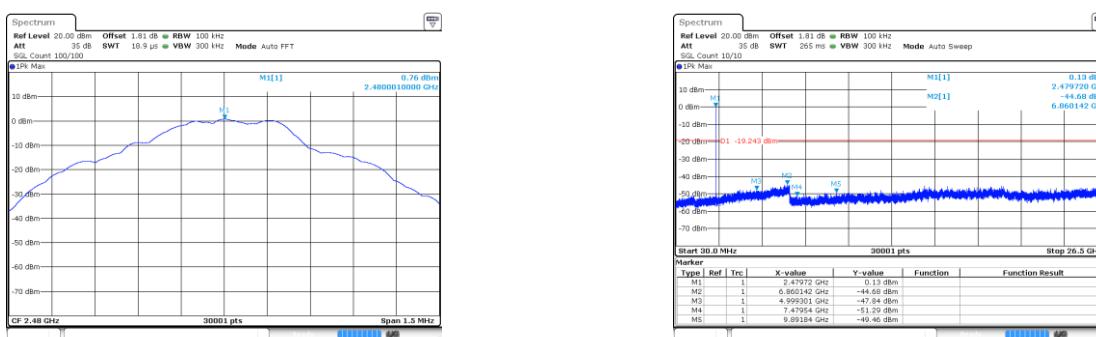


30MHz~25GHz

8-DPSK mode:

Test channel:



Lowest channel

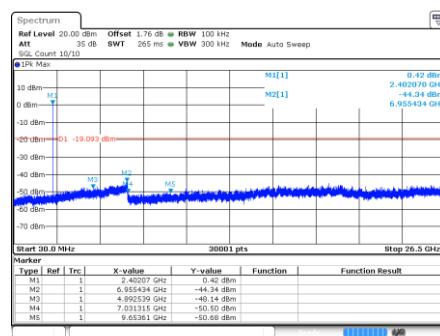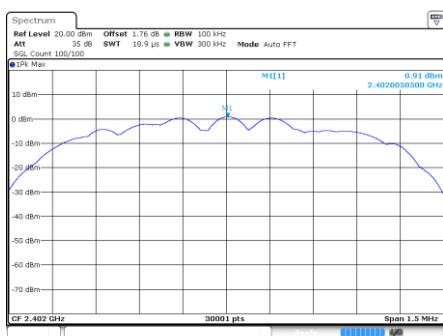

30MHz~25GHz

Test channel:



Middle channel

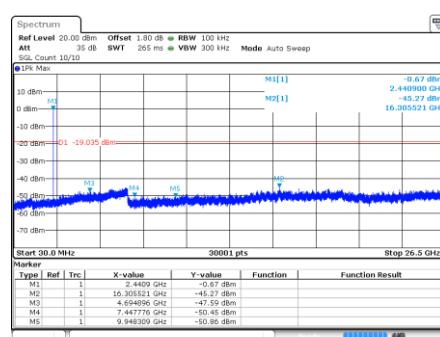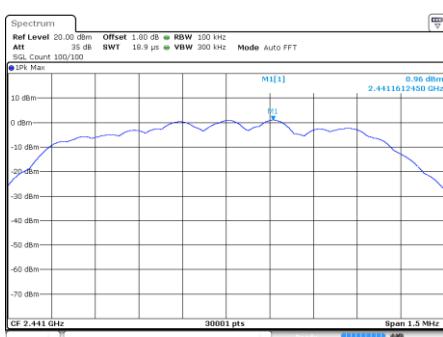

30MHz~25GHz


Test channel:

Highest channel

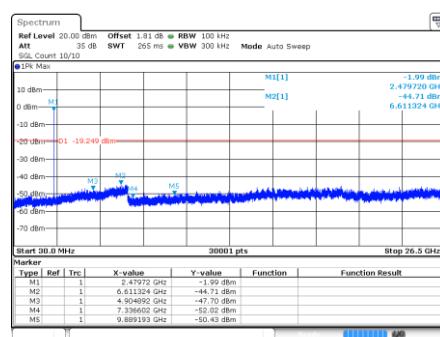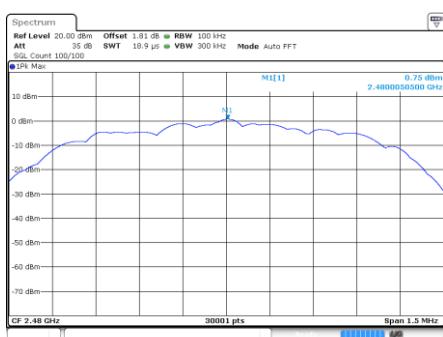


30MHz~25GHz


6.9.2 Radiated Emission Method

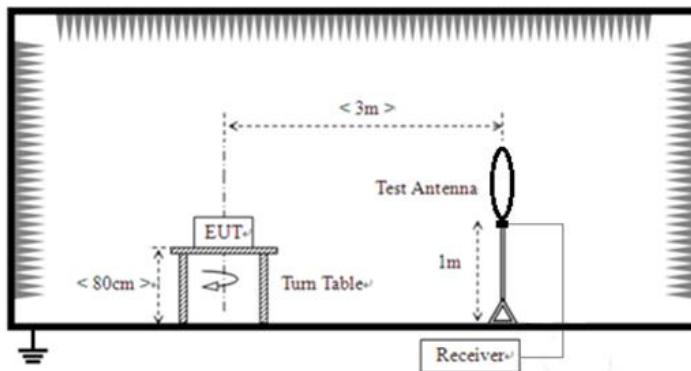Test Requirement:	FCC Part15 C Section 15.209						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	9kHz to 25GHz						
Test site:	Measurement Distance: 3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Value		
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak		
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak		
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak		
	Above 1GHz	Peak	1MHz	3MHz	Peak		
		Peak	1MHz	10Hz	Average		
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance			
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m			
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m			
	1.705MHz-30MHz	30	QP	30m			
	30MHz-88MHz	100	QP	3m			
	88MHz-216MHz	150	QP				
	216MHz-960MHz	200	QP				
	960MHz-1GHz	500	QP				
	Above 1GHz	500	Average				
		5000	Peak				
Test setup:	For radiated emissions from 9kHz to 30MHz						
							

For radiated emissions from 30MHz to 1GHz

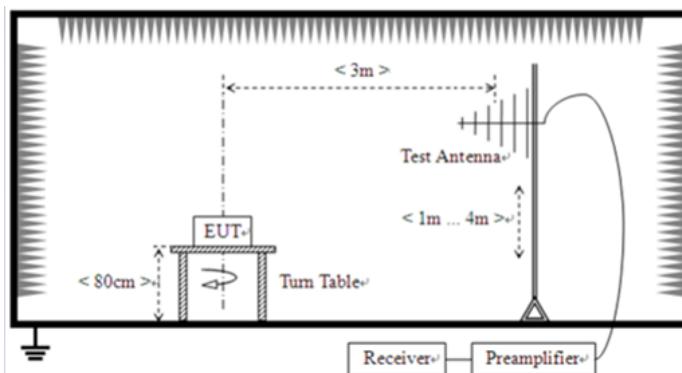

For radiated emissions above 1GHz

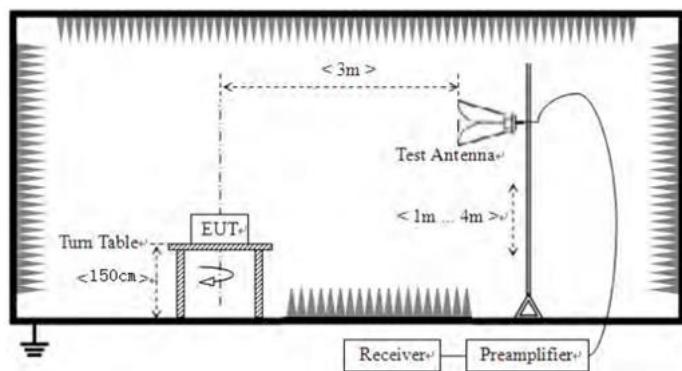

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:	Refer to section 5.0 for details					
Test mode:	Refer to section 4.1 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mba r
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Measurement data:**Remarks:**


1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.


■ 9kHz~30MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

■ Below 1GHz

Pre-scan all test modes, found worst case at GFSK 2480MHz, and so only show the test result of GFSK 2480MHz

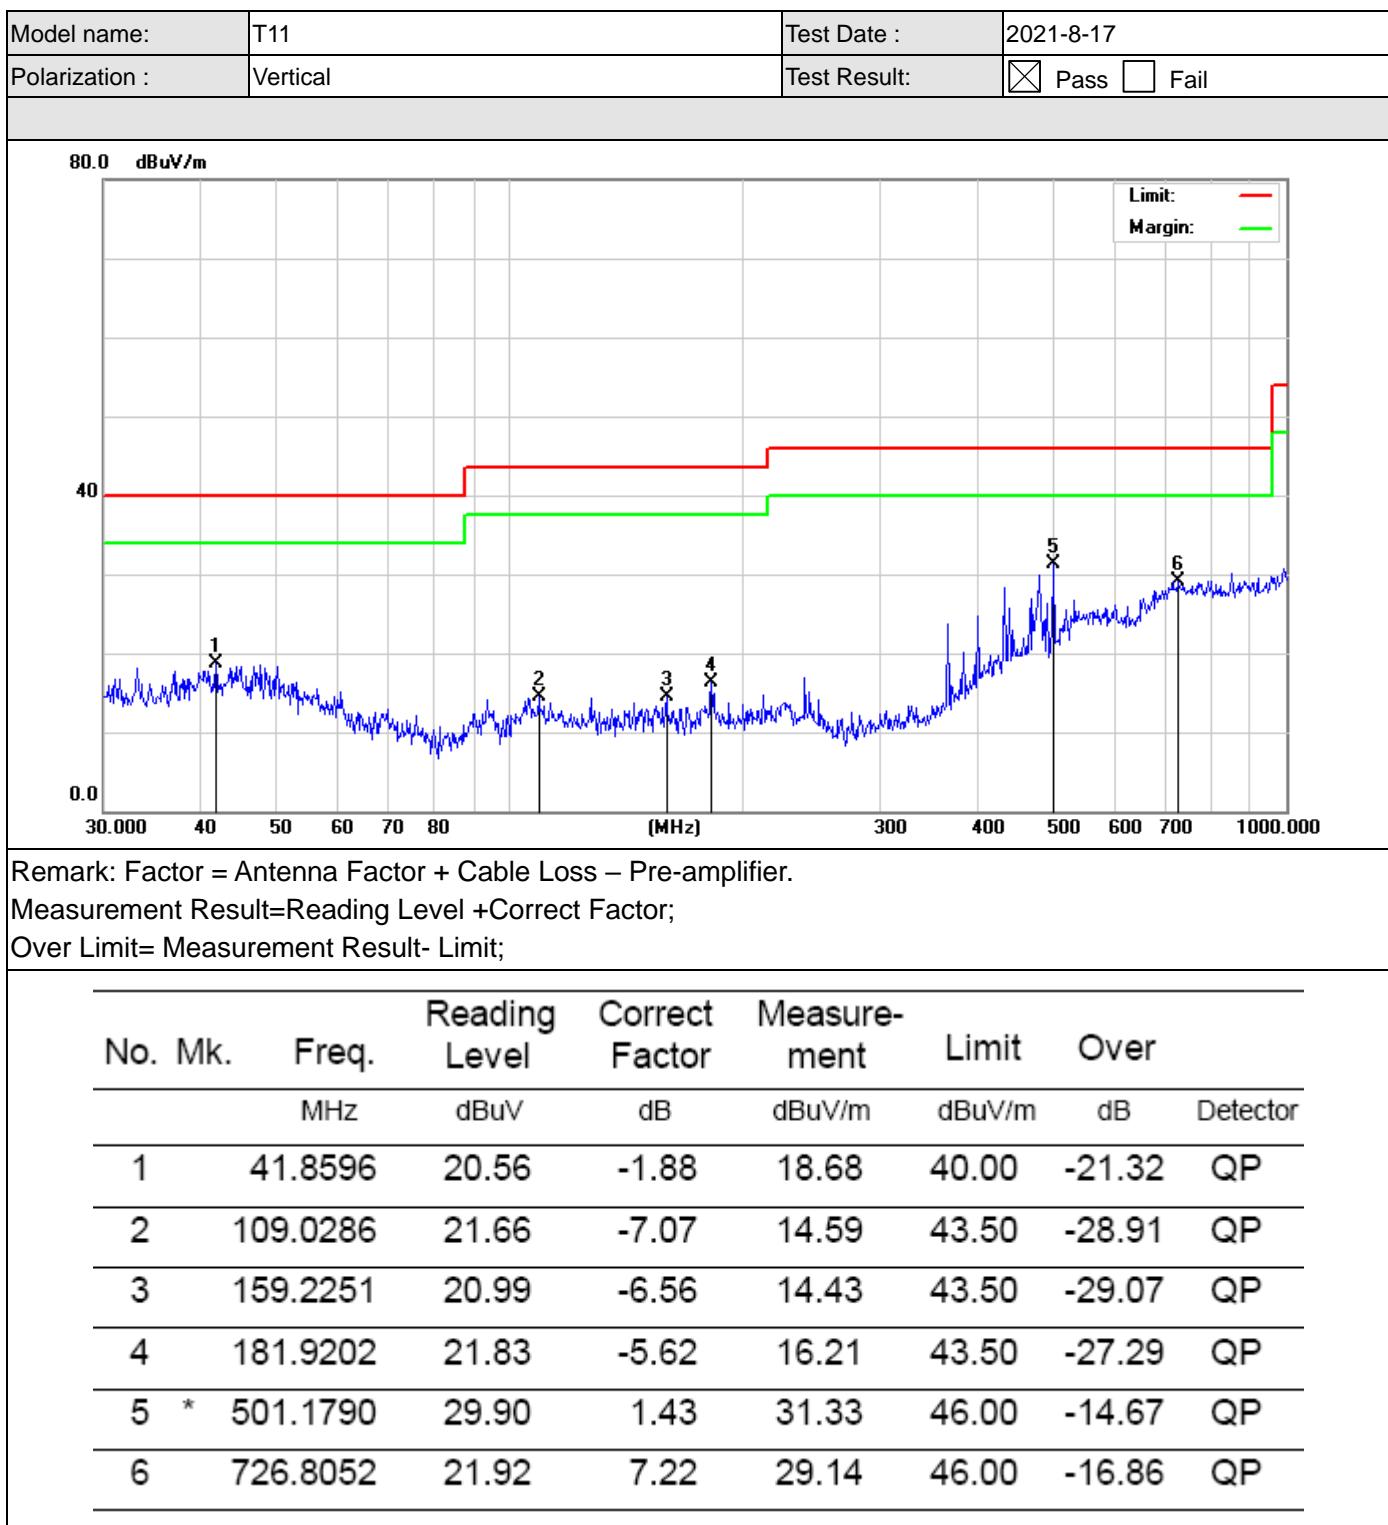

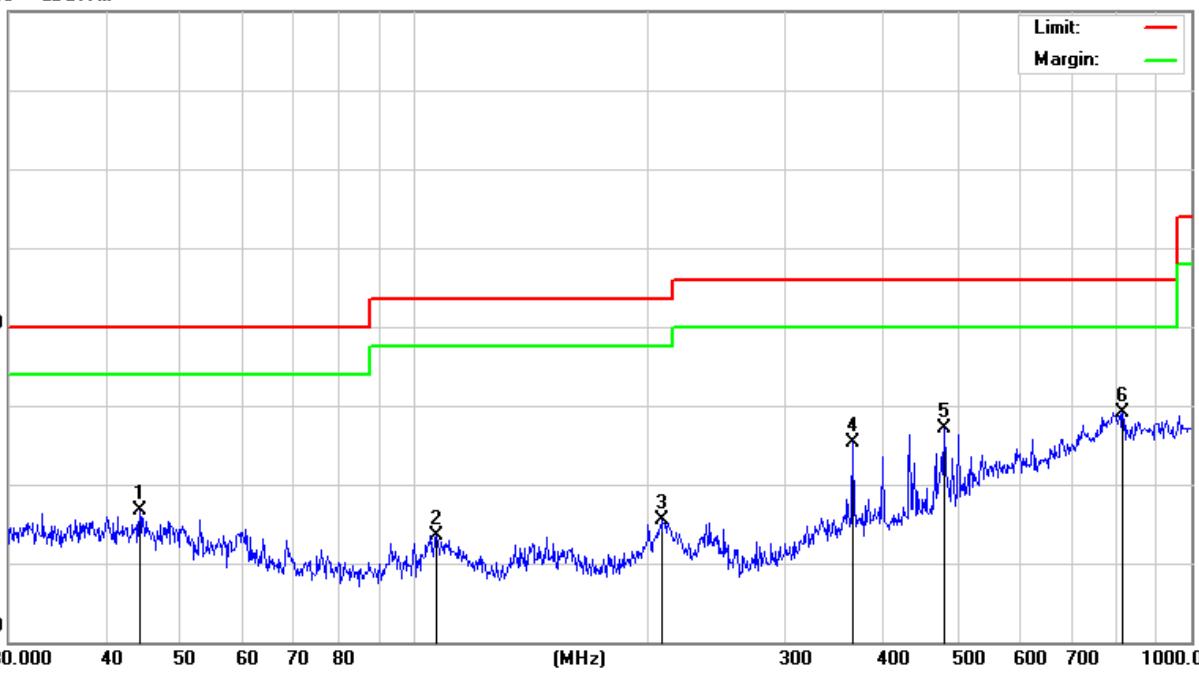Model name:	T11	Test Date :	2021-8-17				
Polarization :	Vertical	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail				
<hr/>							
<hr/>							
80.0	dBuV/m						
40							
0.0							
							
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Measurement Result=Reading Level +Correct Factor; Over Limit= Measurement Result- Limit;							
No.	Mk.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
	Freq.	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
	MHz						
1	44.2751	21.10	-4.49	16.61	40.00	-23.39	QP
2	106.7587	21.34	-7.76	13.58	43.50	-29.92	QP
3	208.5801	19.67	-4.21	15.46	43.50	-28.04	QP
4	366.8231	29.55	-4.25	25.30	46.00	-20.70	QP
5	480.5276	29.65	-2.54	27.11	46.00	-18.89	QP
6 *	815.9678	22.45	6.65	29.10	46.00	-16.90	QP

■ Above 1-25GHz

Test channel:	Lowest channel
---------------	----------------

H

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804.000	48.99	5.06	54.05	74.00	-19.95	PEAK
4804.000	39.44	5.06	44.50	54.00	-9.50	AVG
7206.000	42.15	7.03	49.18	74.00	-24.82	PEAK
7206.000	33.17	7.03	40.20	54.00	-13.80	AVG

V

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804.000	47.69	5.06	52.75	74.00	-21.25	PEAK
4804.000	39.34	5.06	44.40	54.00	-9.60	AVG
7206.000	41.62	7.03	48.65	74.00	-25.35	PEAK
7206.000	32.96	7.03	39.99	54.00	-14.01	AVG

Test channel:	Middle channel
---------------	----------------

H

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4882.000	48.52	5.14	53.66	74.00	-20.34	PEAK
4882.000	39.51	5.14	44.65	54.00	-9.35	AVG
7323.000	42.08	7.52	49.60	74.00	-24.40	PEAK
7323.000	33.15	7.52	40.67	54.00	-13.33	AVG

V

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4882.000	46.97	5.14	52.11	74.00	-21.89	PEAK
4882.000	39.18	5.14	44.32	54.00	-9.68	AVG
7323.000	43.13	7.52	50.65	74.00	-23.35	PEAK
7323.000	32.34	7.52	39.86	54.00	-14.14	AVG

Test channel:	Highest channel
---------------	-----------------

H

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960.000	48.92	5.22	54.14	74.00	-19.86	PEAK
4960.000	39.26	5.22	44.48	54.00	-9.52	AVG
7440.000	42.91	8.06	50.97	74.00	-23.03	PEAK
7440.000	32.70	8.06	40.76	54.00	-13.24	AVG

V

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960.000	47.10	5.22	52.32	74.00	-21.68	PEAK
4960.000	38.11	5.22	43.33	54.00	-10.67	AVG
7440.000	41.69	8.06	49.75	74.00	-24.25	PEAK
7440.000	32.83	8.06	40.89	54.00	-13.11	AVG

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “**”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. The test data shows only the worst case GFSK mode

7 Test Setup Photo

Reference to the **appendix I** for details.

8 EUT Constructional Details

Reference to the **appendix II** for details.

End of report