

# 深圳市恒利永通电子有限公司

Shenzhen Hengli Yongtong Electronics Co., Ltd.

## 产品承认书

客 户  
CUSTOMER:

深圳市悦尔实业有限公司

品 名 规 格  
DESCRIPTION: TS261N-R

型 号  
MODEL NO: WA-F-LA-00-115

客 户 料 号  
CUS PART NO:

日 期  
DATE:

### 呈样签章

| 工 程<br>ENGINEERING DEPARTMENT | 品 保<br>QC DEPARTMENT | 业 务<br>SALES DEPARTMENT |
|-------------------------------|----------------------|-------------------------|
|                               |                      |                         |

### 客户承认签章

| 工 程<br>ENGINEERING DEPARTMENT | 品 保<br>QC DEPARTMENT | 业 务<br>SALES DEPARTMENT |
|-------------------------------|----------------------|-------------------------|
|                               |                      |                         |

※ 客户确认样品附意栏:

# WA-F-LA-00-115 Specification

## 1. Explanation of part number :

WA - F - LA - 00 - 115  
(1) (2) (3) (4) (5)

(1) Product Type : Wireless Antenna

(2) Material: FPC

(3) Frequency : 2400MHz-2500MHz

(4) Coaxial Cable Type : 00

(5) Suffix : 115

## 2. Electrical Specification :

*Those specifications were specially defined for 悅尔 TS261N-R model, and all characteristics were measured under the model's handset testing jig .*

### 2-1. Frequency Band:

| Frequency Band | MHz       |
|----------------|-----------|
| BT             | 2400-2500 |

### 2-2. Impedance

50 ohm nominal

### 2-3. VSWR

#### 2-3-1. Measurement frequency points and VSWR value

| Frequency<br>(Unit MHz) | 2400 | 2450 | 2500 |
|-------------------------|------|------|------|
| VSWR                    | 1.80 | 1.04 | 1.87 |

## 2-3-2. VSWR

|                        |   |            |            |
|------------------------|---|------------|------------|
| Frequency Band(MHz)    | 2400  | 2450       | 2500       |
| 2-3-3. Typical Value:  | $\leq 2.0$  | $\leq 2.0$ | $\leq 2.0$ |
| 2-3-4 Measuring Method | <ol style="list-style-type: none"> <li>1. A <math>50\Omega</math> coaxial cable is connected to the FPC. Then this cable is connected to a network analyzer to measure the VSWR.</li> <li>2. Keeping this jig away from metal at least 20 cm</li> </ol> |            |            |
| 2-3-5 Picture          |   |            |            |

## 2-4. Efficiency and Gain

- Measuring instruments: microwave darkroom, network analyzer, standard antenna. **微波** Dark room description:

This is the microwave darkroom set up by our company in Shenzhen, which belongs to a far-field measurement system. The size of the darkroom is 7.0 m x 4.0 m x 3.0 m, and the size of the Quiet zone is 15 cm x 15 cm x 15cm

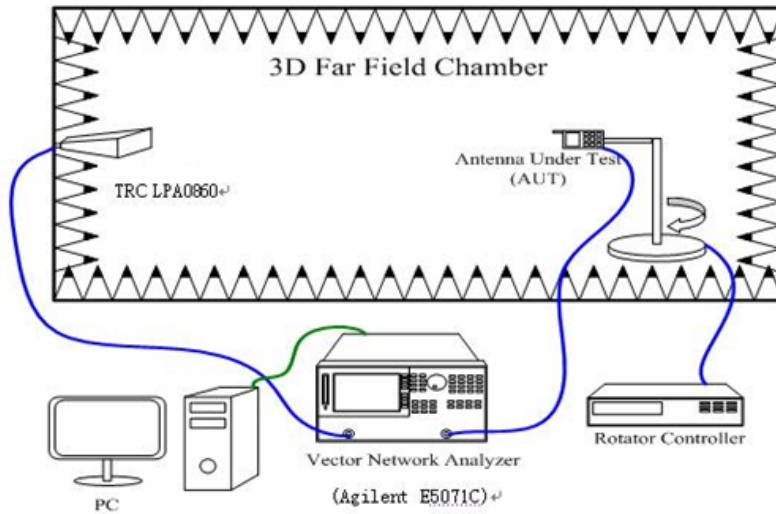


图. 1. 微波暗室内部仪器设置 <sup>1,4)</sup>

FIG. 1 shows the instrument setup in the microwave darkroom and the connection diagram of the network analyzer. The distance between the transmitting antenna (the model of transmitting antenna used in the darkroom is TRC LPA0860 800MHZ-6GHZ) and the antenna to be tested (AUT) is 1.35m. The antenna to be measured is placed on a rotating platform and can be measured roughly and accurately by controlling the rotating Angle of the rotating table.

The antenna to be measured is placed on the rotating table, and the 360-degree field intensity data of each plane (ZY plane and ZX plane) are measured. Another day to be measured

The wire is changed into a standard dipole antenna (the model of the standard dipole antenna used in this darkroom is TRC AD series dipole antenna 800MHz~2500MHz), and the field intensity data of 360 degrees is measured, and the standard gain value is used as the converted gain value. The gain value and direction diagram of the antenna to be measured can be obtained through the conversion of formula 1.


$$G_{AUT} = G_{stand} + P_{AUT} - P_{stand}$$

$G_{AUT}$ : Gain of AUT  
 $G_{stand}$ : Gain of Standard Gain Antenna  
 $P_{AUT}$ : Measured Power of AUT  
 $P_{stand}$ : Measured Power of Standard Gain Antenna

## 2-4-1 Efficiency and Gain

| Frequency(MHz) | Efficiency (%) | Average GAIN(dB) | Peak GAIN (dBi) |
|----------------|----------------|------------------|-----------------|
| 2400           | 20.86          | -6.80            | -1.54           |
| 2450           | 24.18          | -6.16            | -1.69           |
| 2500           | 22.75          | -6.43            | -1.7            |

## 2-4-2 2D/3D Gain Pattern

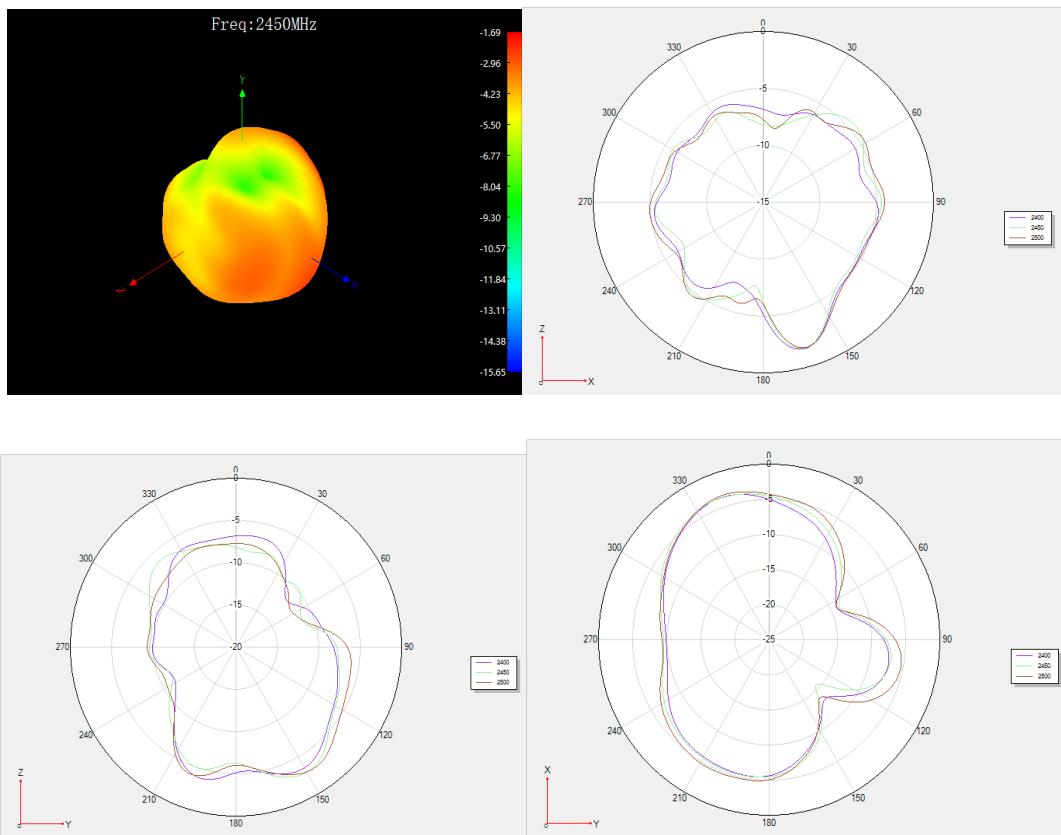

## 3. Mechanical Specification:

### 3-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing Figure 3-1-

