


**eyesound**  
Multifunctional Night Light Speaker  
**User Manual**

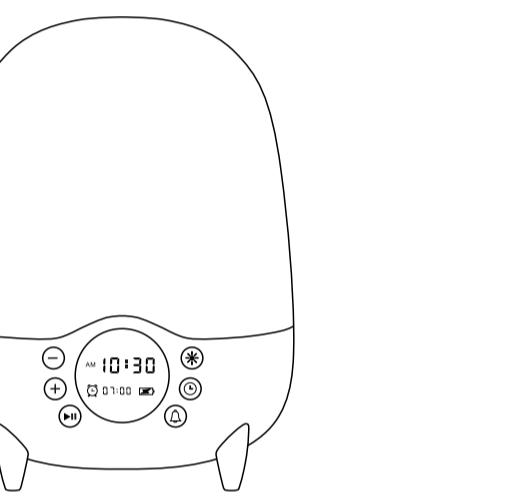

Y11-English

**Product parameters**


|                     |                         |
|---------------------|-------------------------|
| Manufacturer Number | Y10                     |
| Lamp Type           | LED                     |
| Lamp Power          | 8W                      |
| Battery Capacity    | 3000 mAh                |
| Charging Port       | Type-C, DC/5V, 1A       |
| Charge Time         | 3-4 hours               |
| Working Time        | 6-8 hours               |
| Dimensions          | 140mm(Dmax) x 190mm (H) |
| Weight              | 695g(±2g)               |

**Packing List**

- Night Light Bluetooth Speaker x 1
- Charging Data Cable x 1
- 3.5mm Audio Cable x 1
- User Manual x 1
- Remote Control x 1
- AAA Battery x 2

1


**NOTE**



1. In order to bring you a better product experience, please read the instructions carefully before use.  
2. Please fully charge before using the following functions. The red indicator lights up when charging and goes out after full charge.  
3. Turn the power button switch to ON to ensure that the product is on.

2


**Introduction to Product Function Buttons**

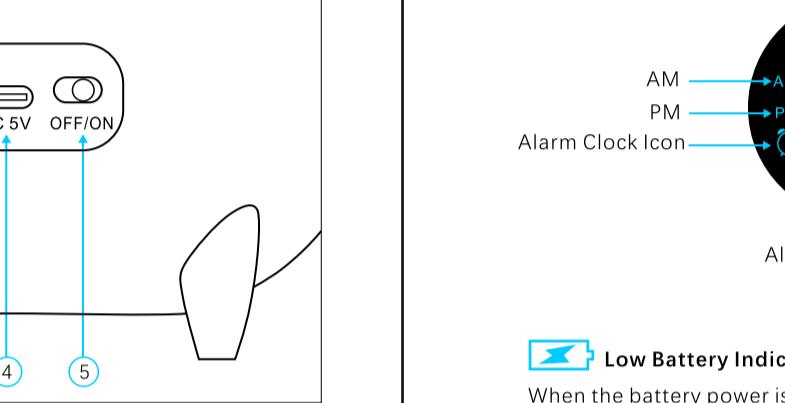

① TF Card Slot: TF memory card playback  
② Aux Input Interface  
③ Charging Indicator: When charging, the indicator light is red and goes out after full charge  
④ Charging Source Port: Type-C Charging Interface  
⑤ Power Button Switch OFF/ON: Turn the power button switch to ON to ensure that the product is on.

3


**Product Display Area Introduction**

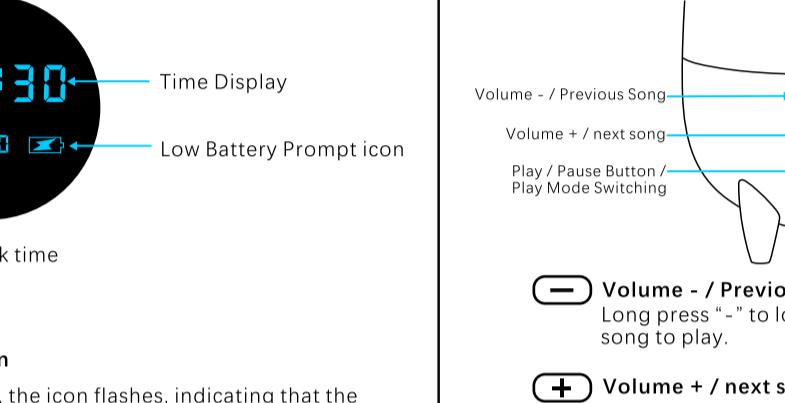

AM PM  
10:30 Time Display  
Alarm Clock Icon  
01:00 Low Battery Prompt icon  
Alarm clock time

4


**Introduction to Product Function Buttons**

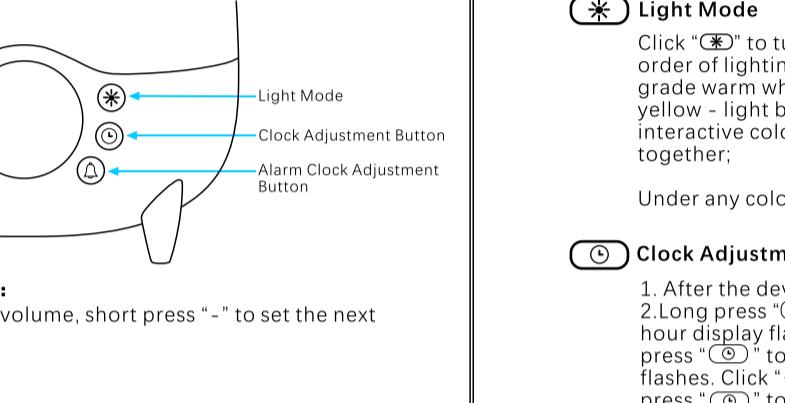

Volume + / Previous Song  
Volume + / next song  
Play / Pause Button / Play Mode Switching  
Clock Adjustment Button  
Alarm Clock Adjustment Button  
Low Battery Indicator Icon  
Play / Pause Button / Play Mode Switching  
Alarm Clock Icon

5


**Introduction to Product Function Buttons**

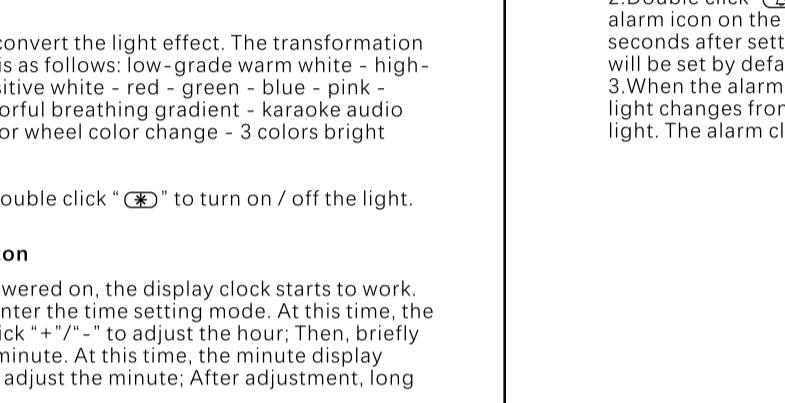

Light Mode  
Volume + / Previous Song  
Volume + / next song  
Play / Pause Button / Play Mode Switching  
Clock Adjustment Button  
Alarm Clock Adjustment Button  
Low Battery Indicator Icon  
Play / Pause Button / Play Mode Switching  
Alarm Clock Icon

6

**Introduction to Product Function Buttons**

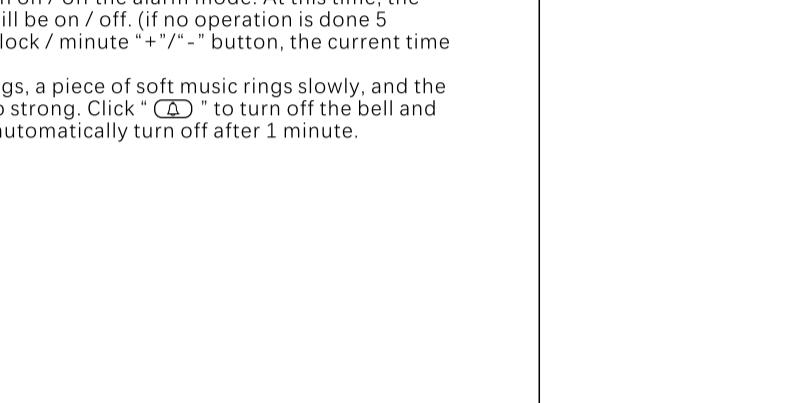

Light Mode  
Volume + / Previous Song  
Volume + / next song  
Play / Pause Button / Play Mode Switching  
Clock Adjustment Button  
Alarm Clock Adjustment Button  
Low Battery Indicator Icon  
Play / Pause Button / Play Mode Switching  
Alarm Clock Icon

7

**Bluetooth Playback Mode**

**Bluetooth Mode**

- After the device is turned on, the device enters the Bluetooth pairing mode, and you will hear the voice prompt "eyesound bluetooth device is ready".
- Turn on the Bluetooth function on the Bluetooth device, search and add a new device to select "eyesound Y11" in the Bluetooth list and connect. After the connection is successful, you will hear a short voice prompt tone. If a password is required, please enter "0000" (4 digits).
- If the first pairing is successful, the speaker will automatically connect to the last connected device after entering the Bluetooth pairing mode again (ensure that your device has turned on the Bluetooth function and is within the connectable range).
- If you need to disconnect, please disconnect manually through your Bluetooth device with a short music prompt tone.

**Precautions for Bluetooth Connection:**  
If the automatic connection of the device is unsuccessful, please connect manually through your Bluetooth device.  
If Bluetooth cannot be connected, please cancel the current pairing, to ensure that the Bluetooth speaker light is not connected by other devices. Then, match the devices according to the previous steps to connect successfully.  
The effective communication distance of Bluetooth connection is 10m. Please ensure that it is within the communication range and there is no physical wall barrier between devices. The recommended distance is no more than 5m.

8

**Hands Free Function**

- In the Bluetooth connection state, the device can control the music playing of the connected device to achieve a variety of effects, and support the function of hands-free answering the phone.
- Turn on the Bluetooth function on the Bluetooth device, search and add a new device to select "eyesound Y11" in the Bluetooth list and connect. After the connection is successful, you will hear a short voice prompt tone. If a password is required, please enter "0000" (4 digits).
- Reject / End an incoming call:** When there is an incoming call, the Bluetooth speaker will send an incoming call prompt tone to remind the incoming call. Short press to  answer the call, and short press  again to end the call.
- Volume + and Volume -:** When there is an incoming call, the Bluetooth speaker will send an incoming call prompt tone to remind the incoming call, and long press  to hang up the incoming call.

**TF Card Playback Mode**

- When the TF card is inserted into the card slot, the corresponding voice prompt will appear. The product will automatically read the audio file in the card and play it. The user can use the speaker key to control the music playback.
- No matter in what mode, once the user inserts the TF card, the speaker will automatically give priority to playing the audio files in the card. After pulling out the TF card, it will automatically switch to the Bluetooth playing mode.
- In AUX IN mode, click the play / pause button only for mute function.

9

**FM Radio Mode**

After the speaker is switched to radio mode, FM radio functions can be used:

**NOTE:** Before using the remote control, make sure the product is turned on. Turn the product power button switch to the "ON" position.

**NOTE:** When FM radio is used, a charging cable must be inserted into the charging interface as the radio antenna, otherwise the radio station cannot be received.

**Reject / End an incoming call:** When there is an incoming call, the Bluetooth speaker will send an incoming call prompt tone to remind the incoming call. Short press to  answer the call, and short press  again to end the call.


**Volume + and Volume -:** When there is an incoming call, the Bluetooth speaker will send an incoming call prompt tone to remind the incoming call, and long press  to hang up the incoming call.

**Color Control Buttons**

1. Plug in the equipped 3.5mm audio cable to connect mobile phones, tablets, MP3, etc., which can be used as an external audio.  
2. In AUX IN mode, pressing "-" / "+" can only adjust the volume, not switching music.  
3. In AUX IN mode, click the play / pause button only for mute function.

10

**Introduction to Remote Control Operation**

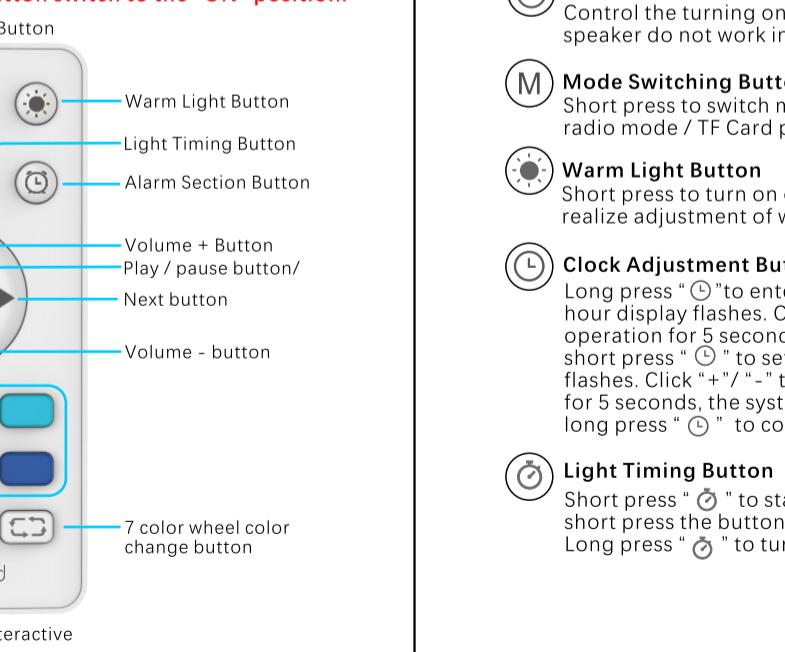

On / Off Button  
Mode Switching Button  
Clock Adjustment Button  
Previous button  
Volume + button  
Volume - button  
Color Control Buttons  
Light Timing Button  
Warm Light Button  
Alarm Section Button  
Volume + button  
Volume - button  
Play / pause button/  
Next button  
7 color wheel color change button  
Karaoke audio interactive color button

11

**Introduction to Remote Control Operation**

**On / Off Button**  
Control the turning on and off of the light (the light and Bluetooth speaker do not work in the off state).

**Mode Switching Button**  
Short press  to enter the alarm setting mode. At this time, the hour display flashes. Click "+" / "-" to adjust the hour. Then, short press  to set the minute. At this time, the minute display flashes. Click "+" / "-" to adjust the minute. After adjustment, long press  to confirm, and the alarm clock icon will light up.

**Clock Adjustment Button**  
Short press  to enter the alarm setting mode. At this time, the hour display flashes. Click "+" / "-" to adjust the hour. Then, short press  to set the minute. At this time, the minute display flashes. Click "+" / "-" to adjust the minute. After adjustment, long press  to confirm, and the alarm clock icon will light up.

**Light Timing Button**  
Short press to turn on or off the warm light, and long press to realize adjustment of warm light and dark.

**Warm Light Button**  
After the radio mode is chosen, click  to start searching the radio channel. Each time a channel is searched, the speaker will briefly play the content of the channel, continue to search the next channel and automatically record it, and click  again to stop searching and play the current channel.

**Volume + and Volume -:** Volume "+" and volume "-" can switch the recorded channels.

**Color Control Buttons**  
You can select the color mode by briefly pressing as need: warm white adjustment, red, green, blue, pink, yellow, cyan, breathing lamp, spectrum lamp, 7-color rotation, click any button to select the color of the light on, and then click the corresponding light off again.

**Colorful breathing gradient button**  
Short press this button to achieve the effect of colorful gradient. Short press again to turn off the light.

**Light Timing Button**  
Short press this button to realize the color flashing interacting with the audio rhythm, and short press again to turn off the light. The alarm clock will automatically turn off after 1 minute.

**7 color wheel color change button**  
Short press this button to realize the rotation effect of 7 colors, and short press again to turn off the light.

12

**Introduction to Remote Control Operation**

**On / Off Button**  
Control the turning on and off of the light (the light and Bluetooth speaker do not work in the off state).

**Mode Switching Button**  
Short press  to enter the alarm setting mode. At this time, the hour display flashes. Click "+" / "-" to adjust the hour. Then, short press  to set the minute. At this time, the minute display flashes. Click "+" / "-" to adjust the minute. After adjustment, long press  to confirm, and the alarm clock icon will light up.

**Clock Adjustment Button**  
Short press  to enter the alarm setting mode. At this time, the hour display flashes. Click "+" / "-" to adjust the hour. Then, short press  to set the minute. At this time, the minute display flashes. Click "+" / "-" to adjust the minute. After adjustment, long press  to confirm, and the alarm clock icon will light up.

**Light Timing Button**  
Short press to turn on or off the warm light, and long press to realize adjustment of warm light and dark.

**Warm Light Button**  
After the radio mode is chosen, click  to start searching the radio channel. Each time a channel is searched, the speaker will briefly play the content of the channel, continue to search the next channel and automatically record it, and click  again to stop searching and play the current channel.

**Volume + and Volume -:** Volume "+" and volume "-" can switch the recorded channels.

**Color Control Buttons**  
You can select the color mode by briefly pressing as need: warm white adjustment, red, green, blue, pink, yellow, cyan, breathing lamp, spectrum lamp, 7-color rotation, click any button to select the color of the light on, and then click the corresponding light off again.

**Colorful breathing gradient button**  
Short press this button to achieve the effect of colorful gradient. Short press again to turn off the light.

**Light Timing Button**  
Short press this button to realize the color flashing interacting with the audio rhythm, and short press again to turn off the light. The alarm clock will automatically turn off after 1 minute.

**7 color wheel color change button**  
Short press this button to realize the rotation effect of 7 colors, and short press again to turn off the light.

13

**Introduction to Remote Control Operation**

**On / Off Button**  
Control the turning on and off of the light (the light and Bluetooth speaker do not work in the off state).

**Mode Switching Button**  
Short press  to enter the alarm setting mode. At this time, the hour display flashes. Click "+" / "-" to adjust the hour. Then, short press  to set the minute. At this time, the minute display flashes. Click "+" / "-" to adjust the minute. After adjustment, long press  to confirm, and the alarm clock icon will light up.

**Clock Adjustment Button**  
Short press  to enter the alarm setting mode. At this time, the hour display flashes. Click "+" / "-" to adjust the hour. Then, short press  to set the minute. At this time, the minute display flashes. Click "+" / "-" to adjust the minute. After adjustment, long press  to confirm, and the alarm clock icon will light up.

**Light Timing Button**  
Short press to turn on or off the warm light, and long press to realize adjustment of warm light and dark.

**Warm Light Button**  
After the radio mode is chosen, click  to start searching the radio channel. Each time a channel is searched, the speaker will briefly play the content of the channel, continue to search the next channel and automatically record it, and click  again to stop searching and play the current channel.

**Volume + and Volume -:** Volume "+" and volume "-" can switch the recorded channels.

**Color Control Buttons**  
You can select the color mode by briefly pressing as need: warm white adjustment, red, green, blue, pink, yellow, cyan, breathing lamp, spectrum lamp, 7-color rotation, click any button to select the color of the light on, and then click the corresponding light off again.

**Colorful breathing gradient button**  
Short press this button to achieve the effect of colorful gradient. Short press again to turn off the light.

**Light Timing Button**  
Short press this button to realize the color flashing interacting with the audio rhythm, and short press again to turn off the light. The alarm clock will automatically turn off after 1 minute.

**7 color wheel color change button**  
Short press this button to realize the rotation effect of 7 colors, and short press again to turn off the light.

14

**Charging and Battery Service Life**

When the battery power is too low, the icon flashes, indicating that the power is insufficient. Please charge as soon as possible. When charging, the red indicator light next to the charging port is on, and the indicator light goes out after full charge.

**Product Waranty**

Our products have passed strict and strict related to product quality (QC), FCO, and product damage, unsafe products and avoid damage of the product, we will not be responsible.

2. The product shall be kept away from water and fire. Children should not use it independently under the guidance of adults.

3. Place it on a stable table to prevent it from falling and damaging.

4. Must be operated in strict accordance with the manual.

**Product Waranty**

All products support 180-day unconditional return and replacement, 180-day free return and after-sales maintenance service. If you have problems when using, please contact us in time, we will solve your problems and solve all your problems regarding the product.

CE

15

#### FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### RF Exposure Statement

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.