



5500MHz




5700MHz






Band Edges(IEEE802.11ax HE40 mode)

5190MHz

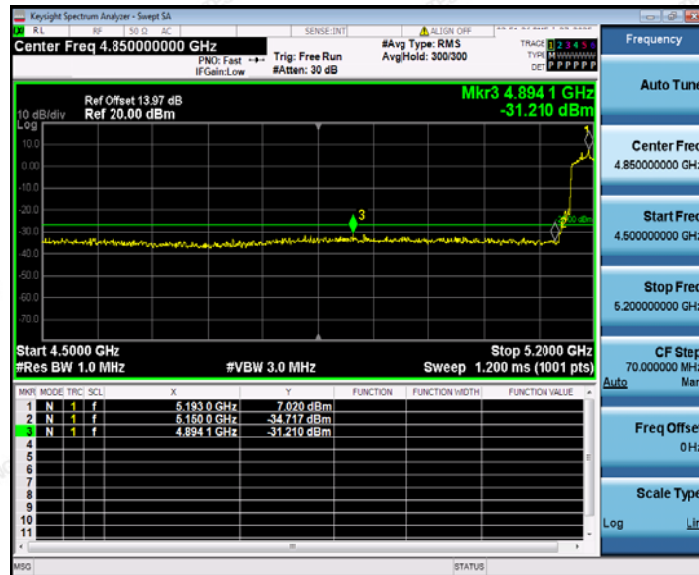


5230MHz

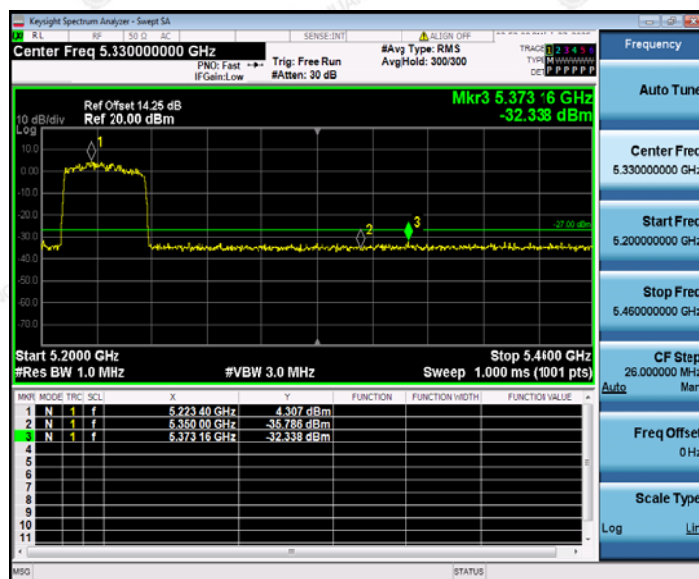



5270MHz

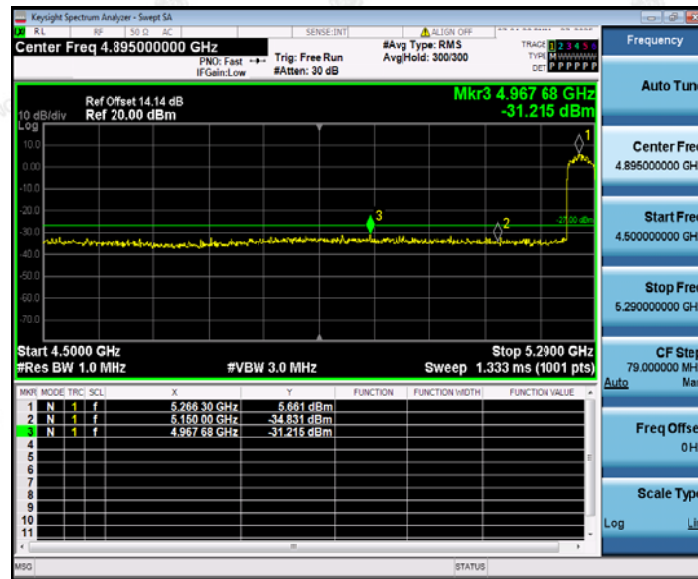

5310MHz





5510MHz




5670MHz





Band Edges(IEEE802.11ax HE80 mode)

5210MHz

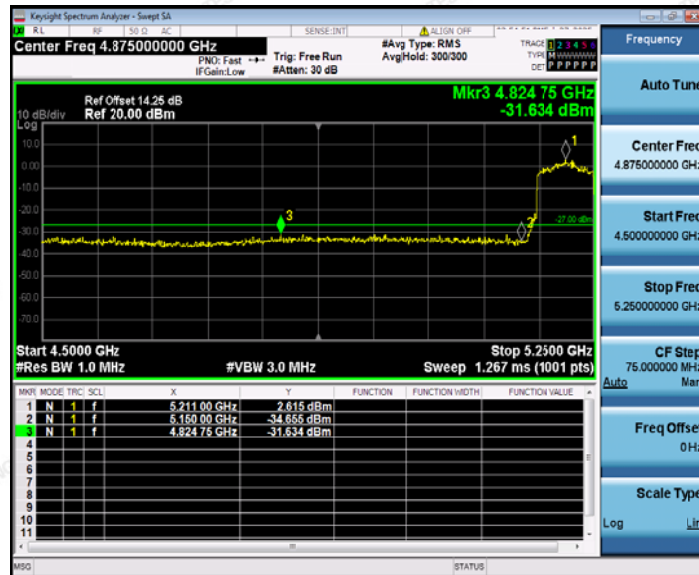

5210MHz





5290MHz



5290MHz





5530MHz




5610MHz





Band Edges(IEEE802.11ax HE160 mode)

5250MHz

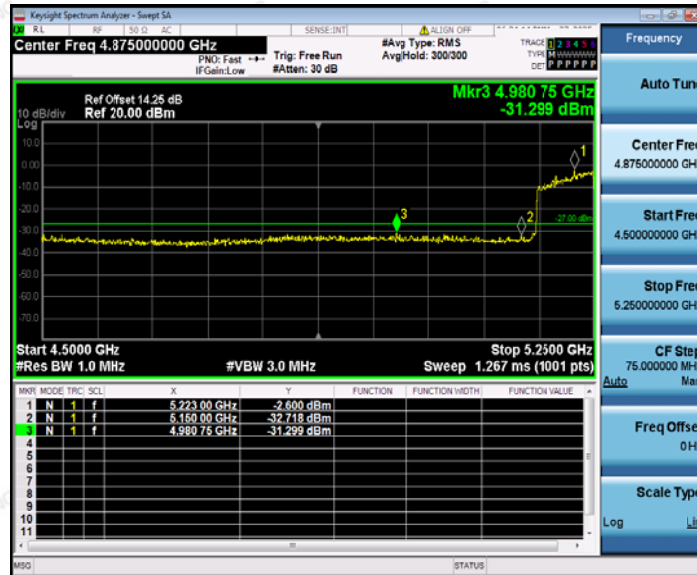

5250MHz






5570MHz



5570MHz

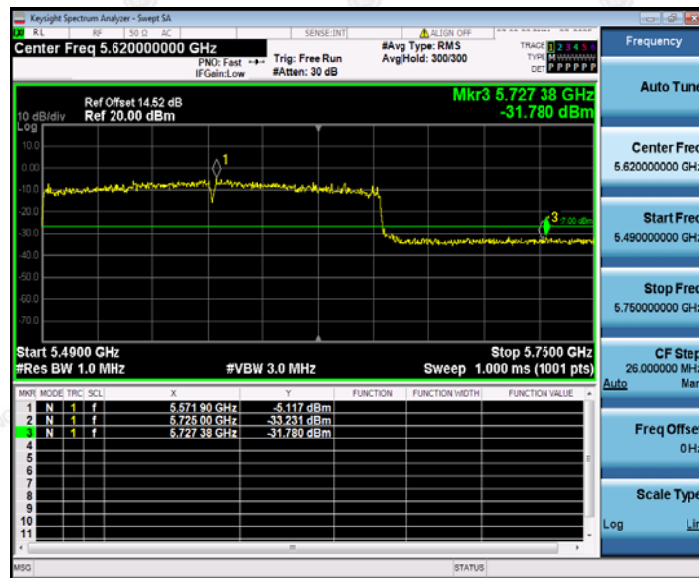




Band Edges(IEEE802.11be EHT20 mode)

5180MHz




5240MHz

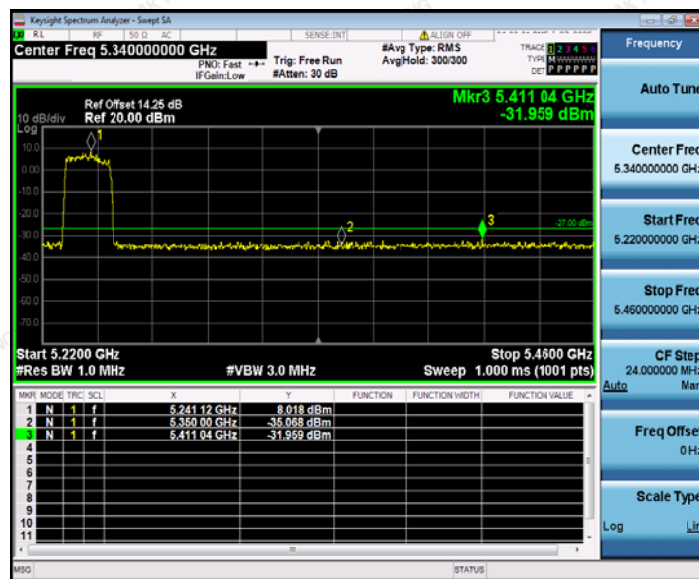




Band Edges(IEEE802.11be EHT40 mode)

5190MHz

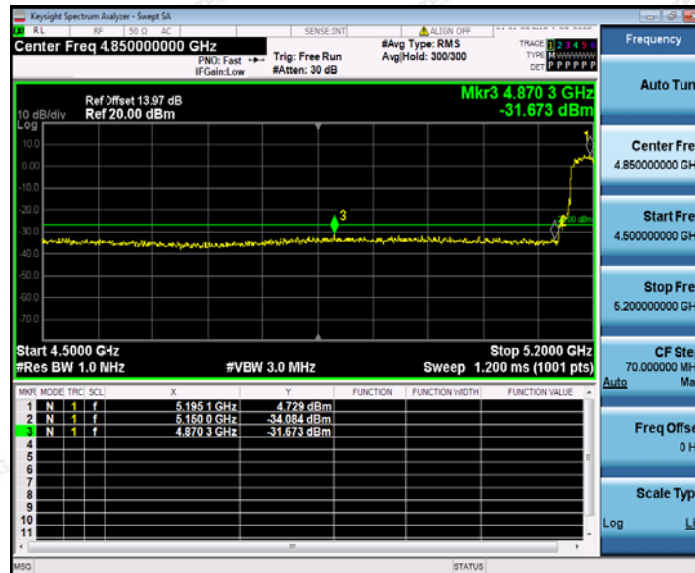


5230MHz

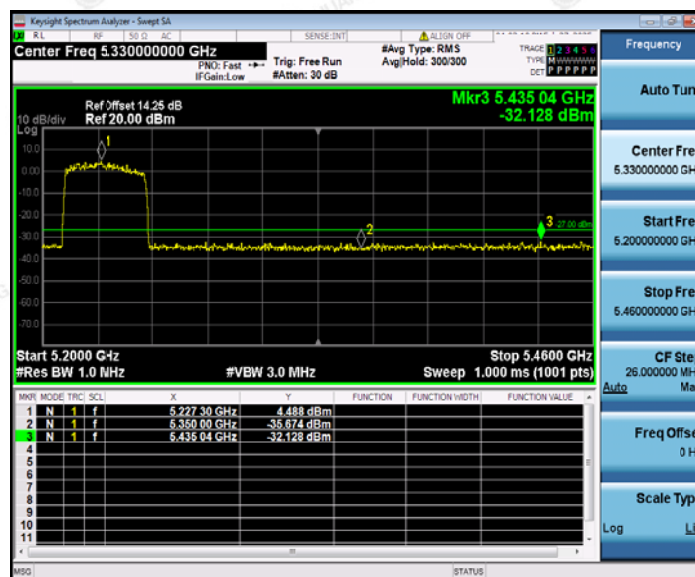



Band Edges(IEEE802.11be EHT80 mode)

5210MHz

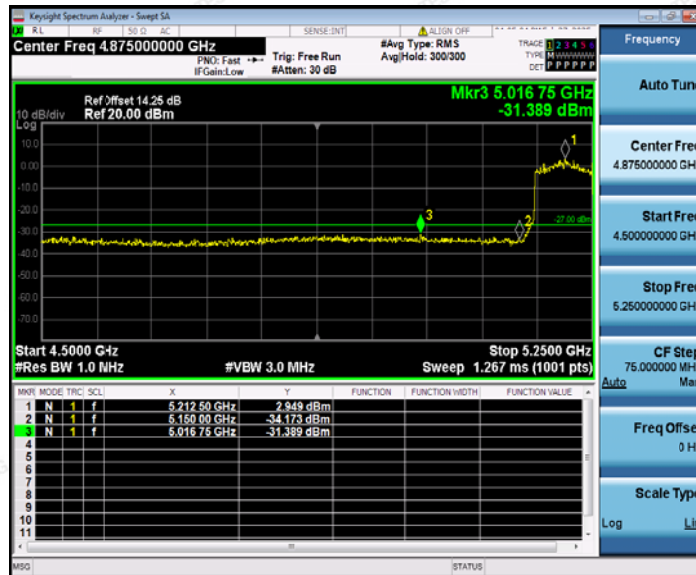

5210MHz





6.4 Maximum Power Spectral Density

LIMIT


According to §15.407(a),

For the 5.15-5.25 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the 5.25-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Test Configuration

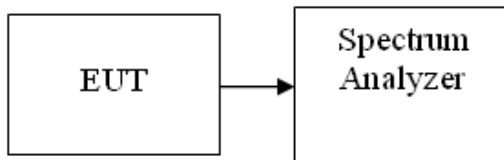

TESTPROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span must be greater than 26dB bandwidth, adjust as necessary, Sweep= auto, Detector RMS
3. Record the max. reading.

TESTRESULTS

No non-compliance noted

Test Data



Testmode:IEEE802.11a mode

5150~5250MHz

Channel	Frequency (MHz)	PPSD(dBm)		Mimo	Limit(dBm)	Result
		Ant1	Ant2			
Low	5180	-1.91	1.02	/	11	PASS
Mid	5200	-0.93	1.44	/	11	PASS
High	5240	-0.75	2.13	/	11	PASS

5250~5350MHz

Channel	Frequency (MHz)	PPSD(dBm)		Mimo	Limit(dBm)	Result
		Ant1	Ant2			
Low	5260	0.68	0.03	/	11	PASS
Mid	5280	-0.98	0.18	/	11	PASS
High	5320	-3.66	0.06	/	11	PASS

5470~5725MHz

Channel	Frequency (MHz)	PPSD(dBm)		Mimo	Limit(dBm)	Result
		Ant1	Ant2			
Low	5500	-0.34	-2.88	/	11	PASS
Mid	5580	-1.43	-3.84	/	11	PASS
High	5700	-2.82	-4.00	/	11	PASS

Testmode:IEEE802.11n HT20 mode

5150~5250MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5180	-2.70	1.31	11	PASS
Mid	5200	-2.70	0.18	11	PASS
High	5240	-1.62	1.74	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5180	2.76	11	PASS
Mid	5200	1.98	11	PASS
High	5240	3.39	11	PASS

**5250~5350MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5260	1.21	-0.55	11	PASS
Mid	5280	1.16	-0.26	11	PASS
High	5320	-1.43	-0.71	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5260	3.43	11	PASS
Mid	5280	3.52	11	PASS
High	5320	1.96	11	PASS

5470~5725MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5500	0.33	-2.96	11	PASS
Mid	5580	-1.43	-4.19	11	PASS
High	5700	-2.90	-4.57	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5500	2.00	10.57	PASS
Mid	5580	0.42	10.57	PASS
High	5700	-0.64	10.57	PASS

Testmode:IEEE802.11n HT40 mode**5150~5250MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5190	-6.98	-3.28	11	PASS
High	5230	-5.56	-2.75	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5190	-1.74	11	PASS
High	5230	-0.92	11	PASS

**5250~5350MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5270	-3.02	-4.81	11	PASS
High	5310	-4.14	-4.70	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5270	-0.81	11	PASS
High	5310	-1.40	11	PASS

5470~5725MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5510	-3.94	-7.59	11	PASS
Mid	5550	-5.08	-8.43	11	PASS
High	5670	-6.42	-7.81	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5510	-2.38	10.57	PASS
Mid	5550	-3.43	10.57	PASS
High	5670	-4.05	10.57	PASS

Testmode:IEEE802.11ac HT20 mode**5150~5250MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5180	-2.17	1.16	11	PASS
Mid	5200	-1.17	0.96	11	PASS
High	5240	-0.21	2.22	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5180	2.82	11	PASS
Mid	5200	3.03	11	PASS
High	5240	4.18	11	PASS

**5250~5350MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5260	2.00	-0.70	11	PASS
Mid	5280	1.08	0.07	11	PASS
High	5320	0.63	-0.20	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5260	3.87	11	PASS
Mid	5280	3.61	11	PASS
High	5320	3.25	11	PASS

5470~5725MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5500	-0.15	-2.35	11	PASS
Mid	5580	-1.21	-3.95	11	PASS
High	5700	-3.49	-3.85	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5500	1.90	10.57	PASS
Mid	5580	0.64	10.57	PASS
High	5700	-0.66	10.57	PASS

Testmode:IEEE802.11ac HT40 mode**5150~5250MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5190	-4.91	-2.39	11	PASS
High	5230	-3.53	-1.95	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5190	-0.46	11	PASS
High	5230	0.34	11	PASS

**5250~5350MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5270	-3.85	-4.39	11	PASS
High	5310	-4.60	-4.66	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5270	-1.10	11	PASS
High	5310	-1.62	11	PASS

5470~5725MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5510	-4.73	-5.98	11	PASS
Mid	5550	-7.41	-7.39	11	PASS
High	5670	-6.40	-8.07	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5510	-2.30	10.57	PASS
Mid	5550	-4.39	10.57	PASS
High	5670	-4.14	10.57	PASS

Testmode:IEEE802.11ac HT80 mode**5150~5250MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5210	-8.86	-7.40	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5210	-5.06	11	PASS

**5250~5350MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5290	-8.25	-10.57	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5290	-6.25	11	PASS

5470~5725MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5530	-7.97	-10.90	11	PASS
High	5610	-8.06	-12.39	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5530	-6.18	10.57	PASS
High	5610	-6.70	10.57	PASS

Testmode:IEEE802.11ac HT160 mode

5150~5350MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5250	-15.08	-9.32	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5250	-8.30	11	PASS

5470~5725MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5570	-12.51	-15.77	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5570	-10.83	10.57	PASS



Testmode:IEEE802.11ax HE20 mode

5150~5250MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5180	-1.29	0.88	11	PASS
Mid	5200	-0.45	1.19	11	PASS
High	5240	0.36	2.44	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5180	2.94	11	PASS
Mid	5200	3.46	11	PASS
High	5240	4.53	11	PASS

5250~5350MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5260	2.12	0.27	11	PASS
Mid	5280	1.94	0.80	11	PASS
High	5320	-0.73	0.04	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5260	4.30	11	PASS
Mid	5280	4.42	11	PASS
High	5320	2.68	11	PASS

5470~5725MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5500	-0.03	-1.62	11	PASS
Mid	5580	-1.17	-3.97	11	PASS
High	5700	-2.80	-3.32	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5500	2.26	10.57	PASS
Mid	5580	0.66	10.57	PASS
High	5700	-0.04	10.57	PASS



Testmode:IEEE802.11ax HE40 mode

5150~5250MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5190	-4.90	-2.41	11	PASS
High	5230	-4.48	-1.74	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5190	-0.47	11	PASS
High	5230	0.11	11	PASS

5250~5350MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5270	-3.79	-3.97	11	PASS
High	5310	-5.16	-5.46	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5270	-0.87	11	PASS
High	5310	-2.30	11	PASS

5470~5725MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5510	-4.13	-6.95	11	PASS
Mid	5550	-4.45	-8.22	11	PASS
High	5670	-5.34	-7.53	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5510	-2.30	10.57	PASS
Mid	5550	-2.93	10.57	PASS
High	5670	-3.29	10.57	PASS

**Testmode:IEEE802.11ax HE80 mode****5150~5250MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5210	-8.84	-7.06	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5210	-4.85	11	PASS

5250~5350MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5290	-7.70	-10.40	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5290	-5.83	11	PASS

5470~5725MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5530	-7.09	-10.52	11	PASS
High	5610	-8.25	-11.52	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5530	-5.46	10.57	PASS
High	5610	-6.57	10.57	PASS

**Testmode:IEEE802.11ax HE160 mode****5150~5350MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5250	-9.39	-9.85	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5250	-6.60	11	PASS

5470~5725MHz

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5570	-13.41	-16.44	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5570	-11.66	10.57	PASS

Testmode:IEEE802.11be EHT20 mode**5150~5250MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5180	-1.47	1.04	11	PASS
Mid	5200	-1.46	0.73	11	PASS
High	5240	0.76	2.67	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5180	2.97	11	PASS
Mid	5200	2.78	11	PASS
High	5240	4.83	11	PASS

**Testmode:IEEE802.11be EHT40 mode****5150~5250MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5190	-5.01	-2.51	11	PASS
High	5230	-4.48	-2.46	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5190	-0.57	11	PASS
High	5230	-0.34	11	PASS

Testmode:IEEE802.11be EHT80 mode**5150~5250MHz**

Channel	Frequency (MHz)	PPSD(dBm)		Limit(dBm)	Result
		Ant1	Ant2		
Low	5210	-8.31	-6.68	11	PASS

Channel	Frequency (MHz)	Mimo	Limit(dBm)	Result
Low	5210	-4.41	11	PASS

Note:

1. Duty factor has been off seted with cable loss
2. According to KDB 662911, Result power = $10\log(10(\text{ant1}/10)+10(\text{ant2}/10))$.
3. Result unit: W, The end result is converted to units of dBm.
 $5.6\text{G MIMO limit}=11\text{dBm}-(\text{direction gain}-6\text{dBi})= 10.57(\text{dBm/MHz})$




Test Plot
Antenna 1


IEEE802.11a mode:

5150~5250MHz

Low Channel

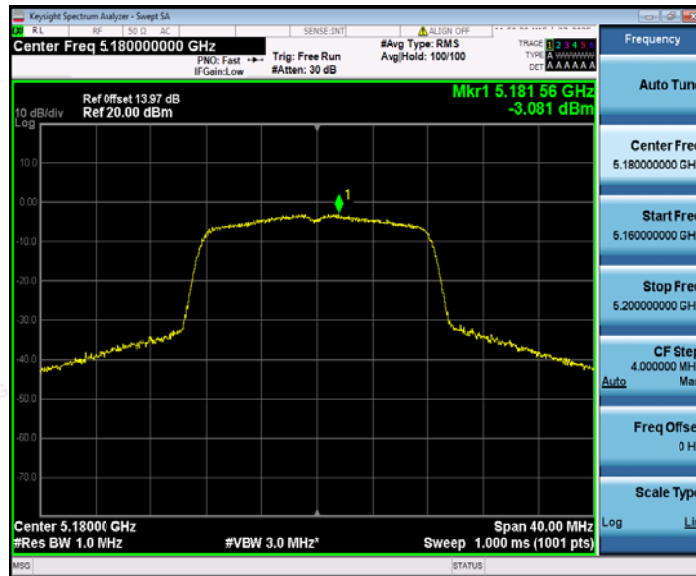

Mid Channel

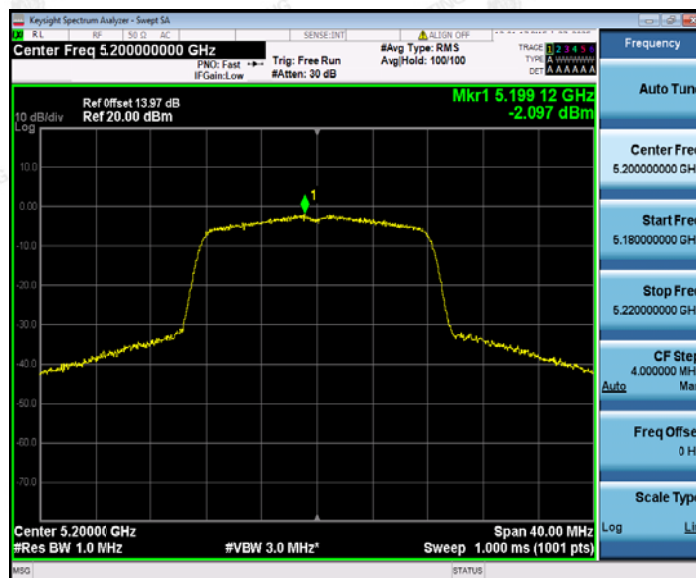




High Channel



5250~5350MHz

Low Channel

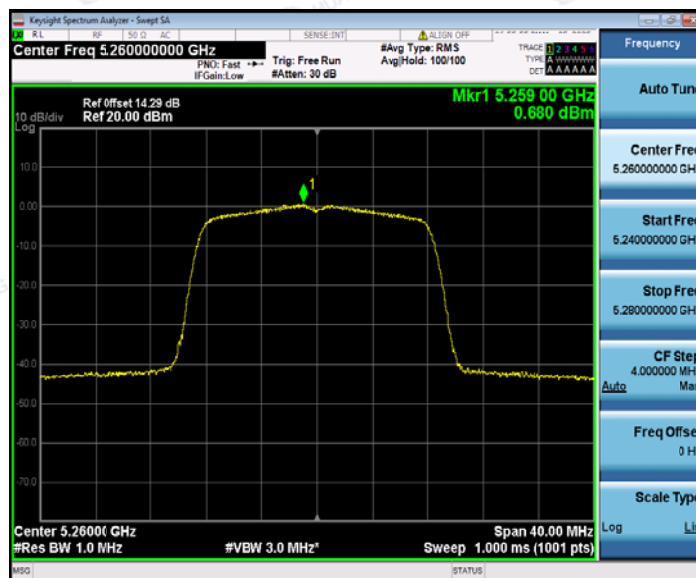



Mid Channel




High Channel






5470~5725MHz

Low Channel

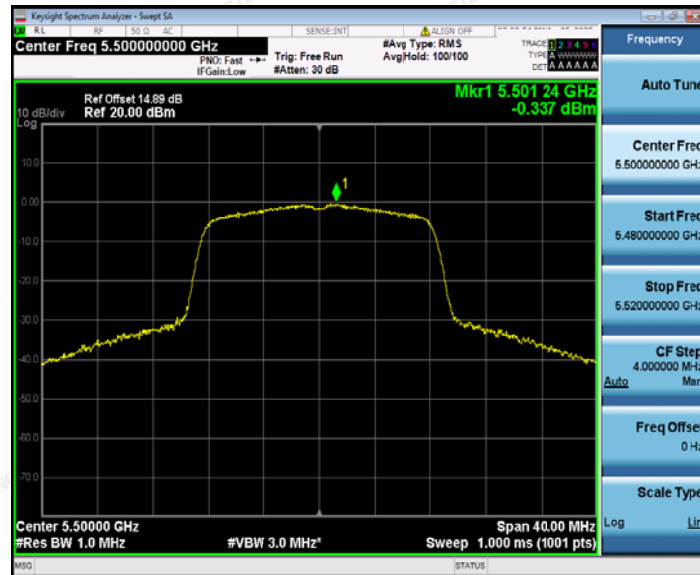

Mid Channel

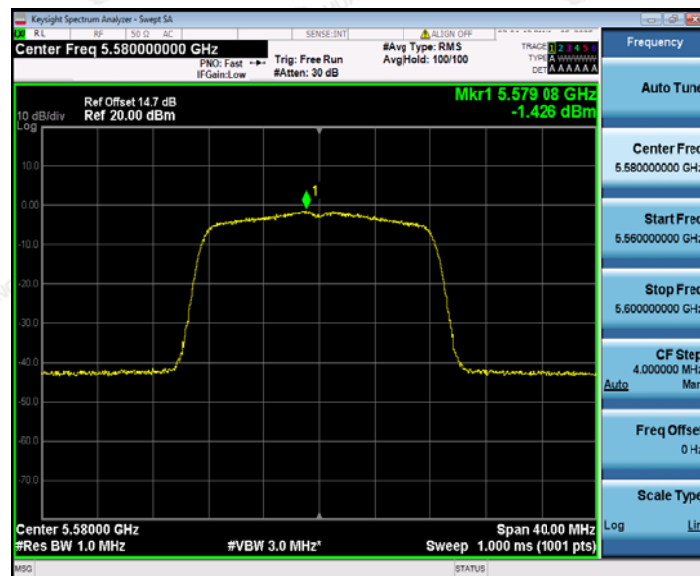



High Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China


IEEE802.11n HT20 mode

5150~5250MHz

Low Channel



Mid Channel

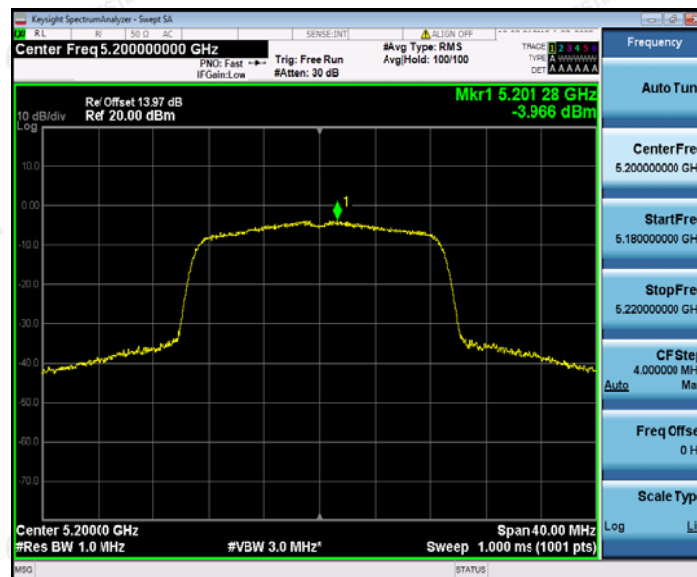

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




High Channel




5250~5350MHz

Low Channel

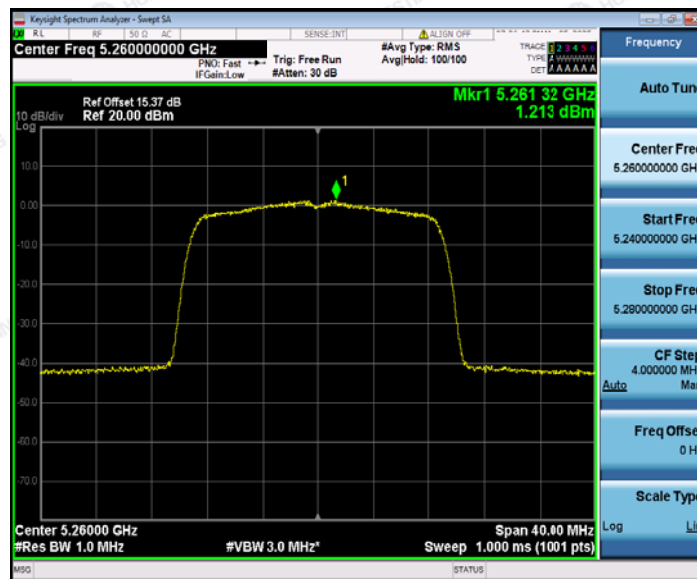




Mid Channel

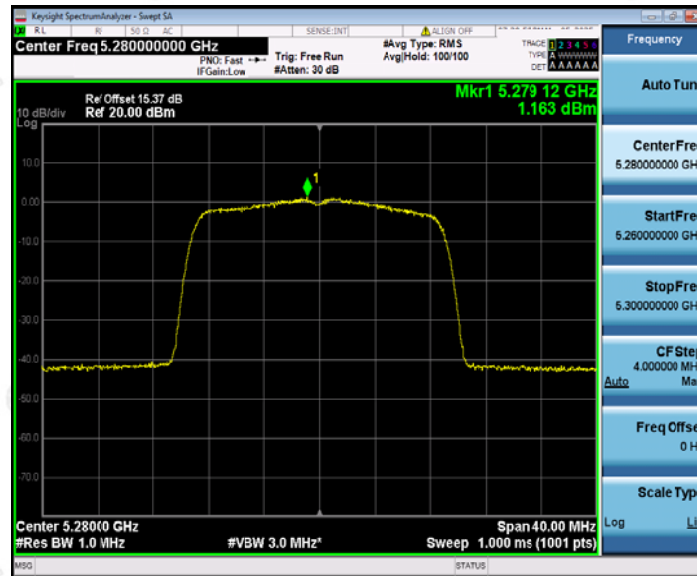


High Channel

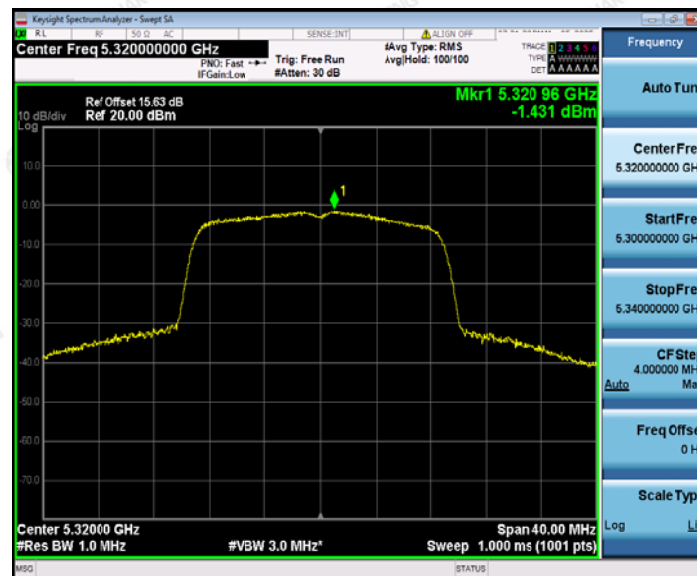



5470~5725MHz

Low Channel

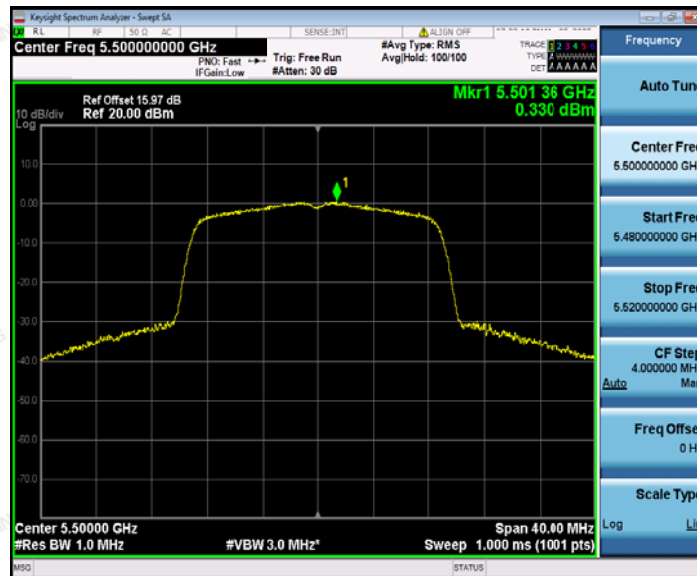

Mid Channel





High Channel






IEEE802.11n HT40 mode

5150~5250MHz

Low Channel

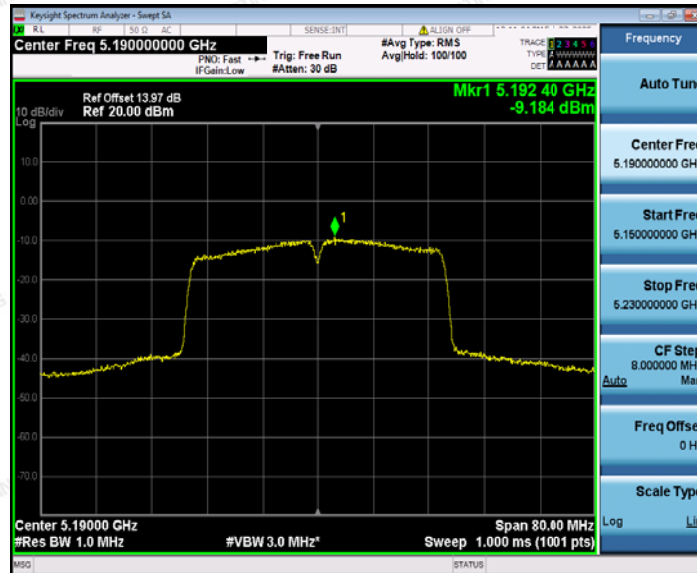

High Channel






5250~5350MHz

Low Channel




High Channel

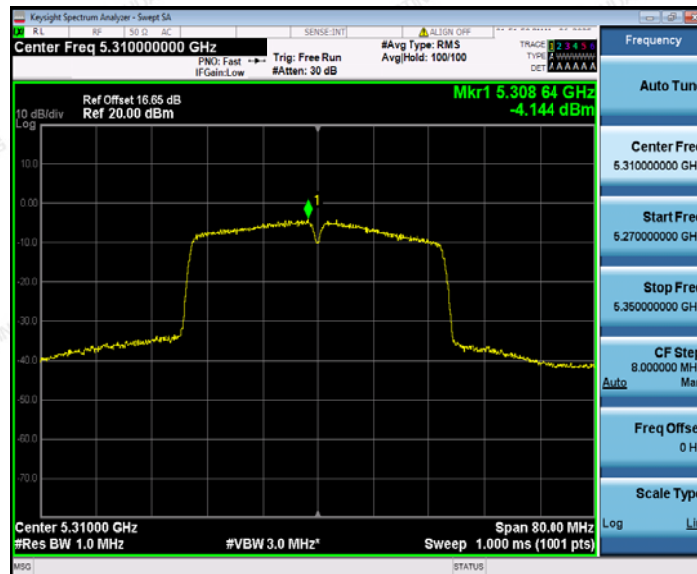




5470~5725MHz

Low Channel

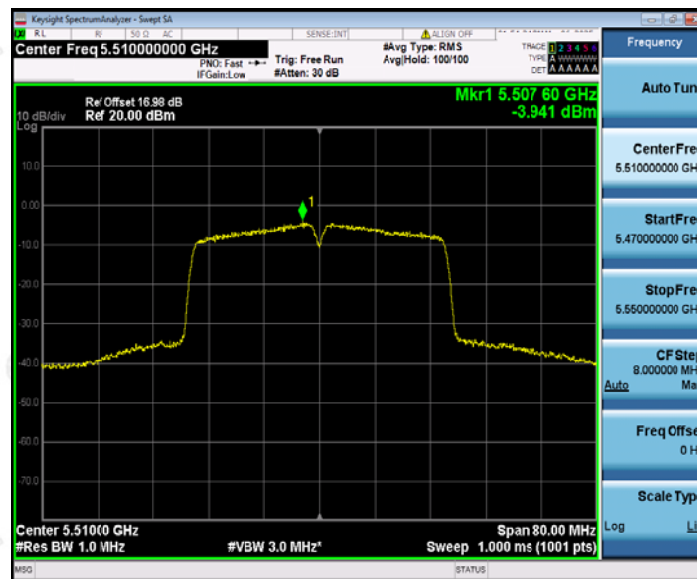

Mid Channel

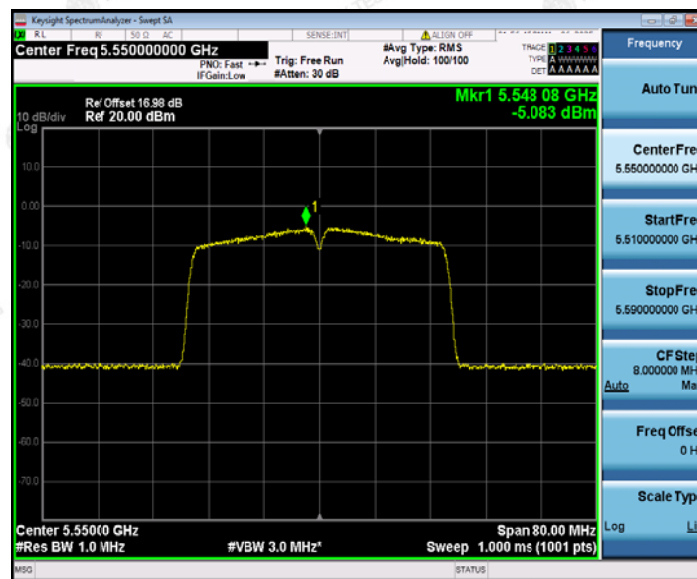

[illegible]

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China