

Give birth to Article Letter of recognition Book



Specificat	HG20250512001
Effective	

Customer's name	Two-dimensional four-image intelligent technology limited liability company
Product type	QI2Coil
Honggui material number	43.5*0.80pen double groove with hole/0.08*80Multi-stranded wire
Customer material number	

[☒ The new version is released , ☐ Version revision] [This specification contains a total ofTwo Page] [RoHS Compliant Parts]

Weave	Check	Ratify
Peng Jianji		

Anfu Honggui Electronics Co., Ltd.

Building2,New Energy Industrial park,South Area of Anfu High-tech Industrial park,Ji'an City,Jiangxi Province

Please be sure to sign and return this acknowledgement within one week after the customer receives it.Overdue shall be deemed to be implemented according to the standard of this letter of recognition at the time of production.

[Customer approval]

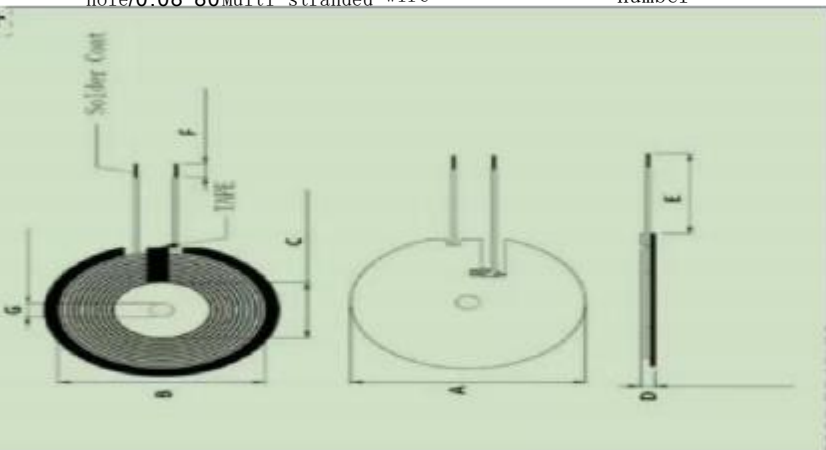
Date :

Recognition status: ☐ Fully admit ☐

Conditional recognition ☐ Refuse to admit

Ratify	Check	Re-inspection	Examine

Explain:

Customer's name	Two-dimensional four-image intelligent technology limited liability company		Customer material number														
Honggui material number	43.5*0.8Open double groove with hole/0.08*80Multi-stranded wire		Specification number	HG20250512001	Edition 01												
<div>◆、外形尺寸 External size</div> 			<div>(Unit: mm)</div> <table><tr><td>A</td><td>43.5 ±0.5</td></tr><tr><td>B</td><td>40.0 ±1</td></tr><tr><td>C</td><td>20.5 ±0.5</td></tr><tr><td>D</td><td>2.1±0.2</td></tr><tr><td>E</td><td>200±3</td></tr><tr><td>F</td><td>2 ±1</td></tr></table> <div>(1)Wire diameter: 0.08*80P Hot air self-adhesive copper wire (2)The number of winding coils:11 TS (3)Whether the starting and ending lines intersect :Yes (4)Coil packageSix millimetersWide high-temperature tape (5)The coil and the magnetic sheet should be pasted in the stering. Six (6)Diameter of the middle of the coil20MMThickness0.8 millimetreRound piece</div>			A	43.5 ±0.5	B	40.0 ±1	C	20.5 ±0.5	D	2.1±0.2	E	200±3	F	2 ±1
A	43.5 ±0.5																
B	40.0 ±1																
C	20.5 ±0.5																
D	2.1±0.2																
E	200±3																
F	2 ±1																
Parameter	Specifications	Test conditions	Test instrument														
L0	7.9 ± 0.3 μH	100K Hz/1V	■TH181														
Q	>30 minutes	100K Hz/1V	■TH181														
DCR.	<80 MΩ	@ twenty five℃	■CH-502														
Bill of materials :																	
Serials																	
1	Materials																
2	Magnetic sheet	20*0.8Roundpiece	PC95 Strongzinc														
3	Magnetic sheet	43.5*0.8Double slots with holes	PC95 Strongzinc														
4	Copper wire	0.08*80P	Hot air self-adhesive copper wire														
5	High-temperat uret ape	6MM	Eco-friendiy adhesive tape														
6	Tin	High temperatuer tinbar	Thousand island environmental tin														
7	Glue	White glues	Eco-friendly adhesive														
AUTHOR		CHECK	APPROVE														
pengjianji																	