

INSTALLATION INSTRUCTIONS

LCSL640SMXX

Thank you for purchasing Cloudy Bay Smart LED Lighting Fixtures.



6 HEAD SMART NARROW FLOOD TRACK LIGHTING KIT



DAMP
LOCATION
Intertek



GENERAL: All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, contact and obtain the services of a qualified electrician. Use UL or IEC approved wire only for input/output connections.

Remove fixture and mounting components from the box, and make sure that no parts are missing, by referencing the illustration in the illustration instructions.

Turn power off before installation, inspection, or removal.
Use all necessary precautions while performing this procedure.

Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Properly ground electrical enclosure. IT IS IMPERATIVE THAT THE OUTLET BOX BE PROPERLY GROUNDED.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, OTHERWISE SAFETY WILL BE COMPROMISED.

This Integrated LED Fixture has no lamp/bulb to replace.

Contact us through: smart@cloudybaylighting.com

QUESTIONS? COMMENTS? SUGGESTIONS? COMPLAINTS?

Please contact with us through

smart@cloudybaylighting.com or

info@cloudybaylighting.com We will do our best to make it right for you. Thank you very much!


3-Year Limited Warranty

LIMITED WARRANTY: This fixture is warranted to be free from defects in workmanship and material for up to 3-years. Based upon reasonable household usage, when used in accordance with package and included instructions. If this fixture does not last for the time period guaranteed, manufacturer will send you a replacement fixture upon receipt of the returned fixture, register receipt, and proof of purchase. To contact us, please email us at smart@cloudybaylighting.com to find out how to return the fixture. We are committed to making high quality products. Returning the fixture will help us monitor and further improve product quality. This replacement is the sole remedy available, and LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IS HEREBY EXPRESSLY EXCLUDED

PLEASE READ CAREFULLY BEFORE INSTALLING FIXTURE

Save these instructions, as you may need them at a later date.

Figure 1

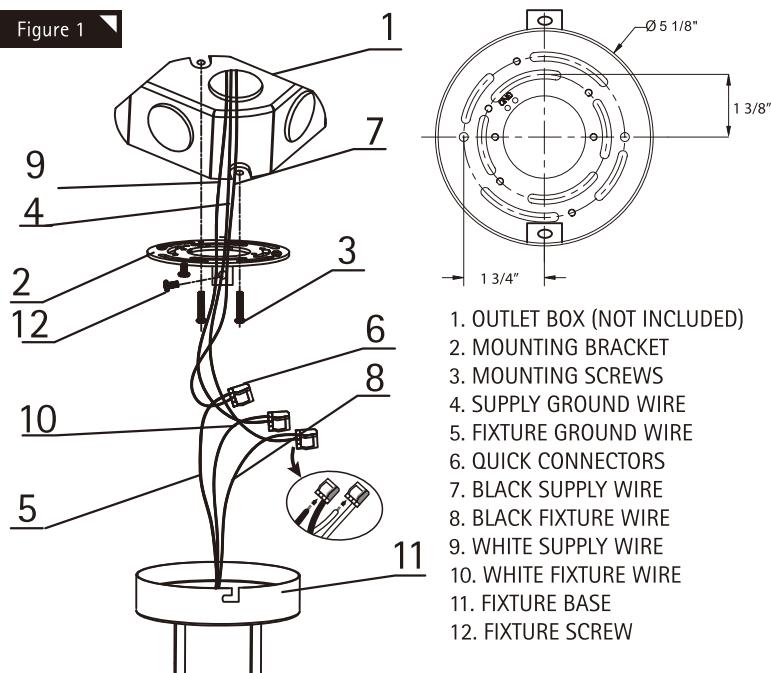

Please follow these steps for installation.

1. SHUT OFF MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!
2. Remove contents from box. Ensure that no parts are missing. Reference the illustration included with this instruction manual.
3. Attach the MOUNTING SCREWS(3) to the MOUNTING BRACKET(2).
4. Locate BLACK AND WHITE SUPPLY WIRES(7&9) and the SUPPLY GROUND WIRE(4), and remove them from the OUTLET BOX(1).
5. Use MOUNTING SCREWS(3) to mount MOUNTING BRACKET(2) to the OUTLET BOX (1).
6. Make the following wire connections (Fig.1), using the provided QUICK CONNECTORS(8):
WHITE (-) SUPPLY WIRE (9) TO WHITE FIXTURE WIRE (10)
BLACK (+) SUPPLY WIRE (7) TO BLACK FIXTURE WIRE (8)
SUPPLY GROUND WIRE (4) TO FIXTURE GROUND WIRE (5)
7. Raise FIXTURE BASE(11) and adjust its position until FIXTURE SCREW(12) locate in the edge of L hole, then use FIXTURE SCREW(12) to tighten FIXTURE BASE(11) and MOUNTING BRACKET(2) securely.
8. Restore power at fuse box/circuit breaker. Check operation of Integrated LED Fixture.
9. Refer to User Manual and Voice control guideline to set up products accordingly.

⚠: If you only have a dimmer at hand, set it to highest level only. If light performance is not good, we strongly advise you to change it to a regular switch.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

•Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.









Cloudy Bay Smart Lighting VOICE CONTROL GUIDE

(Includes How to Create Voice Control Group in Alexa APP)



Amazon, Alexa and all related logos
are trademarks of Amazon.com, Inc. or its affiliates

Link Cloudy Bay with Amazon Alexa

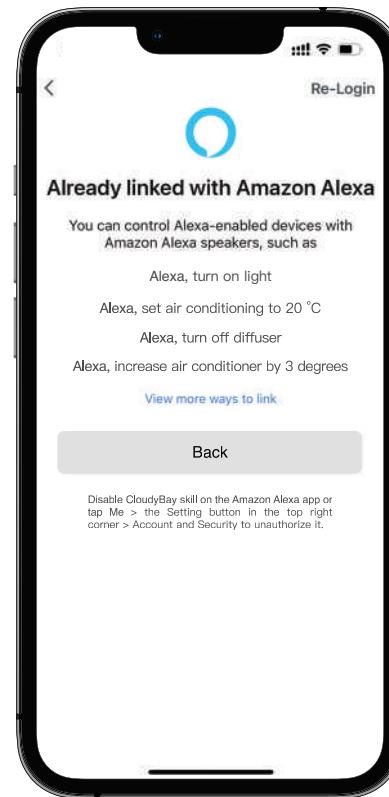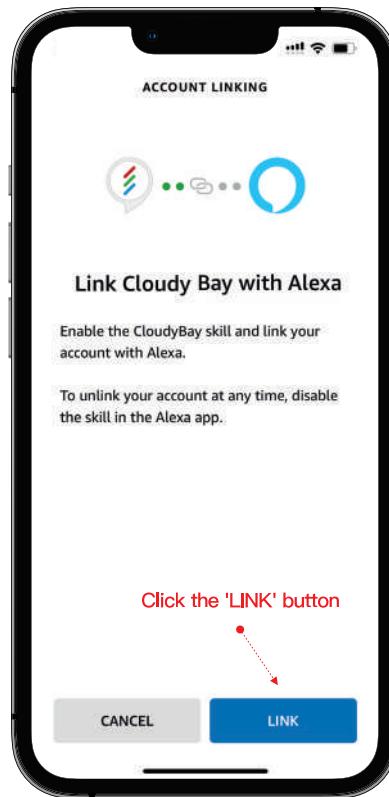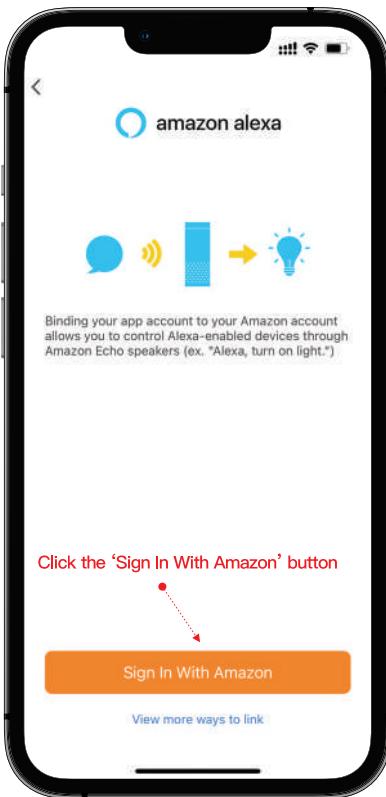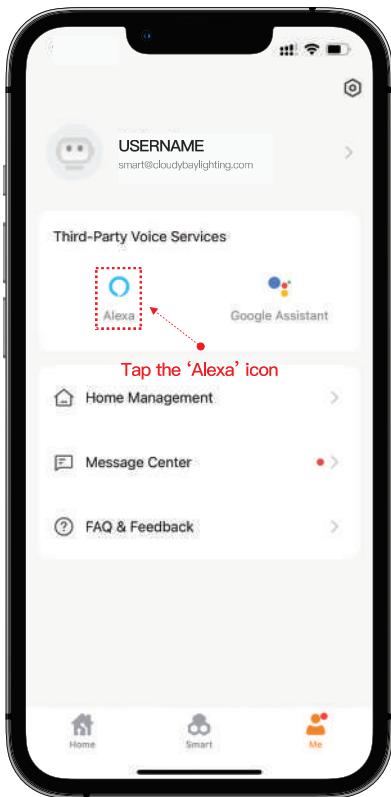

 STEP1: Open the Cloudy Bay App, click 'Me' Tab, then tap the 'Alexa' icon.

 STEP2: Click 'Sign In With Amazon' button.


 STEP3: Alexa APP will be called out, just Click the 'LINK' button.

 **Finish**

* Please make sure you have installed Alexa APP on your mobile device.

* Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

Create Amazon Alexa Voice Control Group

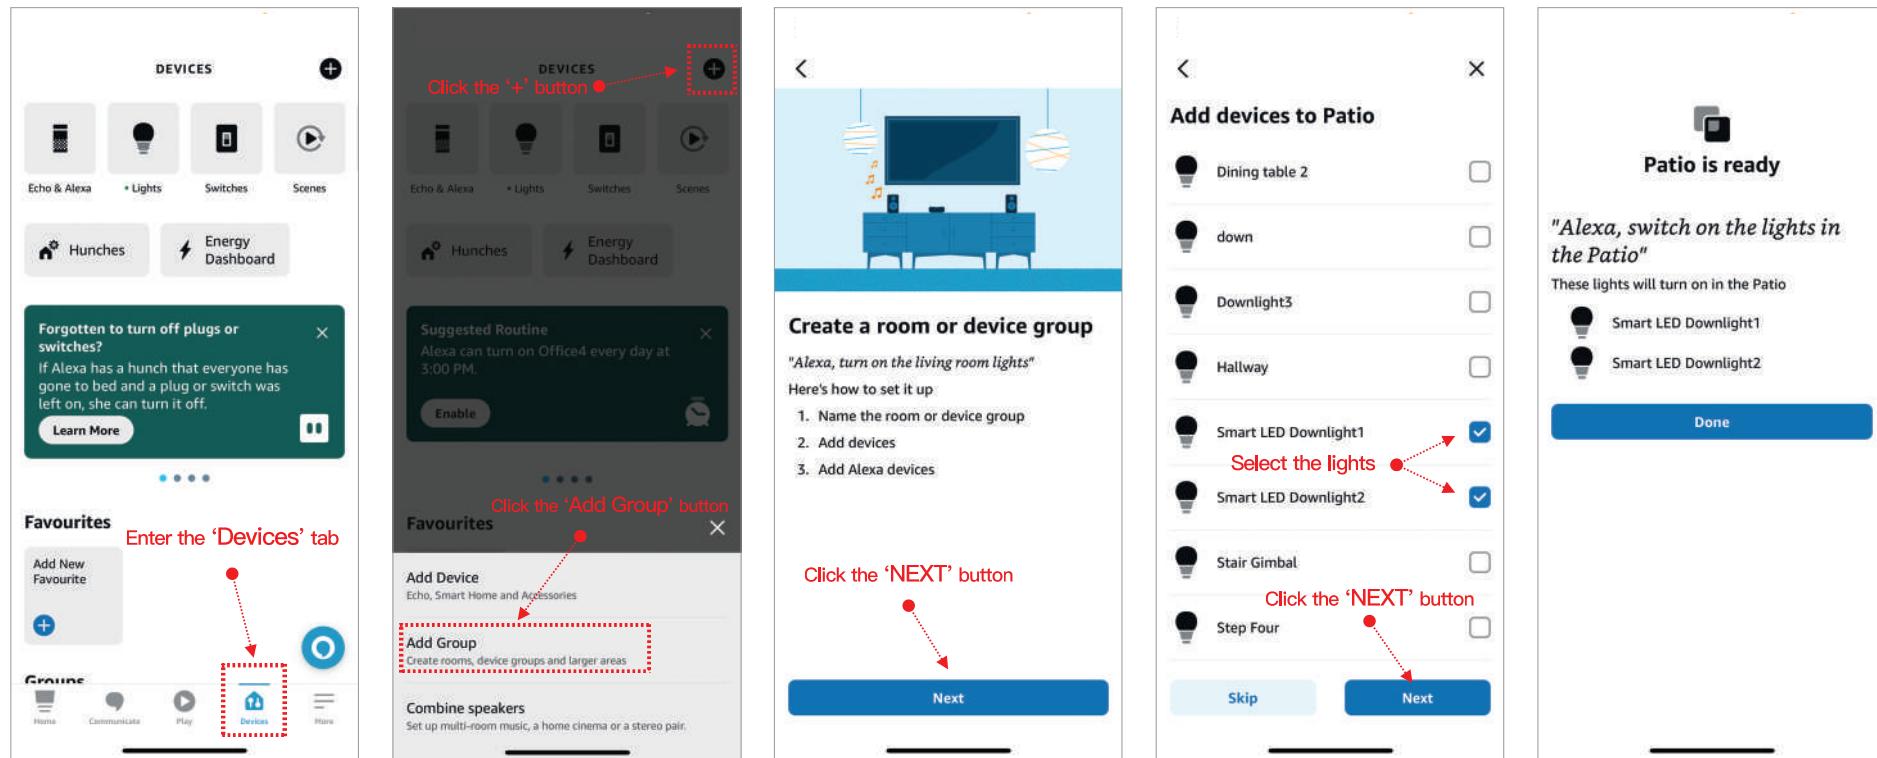

Open the Amazon Alexa APP, and follow the steps below.

1. Click **Devices** Tab.
2. Click the ‘+’ icon on the top right corner, and select **Add Group**.
3. Select **Create a room or device group**.
4. Use the preset group names, or create your own, and then select **Next**.
5. Select the lights you want to include, and then click **Next**.

* Based on the Amazon Alexa APP v2.2.465557.

For more information, please refer to: <https://www.amazon.com/gp/help/customer/display.html?nodeId=GS8URL9U6PW8SPTA>
Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

Tips

Device name

If you want to rename a Cloudy Bay device, we suggest that you rename it in the Cloudy Bay APP. It will be synced to the Amazon Alexa APP.

Scenes

The smart actions or scenes in the Cloudy Bay APP will be synced to the Amazon Alexa APP. Sure, you can disable them at any time.

Unlink to Cloudy Bay

At any time, you can unlink the Cloudy Bay skill in the Skills & Games section of Amazon Alexa APP.

Basic voice commands

To do this:	Say "Alexa", then:
To turn a light on or off	<i>"Turn on or off <light name>"</i>
Dim a light	<i>"dim/set <light name> by fifty percent"</i>
Set Color temperature	<i>"set <light name> to cool white"</i> <i>"set <light name> to warm white"</i> <i>"make <light name> white"</i>
Change the color of a light	<i>"set the front porch light to blue. "</i> <i>"set the bedroom light to red. "</i> <i>"change the kitchen to the color blue."</i>




Cloudy Bay Smart Lighting VOICE CONTROL GUIDE

(Includes How to Create Voice Control Group in Google Home)




Google is a trademark of Google LLC.


Link Cloudy Bay with Google Home

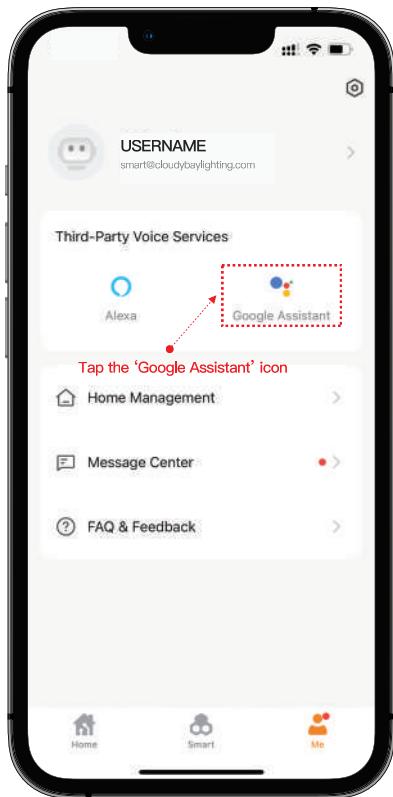


STEP1: Open the CloudyBay App, click 'Me' Tab, then tap the 'Google Assistant' icon.

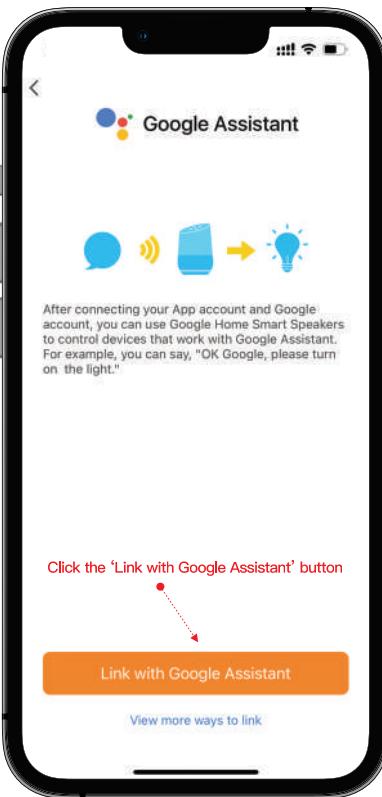

STEP2: Click 'Link with Google Assistant' button.

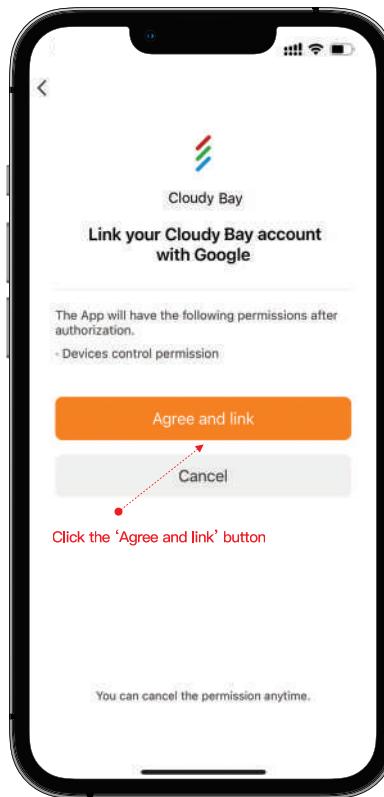

STEP3: Google Home APP will be called out, just Click the 'Agree and link' button.

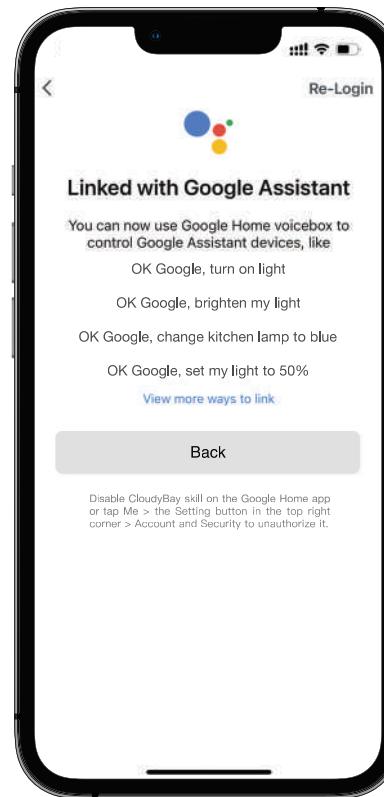


Finish

* Please make sure you have installed the Google Home app on your mobile device.

* Google is a trademark of Google LLC.

Create Google Home Voice Control Group

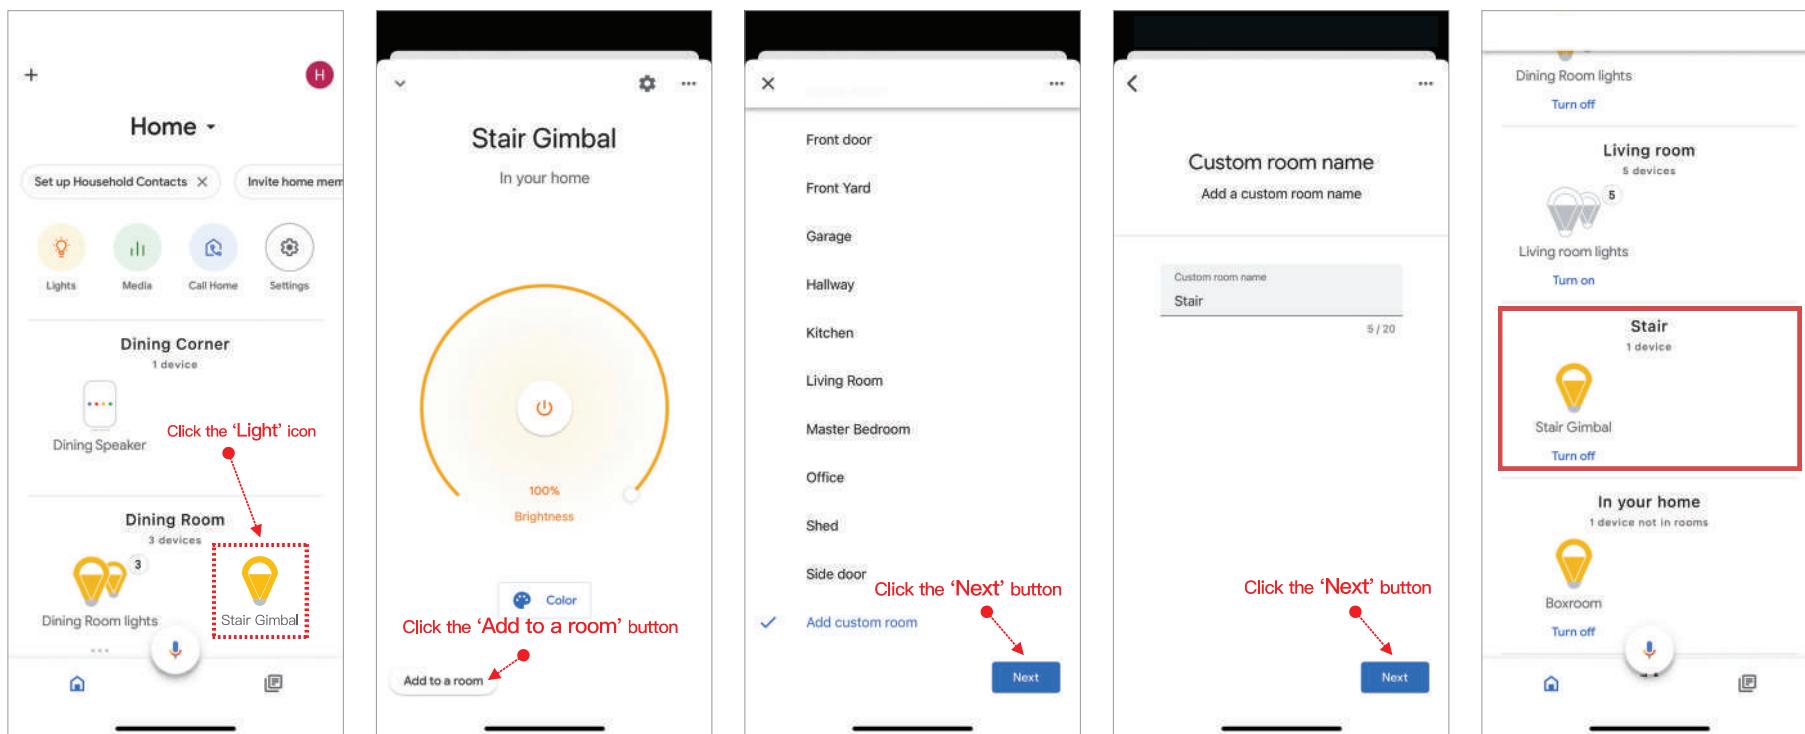

Open the Google Home APP, and follow the steps below.

1. Click the light you want to include in a group.
2. Click **Add to a room** on the left bottom.
3. You can choose an exist group, or create new one.
4. Enter a name for the new group.
5. Tap **Next**.

* Based on the Google Home APP v2.48.106.

For more information, please refer to: <https://support.google.com/googlenest#topic=7029097>

Google is a trademark of Google LLC.

Tips

Device name

If you want to rename a Cloudy Bay device, we suggest that you rename it in the CloudyBay APP. It will be synced to the Google Home APP.

Unlink to Cloudy Bay

At any time, you can unlink your Cloudy Bay account in the Home Control section of Google Home APP.

Basic voice commands

To do this:	Say "Ok Google" or "Hey Google," then:
To turn a light on or off	<i>"Turn on or off <light name>"</i>
Dim a light	<i>"Dim the <light name>"</i>
Brighten a light	<i>"Brighten the <light name>"</i>
Set a light brightness to a certain percentage	<i>"Set <light name> to 50%"</i>
Dim or brighten lights by a certain percentage	<i>"Dim <light name> by 50%"</i> <i>"Brighten <light name> by 30%"</i>
Change the color of a light	<i>"Turn <light name> green"</i>
Turn all lights in room on or off	<i>"Turn on or off lights in <room name>"</i>
Turn all lights on or off	<i>"Turn on or off all of the lights"</i>



Cloudy Bay RGBCW Color Changing Smart Light

USER MANUAL


BLE Version

Contents

1. GET READY	1
2. REGISTRATION	2
3. SETUP HUB	3-4
4. SETUP LIGHTS	5-6
5. LIGHT CONTROL	7
6. GROUP LIGHTS	8
7. FAQ	9
8. TIPS	10

1. GET READY

- Download the 「 Cloudy Bay」 APP

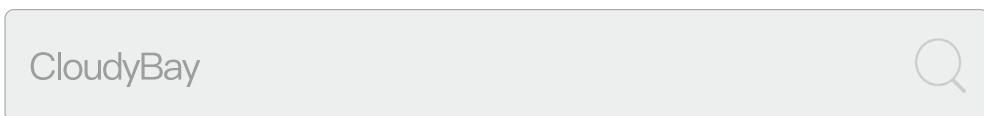

* The APP requires iOS 10.0 / Android 5.0 or above

- Please make sure your mobile device is connected to the 2.4GHz Wi-Fi and mobile device Bluetooth is turned on.

2. REGISTRATION

Register

United States of America >

Email Address

Get Verification Code

Verify it's you

Verification Code **Resend**

Please enter your password 

Confirm

Step1:
Enter your Email Address to get verification code.


Step2:
Enter the verification code and set your password.

3. SETUP HUB

You can connect Max.30 lights with one Hub ideally. If you have already installed the Cloudy Bay Hub, Please skip to Page 5 to add more lights.

Step1: Activate Pairing Mode


Hold the Button for 5 seconds. Please confirm the indicator is blinking.

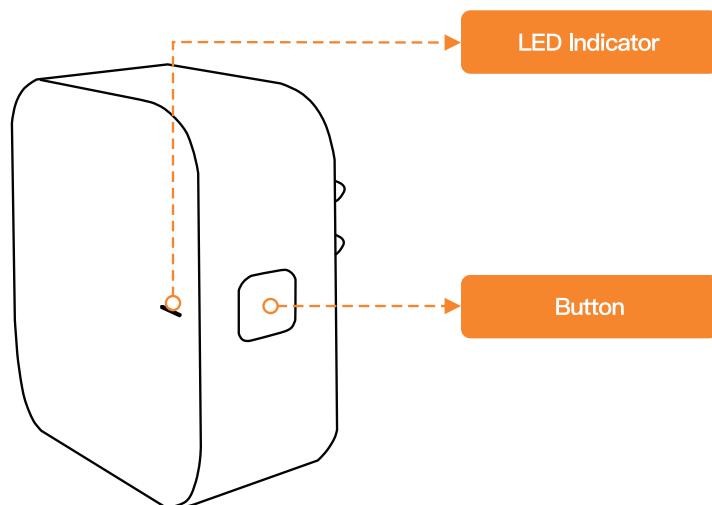

Note: Please make sure your mobile device is connected to the 2.4GHz Wi-Fi and mobile device Bluetooth is turned on.

Step2: Add the Hub


Launch the Cloudy Bay APP and follow the instructions below to add a hub.

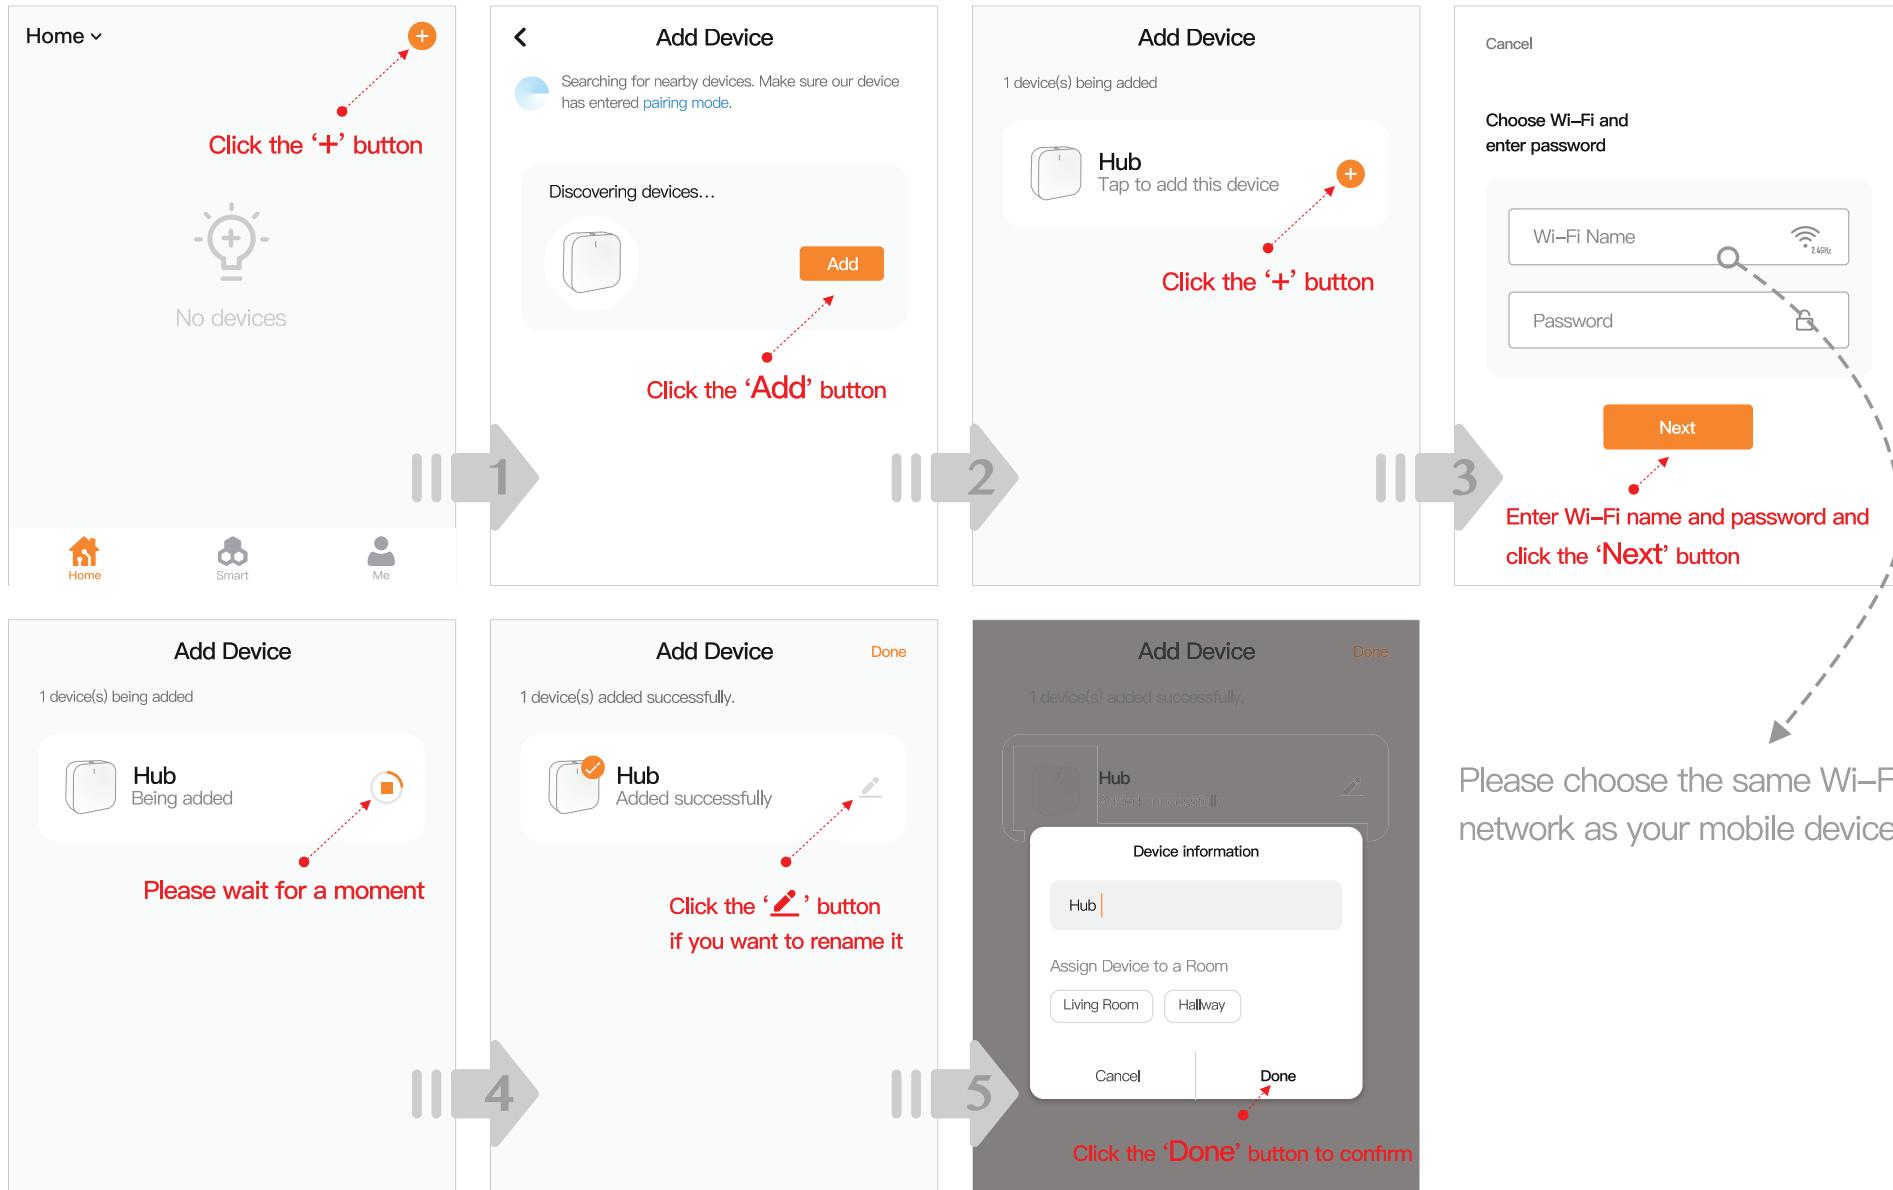

4. SETUP LIGHTS

Step1: Activate Pairing Mode

Please make sure the lights are powered off for more than 10 seconds before adding. Then turn on/off 3 times (on-off-on-off-on), 2 to 4 seconds between each on and off. Waiting few seconds until the lights blinking rapidly.

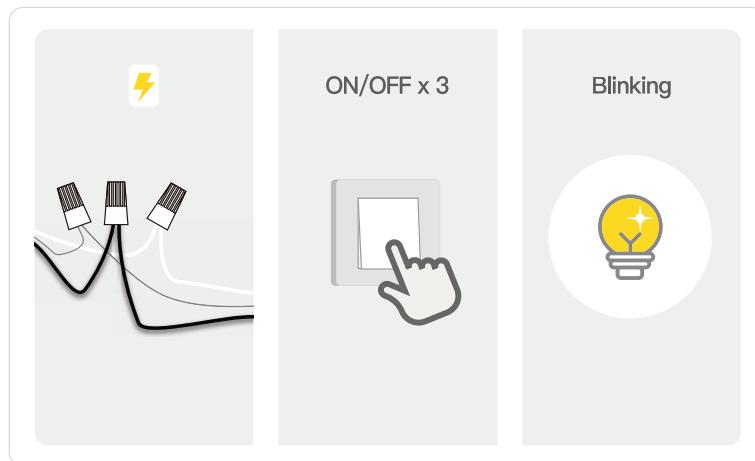

NOTICE


Considering the loading capacity of your house Router and WiFi signal problem.

1. We don't suggest you add more than 6 lights at one time.
2. Some lights might fail to add to CloudyBay APP during this process. Don't worry, just try few more times with steps on Page 5 to 6 until all lights are added to ClodudyBay APP.


Your patience is highly appreciated, Thank you !

Step2: Add the lights

Tap the Hub icon in the Cloudy Bay APP and follow the instructions below to add the lights.

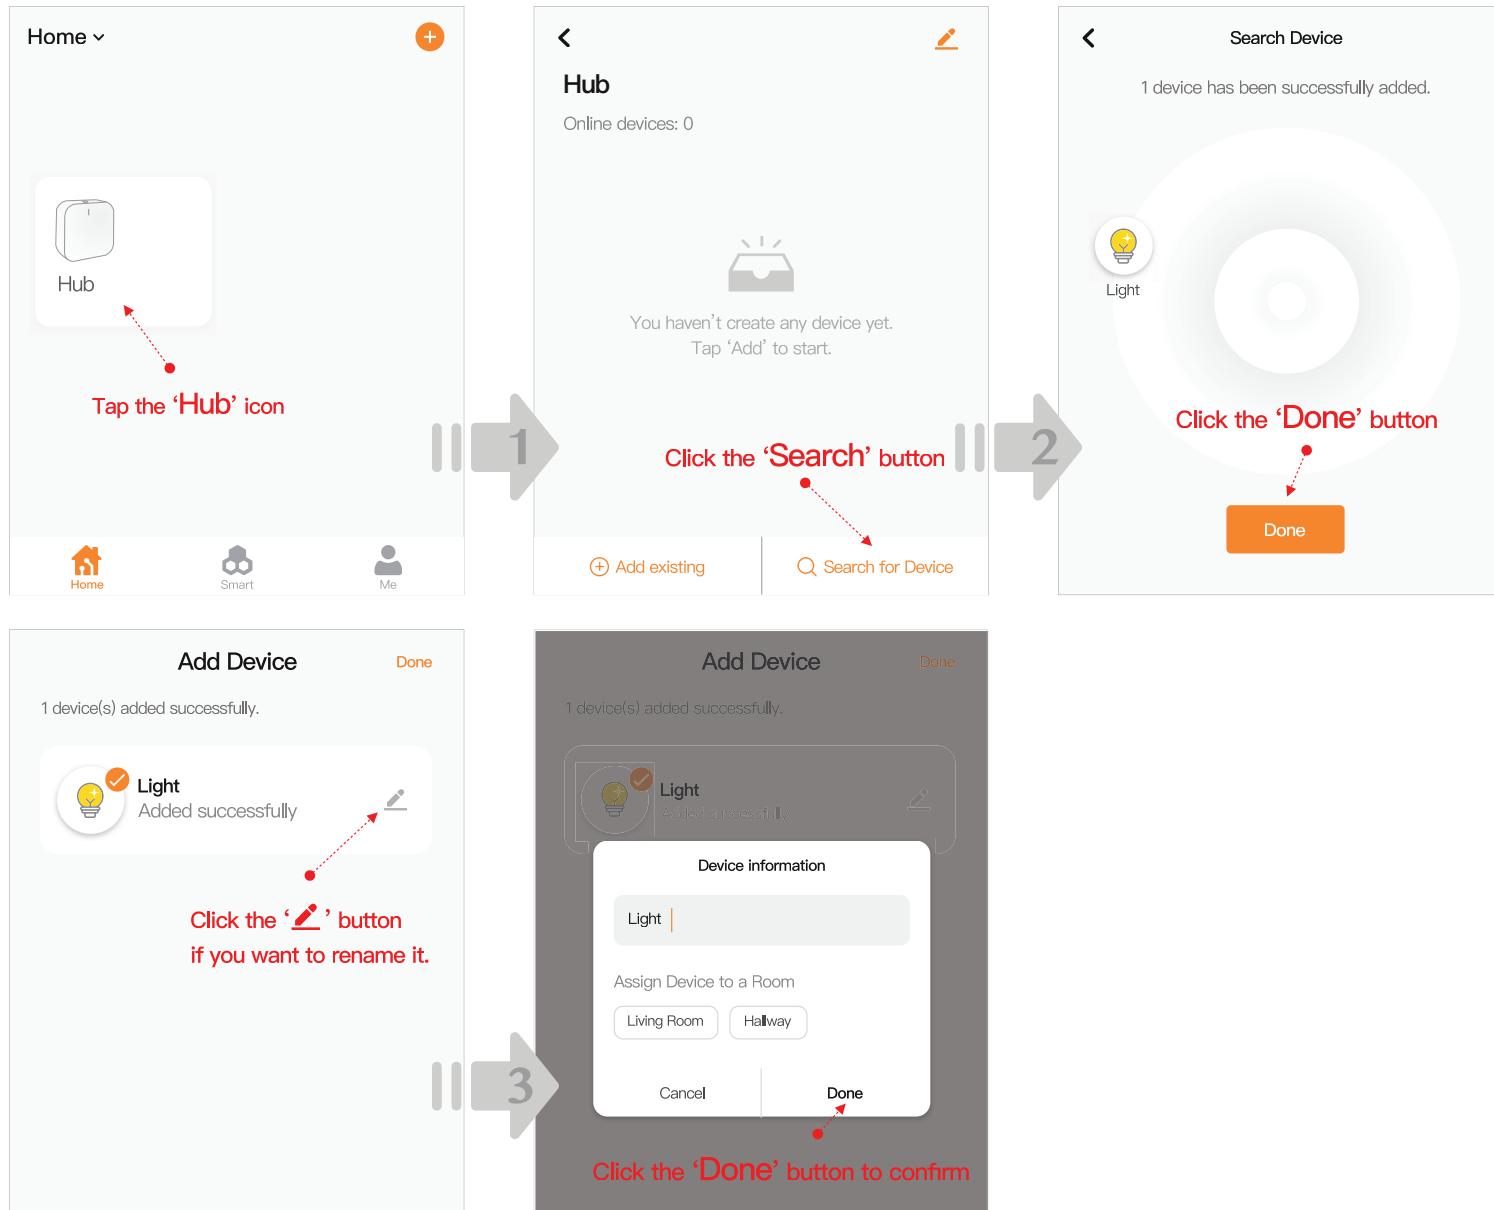


5. LIGHT CONTROL

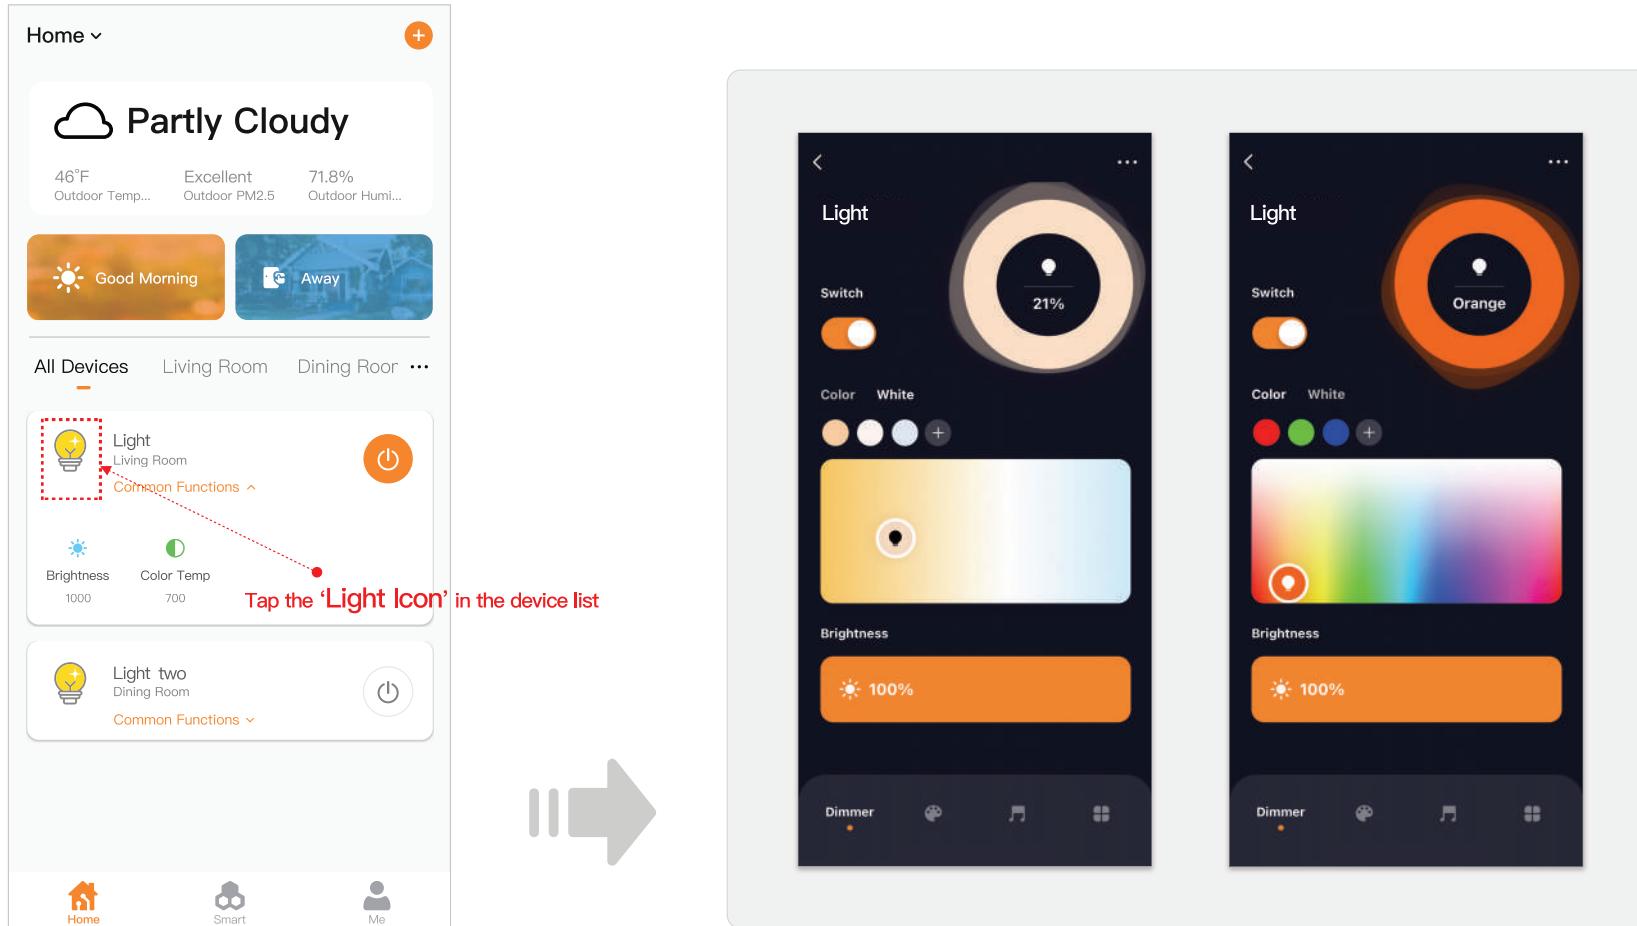

Light Control Panel

If you want to fully control the light, you need to tap the light icon from the device list to enter the control panel.

6. GROUP LIGHTS

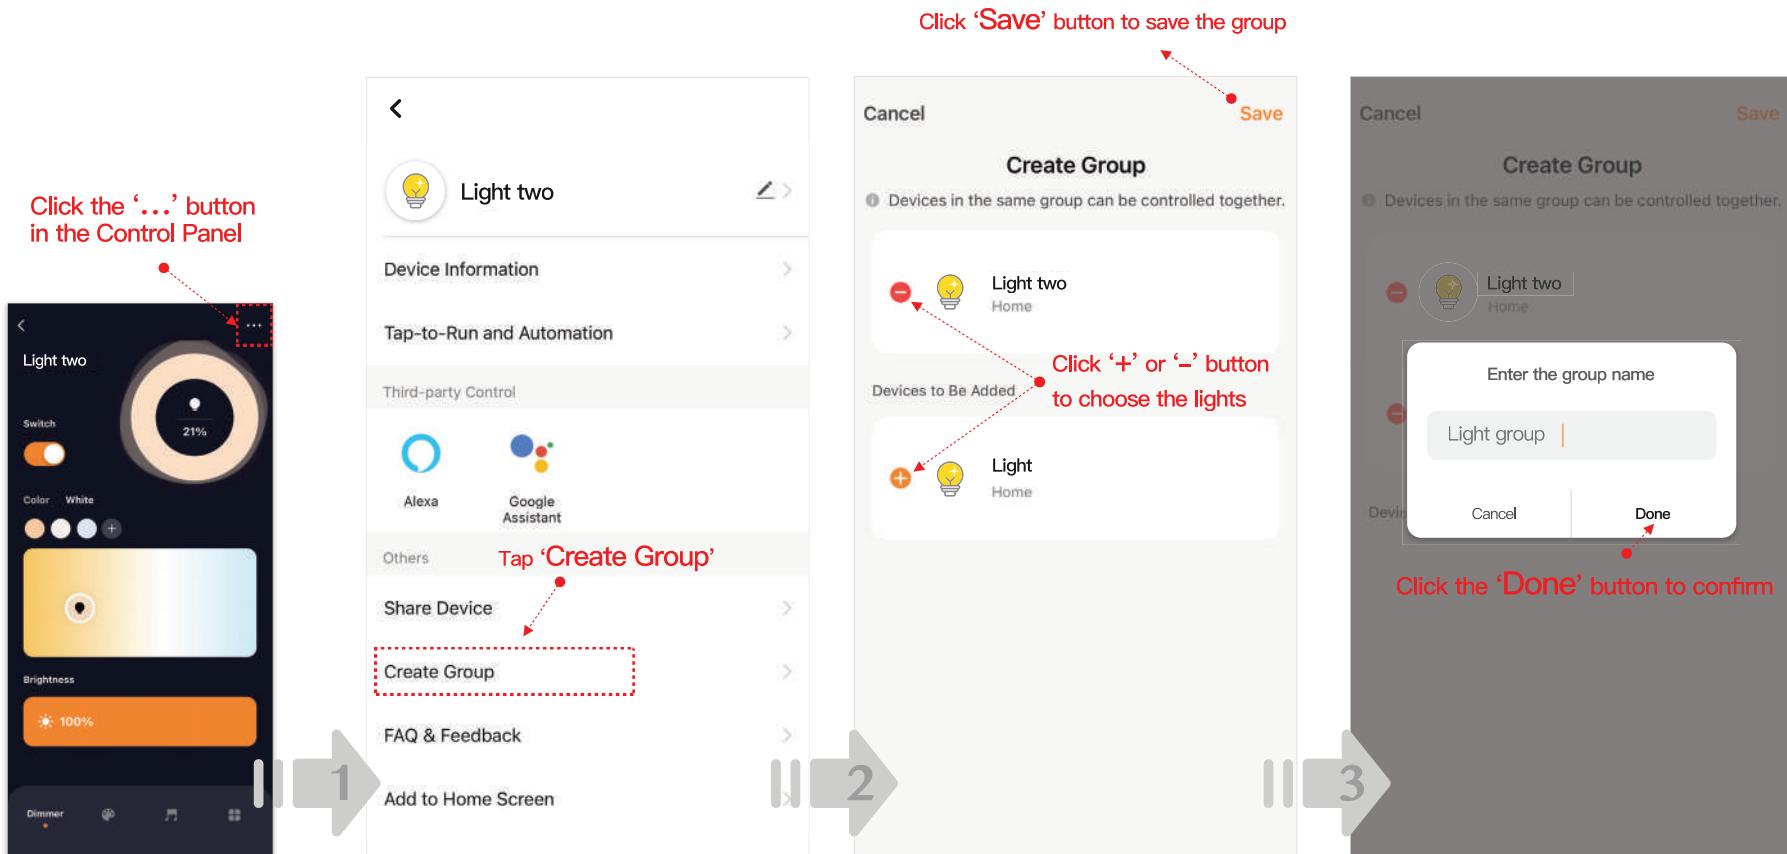

Group Control

You can create lighting groups for different rooms or spaces in the Cloudy Bay App, and they can be controlled not only as a group, but also individually.

7. FAQ

1. Can I dim these lights by physical dimmer ?

No, these lights can only be dimmed by APP control or Voice control.

2. Why can't I activate the pairing mode?

Please make sure the interval between each on/off is 2 to 4 seconds and the light is on each time. Please power off the light for more than 10 seconds before restarting this process.

3. Can I use the 5GHz Wi-Fi to add the lights?

No, only support 2.4GHz Wi-Fi and please make sure step lights and your mobile device were connected to the same Wi-Fi network.

4. How to group lights in the Amazon Alexa or Google Home?

Please refer to Voice Control Guide.

5. Why the lights flash when I control them by wall switch ?

Turning on/off continuously by the wall switch may accidentally activate pairing mode. Just turn it off, wait 30 seconds, then turn it on, it will be back to normal.

6. Can I remote control the lights via mobile network?

Yes. Please make sure the lights are online, you could check the lights status in the Cloudy Bay App.

7. How many lights can I connect?

We recommend assigning Max.30 lights to each hub.

8. Can I share the lights with my family?

Yes, you can. Your family need to get Cloudy Bay APP and sign in. Then you can share one or more lights with him/her to his/her account.

8. TIPS

Warranty

The product carries a 3-year warranty from purchase date. Please feel free to contact us when you have any product problem or suggestions. We take care of all quality-related issues with a REPLACEMENT or FULL REFUND.

Data Security

Cloudy Bay smart products are based on Tuya (NYSE: TUYA) IoT PaaS platform, and who's data center set up in the United States.

More Smart Products

Visit <https://cloudybaylighting.com/smart/> to find more Cloudy Bay smart products.

Support

Visit <https://cloudybaylighting.com/smart/help> ,
or contact us by smart@cloudybaylighting.com to reach us for help.



Cloudy Bay

Smart Product Series

USER MANUAL


WiFi • LED • RGBCW

Contents

1. GET READY	1
2. REGISTRATION	2
3. SET UP LIGHTS	3–4
4. LIGHT CONTROL	5
5. GROUP LIGHTS	6
6. FAQ	7
7. TIPS	8

1. GET READY

- Download the 「 Cloudy Bay」APP

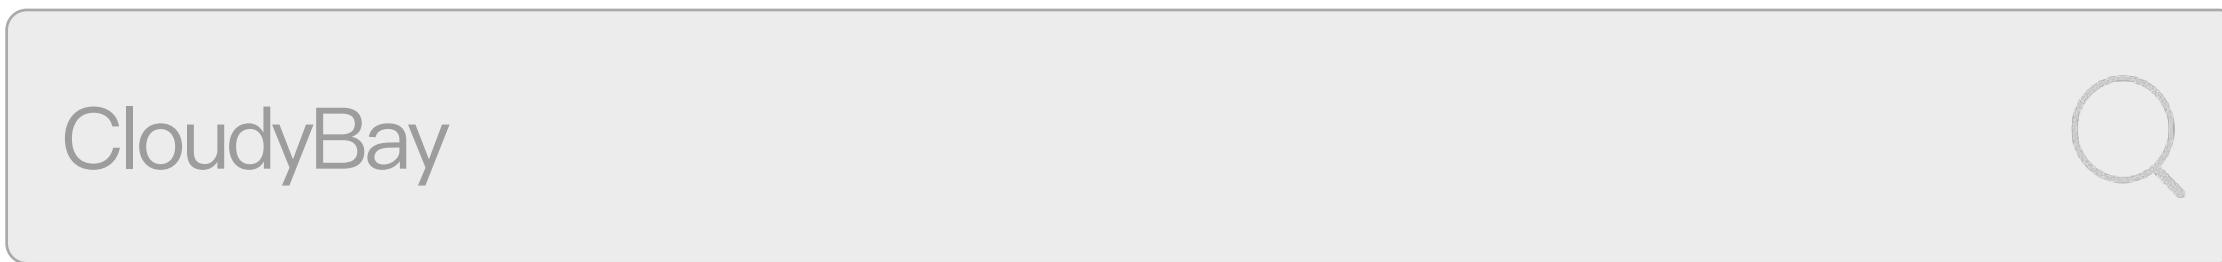

* The APP requires iOS 10.0 / Android 5.0 or above

- Please make sure your mobile device is connected to the 2.4GHz Wi-Fi and mobile device Bluetooth is turned on.

2. REGISTRATION

Register

United States of America >

Email Address

Get Verification Code

Verify it's you

Verification Code **Resend**

Please enter your password 

Confirm

Step1:
Enter your Email Address to get verification code.


Step2:
Enter the verification code and set your password.

3. SET UP LIGHTS

ATTENTION: Considering the loading capacity of your house Router, we highly suggest you add no more than 6 lights at one time..

Step1: Activate Pairing Mode


Please make sure the lights are powered off for more than 10 seconds before adding. Then turn on/off 3 times (on–off–on–off–on), 2 to 4 seconds between each on and off. Waiting few seconds until the lights blinking rapidly.

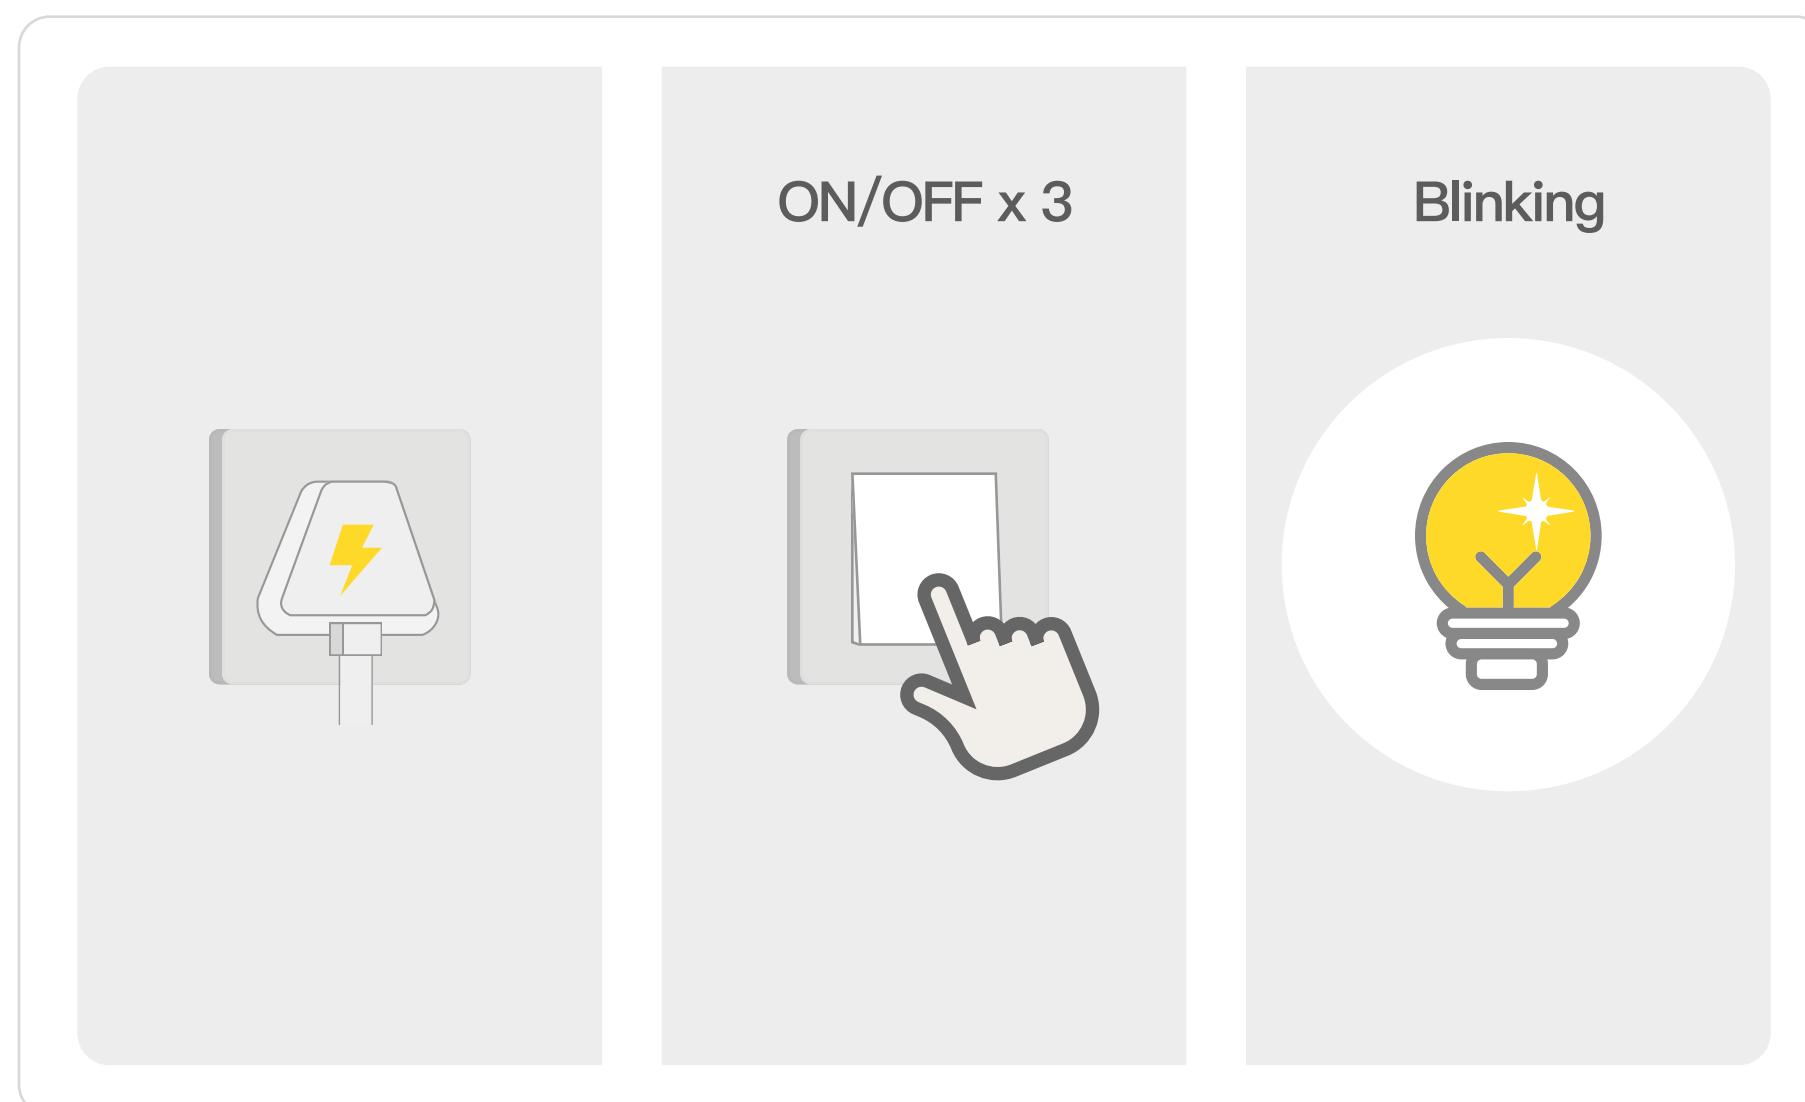


Note: Please make sure your mobile device is connected to the 2.4GHz Wi-Fi and mobile device Bluetooth is turned on.

Step2: Add the Lights

Launch the Cloudy Bay APP and follow the instructions below to add the Lights.

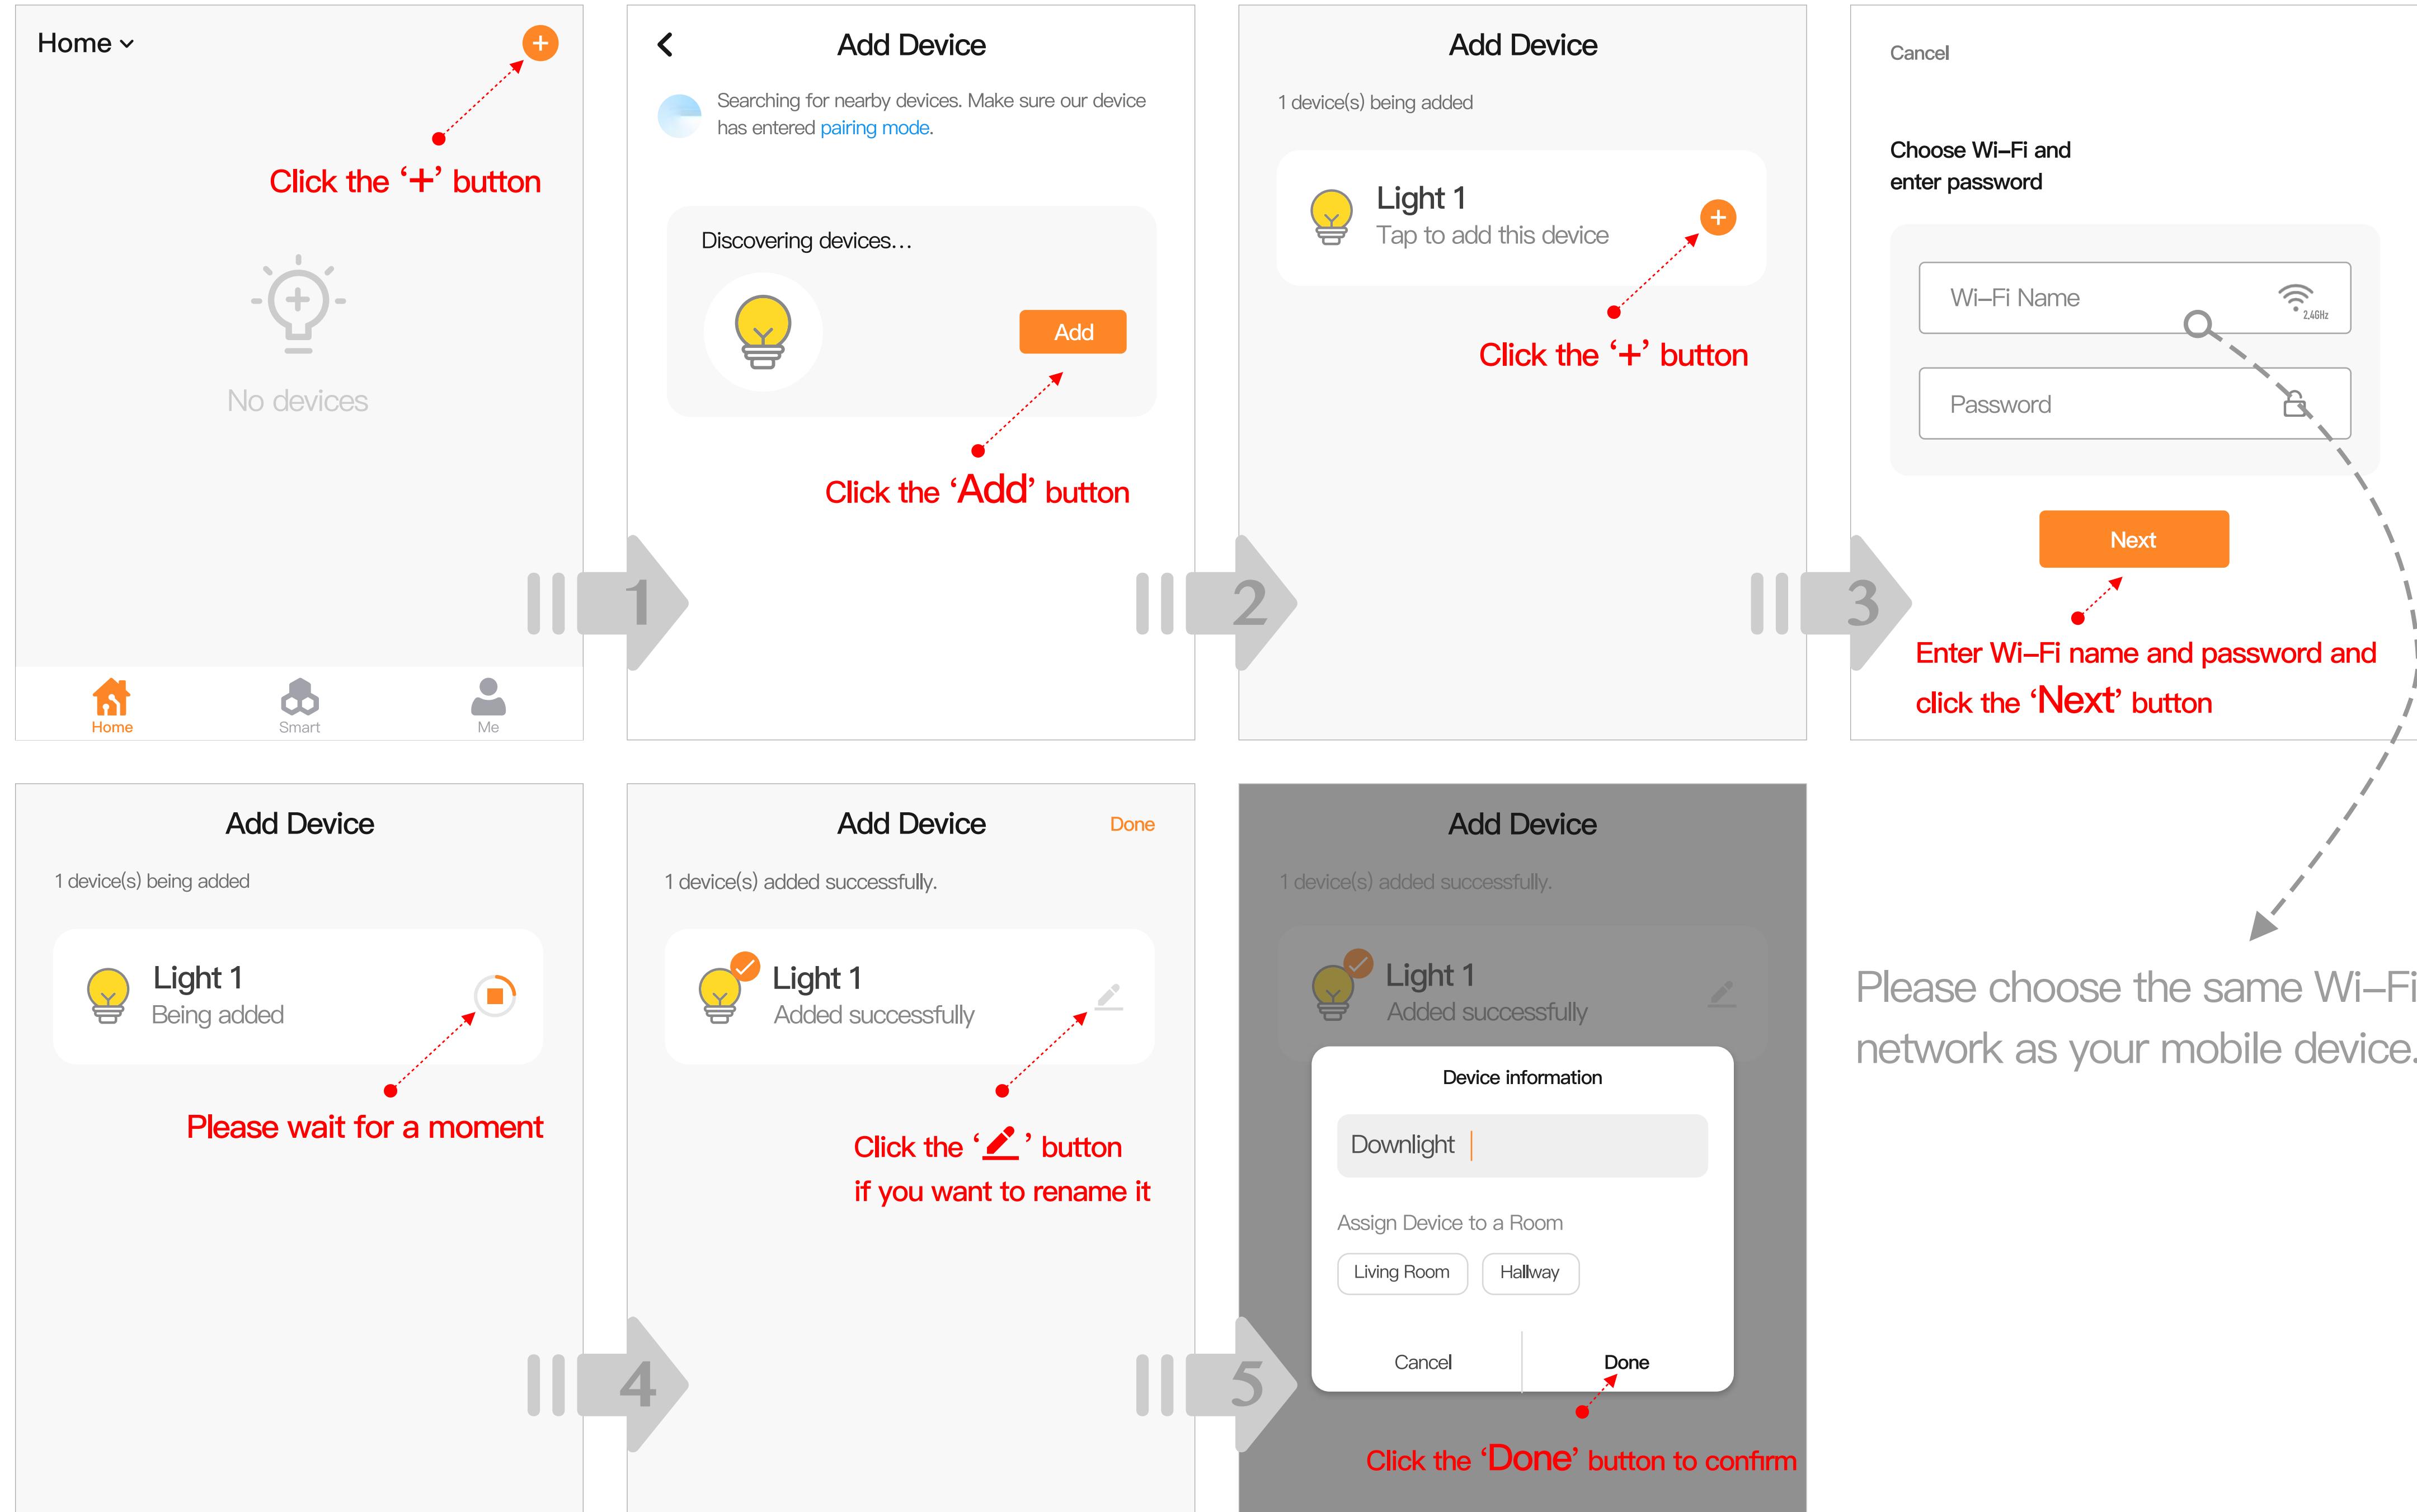


4. LIGHT CONTROL

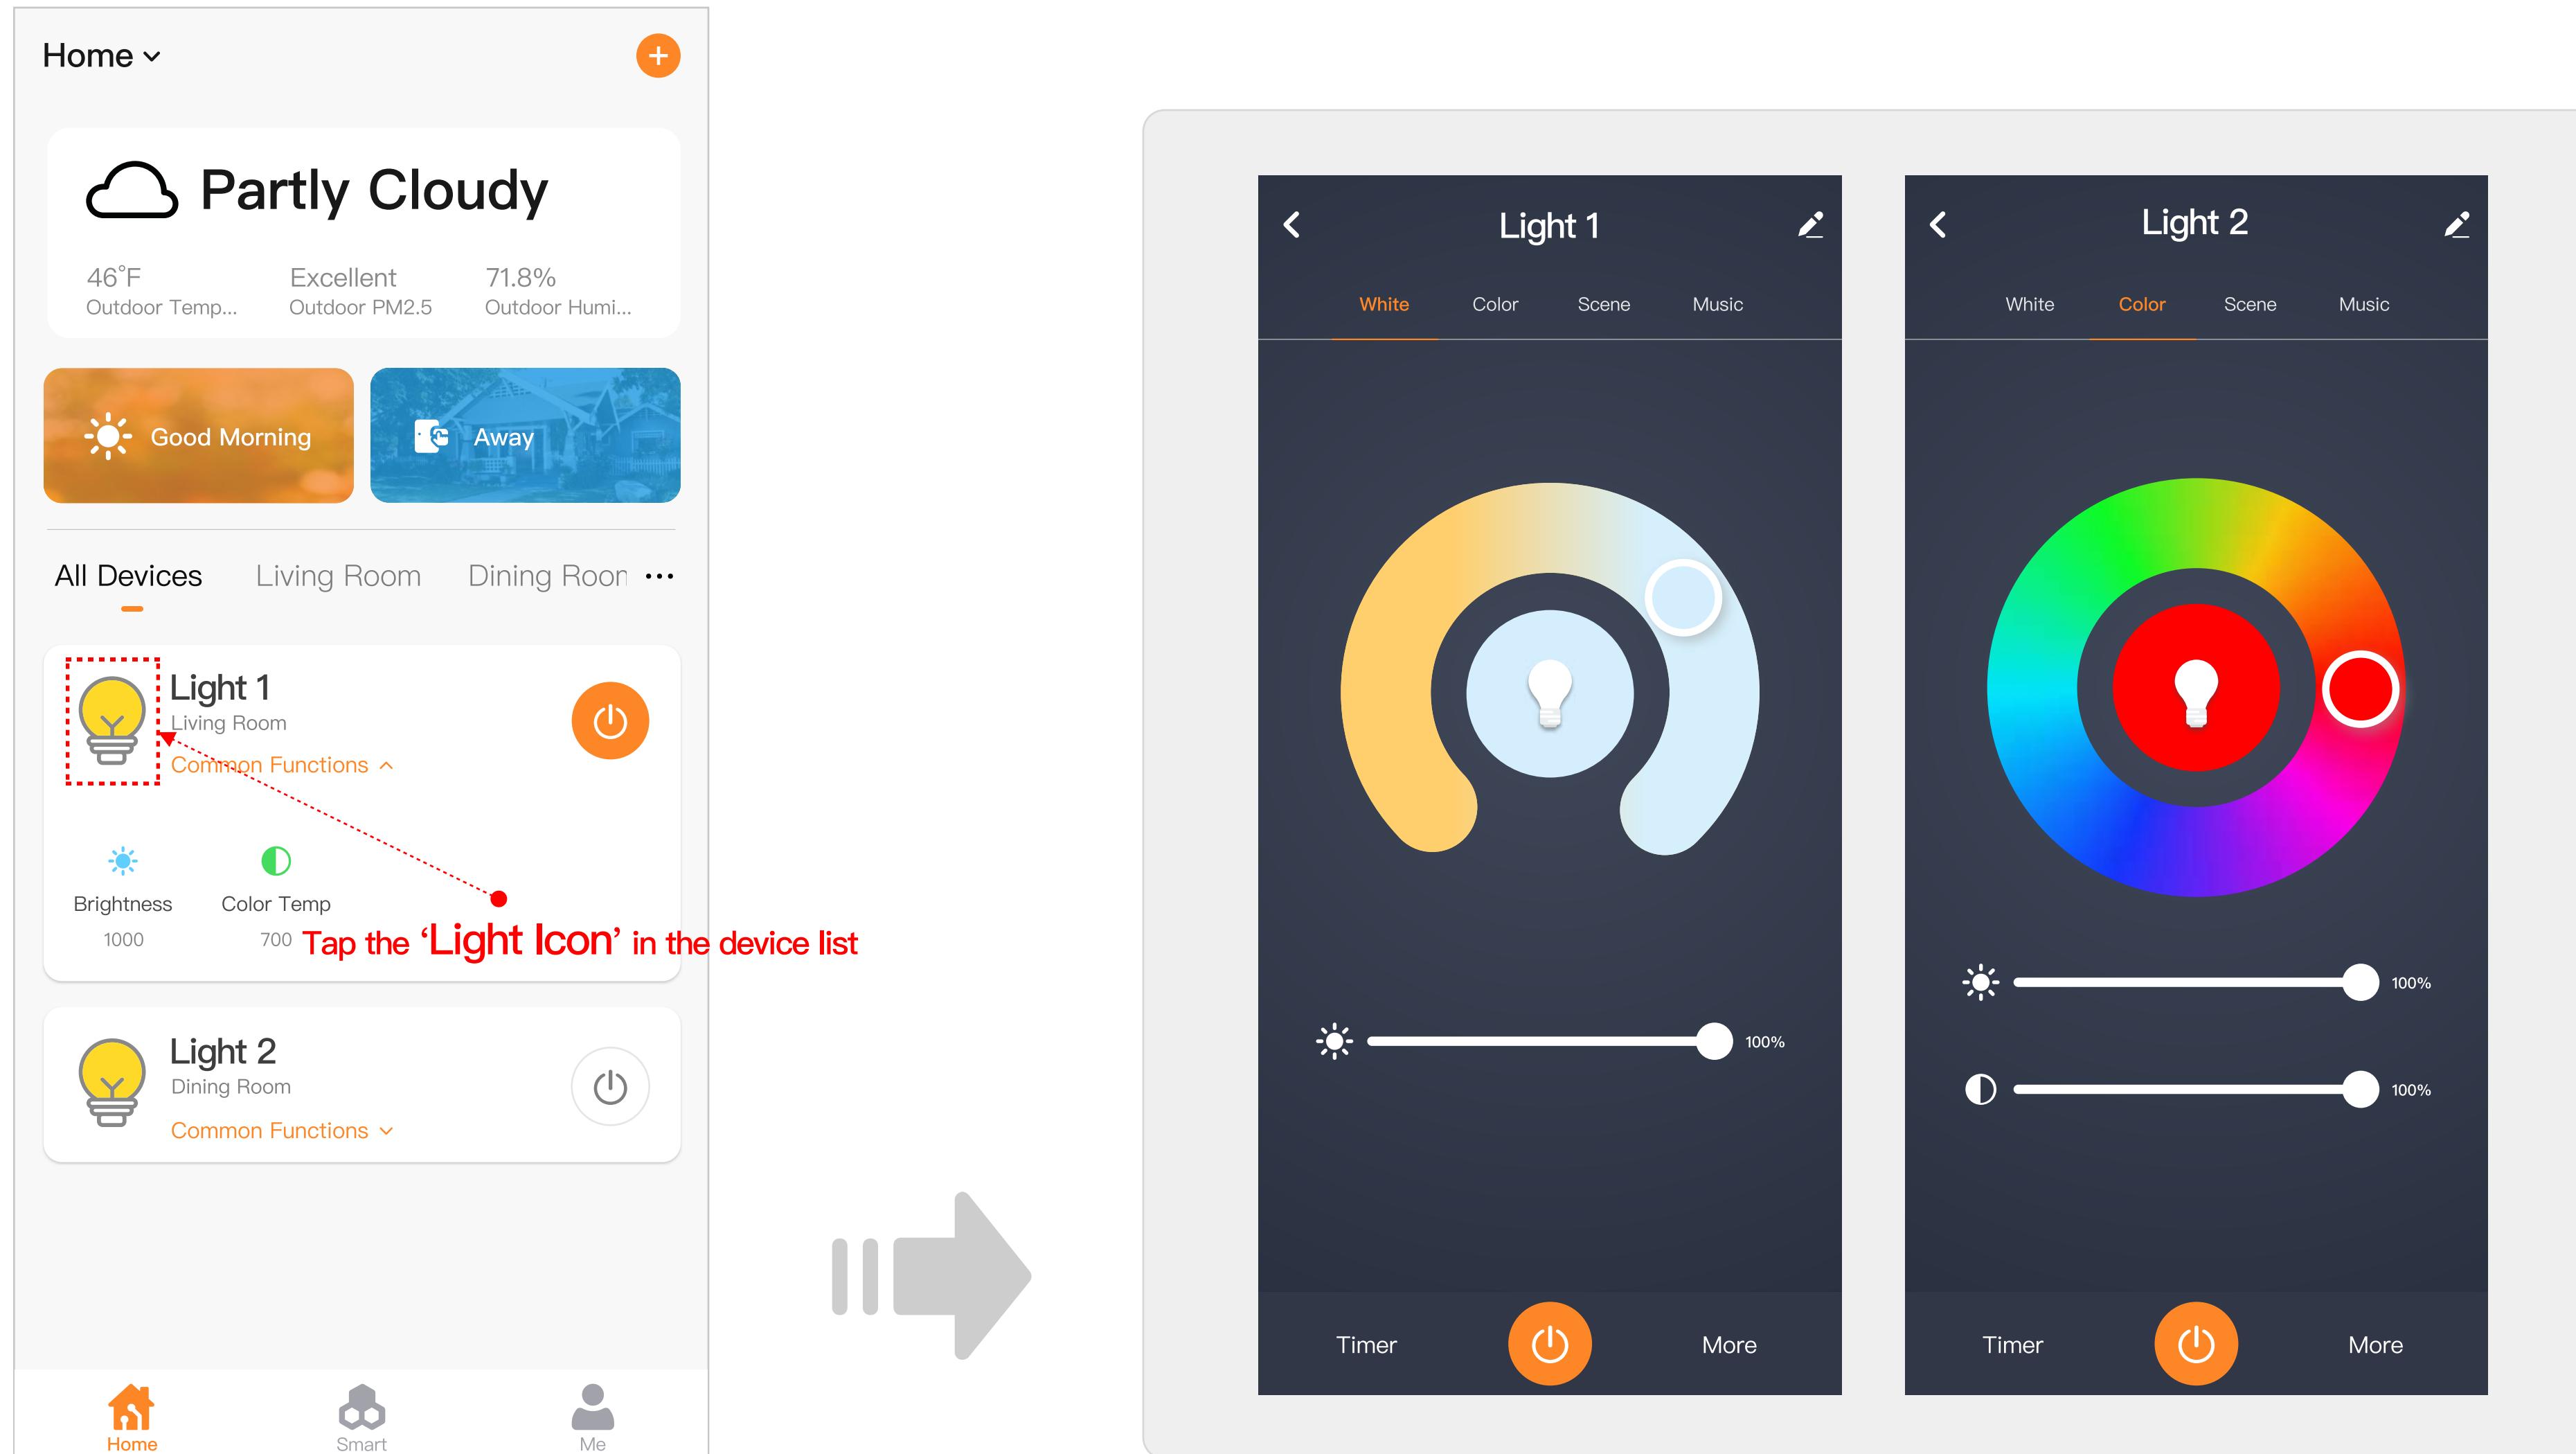

Light Control Panel

If you want to fully control the light, you need to tap the light icon from the device list to enter the control panel.

5. GROUP LIGHTS

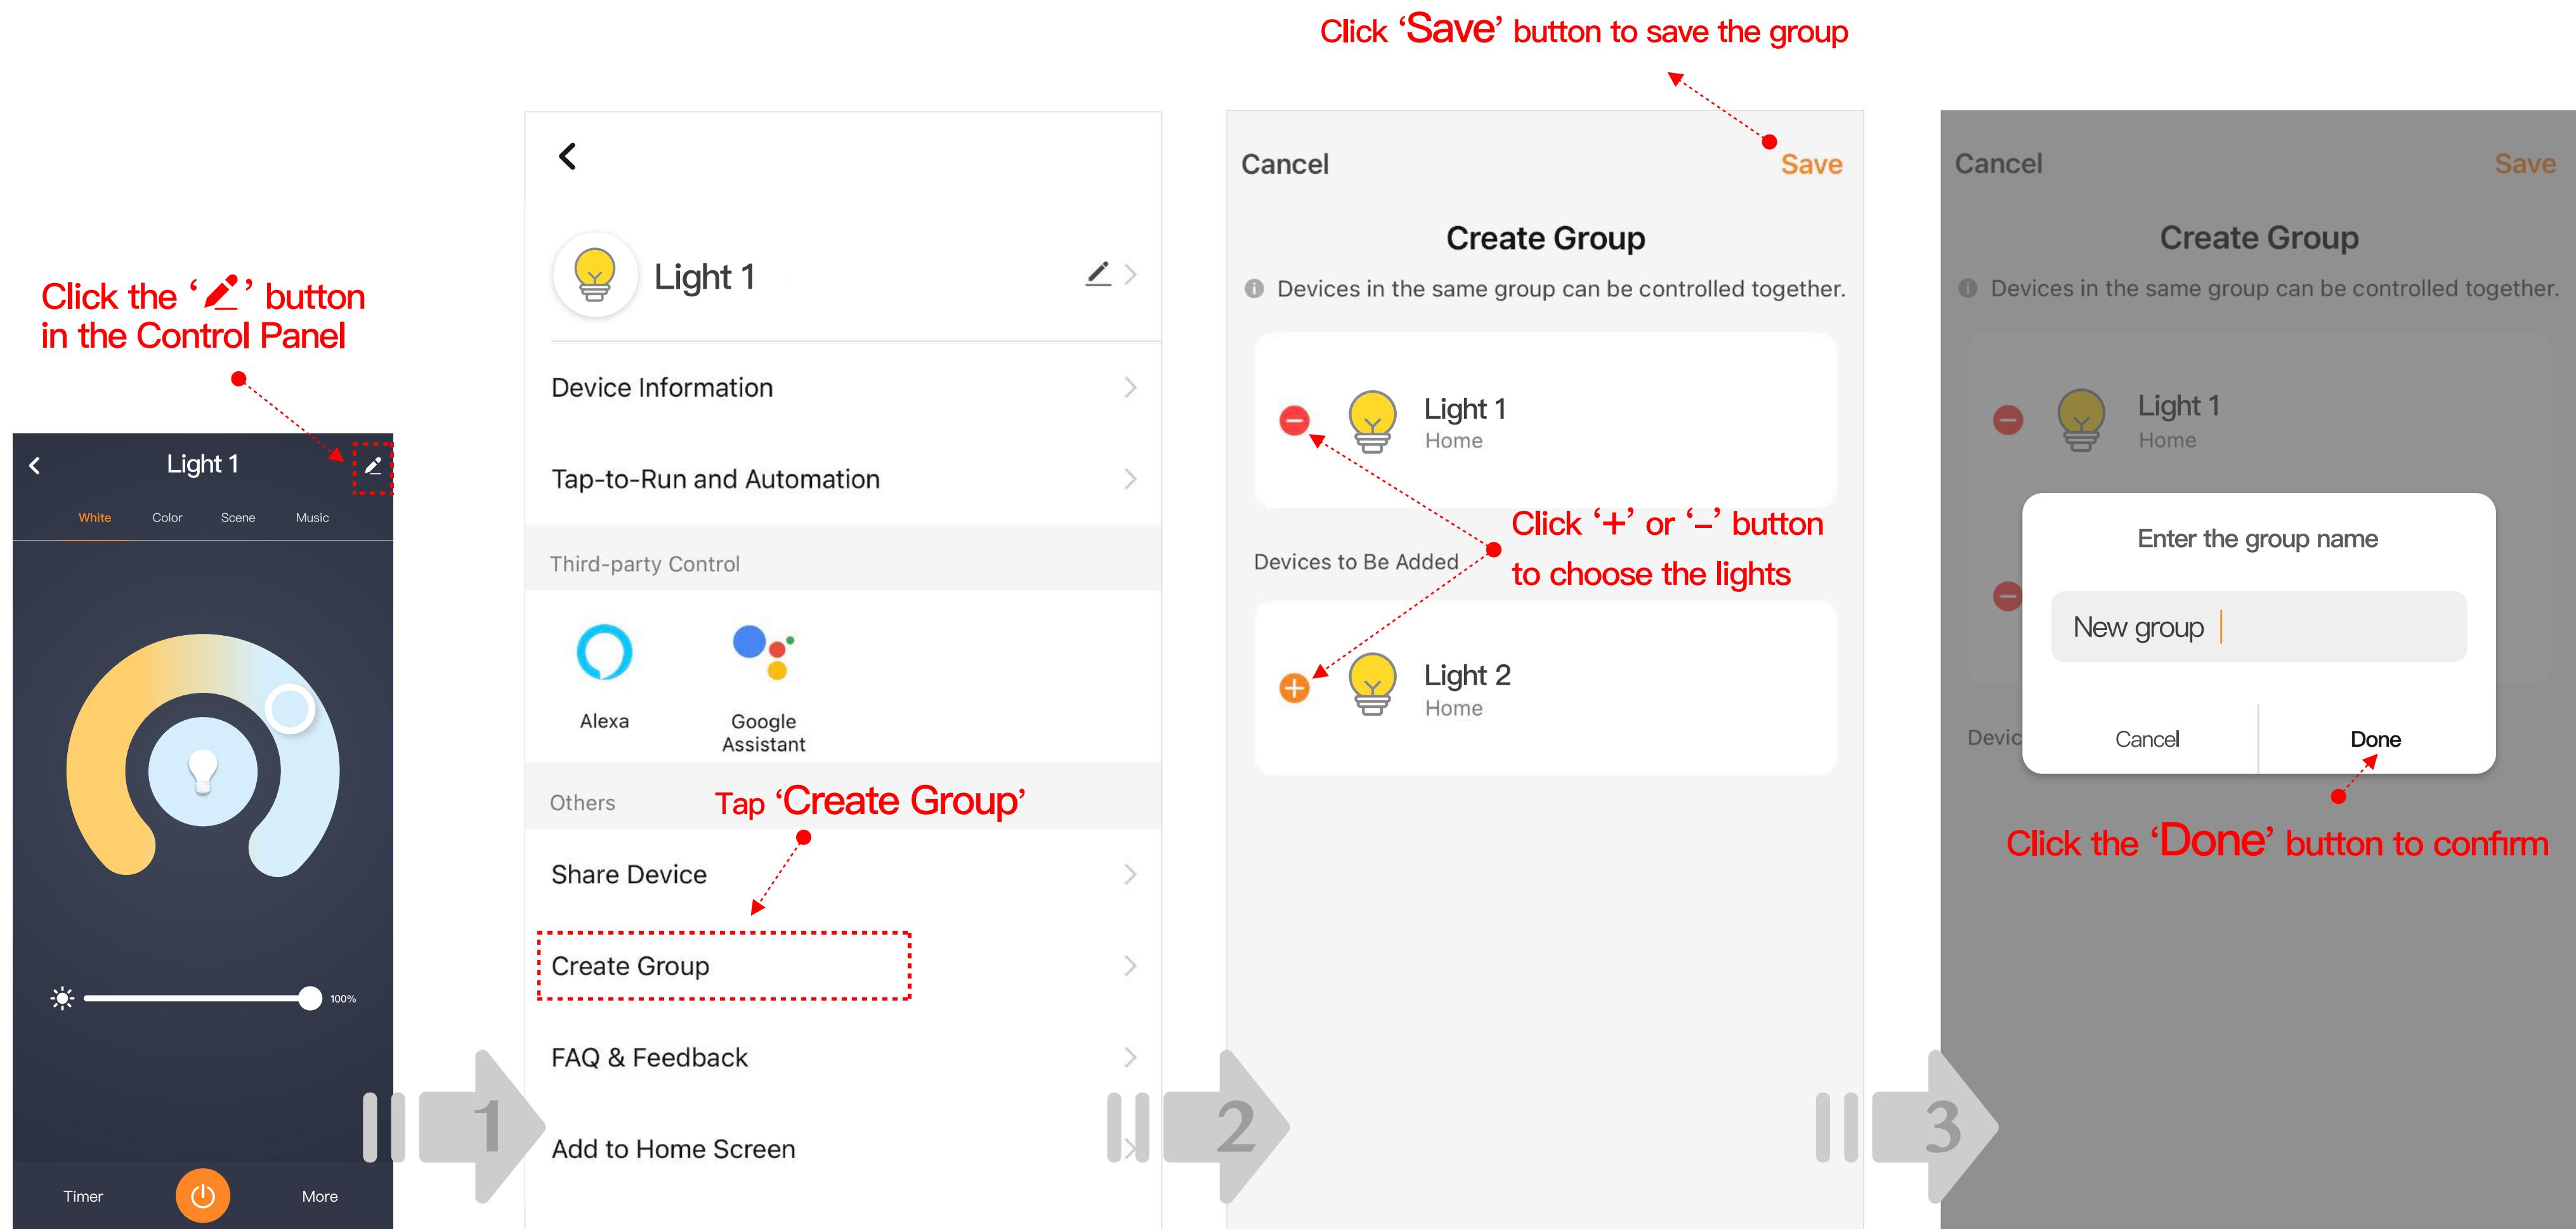

Group Control

You can create lighting groups for different rooms or spaces in the Cloudy Bay App, and they can be controlled not only as a group, but also individually.

6. FAQ

Q1: Can I dim these lights by physical dimmer ?

No, the light can only be dimmed by APP control or Voice control.

Q2. Can I use the 5GHz Wi-Fi to add the lights?

No, only support 2.4GHz Wi-Fi and please make sure step lights and your mobile device were connected to the same Wi-Fi network.

Q3. How to group lights in the Amazon Alexa or Google Home?

Please refer to Voice Control Guide.

Q4. Can I remote control the lights via mobile network?

Yes. Please make sure the lights are online, you could check the lights status in the CloudyBay App.

Q5. How many lights can I connect?

It depends on the connect limitation of your router. CloudyBay APP don't limit the amount of connecting devices.

Q6. Can I share the lights with my family?

Yes, you can. Your family need to get CloudyBay APP and sign in. Then you can share one or more lights with him/her to his/her account.

Q7. If I lost internet, can I control the device via APP?

You can not control the device remotely if your internet goes down. If you are at home and your home router still work, you can control it if you enable the Bluetooth, except some functions via cloud server.

Q8 Do I need to keep the Switch On situation?

Yes, You need to turn on the switch all the time so that you can control it by APP or Voice Control.

Q9. How does CloudyBay ensure data security?

CloudyBay smart products are based on Tuya (NYSE: TUYA) IoT PaaS platform, and who's data center set up in the United States.

7. TIPS

Warranty

The product carries a 3-year warranty from purchase date. Please feel free to contact us when you have any product problem or suggestions. We take care of all quality-related issues with a REPLACEMENT or FULL REFUND.

More Smart Products

Visit <https://cloudybaylighting.com/smart/> to find more Cloudy Bay smart products.

Support

Visit <https://cloudybaylighting.com/smart/help> ,
or contact us by smart@cloudybaylighting.com to reach us for help.