

INSTALLATION INSTRUCTIONS

LFMC1224SMXXYY

Thank you for purchasing CloudyBay Smart LED Lighting Fixtures.



12INCH ROUND LOW PROFILE SMART CEILING LIGHT



GENERAL: All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, contact and obtain the services of a qualified electrician. Use UL or IEC approved wire only for input/output connections.

Remove fixture and mounting components from the box, and make sure that no parts are missing, by referencing the illustration in the illustration instructions.

Turn power off before installation, inspection, or removal.
Use all necessary precautions while performing this procedure.


Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Properly ground electrical enclosure. IT IS IMPERATIVE THAT THE OUTLET BOX BE PROPERLY GROUNDED.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, OTHERWISE SAFETY WILL BE COMPROMISED.

This Integrated LED Fixture has no lamp/bulb to replace.

Procedure to create a group: go to APP home page; b. click one product that you like to add to a group; c. click edit icon on control panel's top right corner; d. select Create Group; e. click icon before product name; f. name the group and save it.

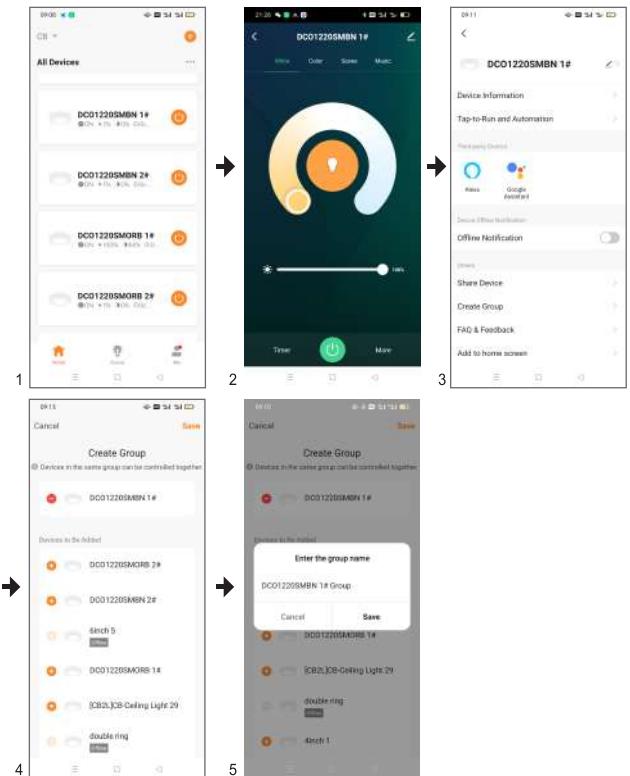

3-Year Limited Warranty




LIMITED WARRANTY: This fixture is warranted to be free from defects in workmanship and material for up to 3-years. Based upon reasonable household usage, when used in accordance with package and included instructions. If this fixture does not last for the time period guaranteed, manufacturer will send you a replacement fixture upon receipt of the returned fixture, register receipt, and proof of purchase. To contact us, please email us at smart@cloudybaylighting.com to find out how to return the fixture. We are committed to making high quality products. Returning the fixture will help us monitor and further improve product quality. This replacement is the sole remedy available, and LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IS HEREBY EXPRESSLY EXCLUDED.

PLEASE READ CAREFULLY BEFORE INSTALLING FIXTURE


Save these instructions, as you may need them at a later date.

Installation Instructions


Component List:

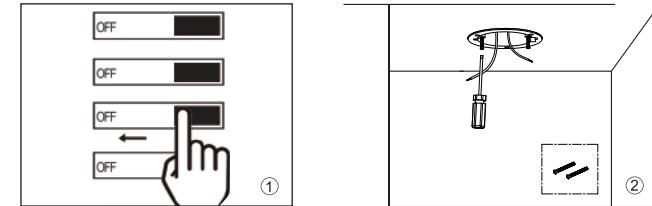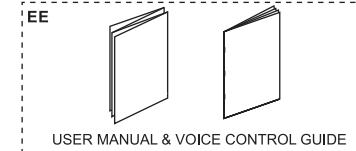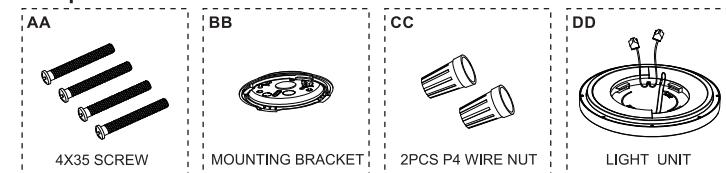


① Turn off power supply before you start installation.

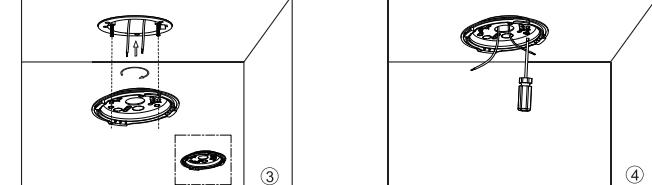

② Use Philips screwdriver to fix two screws AA to junction box (junction box is not included), leave 5mm space between screw head and junction box.

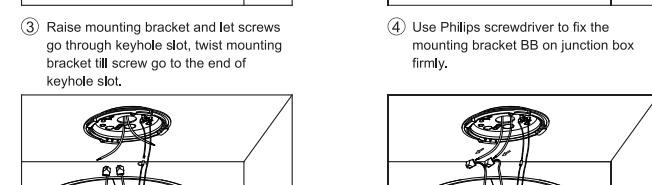


③ Raise mounting bracket and let screws go through keyhole slot, twist mounting bracket till screw go to the end of keyhole slot.

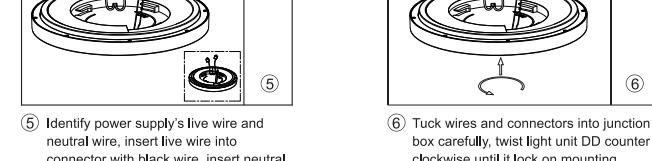


④ Use Philips screwdriver to fix the mounting bracket BB on junction box firmly.



⑤ Identify power supply's live wire and neutral wire, insert live wire into connector with black wire, insert neutral wire into connector with white wire. Note: If power supply's wires are not soldered or not solid wire, you need to hold quick connector, and twist wire until it goes out, then use wire connector CC to do wiring.

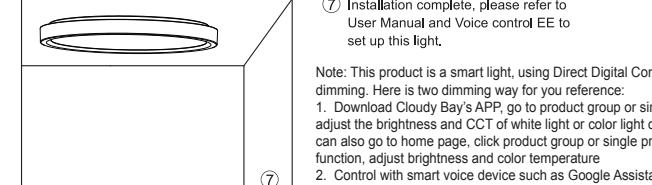

⑥ Tuck wires and connectors into junction box carefully, twist light unit DD counter clockwise until it lock on mounting bracket firmly. Note: Ground wire is not required for plastic body lighting fixture.

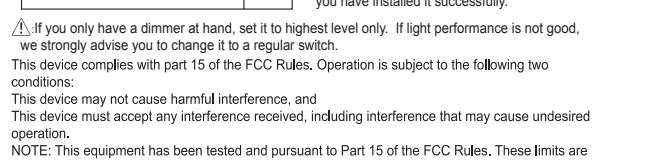

⑦ Installation complete, please refer to User Manual and Voice control EE to set up this light.

Note: This product is a smart light, using Direct Digital Controls rather than triac dimming. Here is two dimming way for you reference:
1. Download Cloudy Bay's APP, go to product group or single product page, adjust the brightness and CCT of white light or color light on control panel; you can also go to home page, click product group or single product's common function, adjust brightness and color temperature.
2. Control with smart voice device such as Google Assistant or Amazon Alexa if you have installed it successfully.

⚠ If you only have a dimmer at hand, set it to highest level only. If light performance is not good, we strongly advise you to change it to a regular switch.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

This device may not cause harmful interference, and This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiver antenna.

Increase the separation between the equipment and receiver.

Install the product onto a circuit different from that to which the receiver is connected.

Consult with the dealer or an experienced radio/TV technician for help.

CAUTION: Any changes made to the electronics circuit will void this equipment's compliance with Part 15 of the FCC Rules and should not be operated.

RF Exposure Information

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

