

FCC Appendix RF Test Data for 5.5GWIFI

FCC ID : 2A4GN-N6

Company: : Shenzhen Ruiying Electronic Co., Ltd

EUT : Projector

Model Number : N5

Report No. : CTA25072501504


Reviewed By : Eric Wang

1 -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5500	Ant1	25.101	----	Pass
NVNT	a	5580	Ant1	27.952	----	Pass
NVNT	a	5700	Ant1	27.131	----	Pass
NVNT	n20	5500	Ant1	28.329	----	Pass
NVNT	n20	5580	Ant1	29.02	----	Pass
NVNT	n20	5700	Ant1	26.855	----	Pass
NVNT	n40	5510	Ant1	51.731	----	Pass
NVNT	n40	5550	Ant1	50.226	----	Pass
NVNT	n40	5670	Ant1	49.032	----	Pass
NVNT	ac20	5500	Ant1	26.253	----	Pass
NVNT	ac20	5580	Ant1	28.764	----	Pass
NVNT	ac20	5700	Ant1	27.941	----	Pass
NVNT	ac40	5510	Ant1	45.361	----	Pass
NVNT	ac40	5550	Ant1	48.185	----	Pass
NVNT	ac40	5670	Ant1	40.939	----	Pass
NVNT	ax20	5500	Ant1	26.805	----	Pass
NVNT	ax20	5580	Ant1	28.899	----	Pass
NVNT	ax20	5700	Ant1	29.059	----	Pass
NVNT	ax40	5510	Ant1	52.757	----	Pass
NVNT	ax40	5550	Ant1	48.932	----	Pass
NVNT	ax40	5670	Ant1	50.072	----	Pass

Test Graphs


-26dB Bandwidth NVNT a 5500MHz Ant1

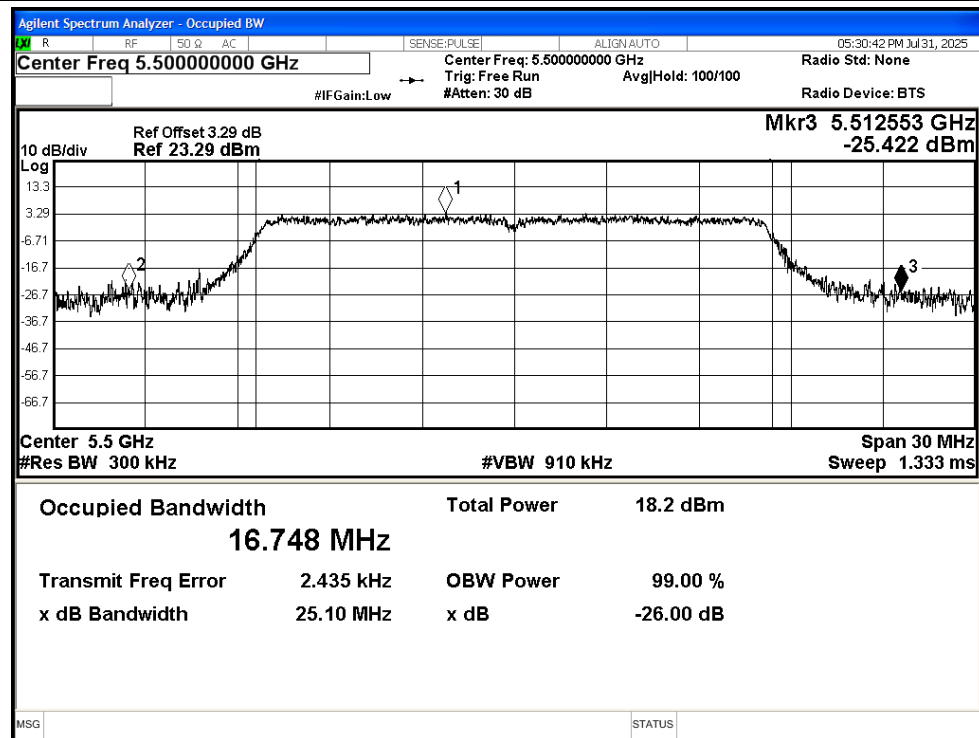


-26dB Bandwidth NVNT a 5580MHz Ant1

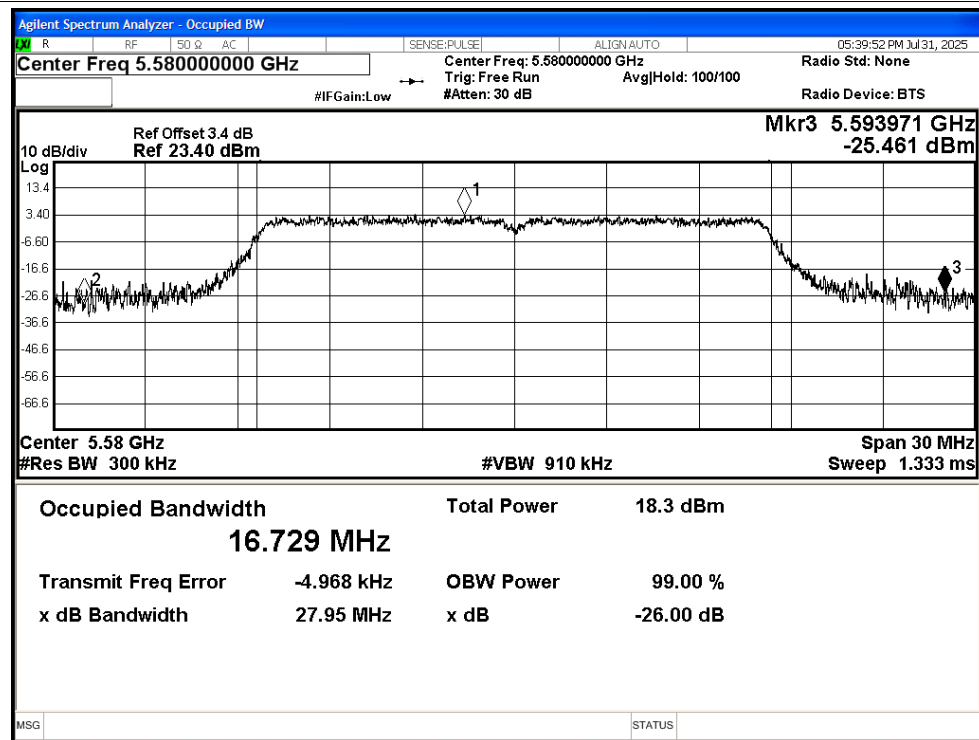


-26dB Bandwidth NVNT a 5700MHz Ant1

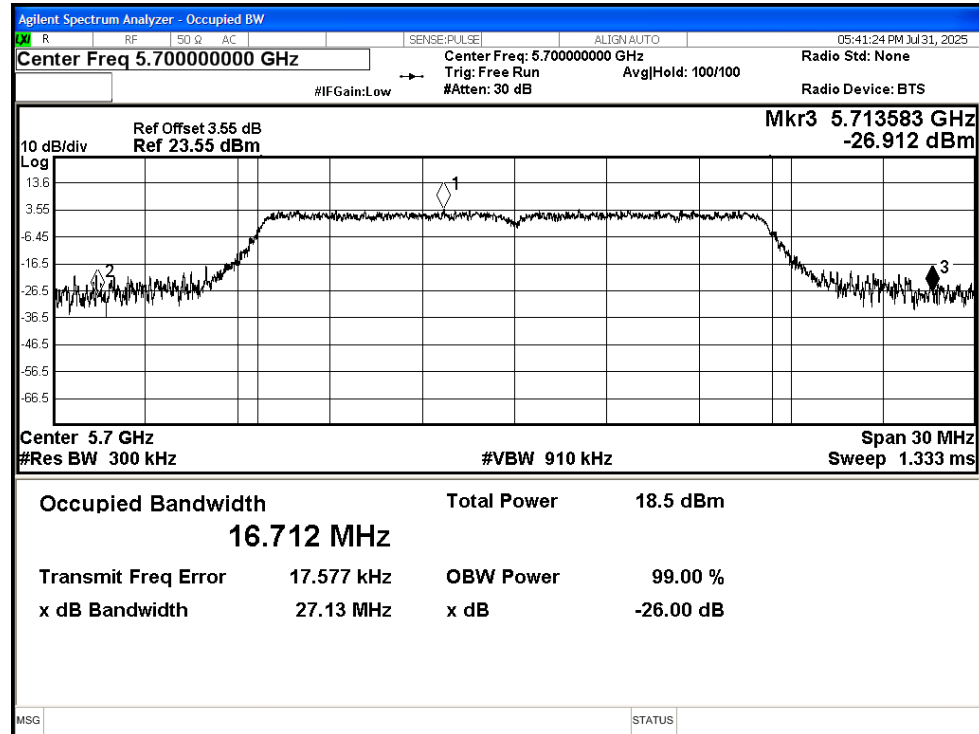


-26dB Bandwidth NVNT n20 5500MHz Ant1

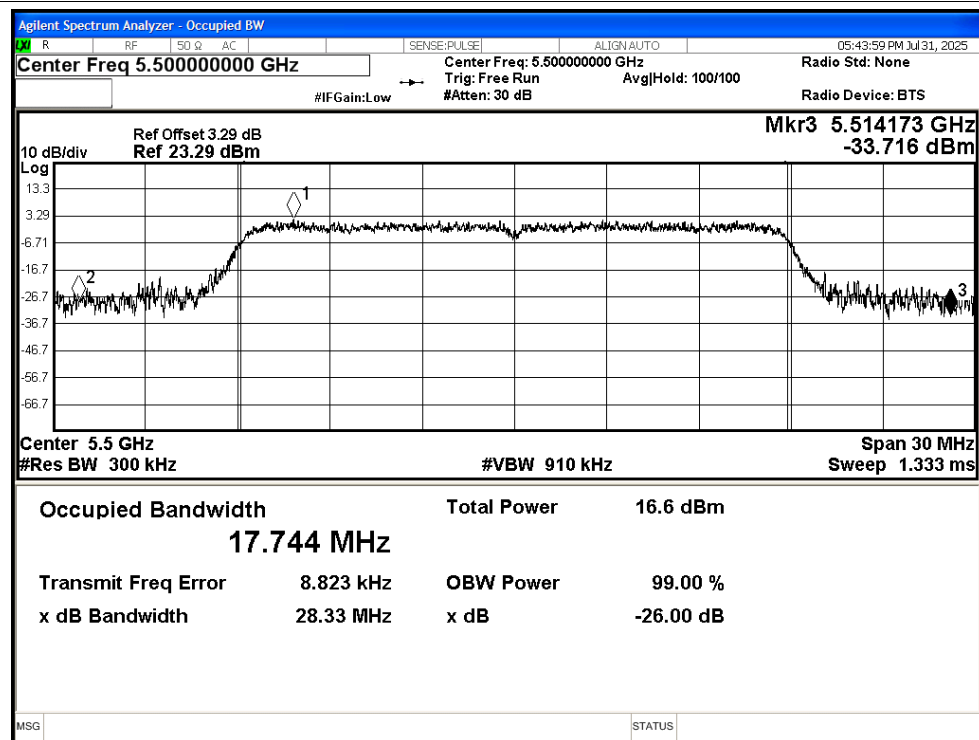


-26dB Bandwidth NVNT n20 5580MHz Ant1

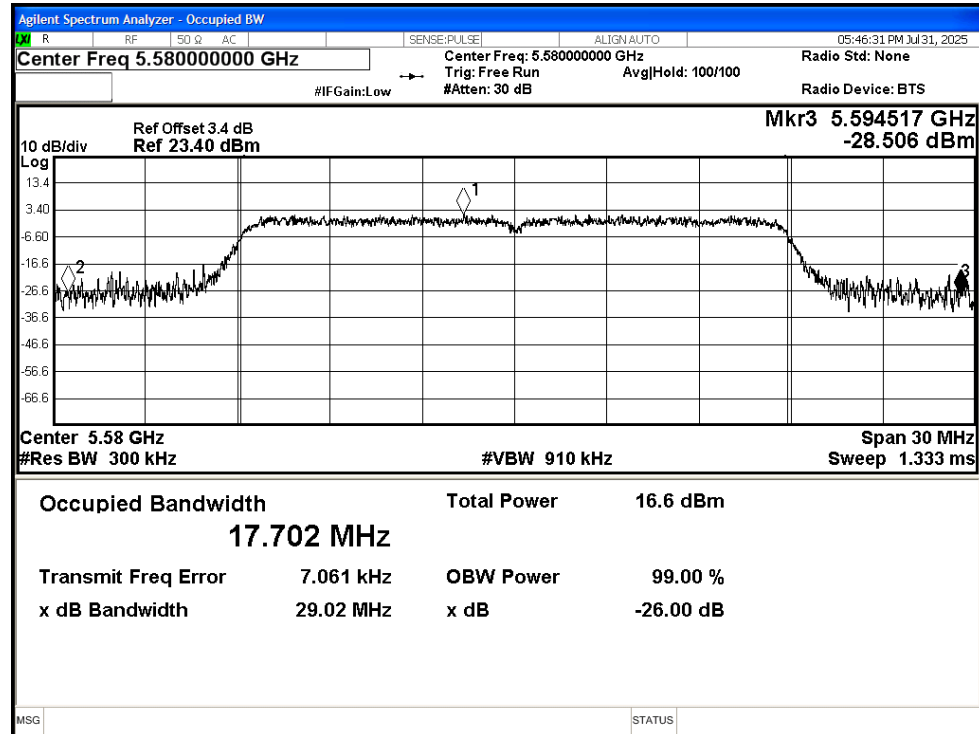


-26dB Bandwidth NVNT n20 5700MHz Ant1

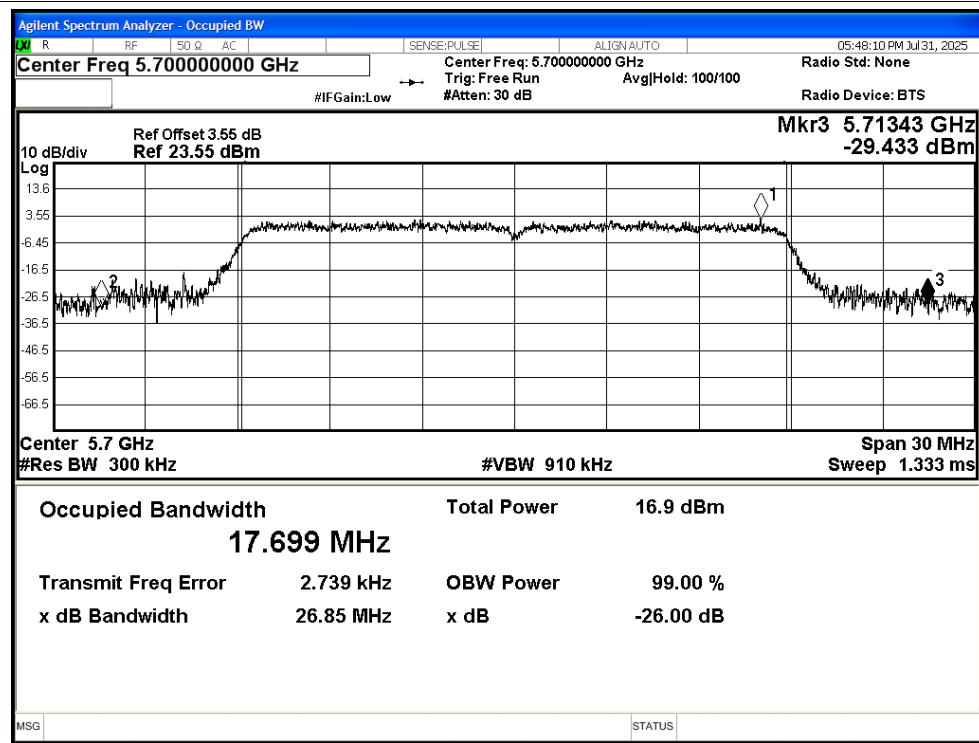


-26dB Bandwidth NVNT n40 5510MHz Ant1

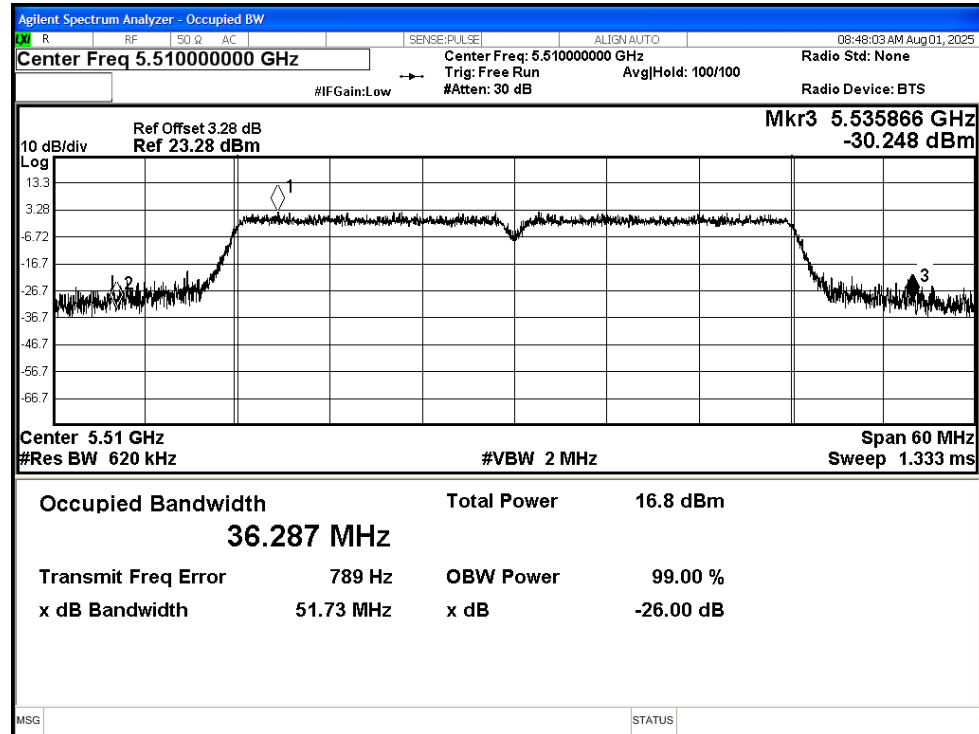


-26dB Bandwidth NVNT n40 5550MHz Ant1

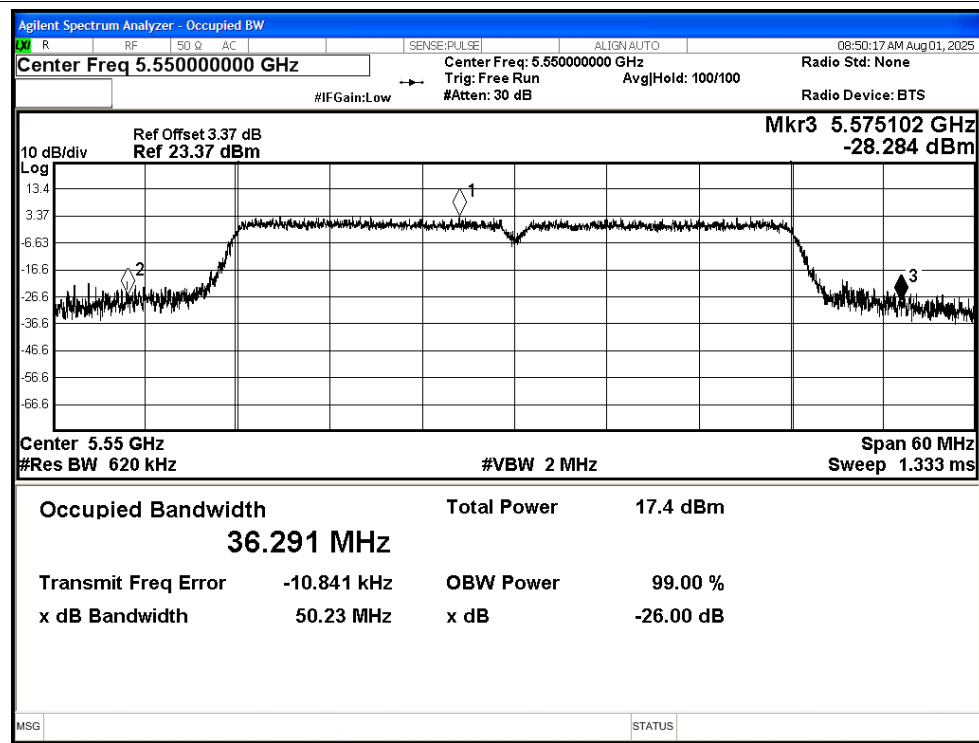


-26dB Bandwidth NVNT n40 5670MHz Ant1

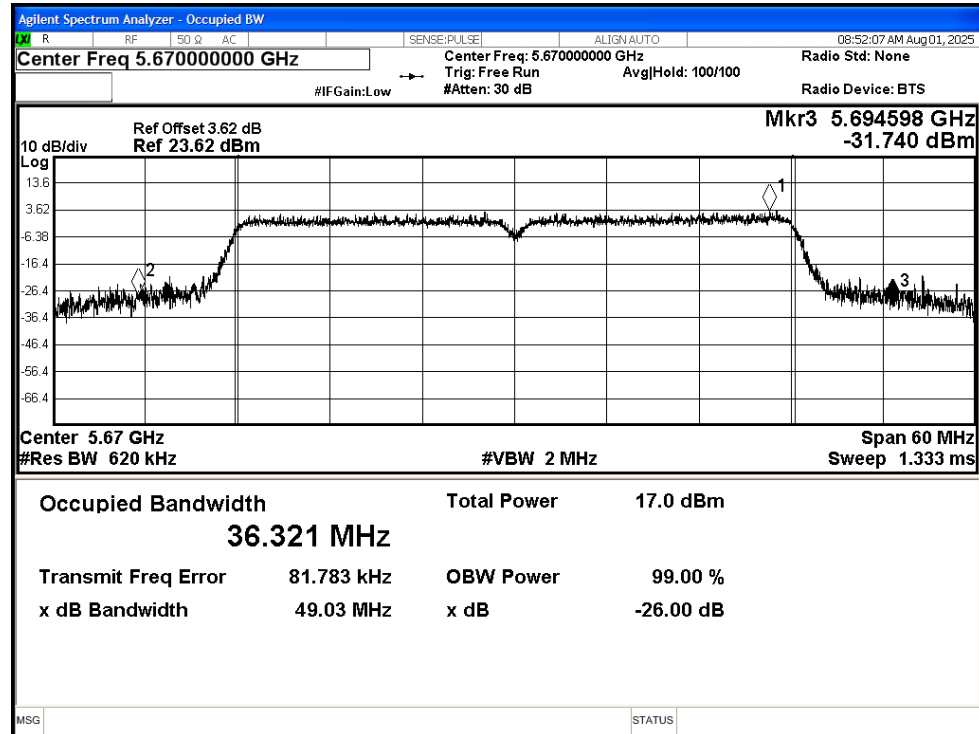


-26dB Bandwidth NVNT ac20 5500MHz Ant1

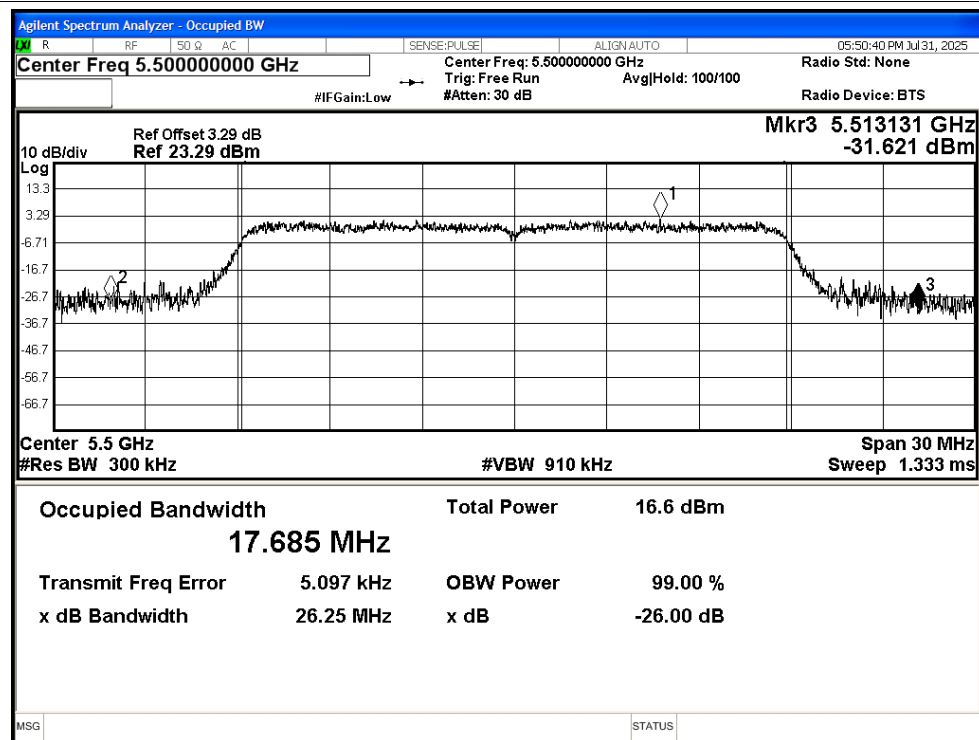


-26dB Bandwidth NVNT ac20 5580MHz Ant1

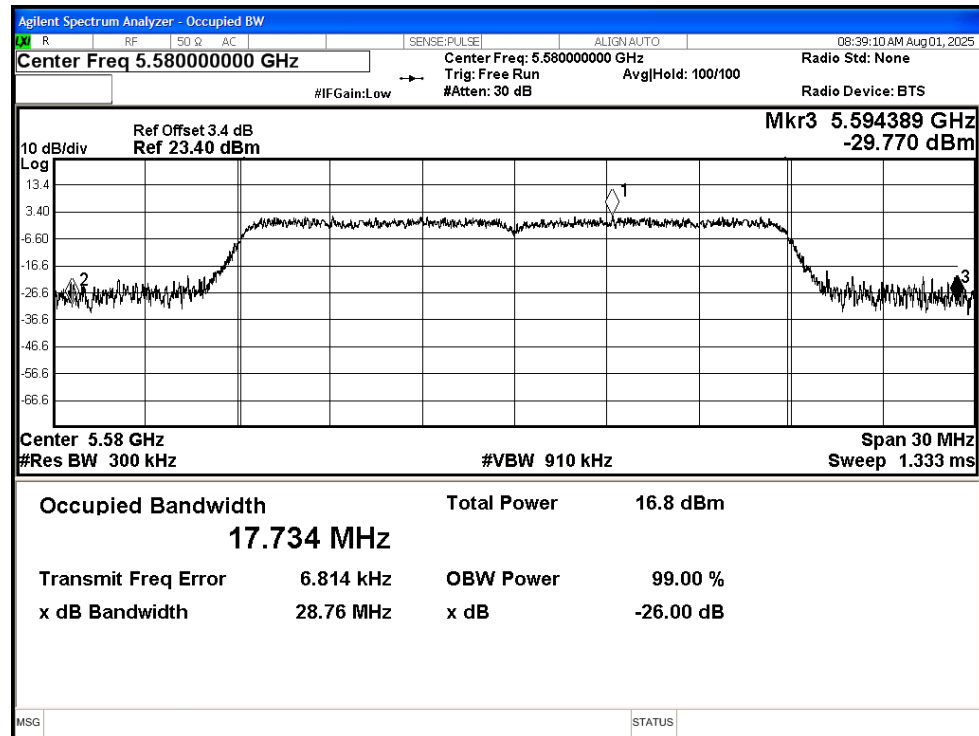


-26dB Bandwidth NVNT ac20 5700MHz Ant1

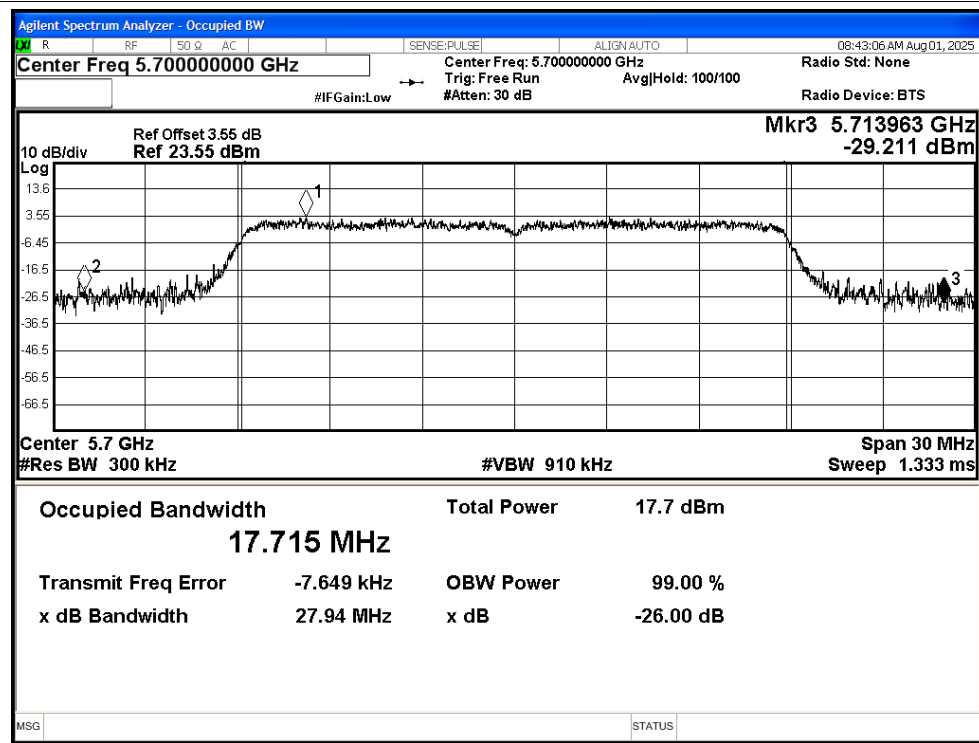


-26dB Bandwidth NVNT ac40 5510MHz Ant1

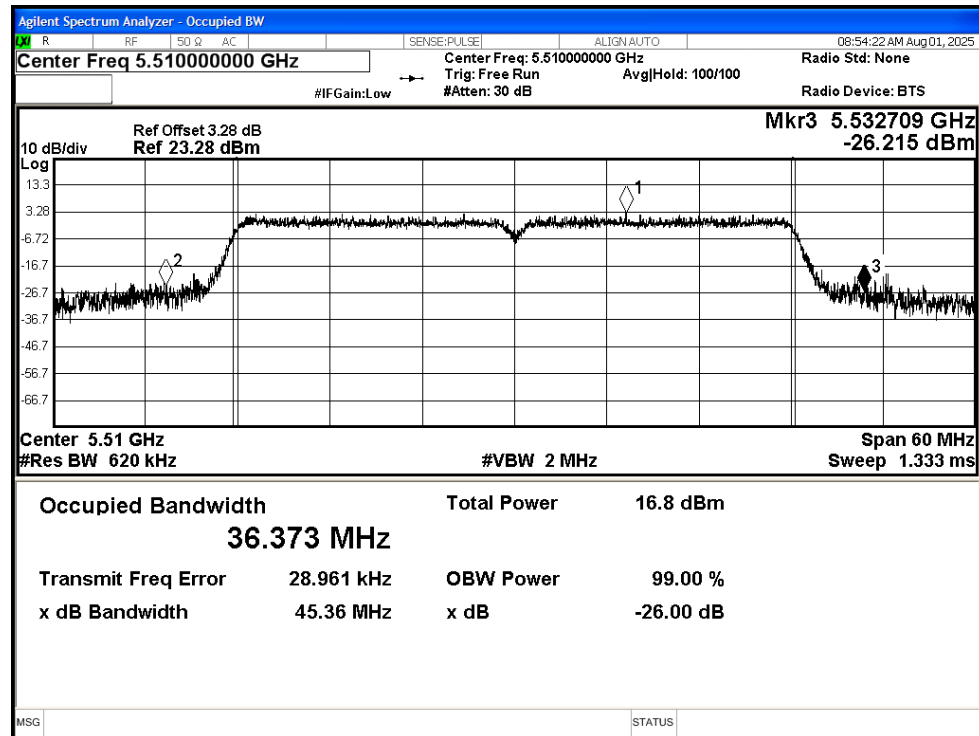


-26dB Bandwidth NVNT ac40 5550MHz Ant1

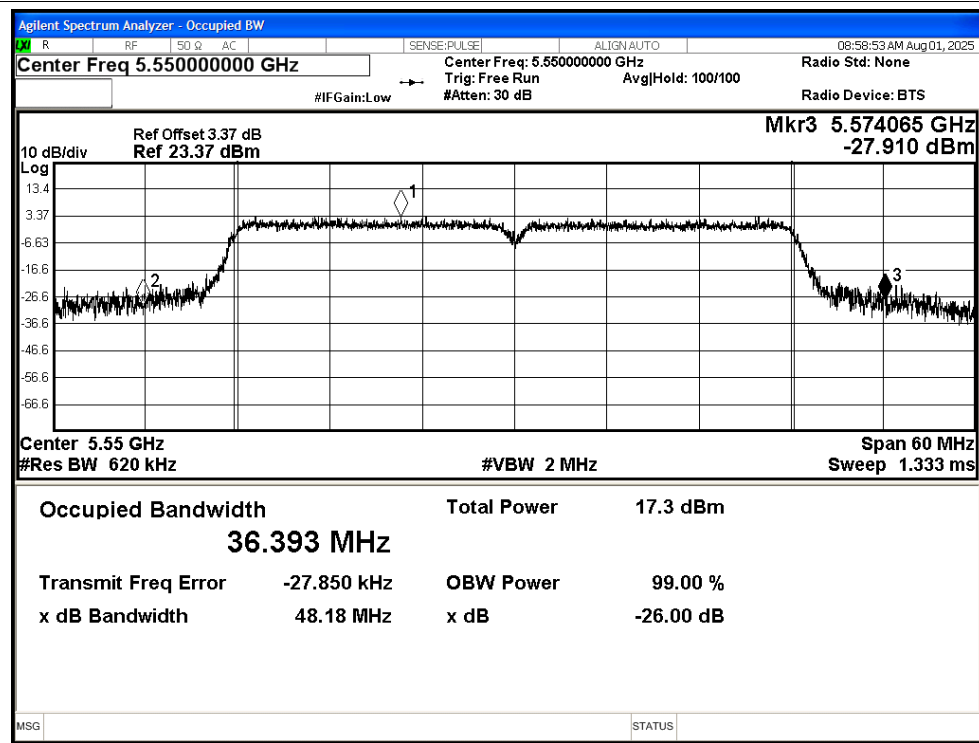


-26dB Bandwidth NVNT ac40 5670MHz Ant1

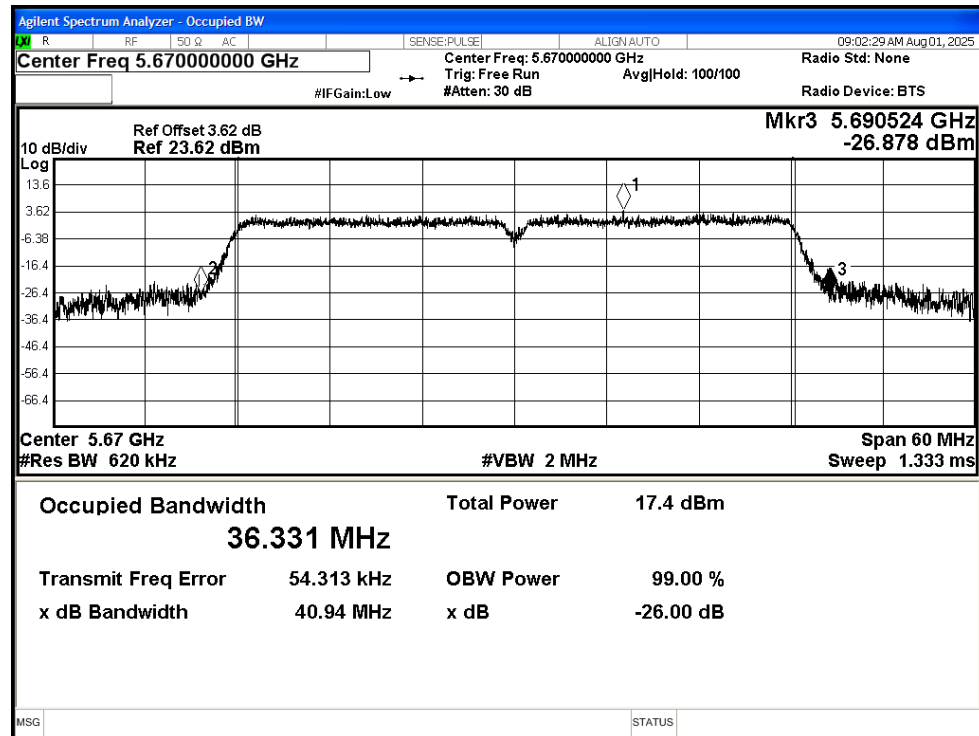


-26dB Bandwidth NVNT ax20 5500MHz Ant1

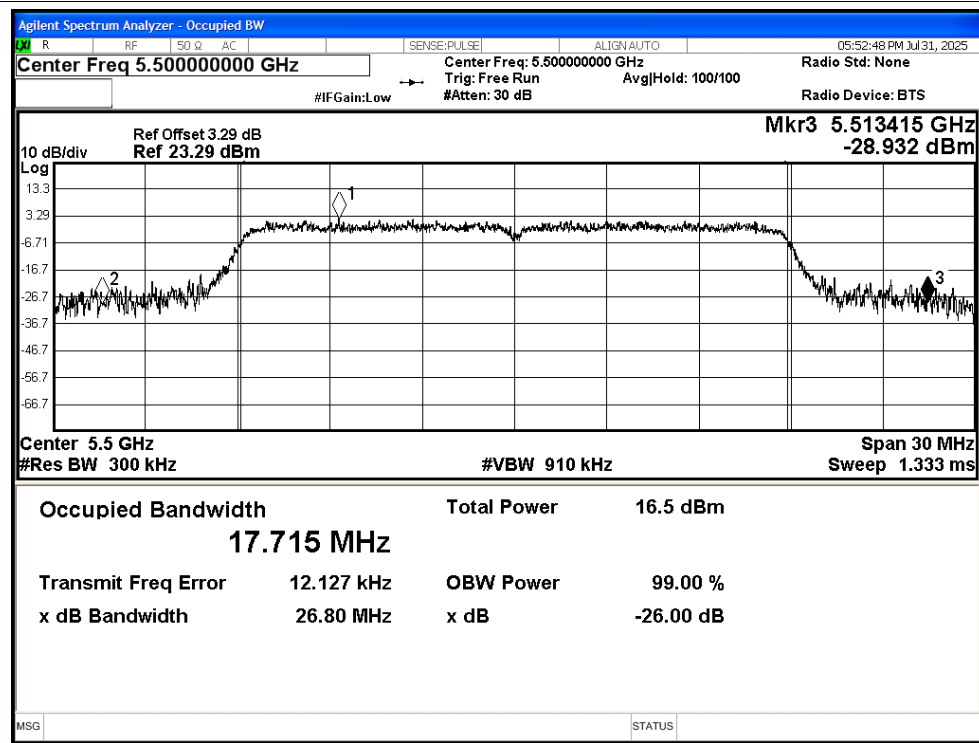


-26dB Bandwidth NVNT ax20 5580MHz Ant1

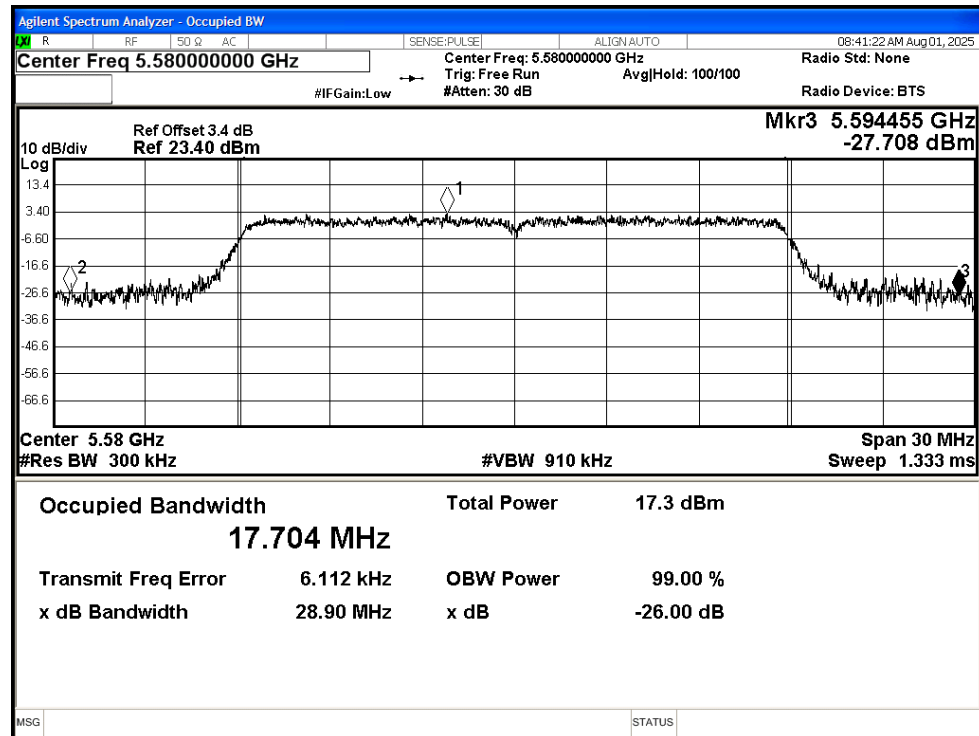


-26dB Bandwidth NVNT ax20 5700MHz Ant1

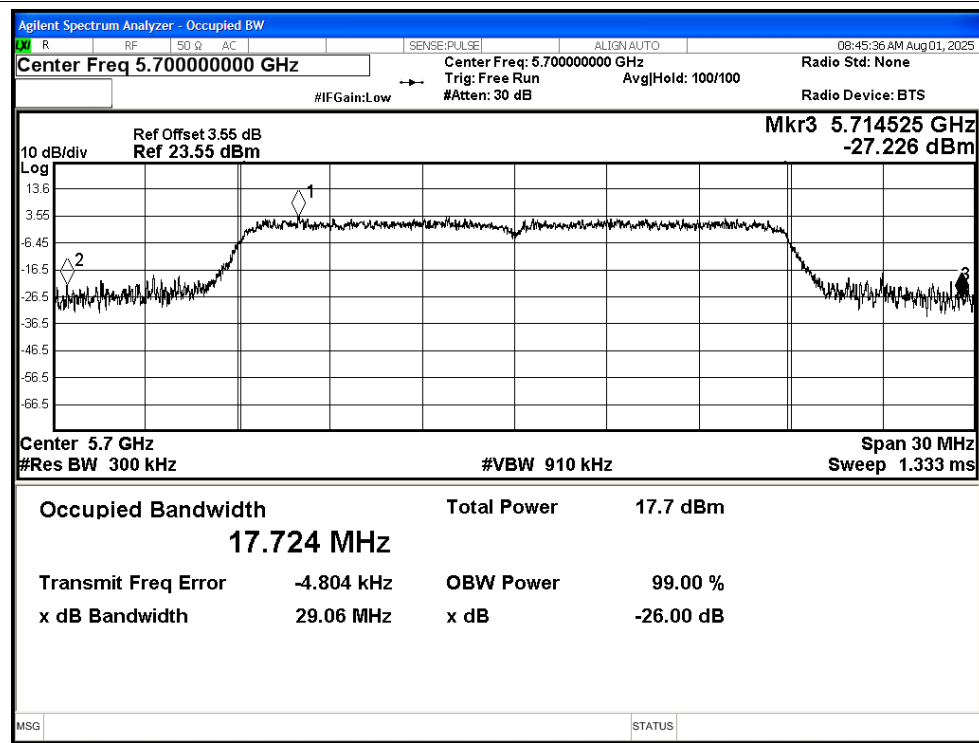


-26dB Bandwidth NVNT ax40 5510MHz Ant1

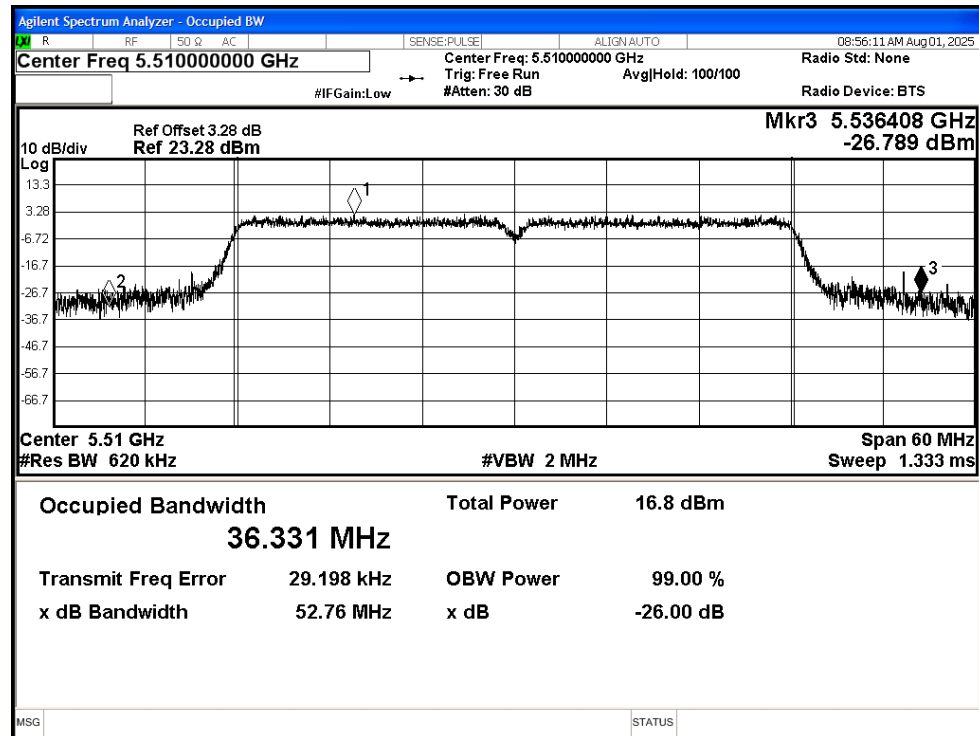

-26dB Bandwidth NVNT ax40 5550MHz Ant1

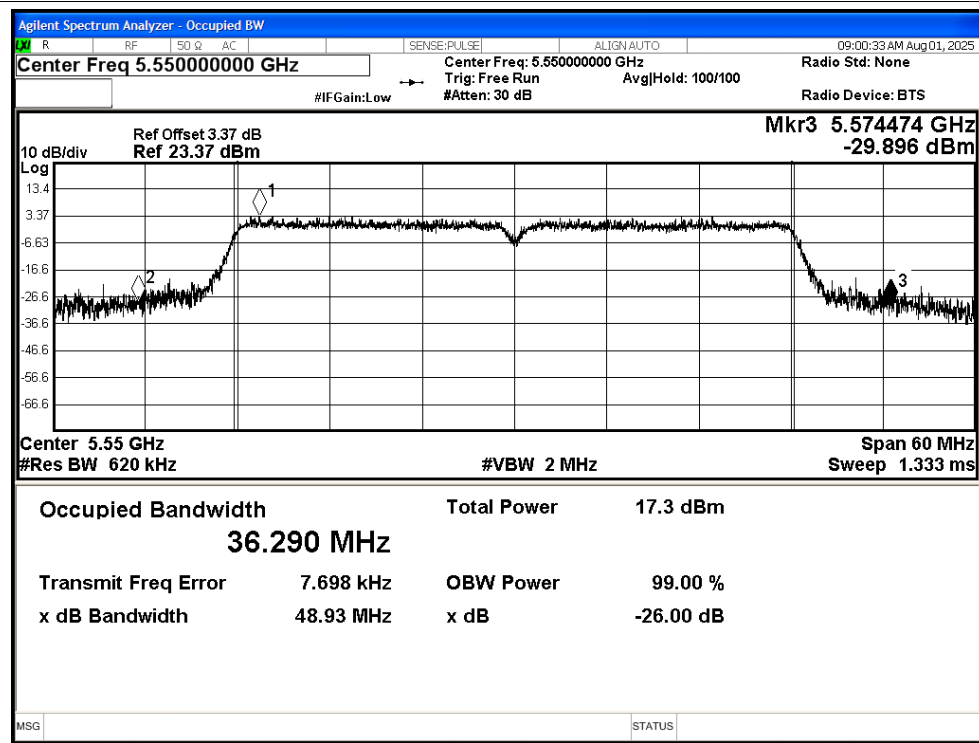


-26dB Bandwidth NVNT ax40 5670MHz Ant1

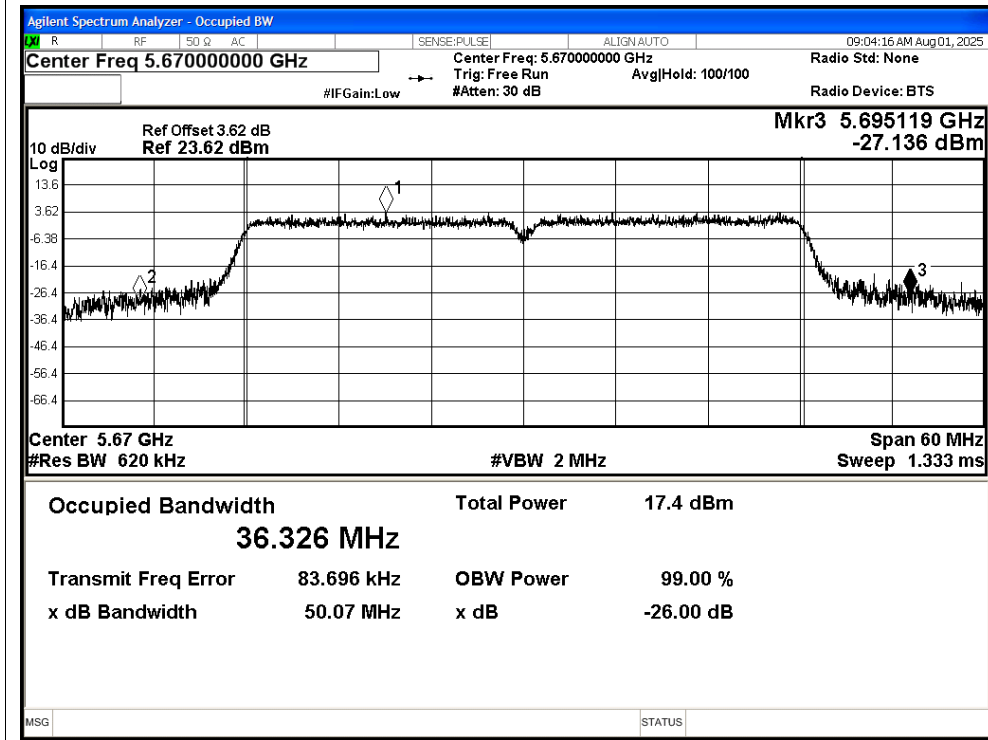


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5500	Ant2	29.005	----	Pass
NVNT	a	5580	Ant2	28.239	----	Pass
NVNT	a	5700	Ant2	28.912	----	Pass
NVNT	n20	5500	Ant2	23.062	----	Pass
NVNT	n20	5580	Ant2	27.544	----	Pass
NVNT	n20	5700	Ant2	29.046	----	Pass
NVNT	n40	5510	Ant2	49.213	----	Pass
NVNT	n40	5550	Ant2	51.973	----	Pass
NVNT	n40	5670	Ant2	46.501	----	Pass
NVNT	ac20	5500	Ant2	29.882	----	Pass
NVNT	ac20	5580	Ant2	27.168	----	Pass
NVNT	ac20	5700	Ant2	29.197	----	Pass
NVNT	ac40	5510	Ant2	44.632	----	Pass
NVNT	ac40	5550	Ant2	53.429	----	Pass
NVNT	ac40	5670	Ant2	44.704	----	Pass
NVNT	ax20	5500	Ant2	26.567	----	Pass
NVNT	ax20	5580	Ant2	26.679	----	Pass
NVNT	ax20	5700	Ant2	28.929	----	Pass
NVNT	ax40	5510	Ant2	48.59	----	Pass
NVNT	ax40	5550	Ant2	45.036	----	Pass
NVNT	ax40	5670	Ant2	47.941	----	Pass

Test Graphs


-26dB Bandwidth NVNT a 5500MHz Ant2

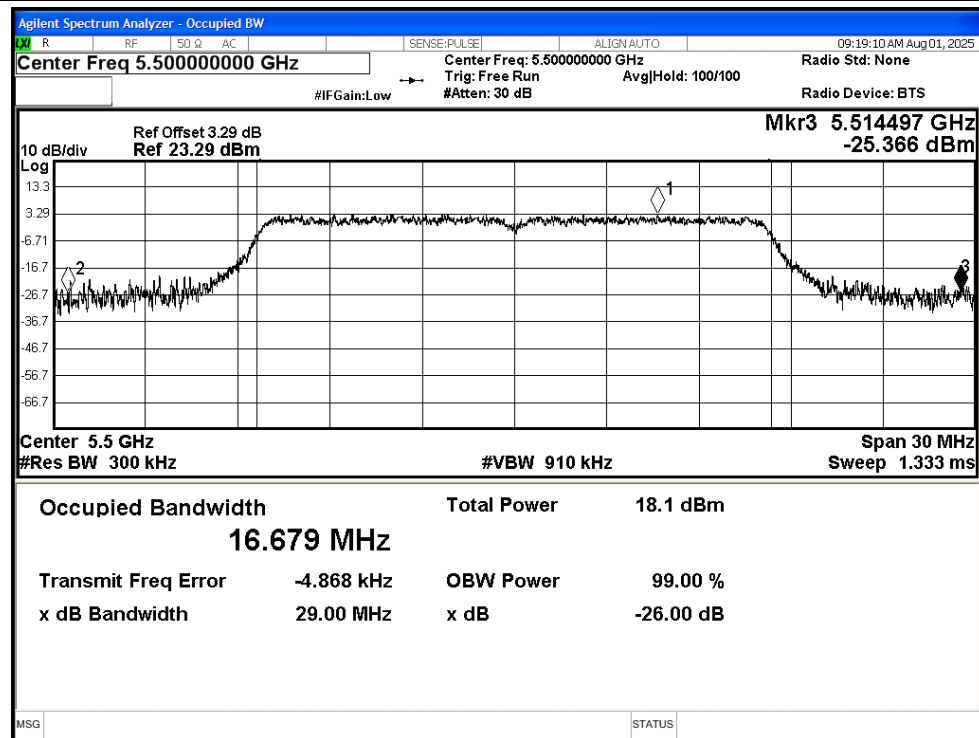


-26dB Bandwidth NVNT a 5580MHz Ant2

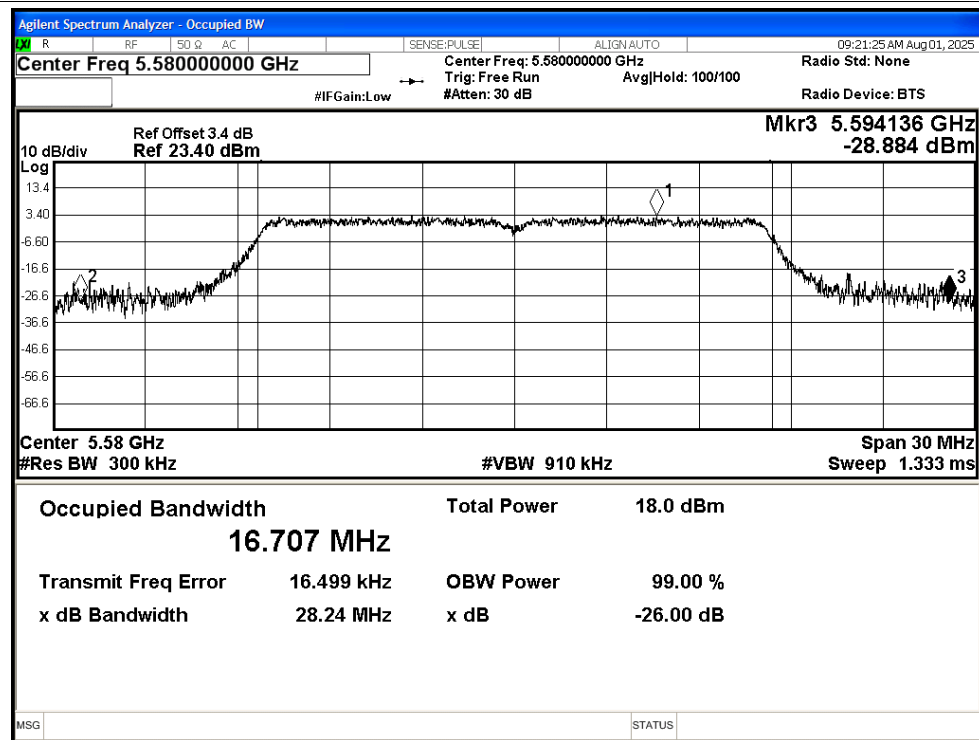


-26dB Bandwidth NVNT a 5700MHz Ant2

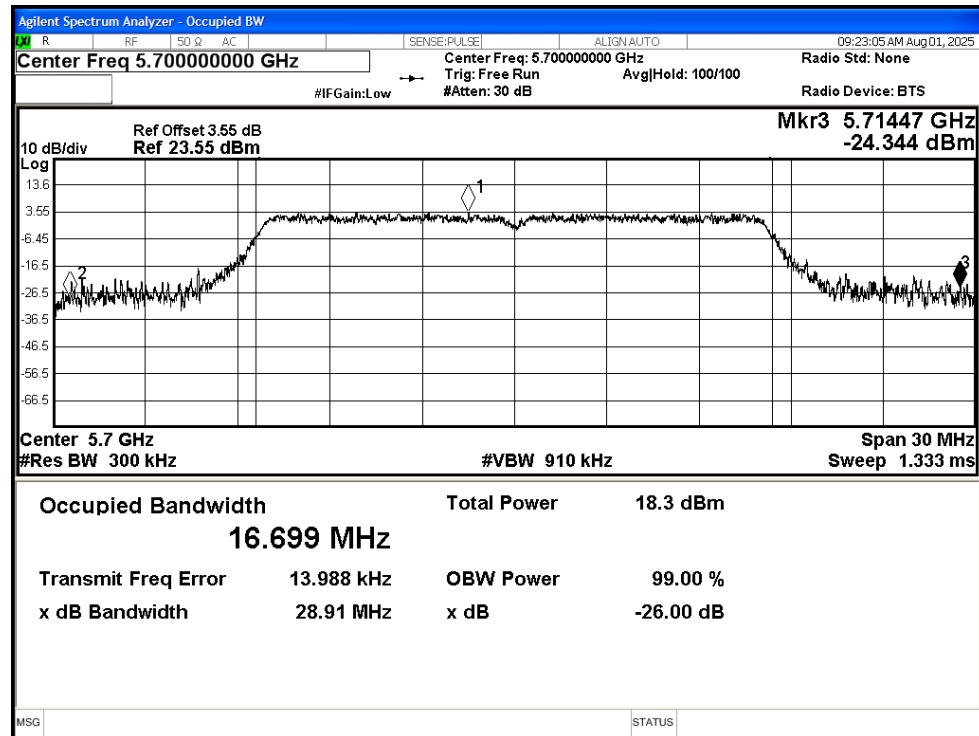


-26dB Bandwidth NVNT n20 5500MHz Ant2

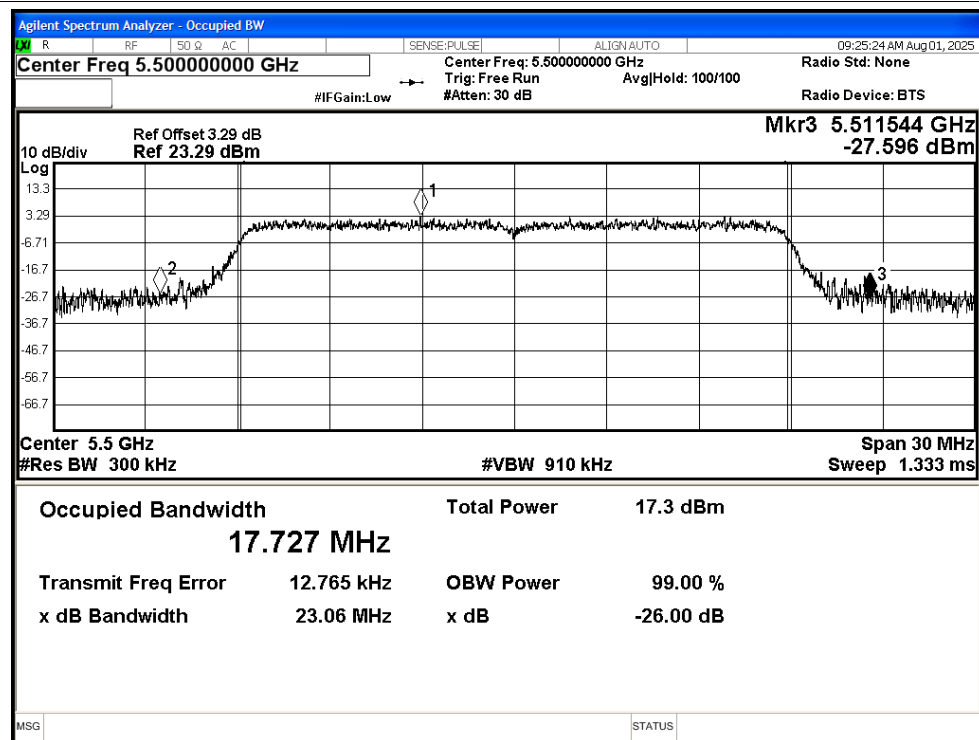


-26dB Bandwidth NVNT n20 5580MHz Ant2

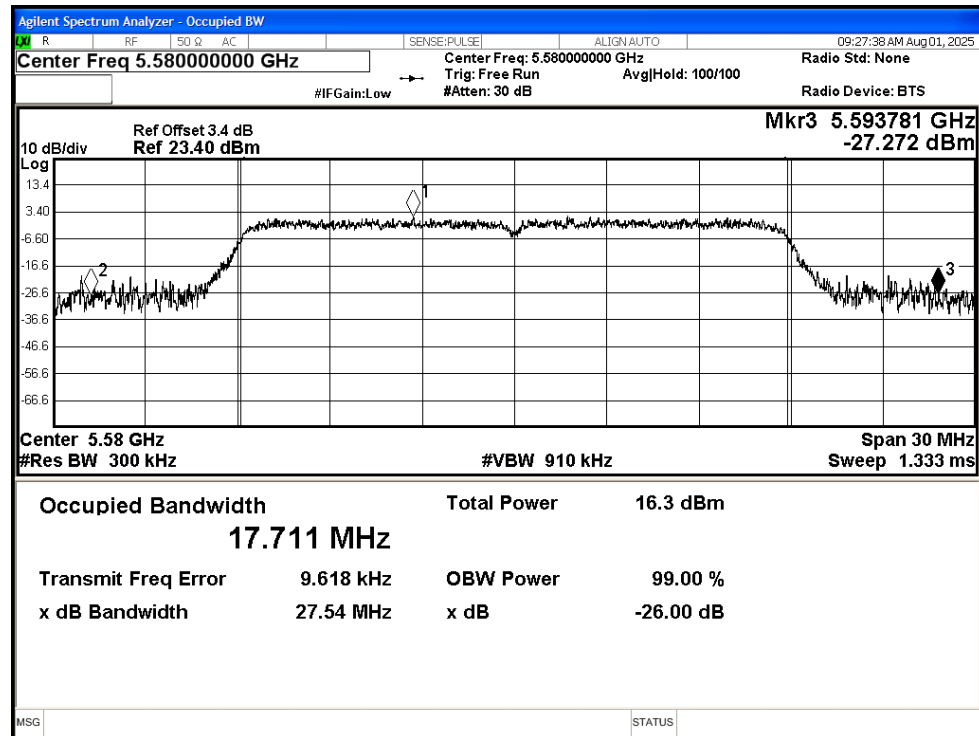


-26dB Bandwidth NVNT n20 5700MHz Ant2

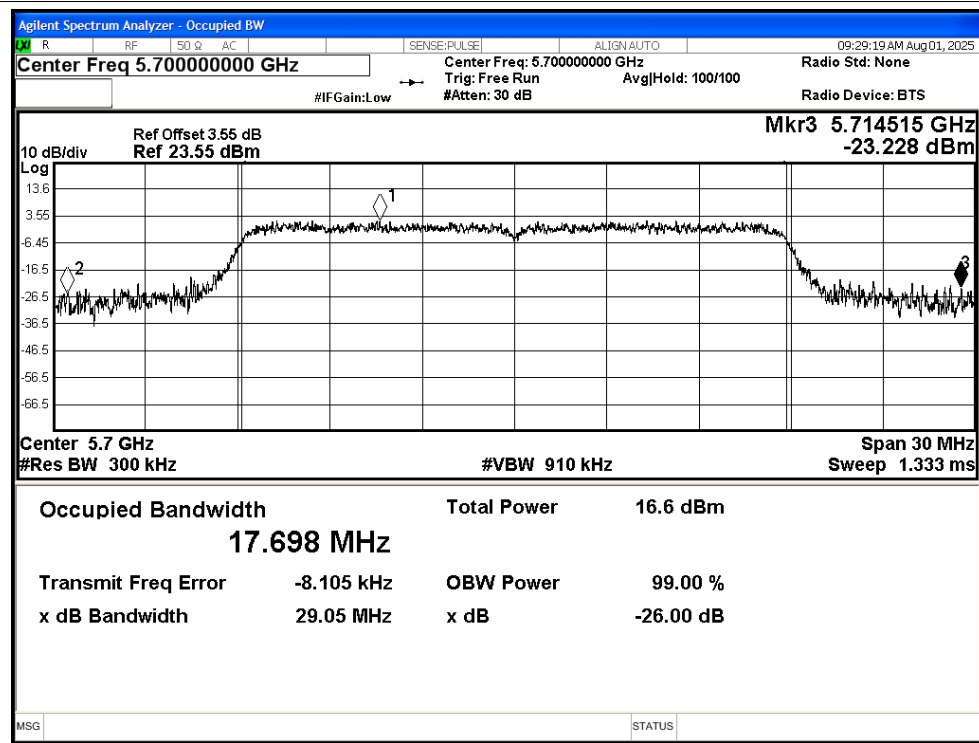


-26dB Bandwidth NVNT n40 5510MHz Ant2

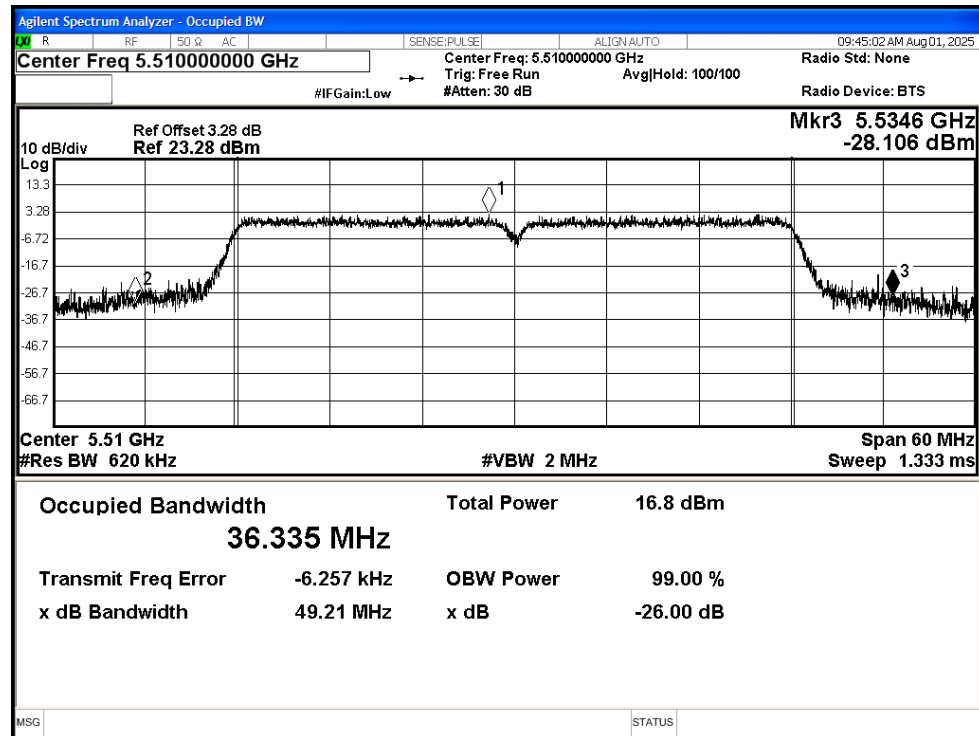


-26dB Bandwidth NVNT n40 5550MHz Ant2

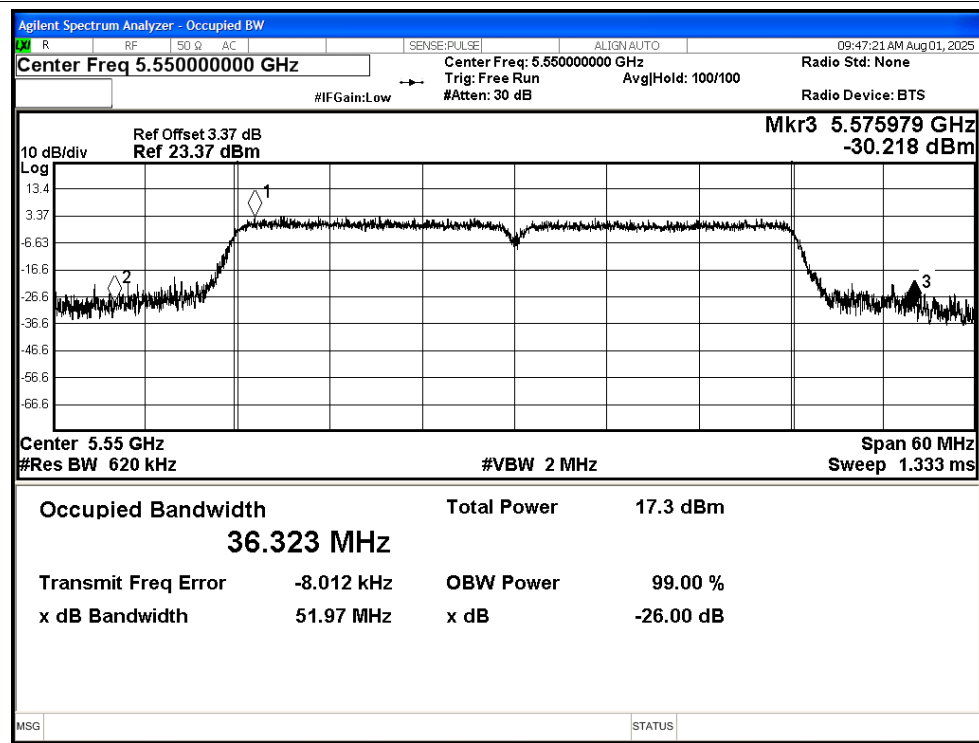


-26dB Bandwidth NVNT n40 5670MHz Ant2

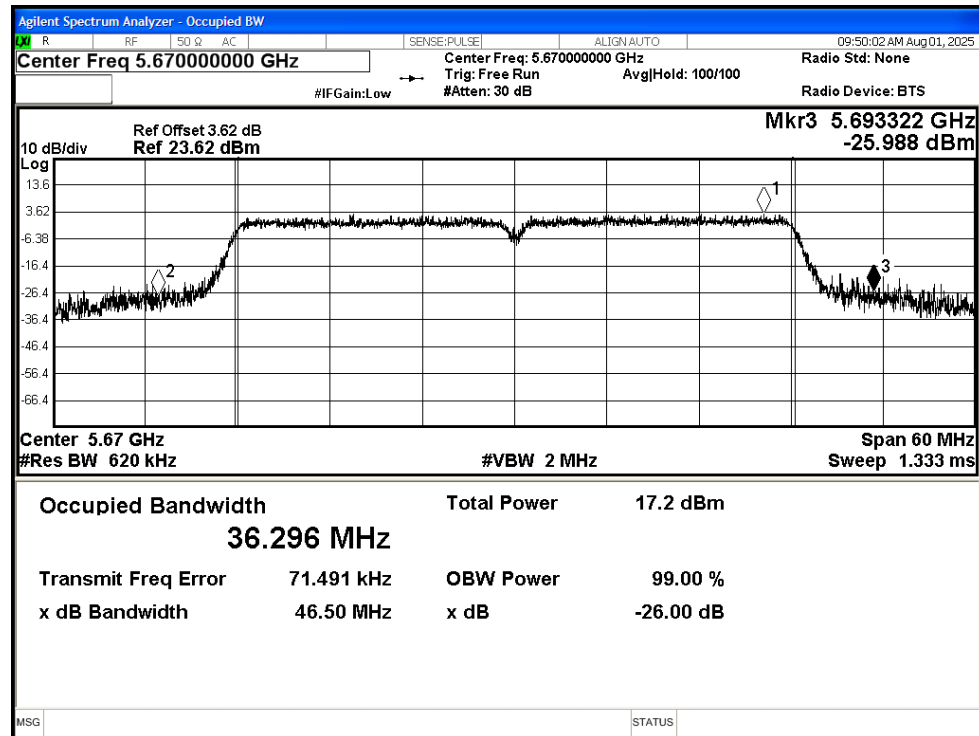


-26dB Bandwidth NVNT ac20 5500MHz Ant2

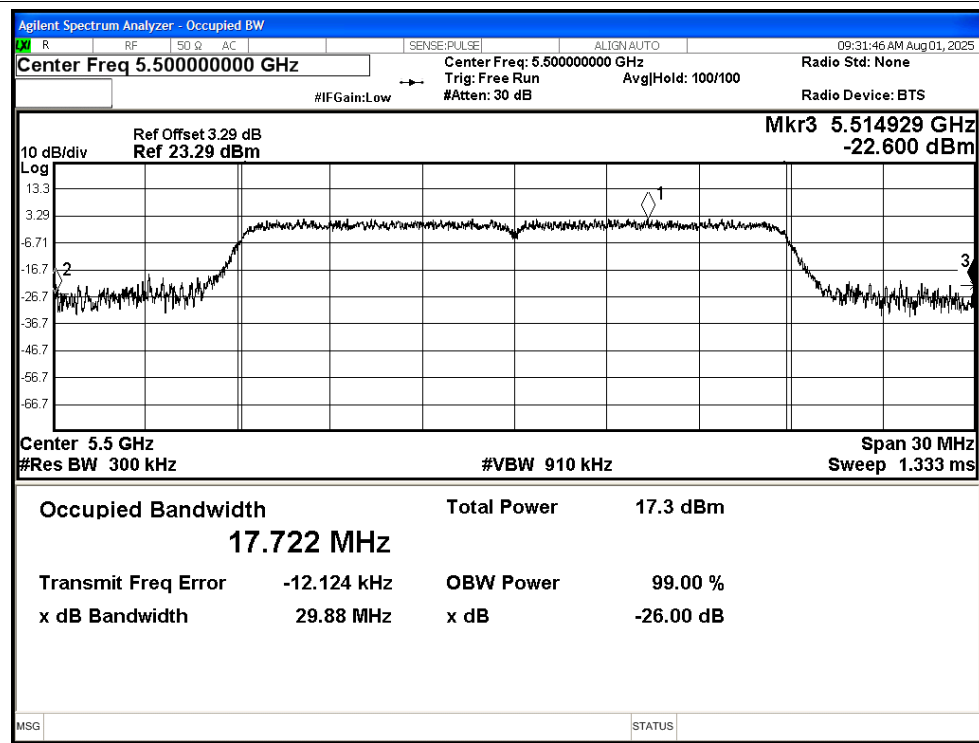


-26dB Bandwidth NVNT ac20 5580MHz Ant2

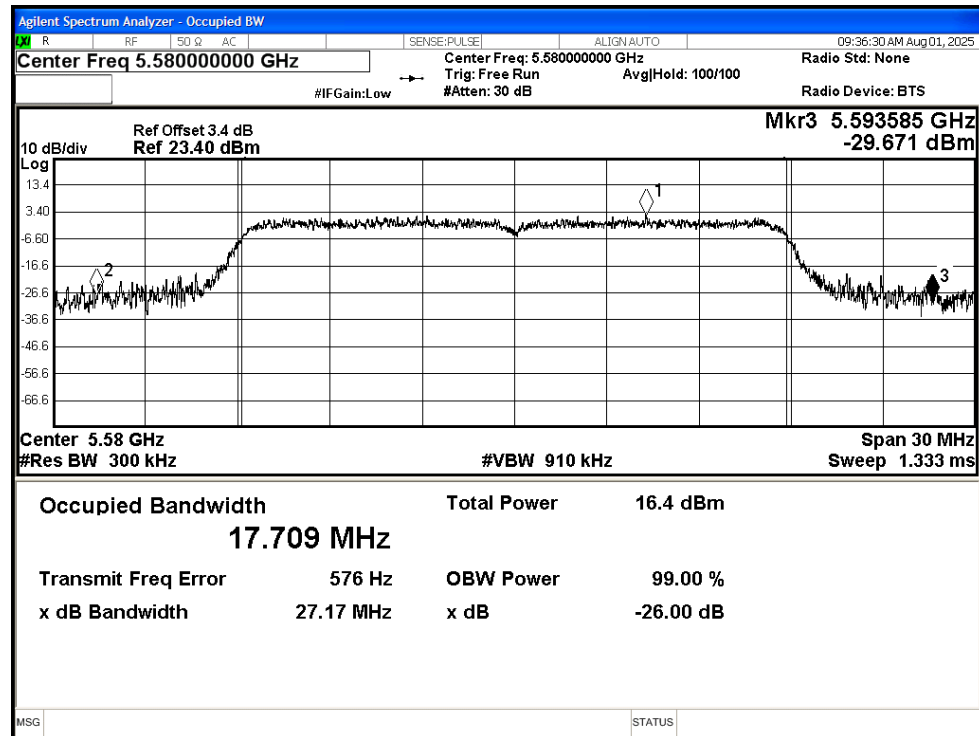


-26dB Bandwidth NVNT ac20 5700MHz Ant2

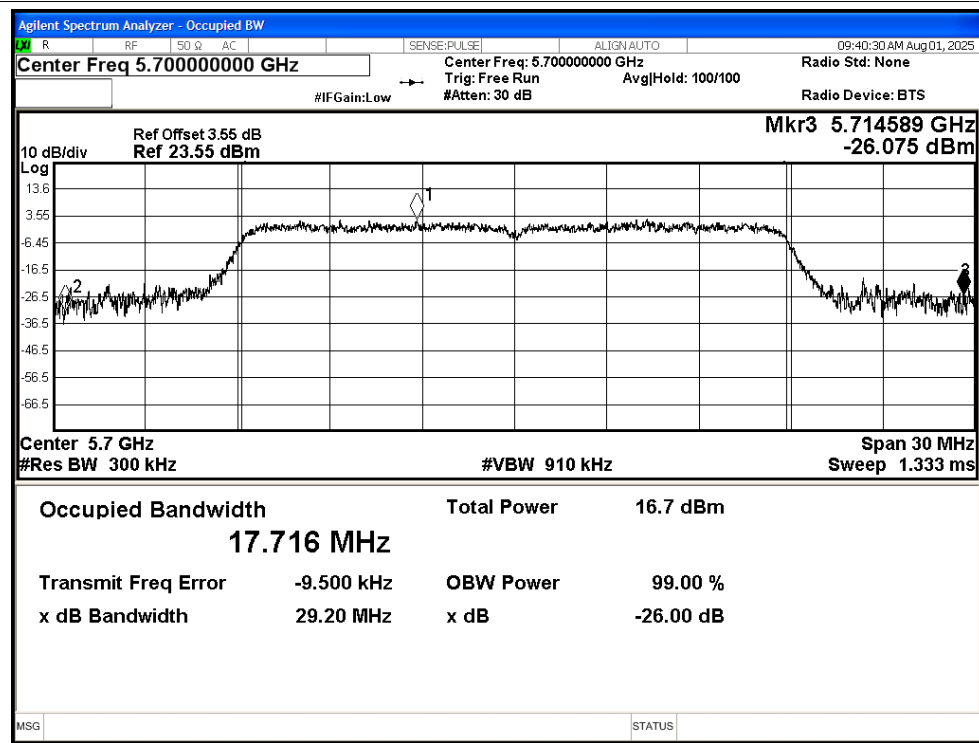


-26dB Bandwidth NVNT ac40 5510MHz Ant2

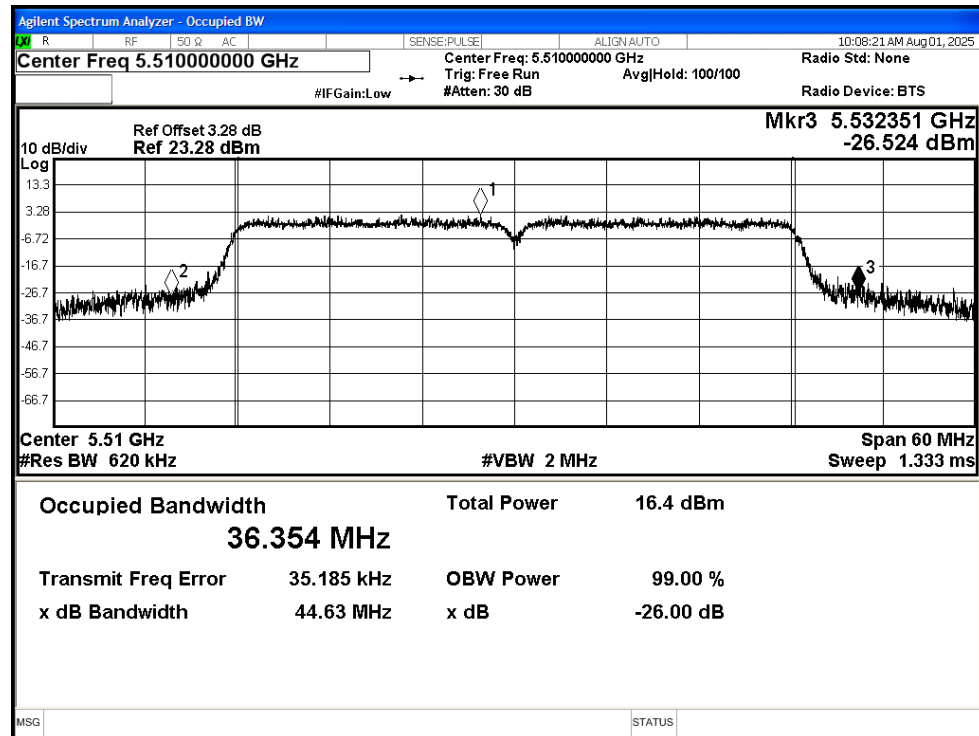


-26dB Bandwidth NVNT ac40 5550MHz Ant2

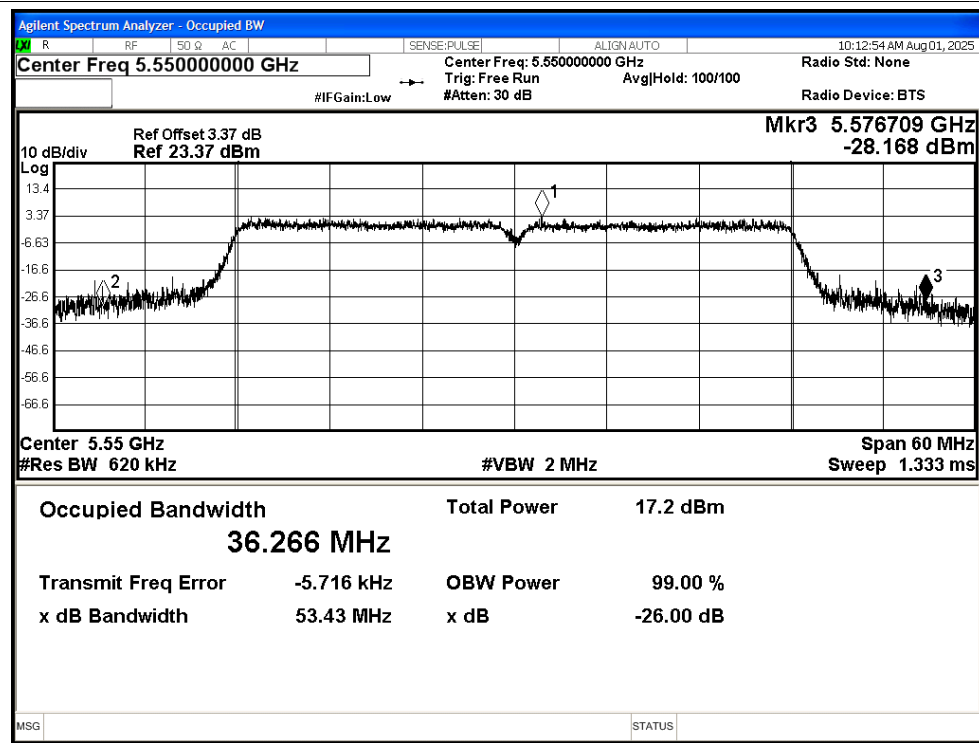


-26dB Bandwidth NVNT ac40 5670MHz Ant2

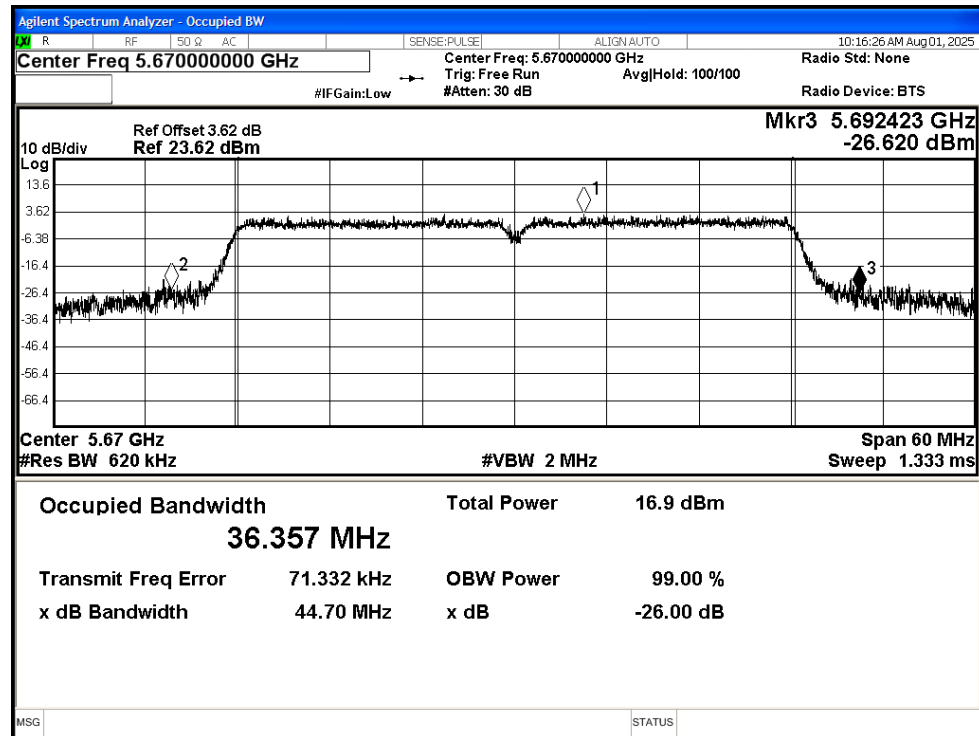


-26dB Bandwidth NVNT ax20 5500MHz Ant2

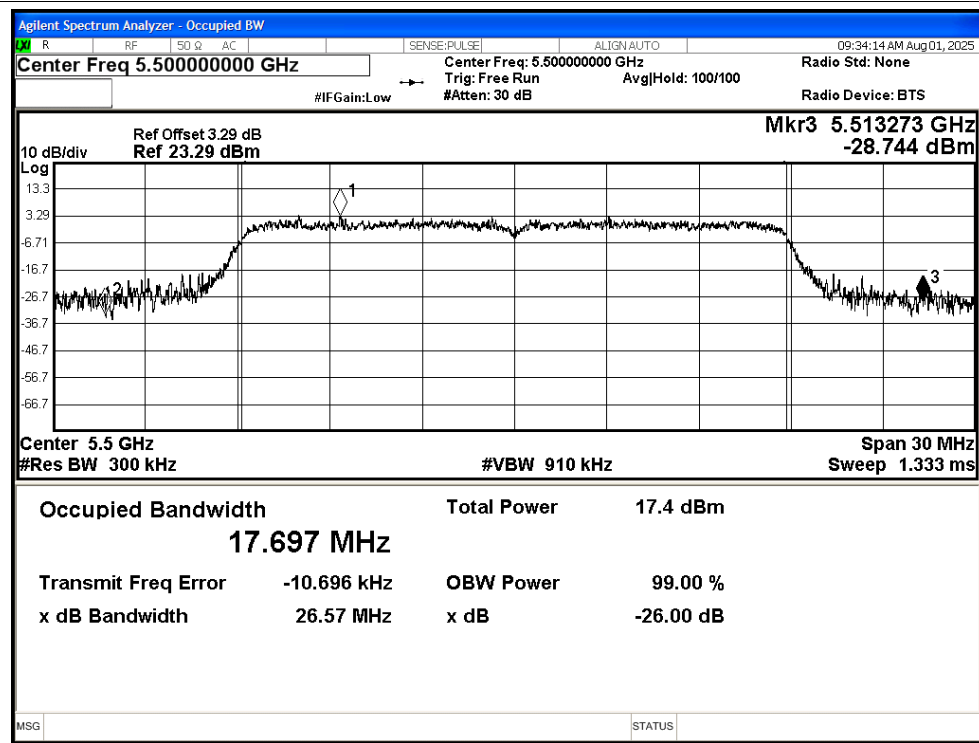


-26dB Bandwidth NVNT ax20 5580MHz Ant2

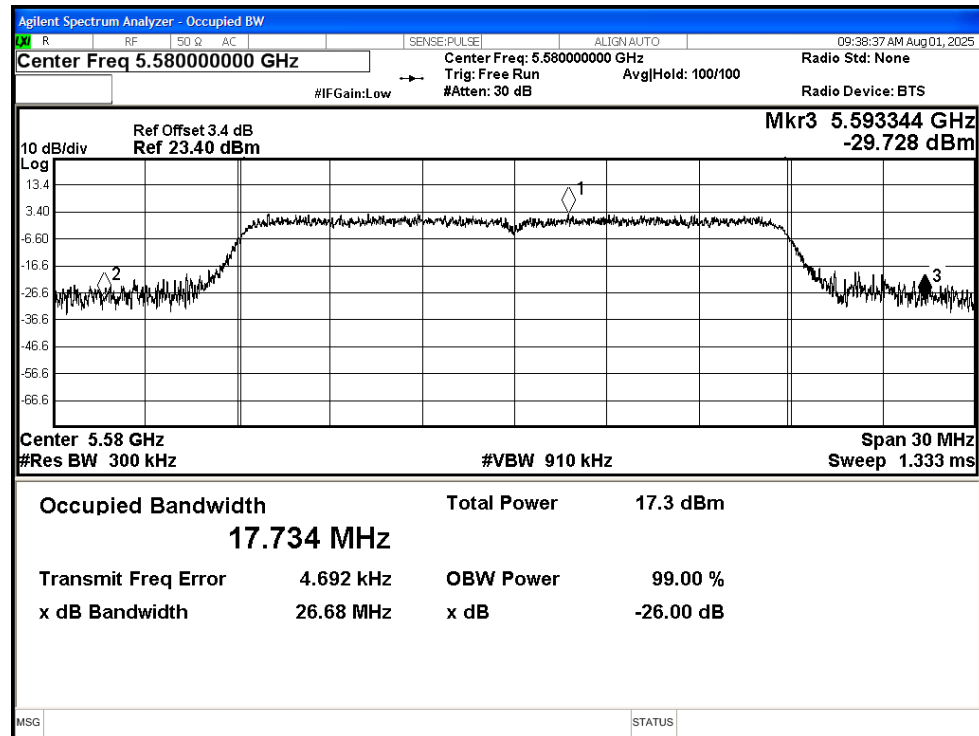


-26dB Bandwidth NVNT ax20 5700MHz Ant2

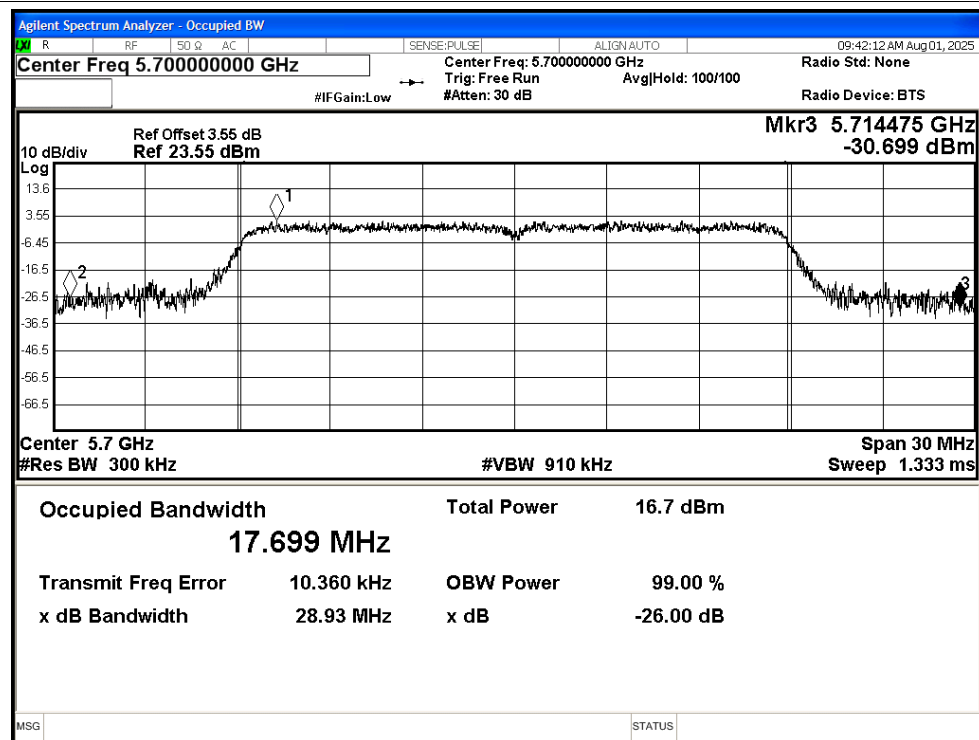


-26dB Bandwidth NVNT ax40 5510MHz Ant2

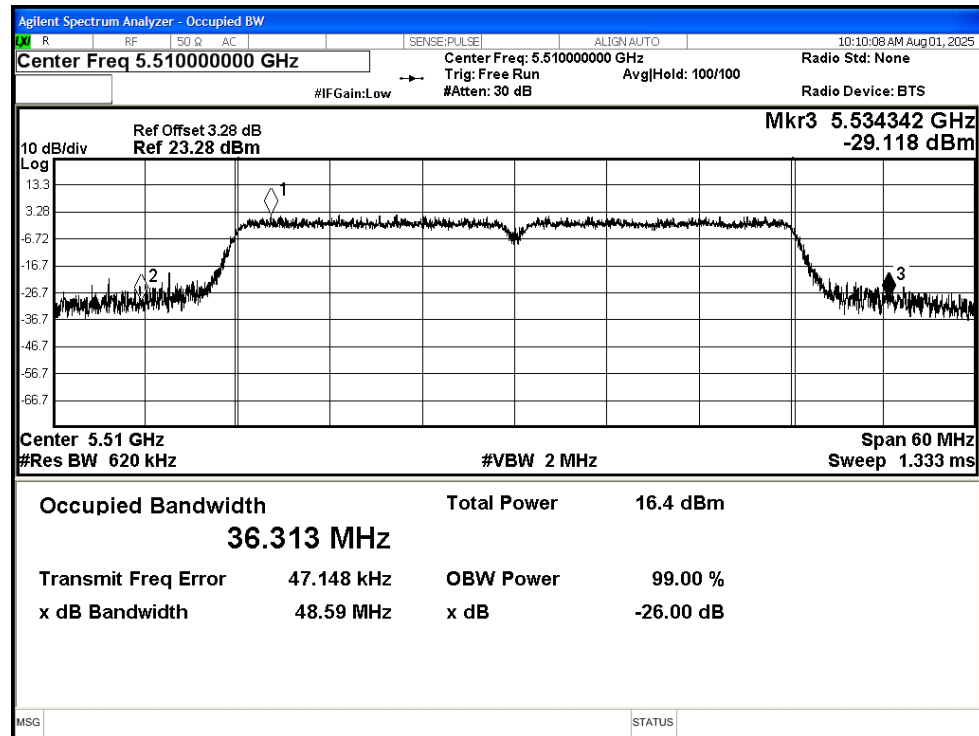

-26dB Bandwidth NVNT ax40 5550MHz Ant2

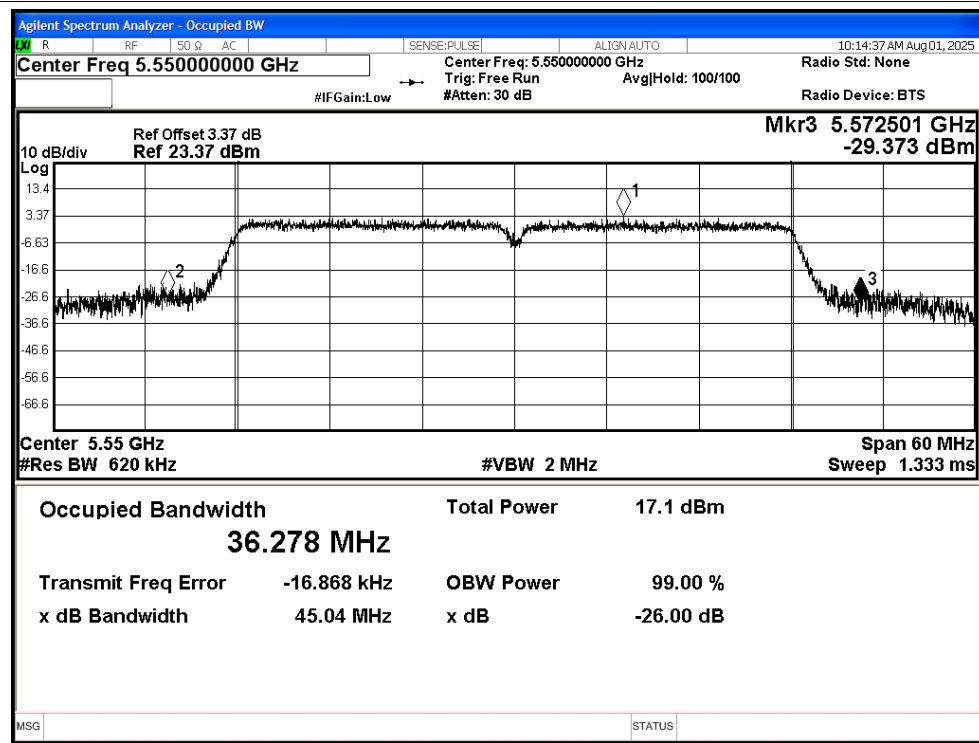

-26dB Bandwidth NVNT ax40 5670MHz Ant2

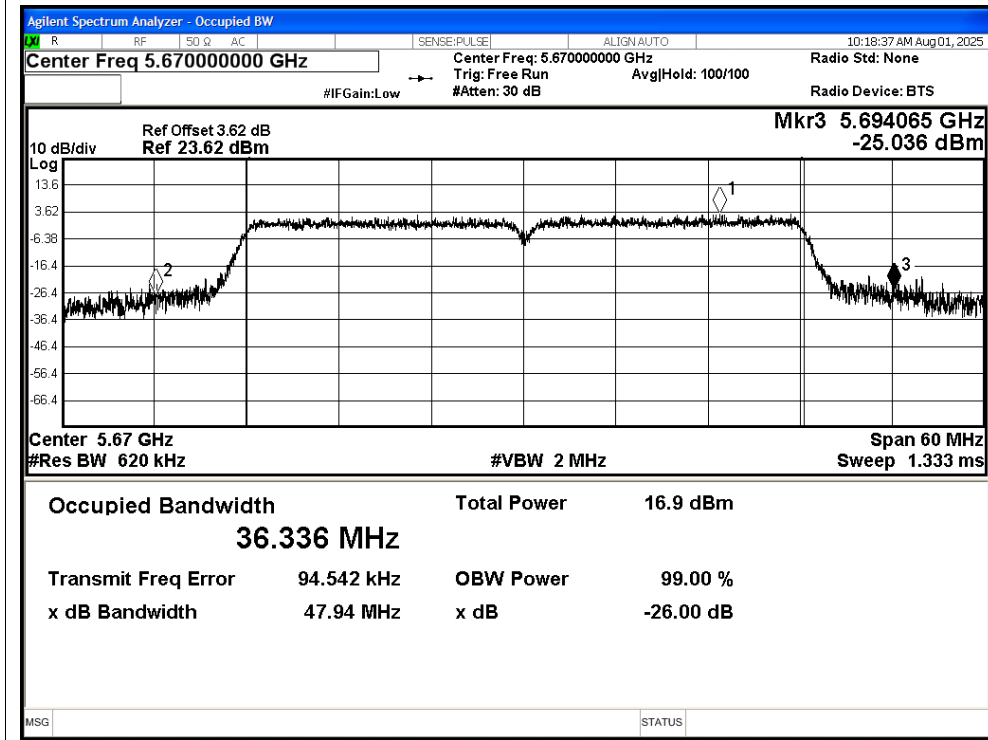


2 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5500	Ant1	16.554
NVNT	a	5580	Ant1	16.518
NVNT	a	5700	Ant1	16.528
NVNT	n20	5500	Ant1	17.639
NVNT	n20	5580	Ant1	17.657
NVNT	n20	5700	Ant1	17.628
NVNT	n40	5510	Ant1	36.24
NVNT	n40	5550	Ant1	36.291
NVNT	n40	5670	Ant1	36.247
NVNT	ac20	5500	Ant1	17.628
NVNT	ac20	5580	Ant1	17.66
NVNT	ac20	5700	Ant1	17.652
NVNT	ac40	5510	Ant1	36.252
NVNT	ac40	5550	Ant1	36.293
NVNT	ac40	5670	Ant1	36.23
NVNT	ax20	5500	Ant1	17.63
NVNT	ax20	5580	Ant1	17.636
NVNT	ax20	5700	Ant1	17.634
NVNT	ax40	5510	Ant1	36.225
NVNT	ax40	5550	Ant1	36.237
NVNT	ax40	5670	Ant1	36.228

Test Graphs


OBW NVNT a 5500MHz Ant1

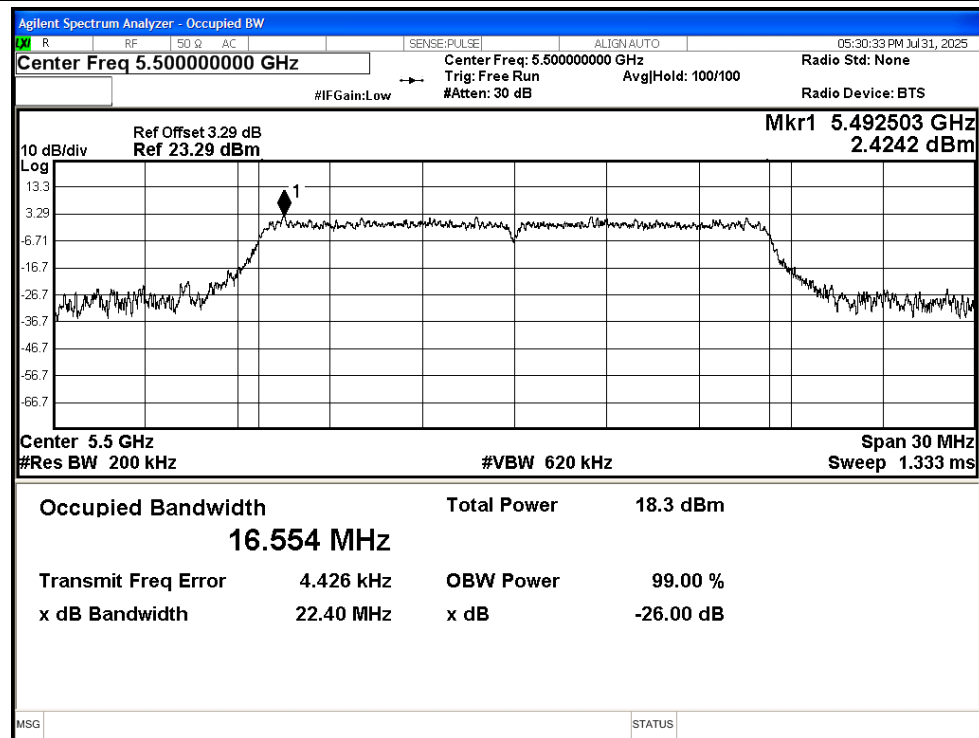


OBW NVNT a 5580MHz Ant1

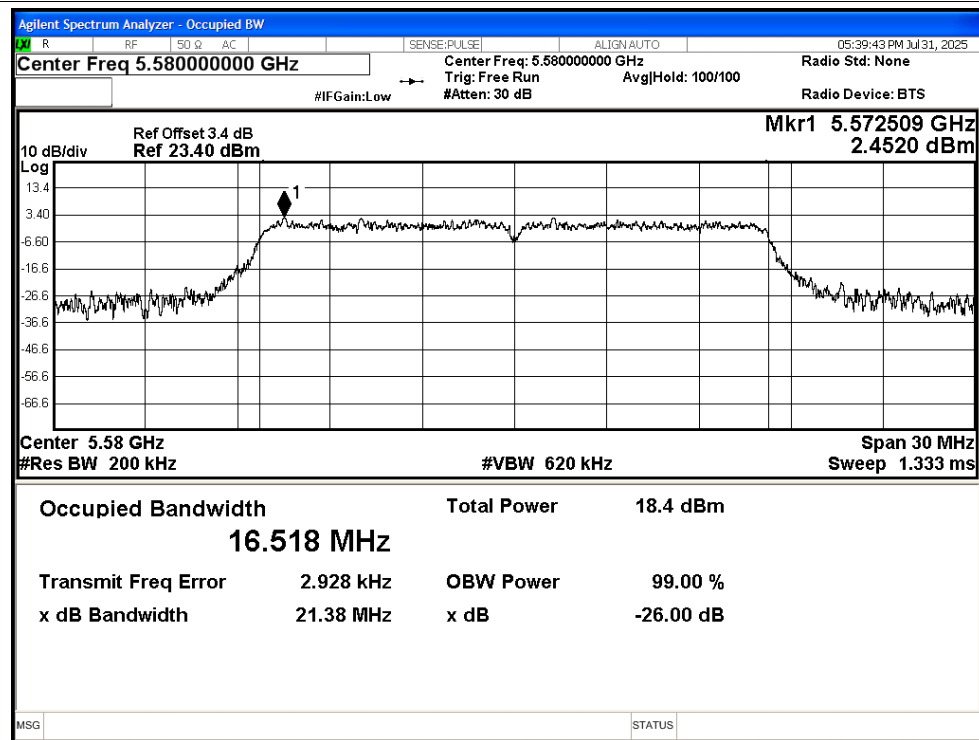


OBW NVNT a 5700MHz Ant1

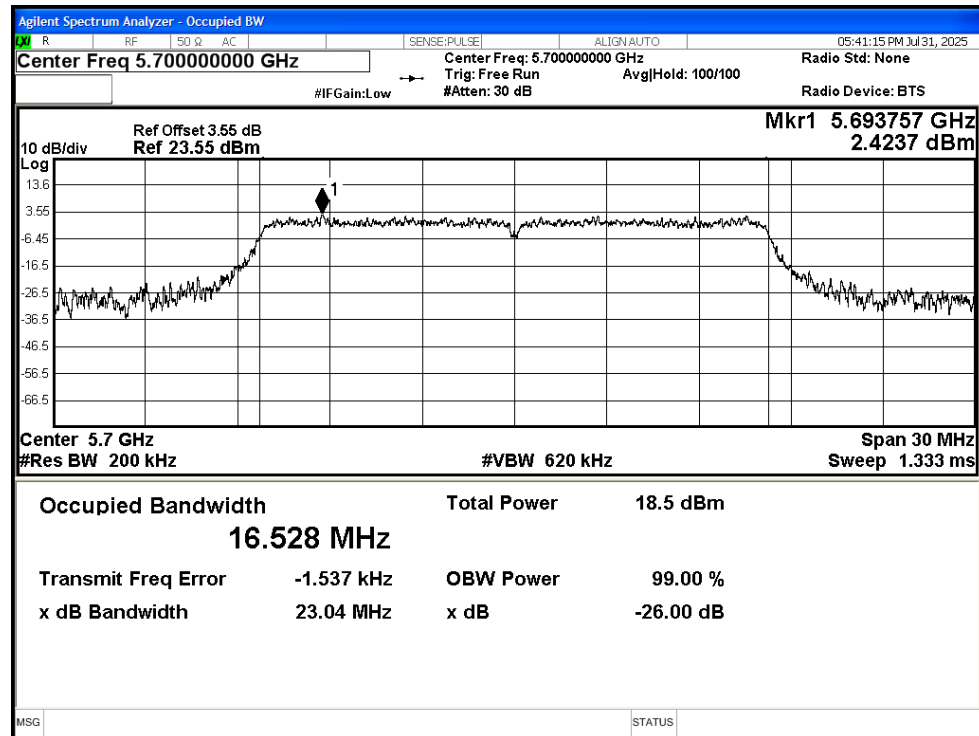


OBW NVNT n20 5500MHz Ant1

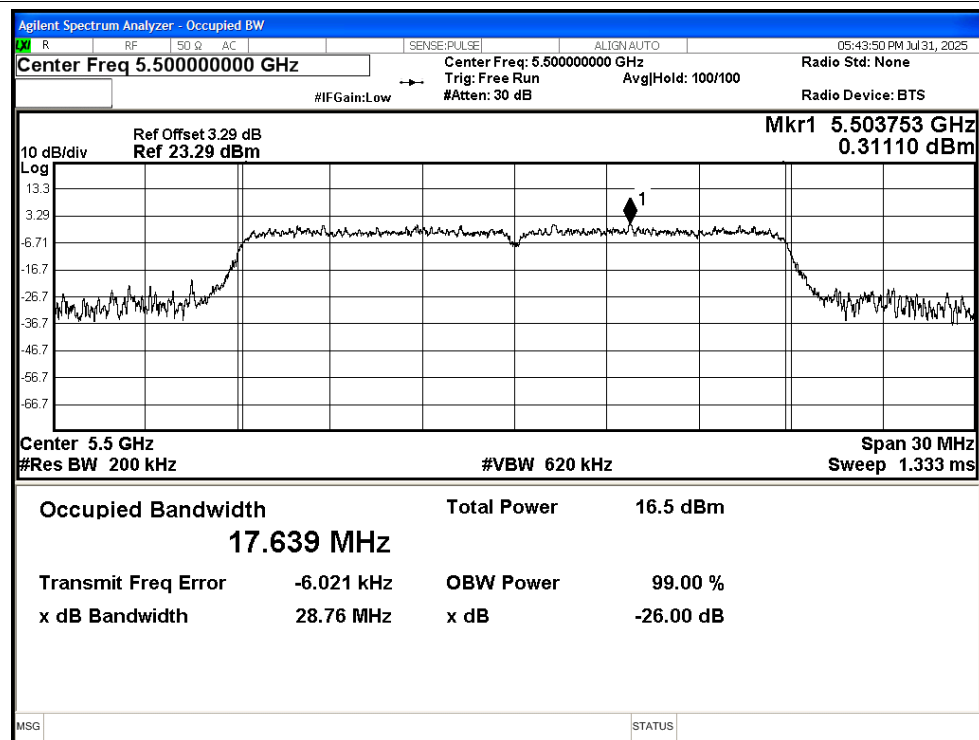


OBW NVNT n20 5580MHz Ant1

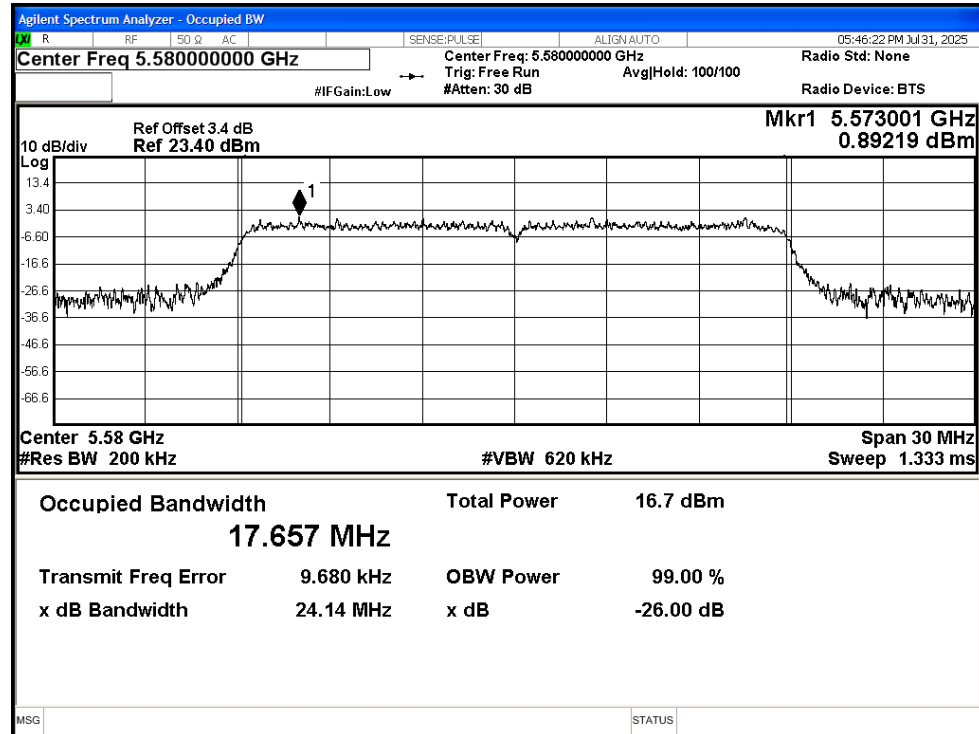


OBW NVNT n20 5700MHz Ant1

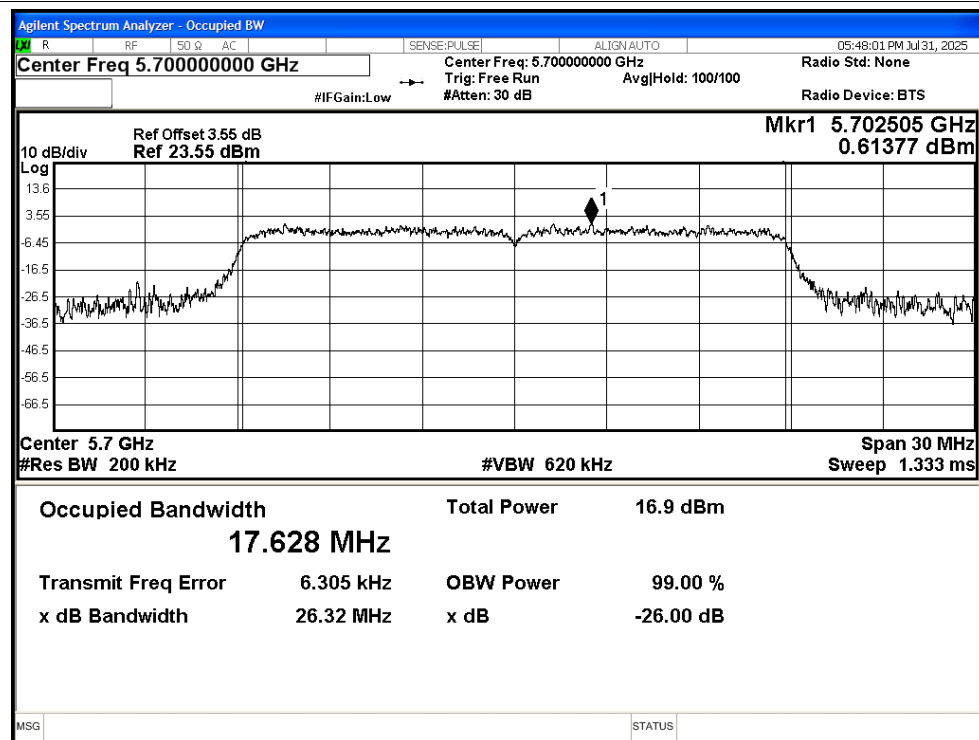


OBW NVNT n40 5510MHz Ant1

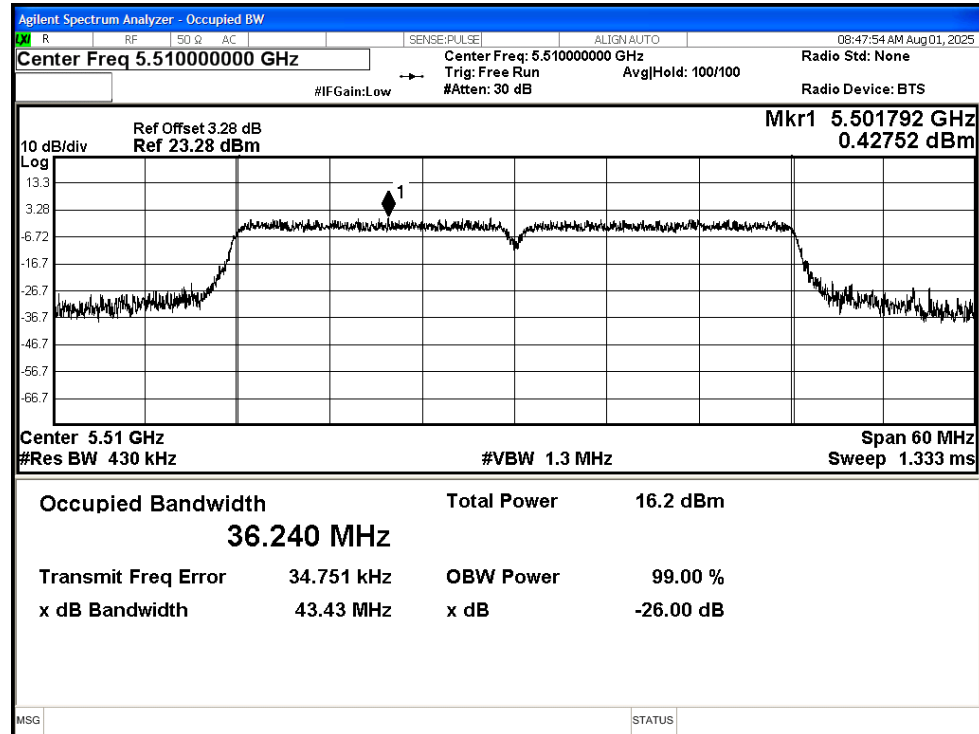


OBW NVNT n40 5550MHz Ant1

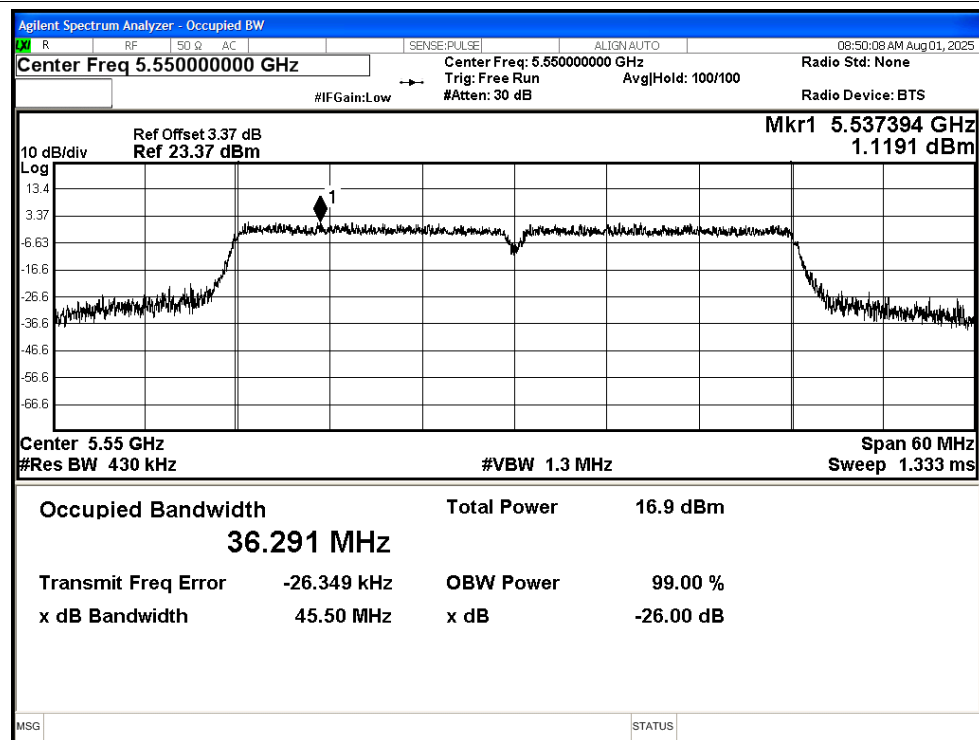


OBW NVNT n40 5670MHz Ant1

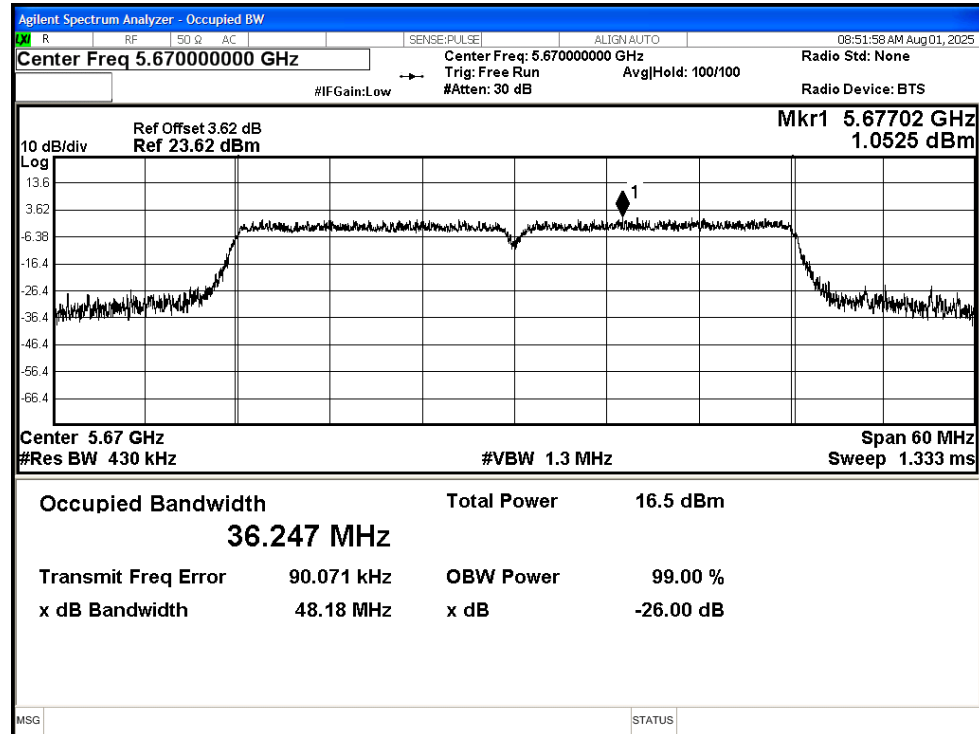


OBW NVNT ac20 5500MHz Ant1

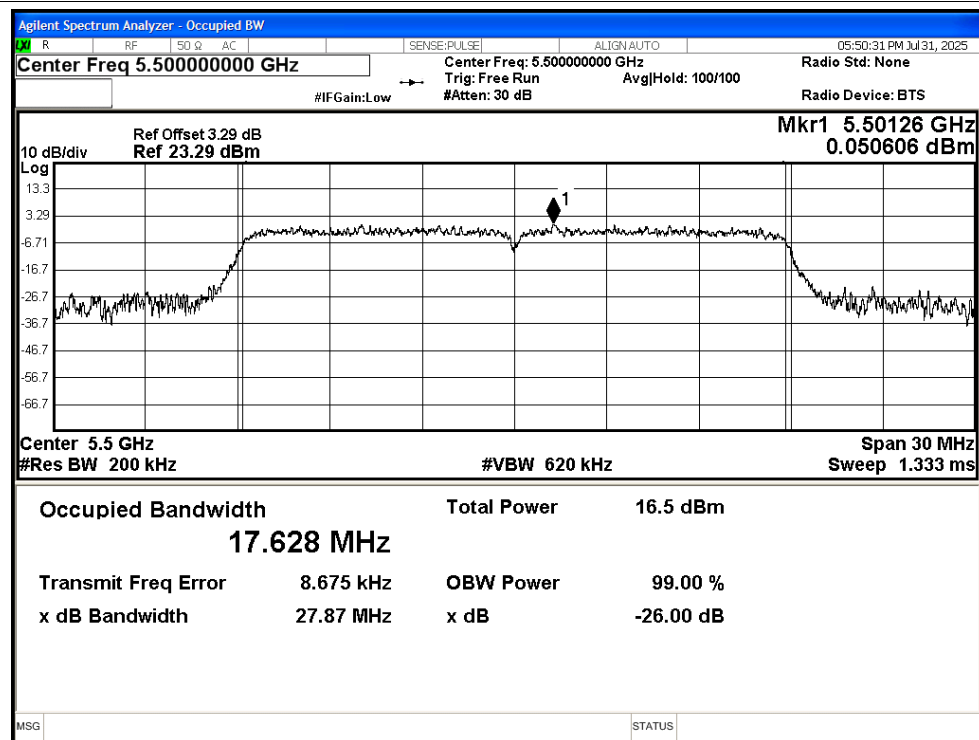


OBW NVNT ac20 5580MHz Ant1

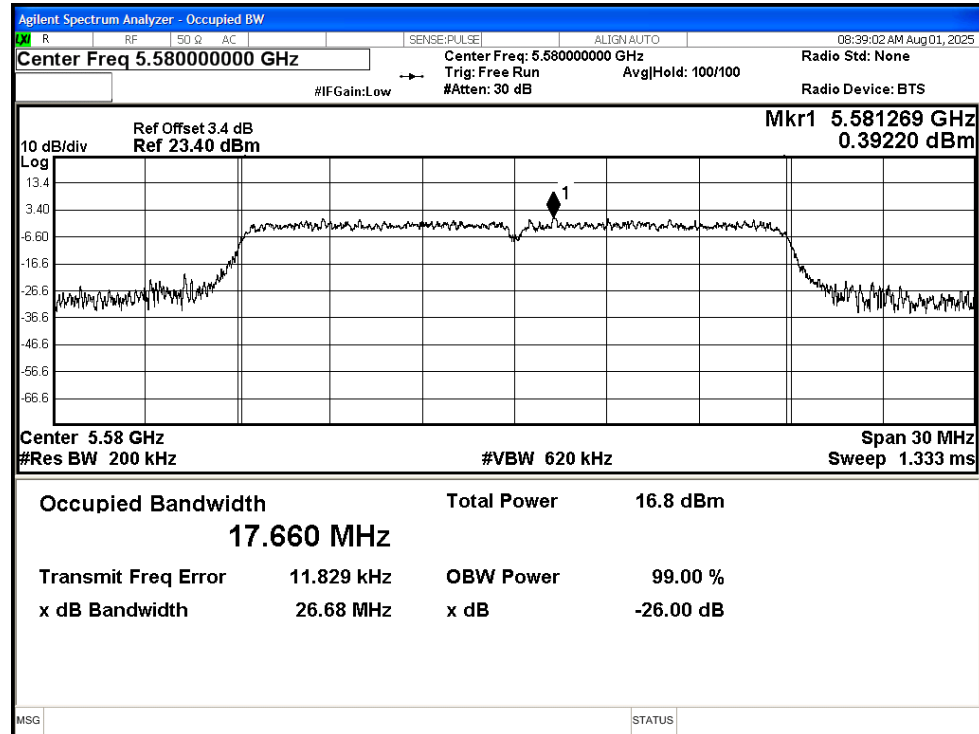


OBW NVNT ac20 5700MHz Ant1

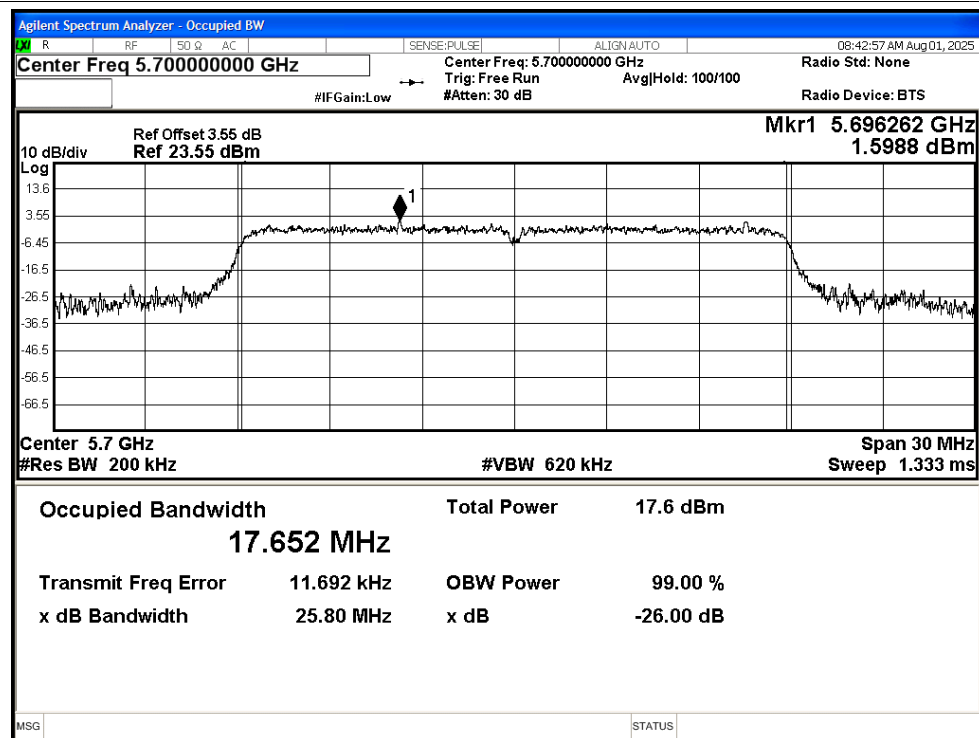


OBW NVNT ac40 5510MHz Ant1

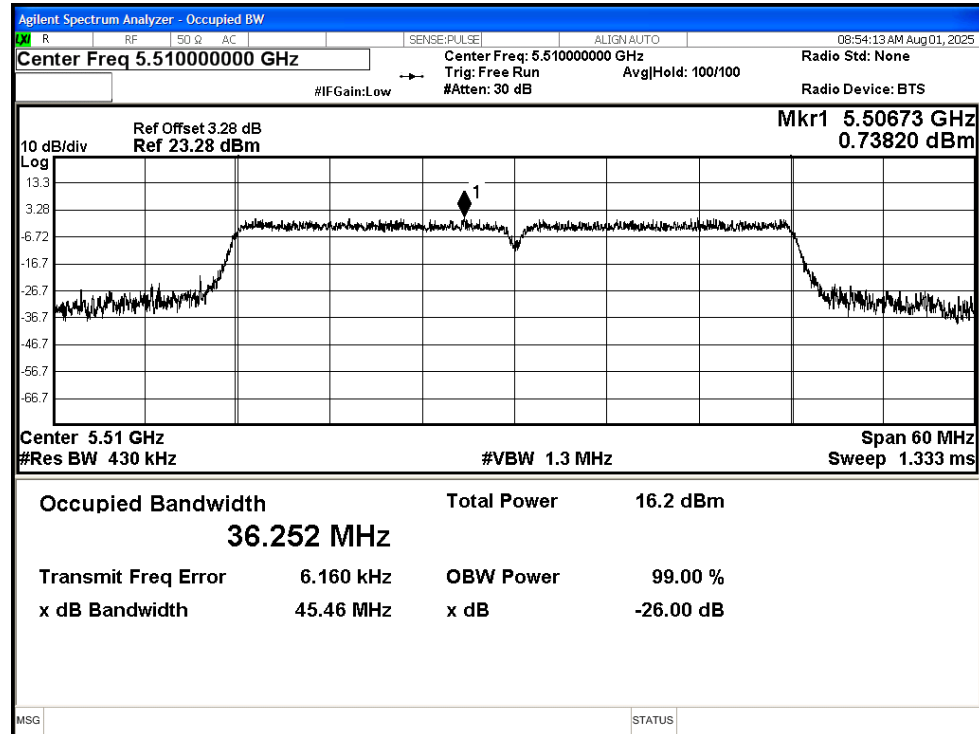


OBW NVNT ac40 5550MHz Ant1

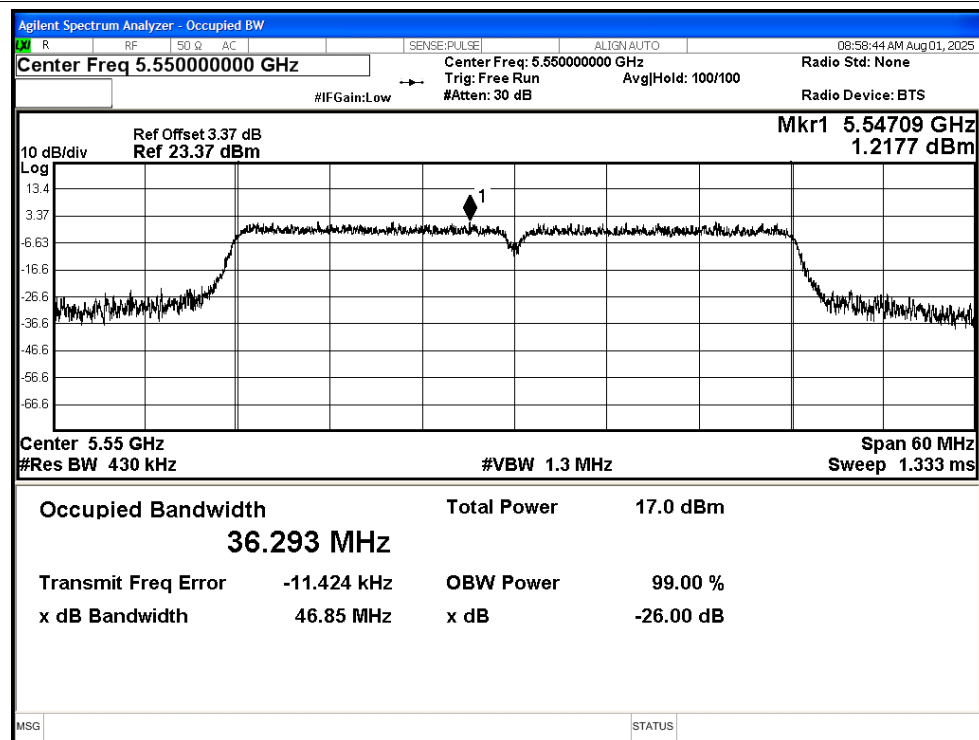


OBW NVNT ac40 5670MHz Ant1

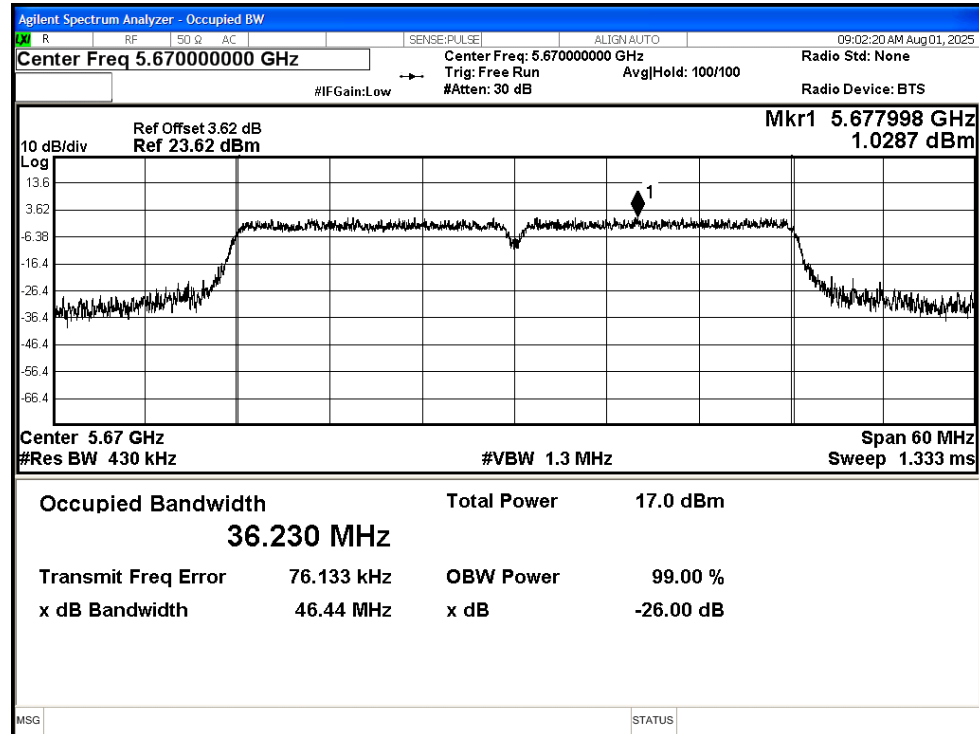


OBW NVNT ax20 5500MHz Ant1

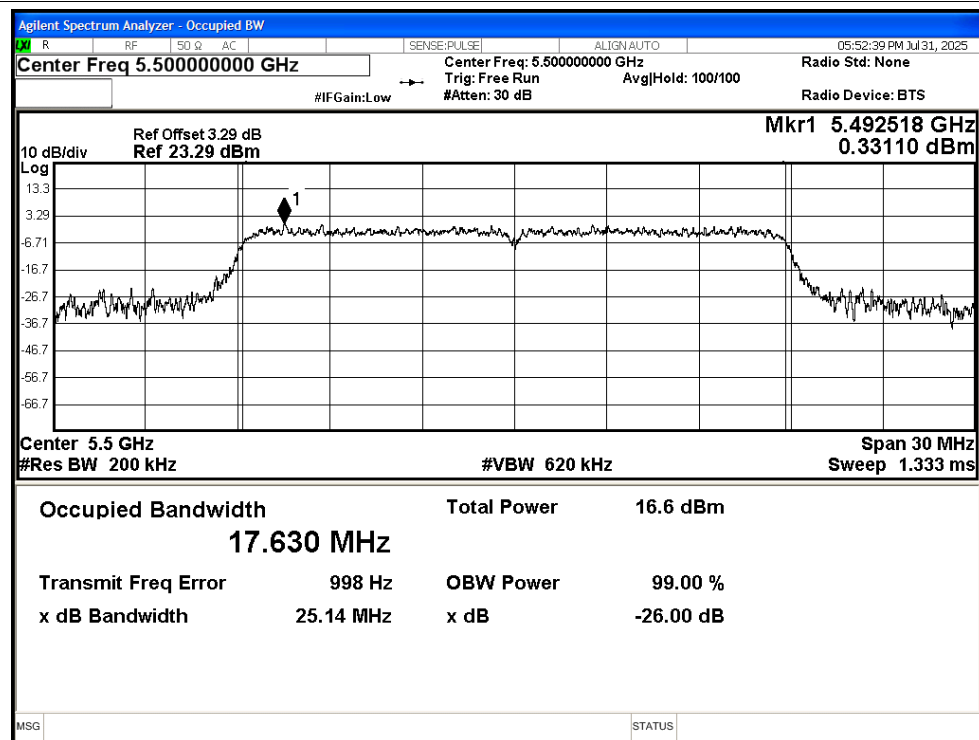


OBW NVNT ax20 5580MHz Ant1

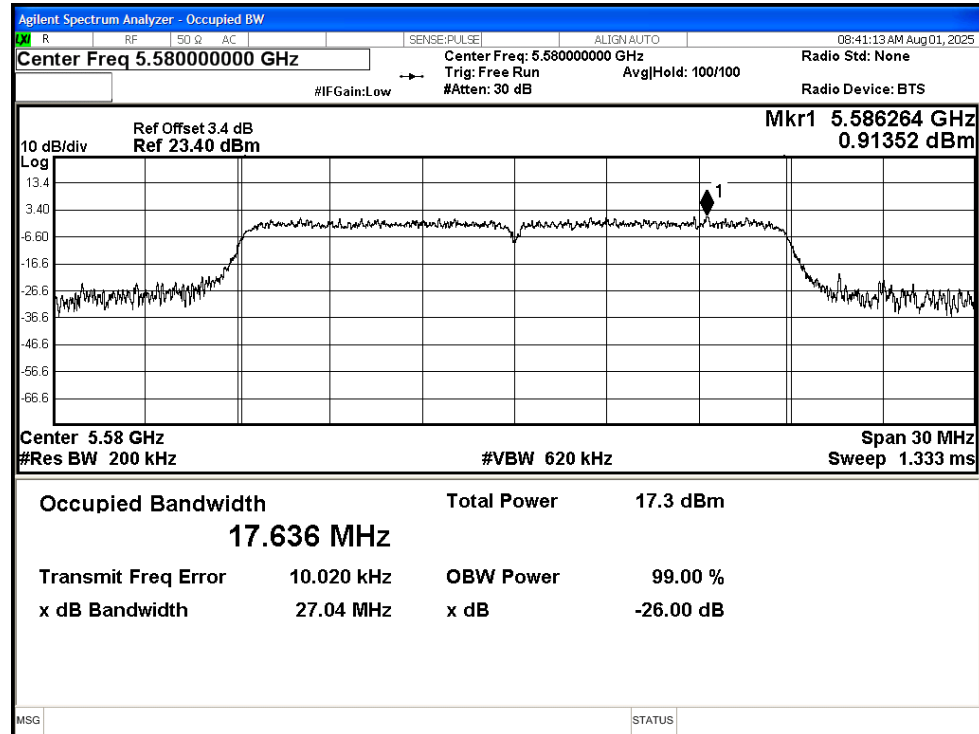


OBW NVNT ax20 5700MHz Ant1

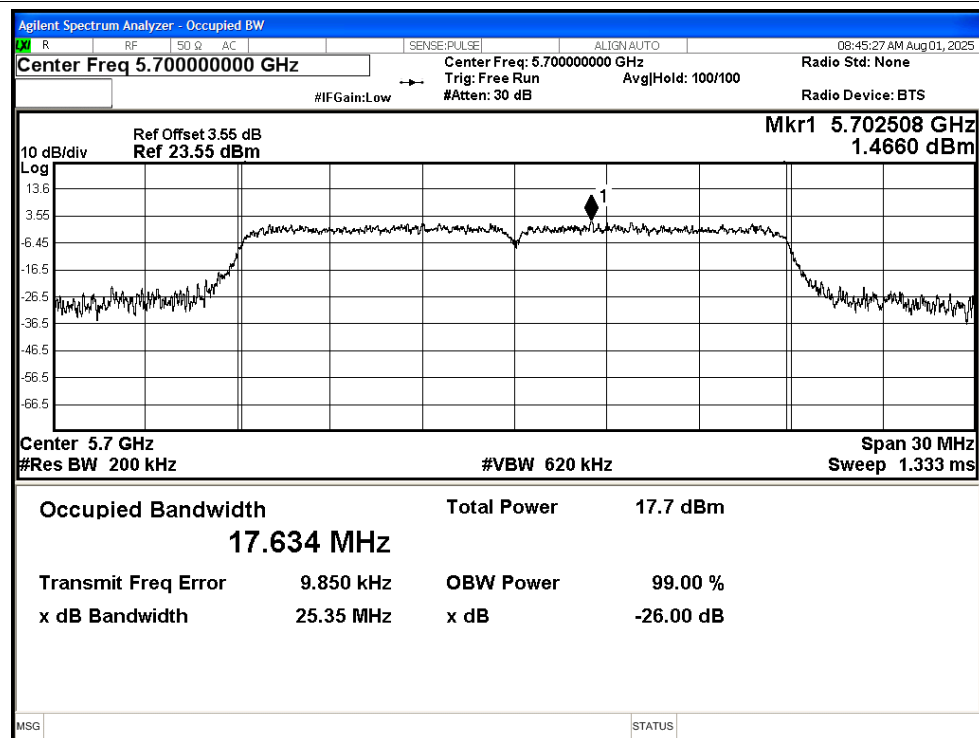


OBW NVNT ax40 5510MHz Ant1

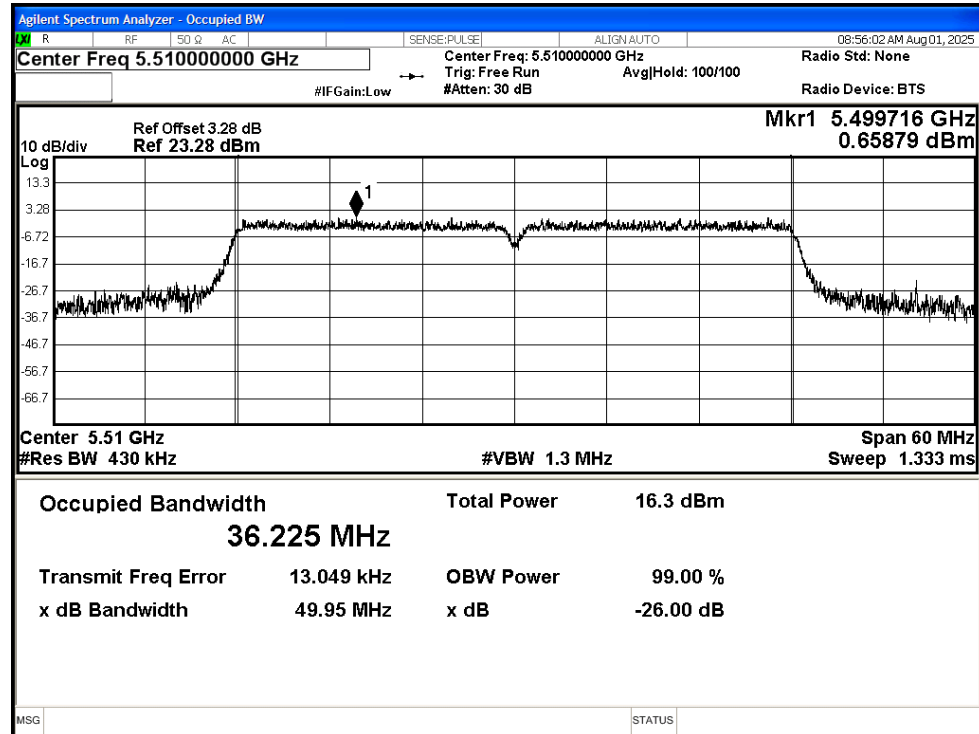

OBW NVNT ax40 5550MHz Ant1

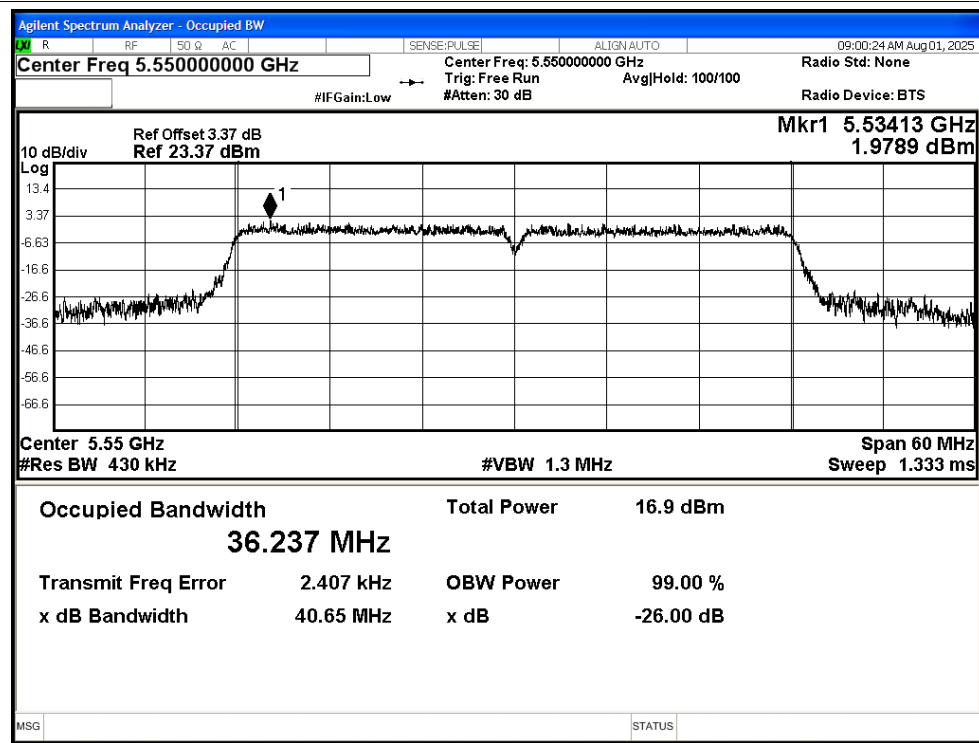


OBW NVNT ax40 5670MHz Ant1

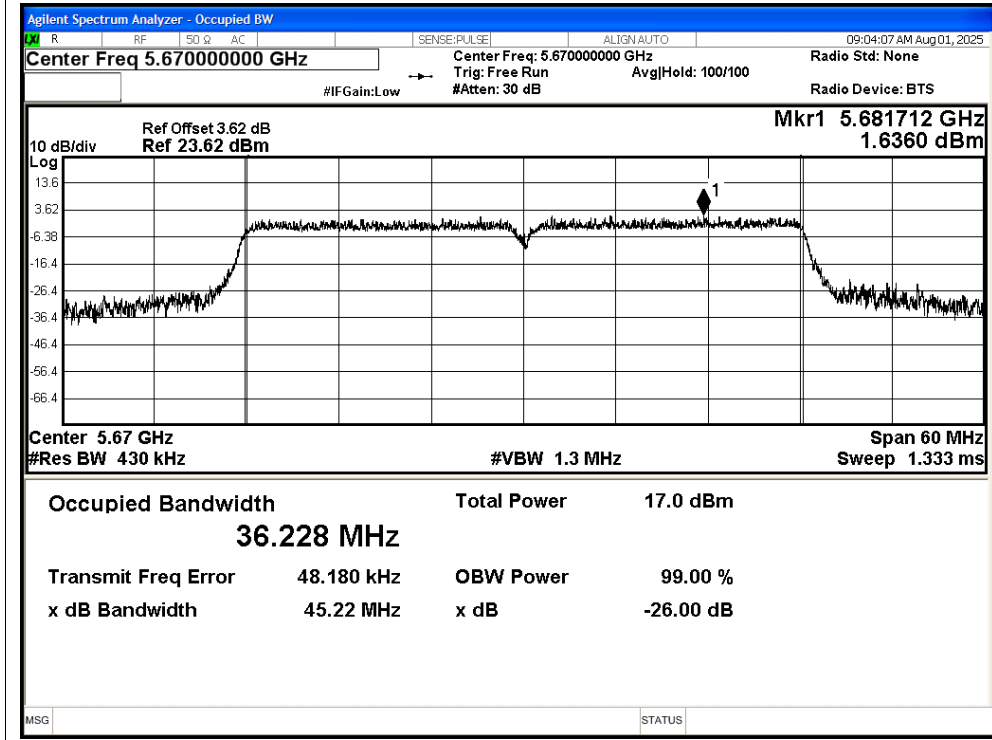


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5500	Ant2	16.529
NVNT	a	5580	Ant2	16.542
NVNT	a	5700	Ant2	16.557
NVNT	n20	5500	Ant2	17.624
NVNT	n20	5580	Ant2	17.631
NVNT	n20	5700	Ant2	17.628
NVNT	n40	5510	Ant2	36.263
NVNT	n40	5550	Ant2	36.268
NVNT	n40	5670	Ant2	36.199
NVNT	ac20	5500	Ant2	17.634
NVNT	ac20	5580	Ant2	17.633
NVNT	ac20	5700	Ant2	17.623
NVNT	ac40	5510	Ant2	36.256
NVNT	ac40	5550	Ant2	36.206
NVNT	ac40	5670	Ant2	36.195
NVNT	ax20	5500	Ant2	17.641
NVNT	ax20	5580	Ant2	17.639
NVNT	ax20	5700	Ant2	17.644
NVNT	ax40	5510	Ant2	36.214
NVNT	ax40	5550	Ant2	36.266
NVNT	ax40	5670	Ant2	36.245

Test Graphs


OBW NVNT a 5500MHz Ant2

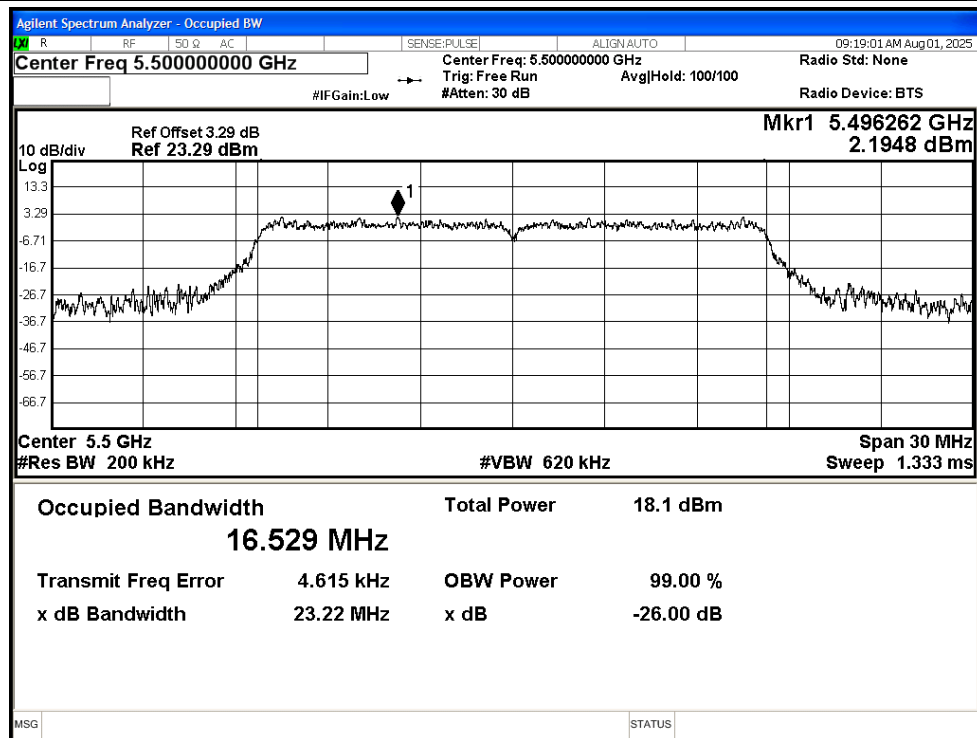


OBW NVNT a 5580MHz Ant2

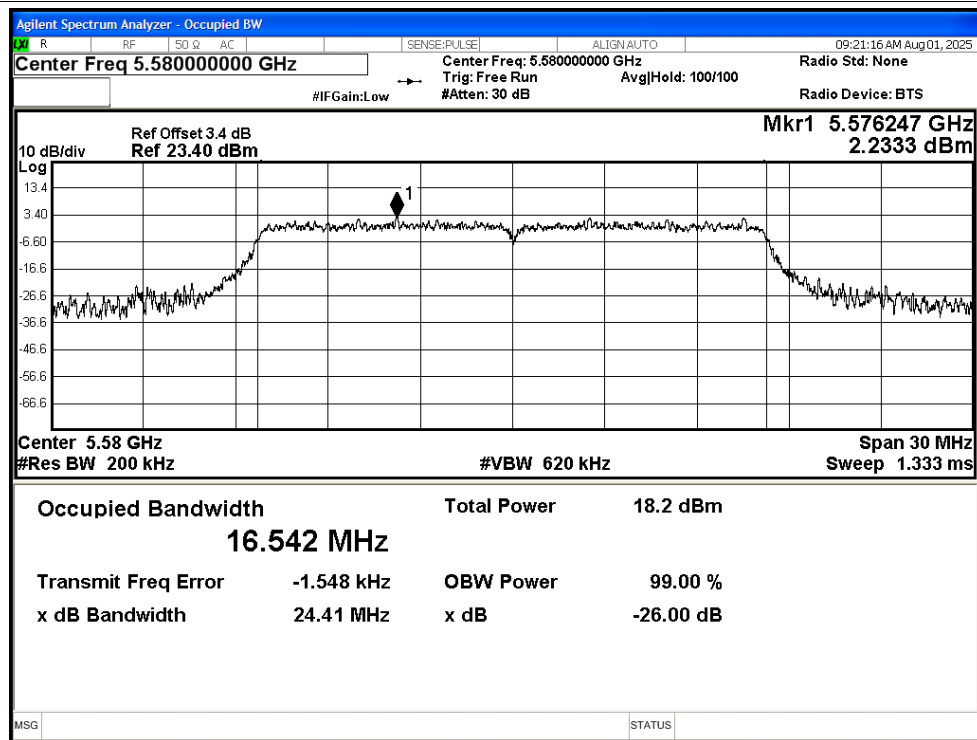


OBW NVNT a 5700MHz Ant2

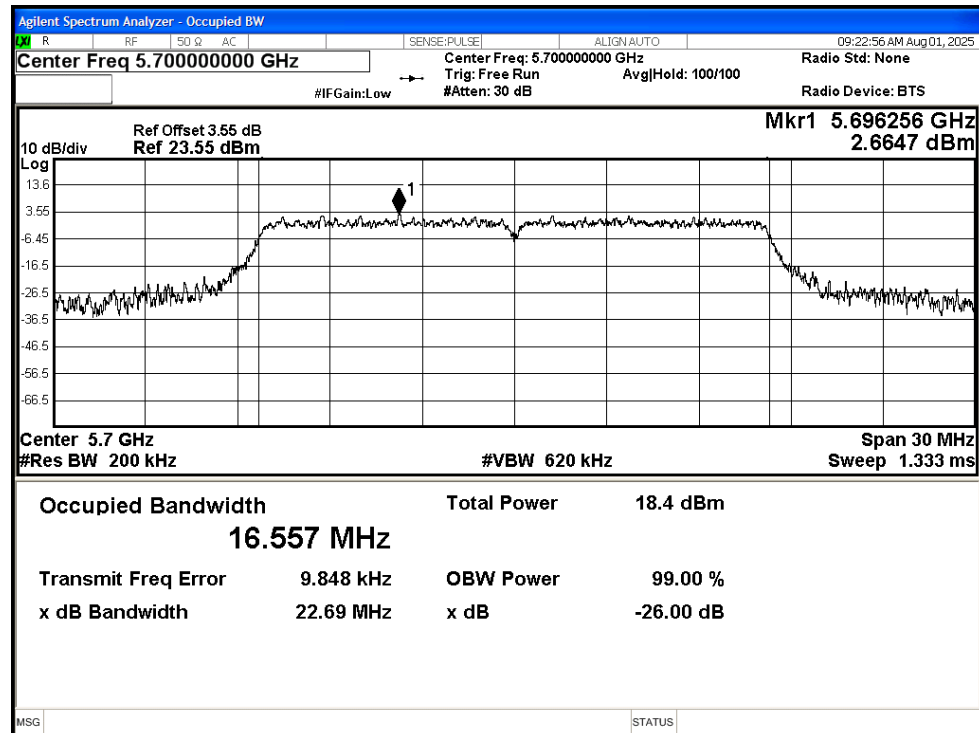


OBW NVNT n20 5500MHz Ant2

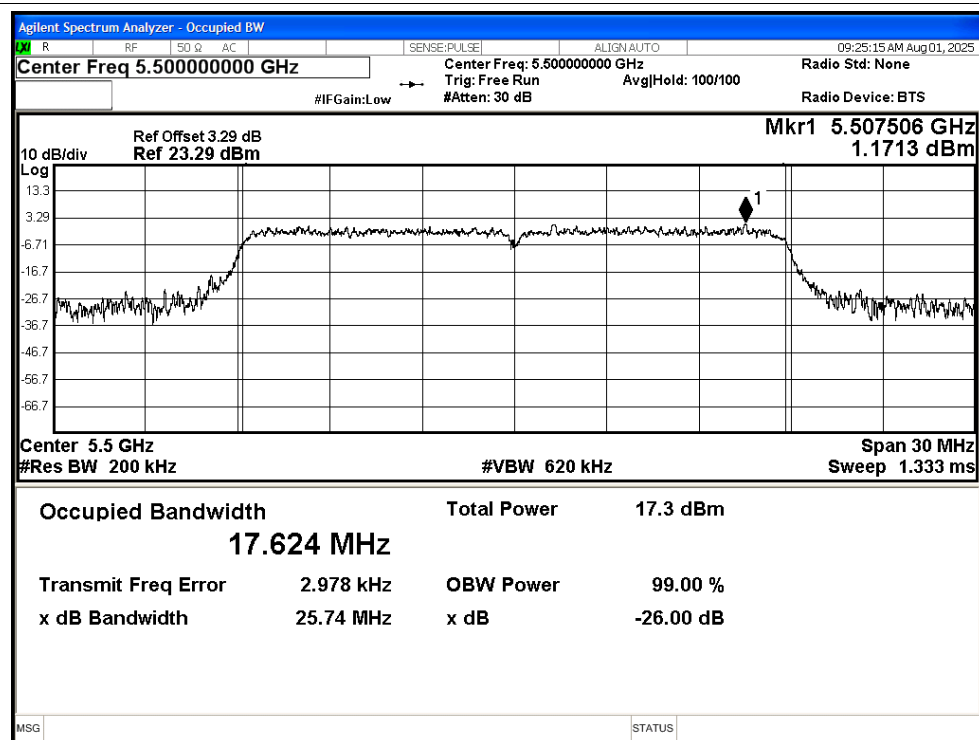


OBW NVNT n20 5580MHz Ant2

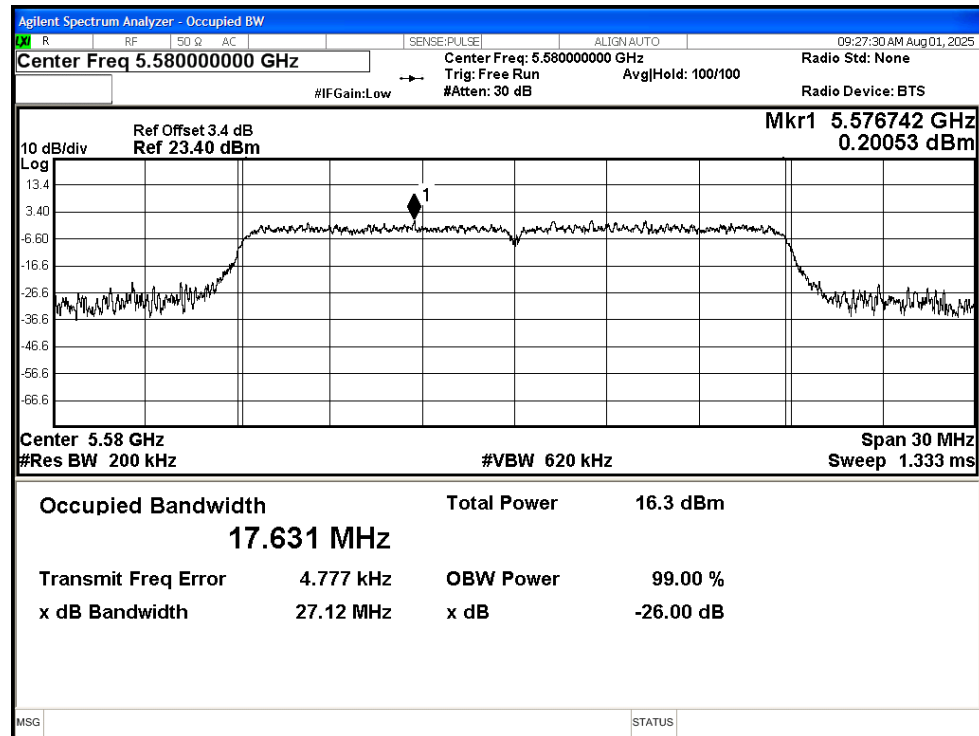


OBW NVNT n20 5700MHz Ant2

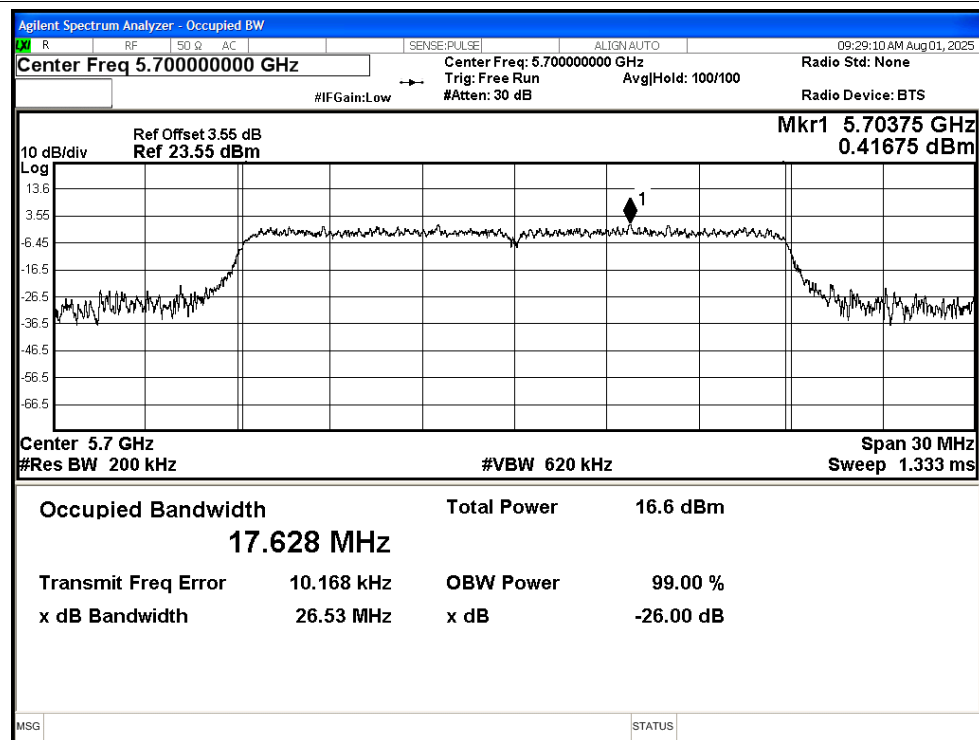


OBW NVNT n40 5510MHz Ant2

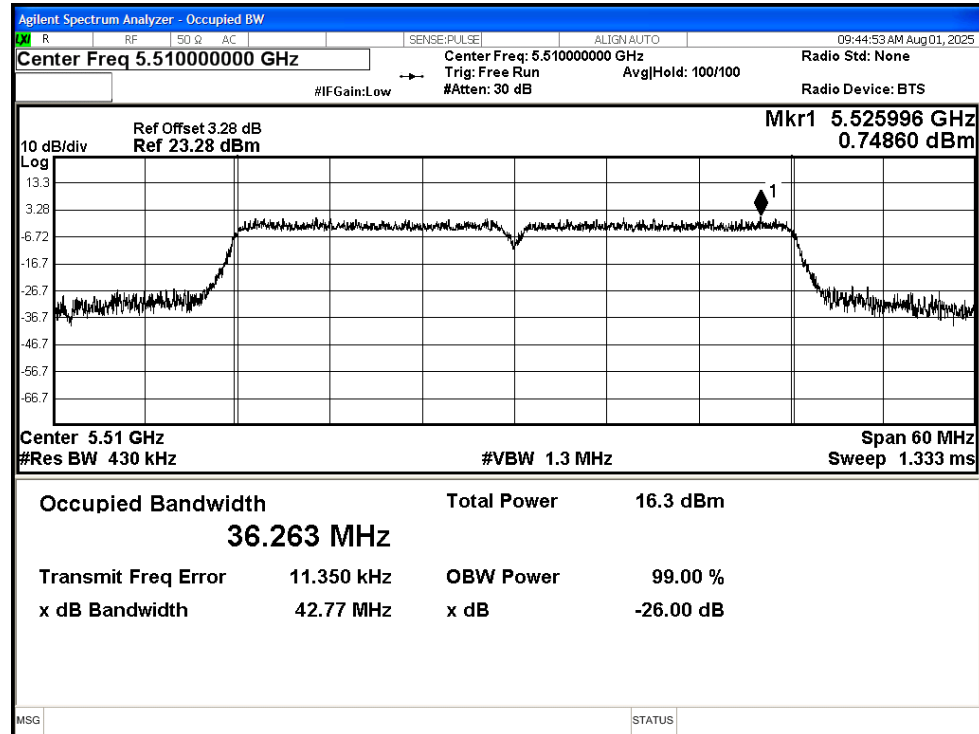


OBW NVNT n40 5550MHz Ant2

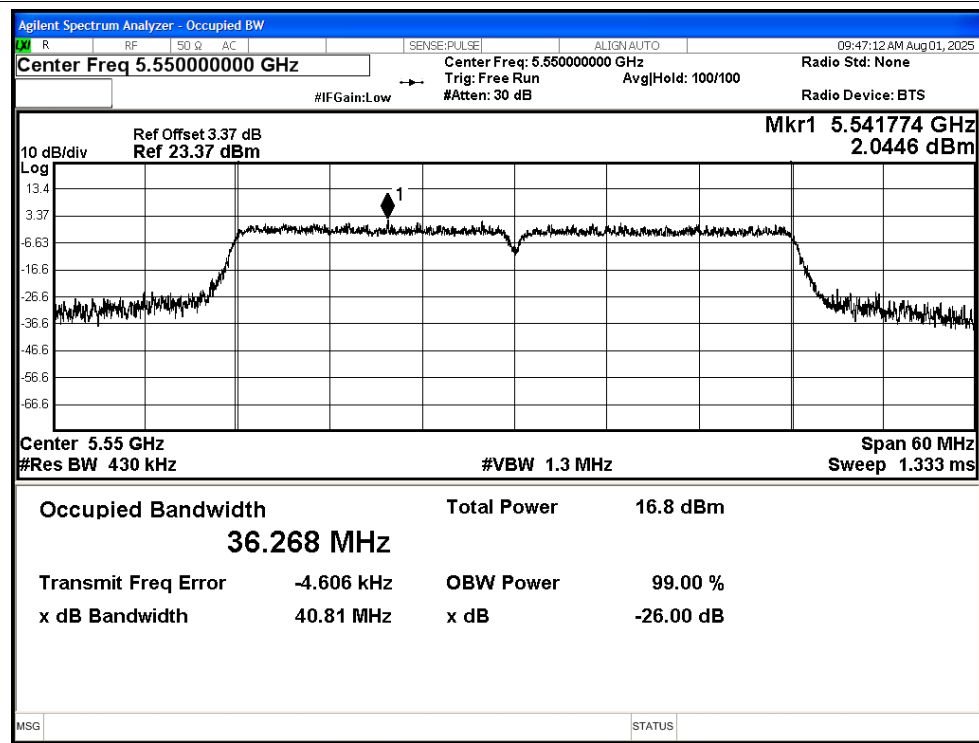


OBW NVNT n40 5670MHz Ant2

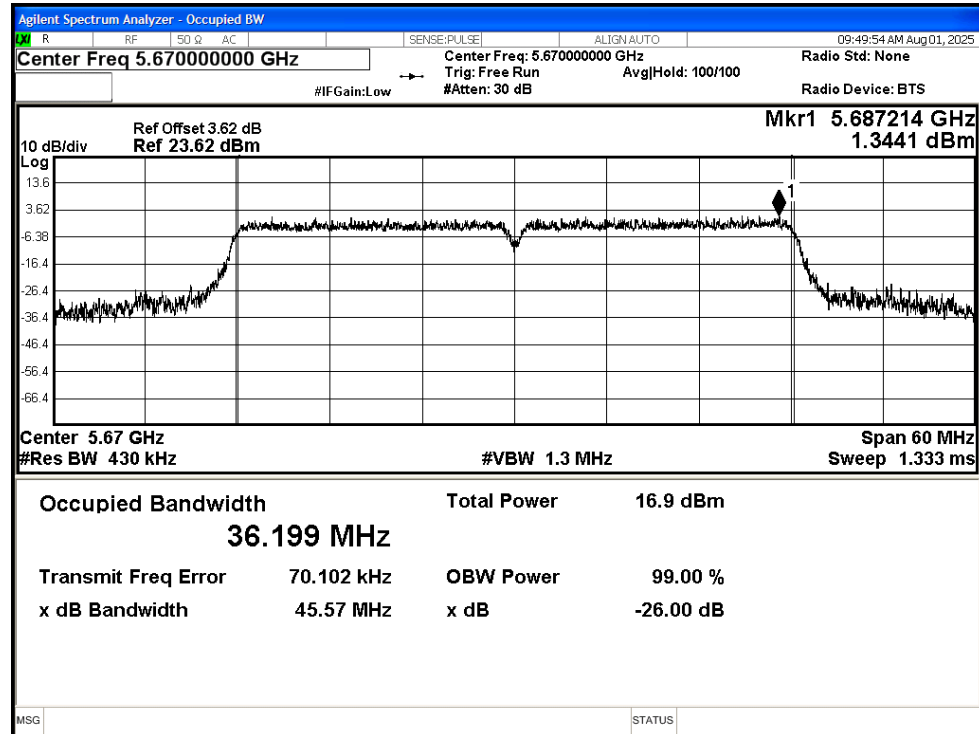


OBW NVNT ac20 5500MHz Ant2

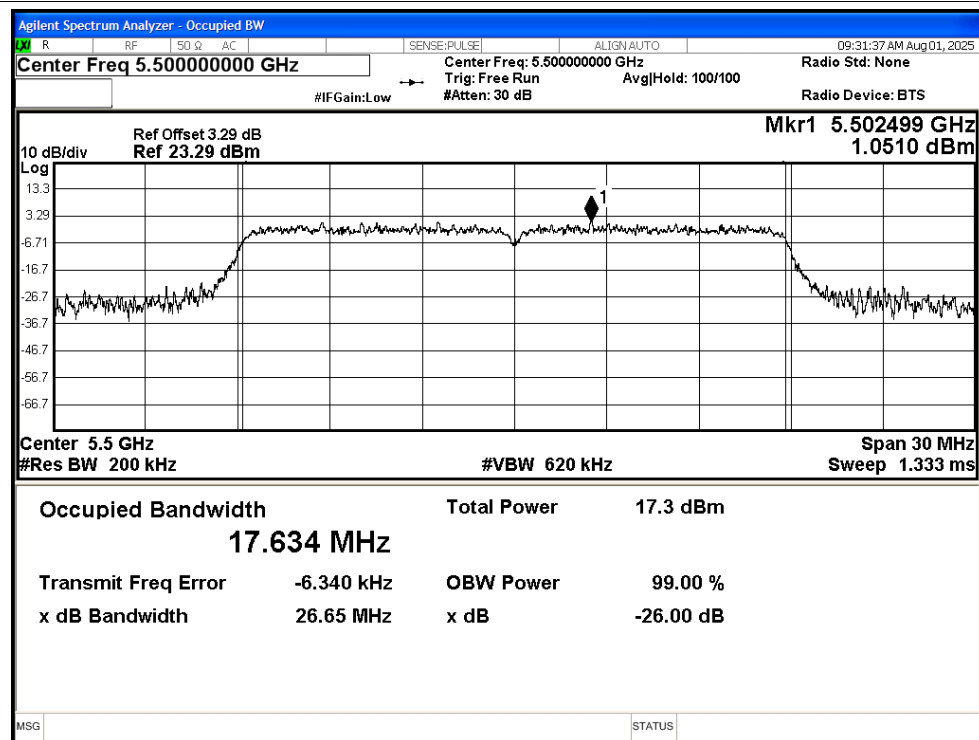


OBW NVNT ac20 5580MHz Ant2

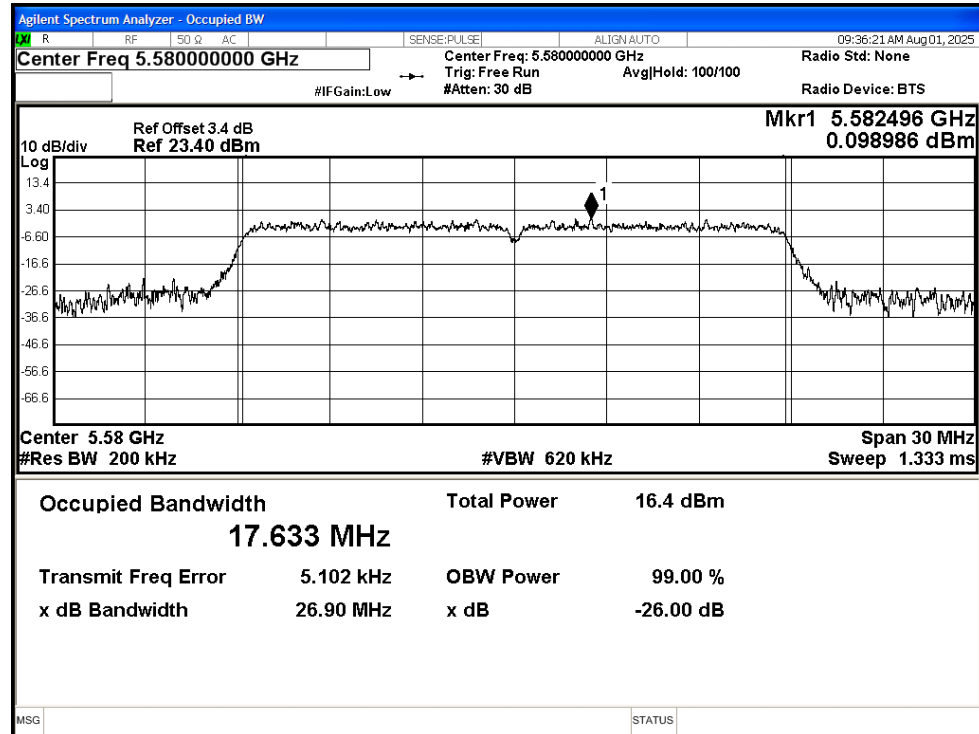


OBW NVNT ac20 5700MHz Ant2

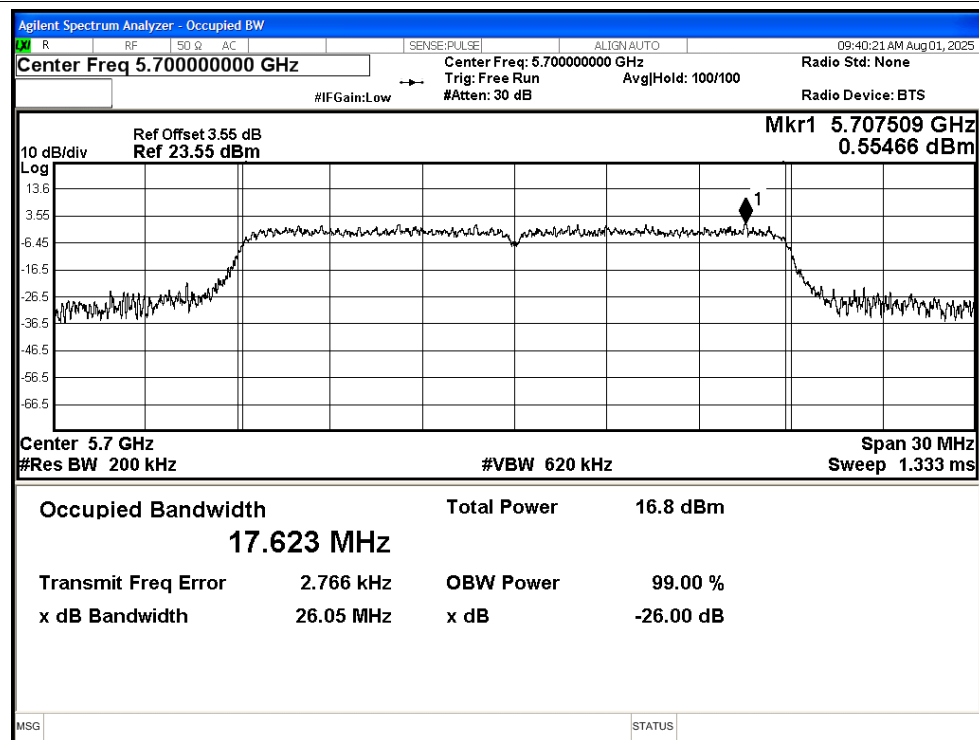


OBW NVNT ac40 5510MHz Ant2

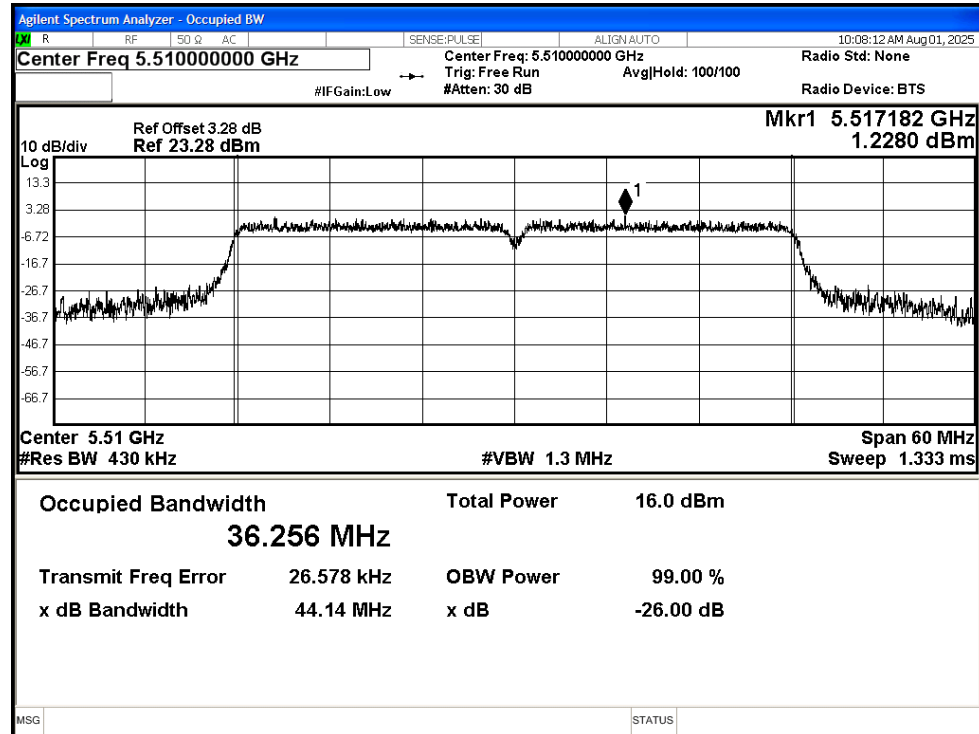


OBW NVNT ac40 5550MHz Ant2

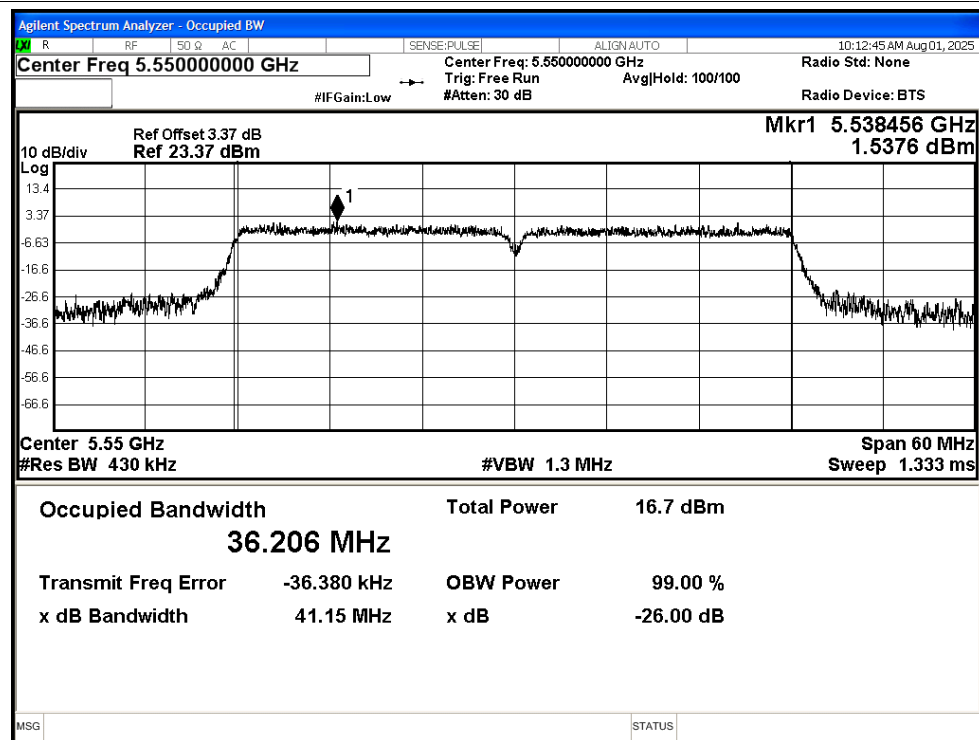


OBW NVNT ac40 5670MHz Ant2

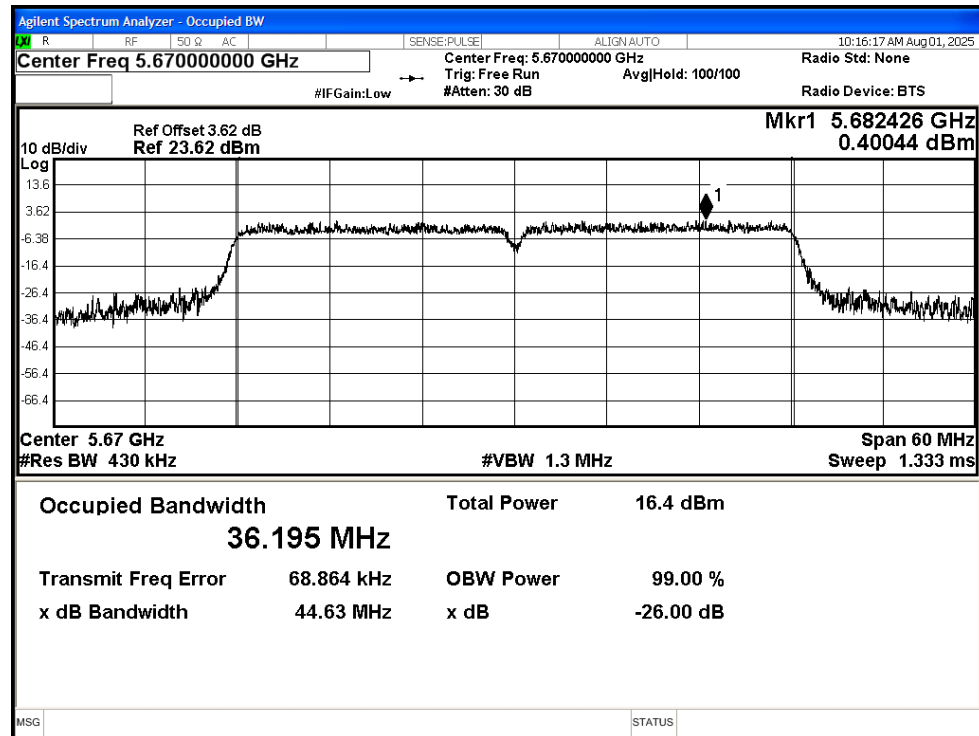


OBW NVNT ax20 5500MHz Ant2

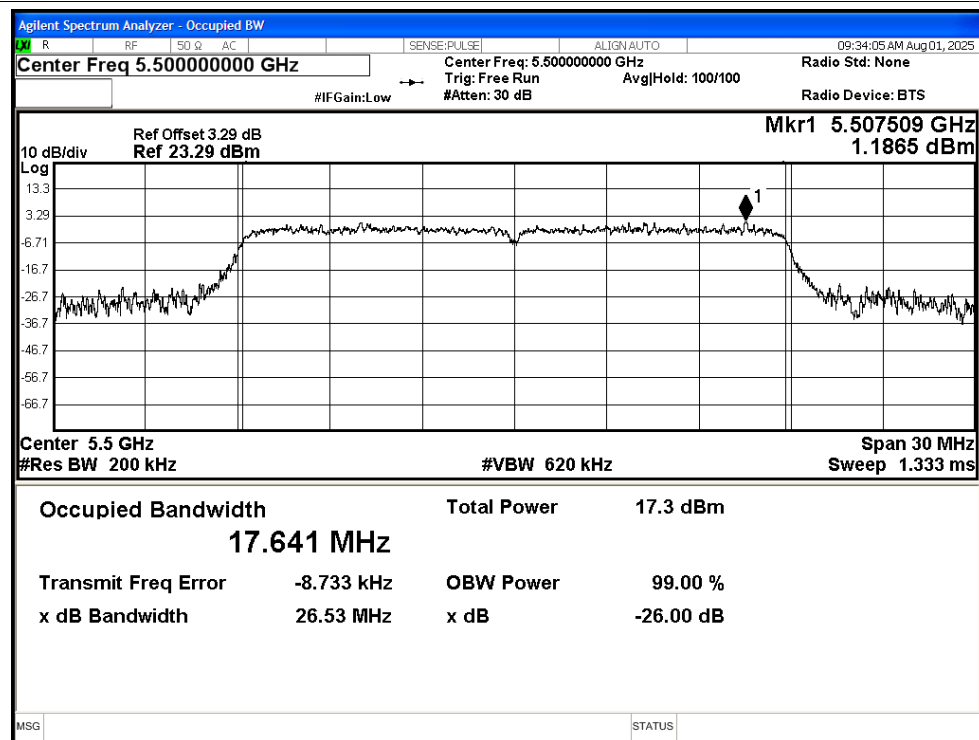


OBW NVNT ax20 5580MHz Ant2

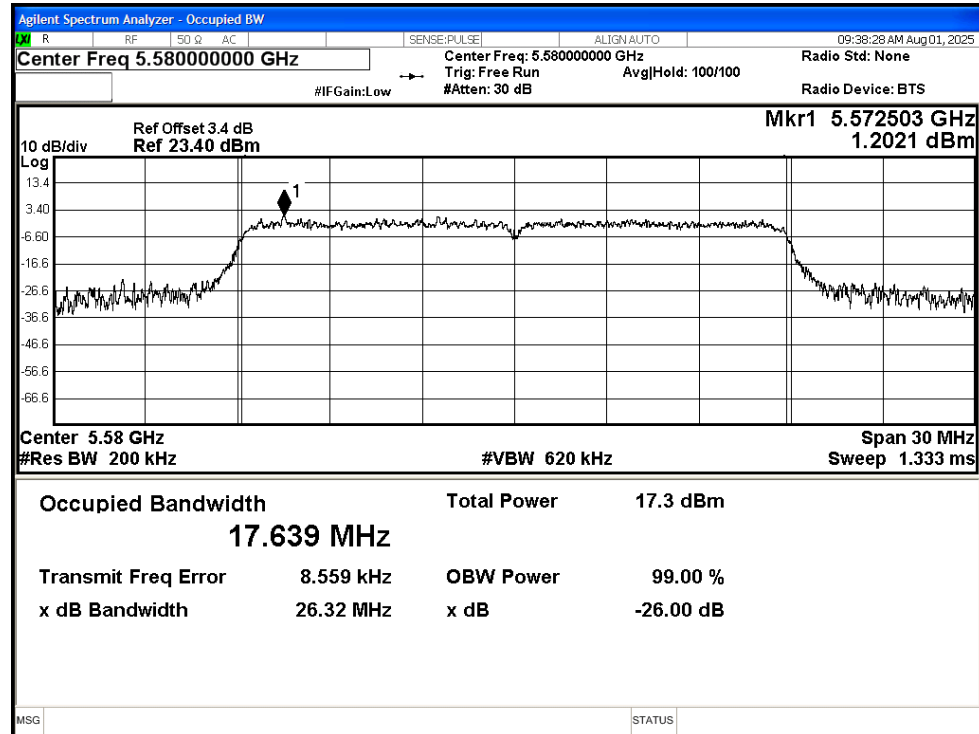


OBW NVNT ax20 5700MHz Ant2

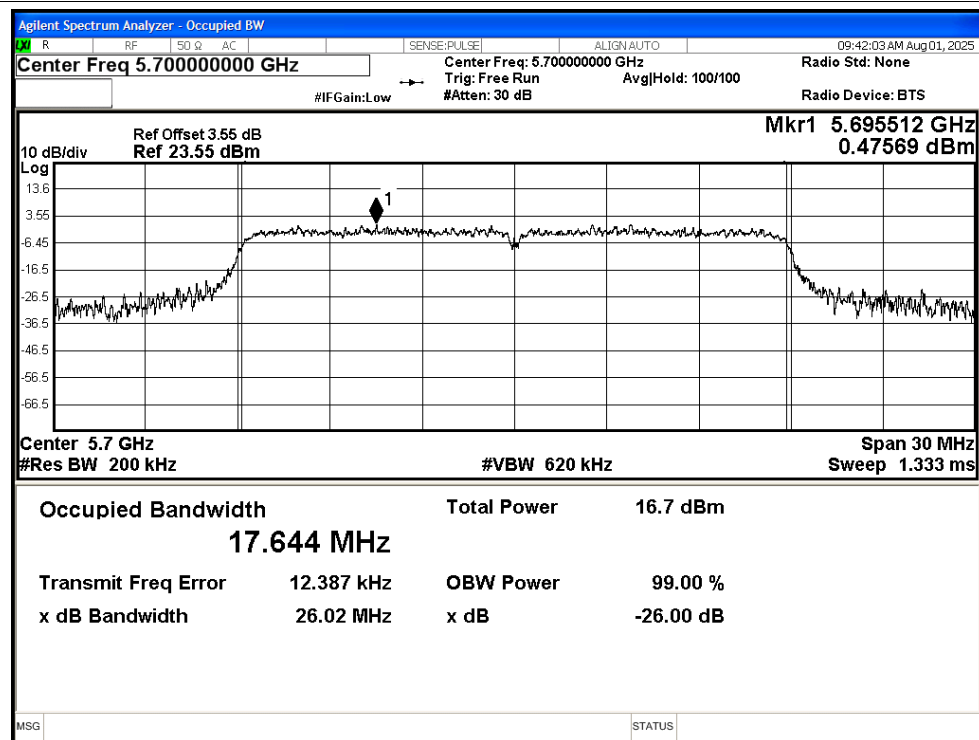


OBW NVNT ax40 5510MHz Ant2

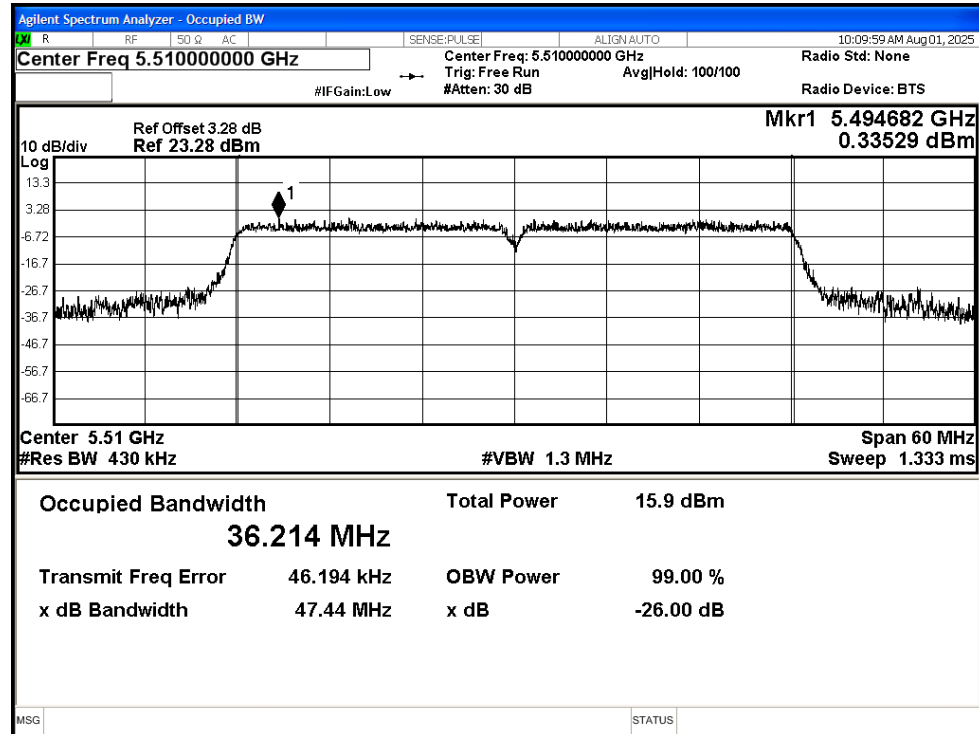

OBW NVNT ax40 5550MHz Ant2

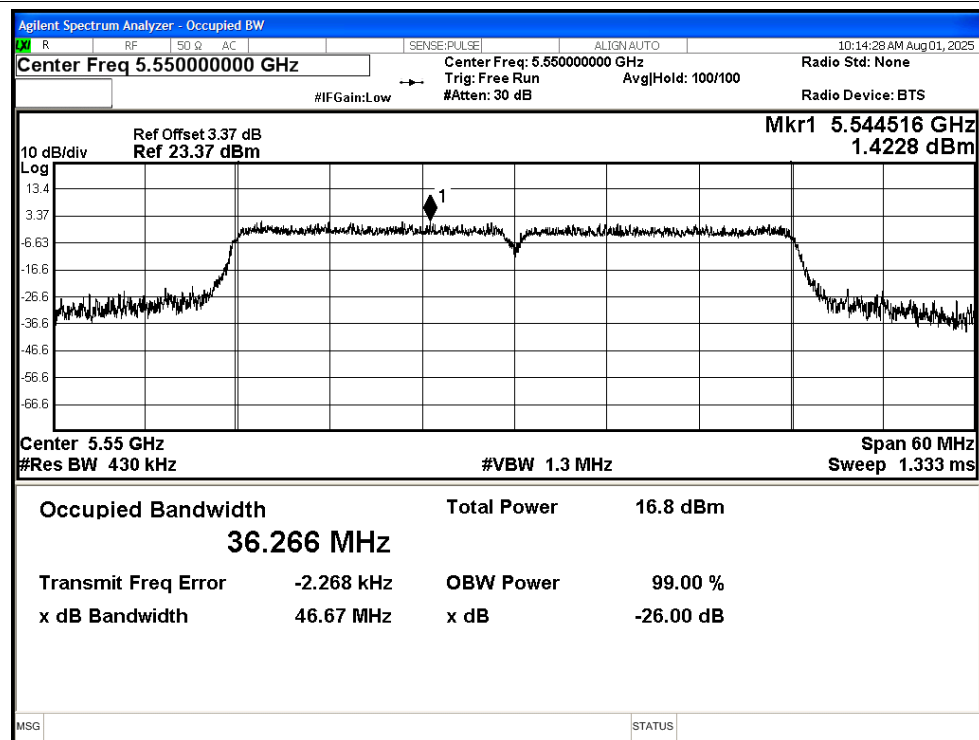

OBW NVNT ax40 5670MHz Ant2

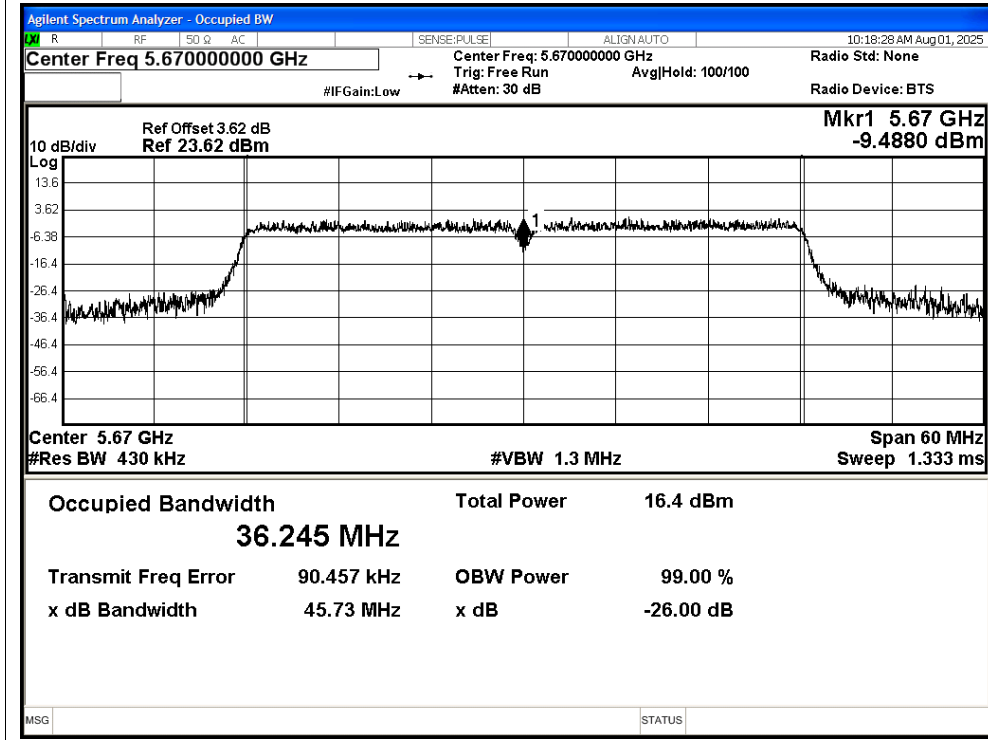

3 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Conducted Limit (dBm)	Antenna gain (dBi)	EIRP (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant1	12.57	0.24	12.81	24	3.4	16.21	24	Pass
NVNT	a	5580	Ant1	12.56	0.24	12.8	24	3.4	16.2	24	Pass
NVNT	a	5700	Ant1	12.85	0.24	13.09	24	3.4	16.49	24	Pass
NVNT	n20	5500	Ant1	11.04	0.12	11.16	24	3.4	14.56	24	Pass
NVNT	n20	5580	Ant1	11.21	0.12	11.33	24	3.4	14.73	24	Pass
NVNT	n20	5700	Ant1	11.38	0.12	11.5	24	3.4	14.9	24	Pass
NVNT	n40	5510	Ant1	10.34	0.23	10.57	24	3.4	13.97	24	Pass
NVNT	n40	5550	Ant1	11.07	0.23	11.3	24	3.4	14.7	24	Pass
NVNT	n40	5670	Ant1	10.59	0.24	10.83	24	3.4	14.23	24	Pass
NVNT	ac20	5500	Ant1	11.08	0.12	11.2	24	3.4	14.6	24	Pass
NVNT	ac20	5580	Ant1	11.3	0.12	11.42	24	3.4	14.82	24	Pass
NVNT	ac20	5700	Ant1	12.18	0.12	12.3	24	3.4	15.7	24	Pass
NVNT	ac40	5510	Ant1	10.25	0.24	10.49	24	3.4	13.89	24	Pass
NVNT	ac40	5550	Ant1	11.1	0.24	11.34	24	3.4	14.74	24	Pass
NVNT	ac40	5670	Ant1	11.02	0.24	11.26	24	3.4	14.66	24	Pass
NVNT	ax20	5500	Ant1	11.02	0.12	11.14	24	3.4	14.54	24	Pass
NVNT	ax20	5580	Ant1	11.85	0.12	11.97	24	3.4	15.37	24	Pass
NVNT	ax20	5700	Ant1	12.2	0.12	12.32	24	3.4	15.72	24	Pass
NVNT	ax40	5510	Ant1	10.43	0.23	10.66	24	3.4	14.06	24	Pass
NVNT	ax40	5550	Ant1	11.13	0.24	11.37	24	3.4	14.77	24	Pass
NVNT	ax40	5670	Ant1	11.06	0.24	11.3	24	3.4	14.7	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Conducted Limit (dBm)	Antenna gain (dBi)	EIRP (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant2	12.39	0.24	12.63	24	3.4	16.03	24	Pass
NVNT	a	5580	Ant2	12.4	0.24	12.64	24	3.4	16.04	24	Pass
NVNT	a	5700	Ant2	12.63	0.24	12.87	24	3.4	16.27	24	Pass
NVNT	n20	5500	Ant2	11.86	0.12	11.98	24	3.4	15.38	24	Pass
NVNT	n20	5580	Ant2	10.79	0.12	10.91	24	3.4	14.31	24	Pass
NVNT	n20	5700	Ant2	11.08	0.12	11.2	24	3.4	14.6	24	Pass
NVNT	n40	5510	Ant2	10.44	0.23	10.67	24	3.4	14.07	24	Pass
NVNT	n40	5550	Ant2	10.96	0.24	11.2	24	3.4	14.6	24	Pass
NVNT	n40	5670	Ant2	10.99	0.24	11.23	24	3.4	14.63	24	Pass
NVNT	ac20	5500	Ant2	11.8	0.12	11.92	24	3.4	15.32	24	Pass
NVNT	ac20	5580	Ant2	10.86	0.12	10.98	24	3.4	14.38	24	Pass
NVNT	ac20	5700	Ant2	11.23	0.12	11.35	24	3.4	14.75	24	Pass
NVNT	ac40	5510	Ant2	10.13	0.24	10.37	24	3.4	13.77	24	Pass
NVNT	ac40	5550	Ant2	10.72	0.24	10.96	24	3.4	14.36	24	Pass
NVNT	ac40	5670	Ant2	10.58	0.24	10.82	24	3.4	14.22	24	Pass

NVNT	ax20	5500	Ant2	11.86	0.12	11.98	24	3.4	15.38	24	Pass
NVNT	ax20	5580	Ant2	11.8	0.12	11.92	24	3.4	15.32	24	Pass
NVNT	ax20	5700	Ant2	11.18	0.12	11.3	24	3.4	14.7	24	Pass
NVNT	ax40	5510	Ant2	10.09	0.24	10.33	24	3.4	13.73	24	Pass
NVNT	ax40	5550	Ant2	10.85	0.24	11.09	24	3.4	14.49	24	Pass
NVNT	ax40	5670	Ant2	10.64	0.24	10.88	24	3.4	14.28	24	Pass

MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5500	11.16	11.98	14.60	23.59	Pass
NVNT	n20	5580	11.33	10.91	14.14	23.59	Pass
NVNT	n20	5700	11.5	11.2	14.36	23.59	Pass
NVNT	n40	5510	10.57	10.67	13.63	23.59	Pass
NVNT	n40	5550	11.3	11.2	14.26	23.59	Pass
NVNT	n40	5670	10.83	11.23	14.04	23.59	Pass
NVNT	ac20	5500	11.2	11.92	14.59	23.59	Pass
NVNT	ac20	5580	11.42	10.98	14.22	23.59	Pass
NVNT	ac20	5700	12.3	11.35	14.86	23.59	Pass
NVNT	ac40	5510	10.49	10.37	13.44	23.59	Pass
NVNT	ac40	5550	11.34	10.96	14.16	23.59	Pass
NVNT	ac40	5670	11.26	10.82	14.06	23.59	Pass
NVNT	ax20	5500	11.14	11.98	14.59	23.59	Pass
NVNT	ax20	5580	11.97	11.92	14.96	23.59	Pass
NVNT	ax20	5700	12.32	11.3	14.85	23.59	Pass
NVNT	ax40	5510	10.66	10.33	13.51	23.59	Pass
NVNT	ax40	5550	11.37	11.09	14.24	23.59	Pass
NVNT	ax40	5670	11.3	10.88	14.11	23.59	Pass

EIRP MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5500	14.56	15.38	18.00	24	Pass
NVNT	n20	5580	14.73	14.31	17.54	24	Pass
NVNT	n20	5700	14.9	14.6	17.76	24	Pass
NVNT	n40	5510	13.97	14.07	17.03	24	Pass
NVNT	n40	5550	14.7	14.6	17.66	24	Pass
NVNT	n40	5670	14.23	14.63	17.44	24	Pass
NVNT	ac20	5500	14.6	15.32	17.99	24	Pass
NVNT	ac20	5580	14.82	14.38	17.62	24	Pass
NVNT	ac20	5700	15.7	14.75	18.26	24	Pass
NVNT	ac40	5510	13.89	13.77	16.84	24	Pass
NVNT	ac40	5550	14.74	14.36	17.56	24	Pass
NVNT	ac40	5670	14.66	14.22	17.46	24	Pass
NVNT	ax20	5500	14.54	15.38	17.99	24	Pass

NVNT	ax20	5580	15.37	15.32	18.36	24	Pass
NVNT	ax20	5700	15.72	14.7	18.25	24	Pass
NVNT	ax40	5510	14.06	13.73	16.91	24	Pass
NVNT	ax40	5550	14.77	14.49	17.64	24	Pass
NVNT	ax40	5670	14.7	14.28	17.51	24	Pass

4 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5500	Ant1	1.99	0.24	2.23	11	Pass
NVNT	a	5580	Ant1	2.04	0.24	2.28	11	Pass
NVNT	a	5700	Ant1	2.33	0.24	2.57	11	Pass
NVNT	n20	5500	Ant1	0.22	0.12	0.34	11	Pass
NVNT	n20	5580	Ant1	0.49	0.12	0.61	11	Pass
NVNT	n20	5700	Ant1	0.68	0.12	0.8	11	Pass
NVNT	n40	5510	Ant1	-3.41	0.23	-3.18	11	Pass
NVNT	n40	5550	Ant1	-2.56	0.23	-2.33	11	Pass
NVNT	n40	5670	Ant1	-3.14	0.24	-2.9	11	Pass
NVNT	ac20	5500	Ant1	0	0.12	0.12	11	Pass
NVNT	ac20	5580	Ant1	0.69	0.12	0.81	11	Pass
NVNT	ac20	5700	Ant1	1.39	0.12	1.51	11	Pass
NVNT	ac40	5510	Ant1	-3.44	0.24	-3.2	11	Pass
NVNT	ac40	5550	Ant1	-2.51	0.24	-2.27	11	Pass
NVNT	ac40	5670	Ant1	-2.54	0.24	-2.3	11	Pass
NVNT	ax20	5500	Ant1	0.19	0.12	0.31	11	Pass
NVNT	ax20	5580	Ant1	1.01	0.12	1.13	11	Pass
NVNT	ax20	5700	Ant1	1.33	0.12	1.45	11	Pass
NVNT	ax40	5510	Ant1	-3.42	0.23	-3.19	11	Pass
NVNT	ax40	5550	Ant1	-2.48	0.24	-2.24	11	Pass
NVNT	ax40	5670	Ant1	-2.5	0.24	-2.26	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5500	Ant2	1.88	0.24	2.12	11	Pass
NVNT	a	5580	Ant2	1.7	0.24	1.94	11	Pass
NVNT	a	5700	Ant2	2.14	0.24	2.38	11	Pass
NVNT	n20	5500	Ant2	0.89	0.12	1.01	11	Pass
NVNT	n20	5580	Ant2	0.08	0.12	0.2	11	Pass
NVNT	n20	5700	Ant2	0.33	0.12	0.45	11	Pass
NVNT	n40	5510	Ant2	-3.42	0.23	-3.19	11	Pass
NVNT	n40	5550	Ant2	-2.53	0.24	-2.29	11	Pass
NVNT	n40	5670	Ant2	-2.67	0.24	-2.43	11	Pass
NVNT	ac20	5500	Ant2	1.01	0.12	1.13	11	Pass
NVNT	ac20	5580	Ant2	0.21	0.12	0.33	11	Pass
NVNT	ac20	5700	Ant2	0.19	0.12	0.31	11	Pass
NVNT	ac40	5510	Ant2	-3.86	0.24	-3.62	11	Pass
NVNT	ac40	5550	Ant2	-2.86	0.24	-2.62	11	Pass
NVNT	ac40	5670	Ant2	-2.94	0.24	-2.7	11	Pass
NVNT	ax20	5500	Ant2	1.07	0.12	1.19	11	Pass
NVNT	ax20	5580	Ant2	1.07	0.12	1.19	11	Pass


NVNT	ax20	5700	Ant2	0.24	0.12	0.36	11	Pass
NVNT	ax40	5510	Ant2	-3.88	0.24	-3.64	11	Pass
NVNT	ax40	5550	Ant2	-2.84	0.24	-2.6	11	Pass
NVNT	ax40	5670	Ant2	-3.01	0.24	-2.77	11	Pass

MIMO


Condition	Mode	Frequency (MHz)	Total PSD (dBm/MHz)			Limit (dBm/MHz)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5500	0.34	1.01	3.70	10.59	Pass
NVNT	n20	5580	0.61	0.2	3.42	10.59	Pass
NVNT	n20	5700	0.8	0.45	3.64	10.59	Pass
NVNT	n40	5510	-3.18	-3.19	-0.17	10.59	Pass
NVNT	n40	5550	-2.33	-2.29	0.70	10.59	Pass
NVNT	n40	5670	-2.9	-2.43	0.35	10.59	Pass
NVNT	ac20	5500	0.12	1.13	3.66	10.59	Pass
NVNT	ac20	5580	0.81	0.33	3.59	10.59	Pass
NVNT	ac20	5700	1.51	0.31	3.96	10.59	Pass
NVNT	ac40	5510	-3.2	-3.62	-0.39	10.59	Pass
NVNT	ac40	5550	-2.27	-2.62	0.57	10.59	Pass
NVNT	ac40	5670	-2.3	-2.7	0.51	10.59	Pass
NVNT	ax20	5500	0.31	1.19	3.78	10.59	Pass
NVNT	ax20	5580	1.13	1.19	4.17	10.59	Pass
NVNT	ax20	5700	1.45	0.36	3.95	10.59	Pass
NVNT	ax40	5510	-3.19	-3.64	-0.40	10.59	Pass
NVNT	ax40	5550	-2.24	-2.6	0.59	10.59	Pass
NVNT	ax40	5670	-2.26	-2.77	0.50	10.59	Pass

Test Graphs


PSD NVNT a 5500MHz Ant1

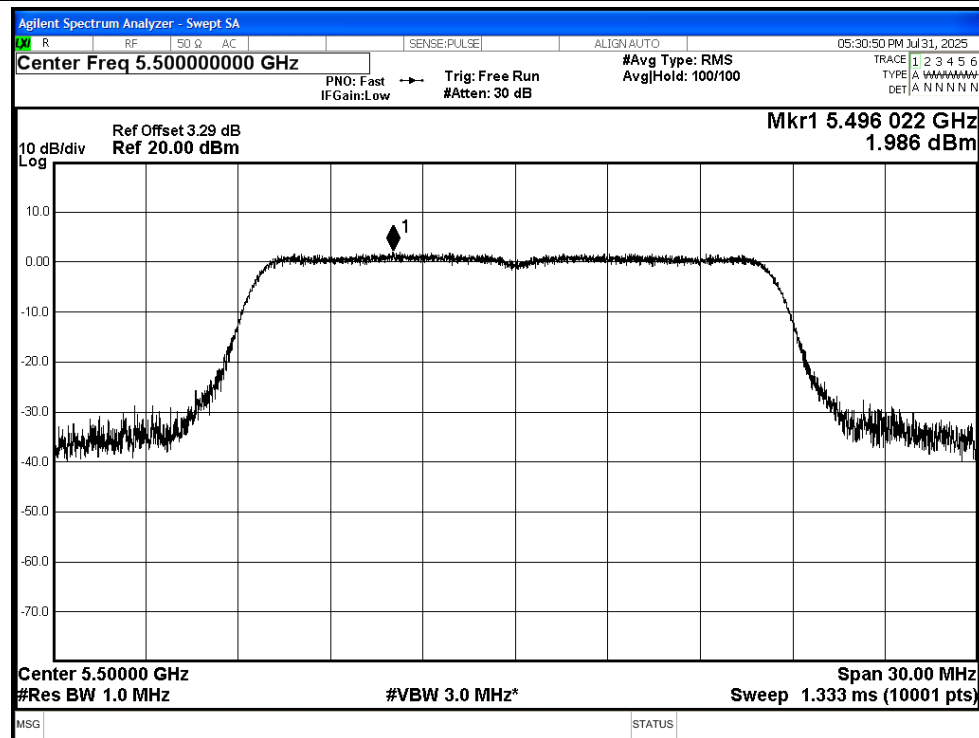


PSD NVNT a 5580MHz Ant1

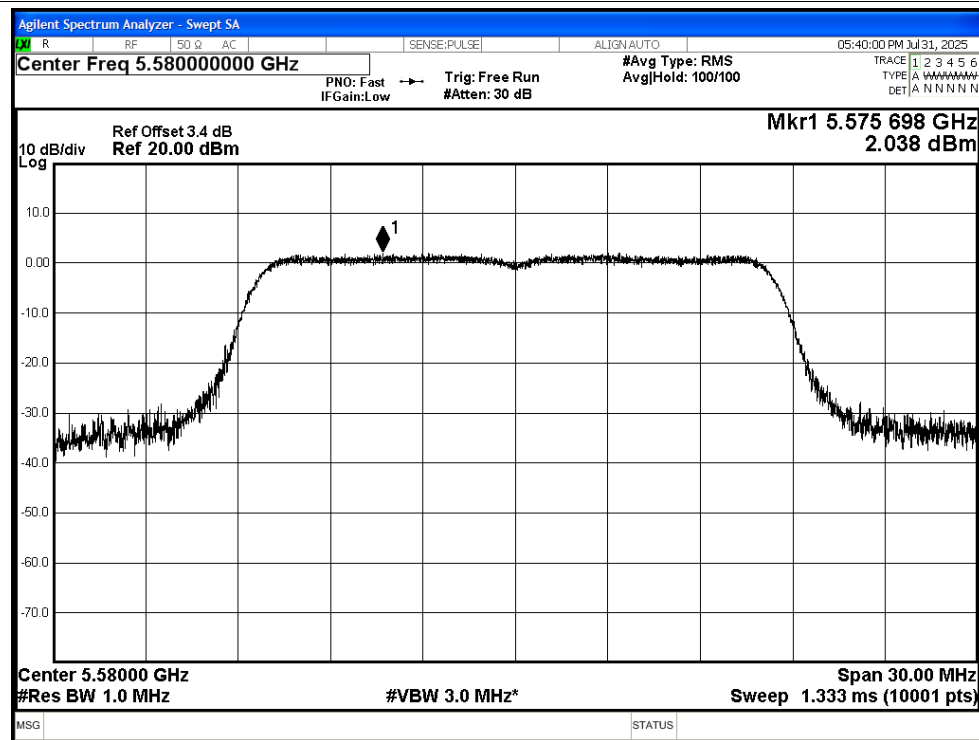


PSD NVNT a 5700MHz Ant1

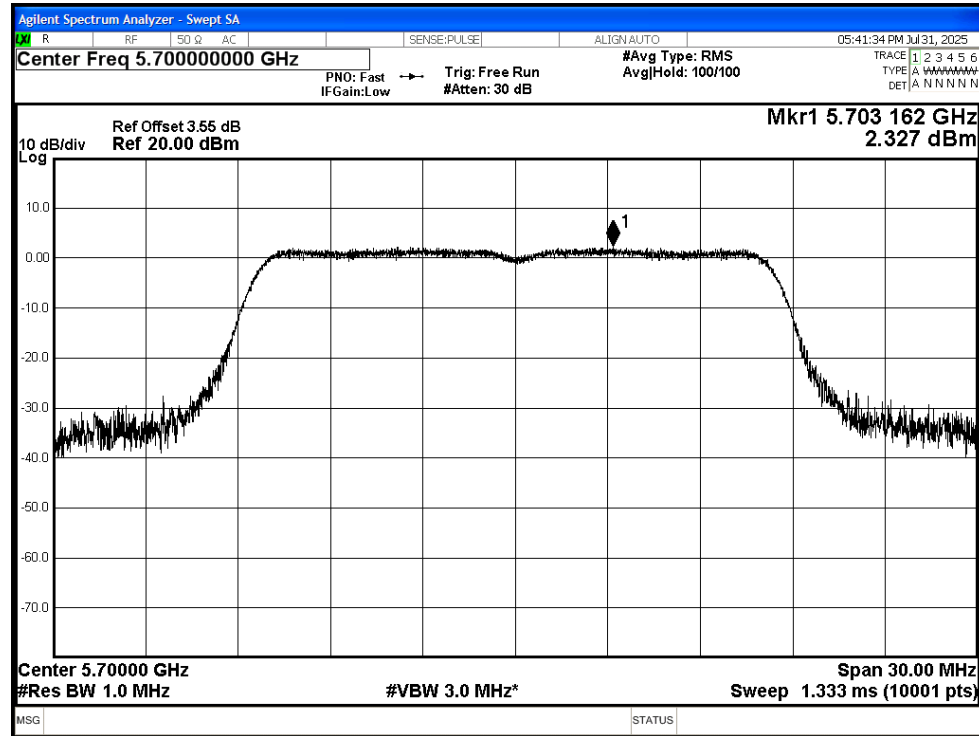


PSD NVNT n20 5500MHz Ant1

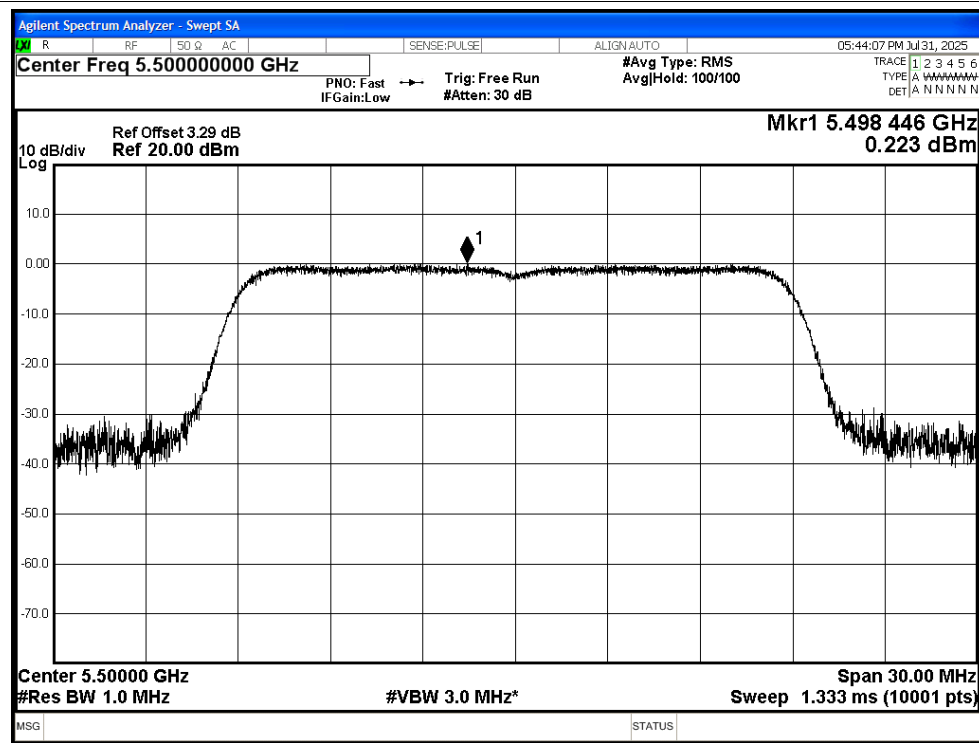


PSD NVNT n20 5580MHz Ant1

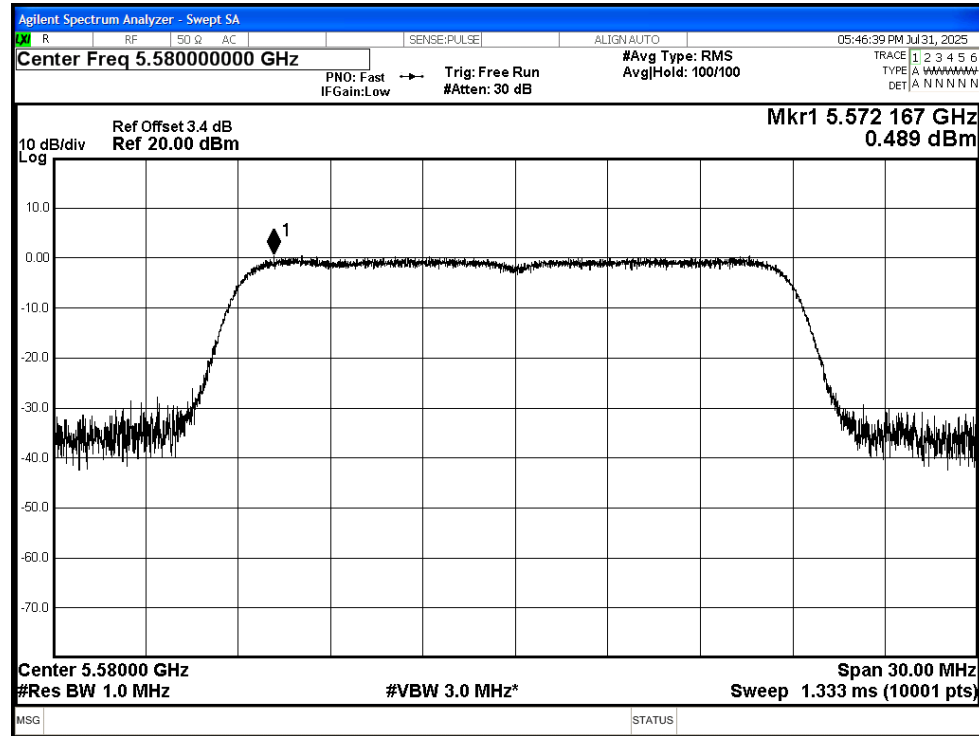


PSD NVNT n20 5700MHz Ant1

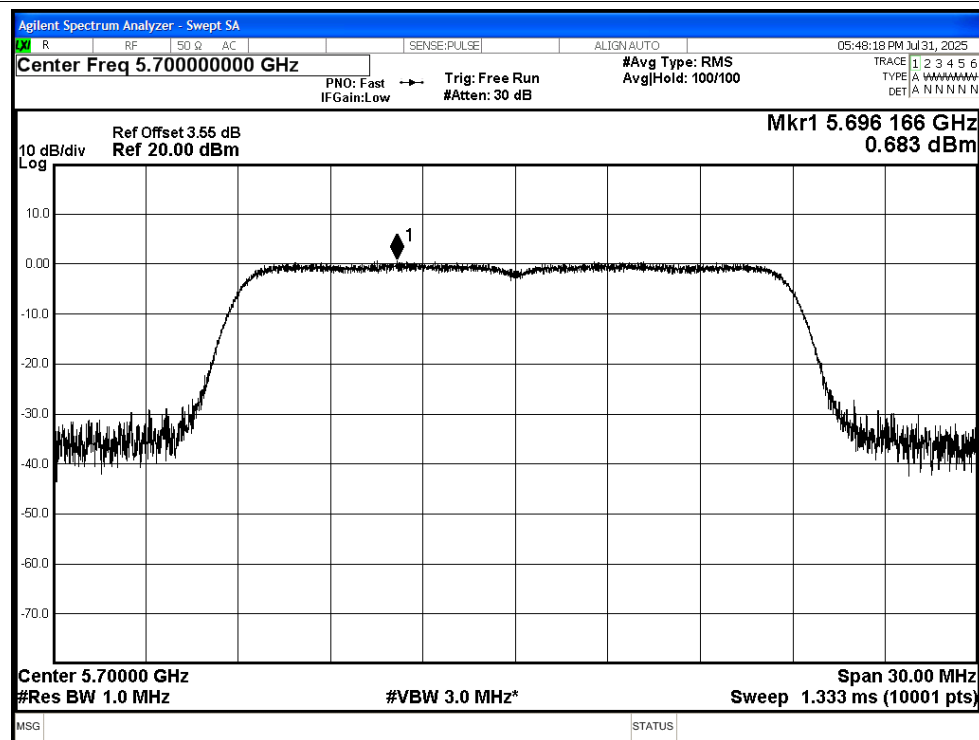


PSD NVNT n40 5510MHz Ant1

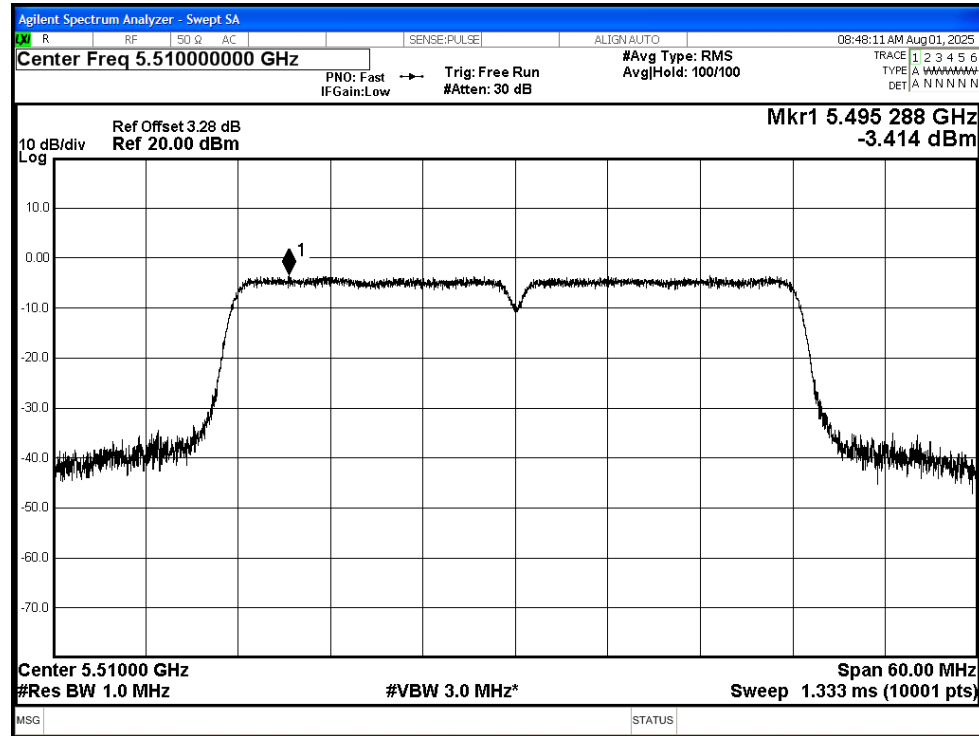


PSD NVNT n40 5550MHz Ant1

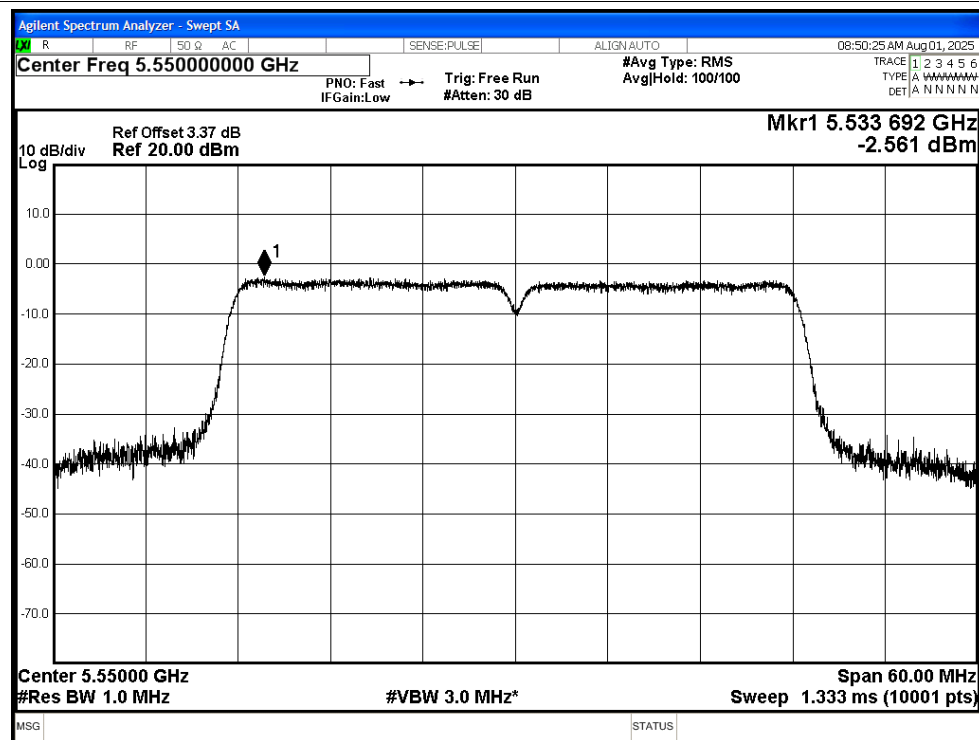


PSD NVNT n40 5670MHz Ant1

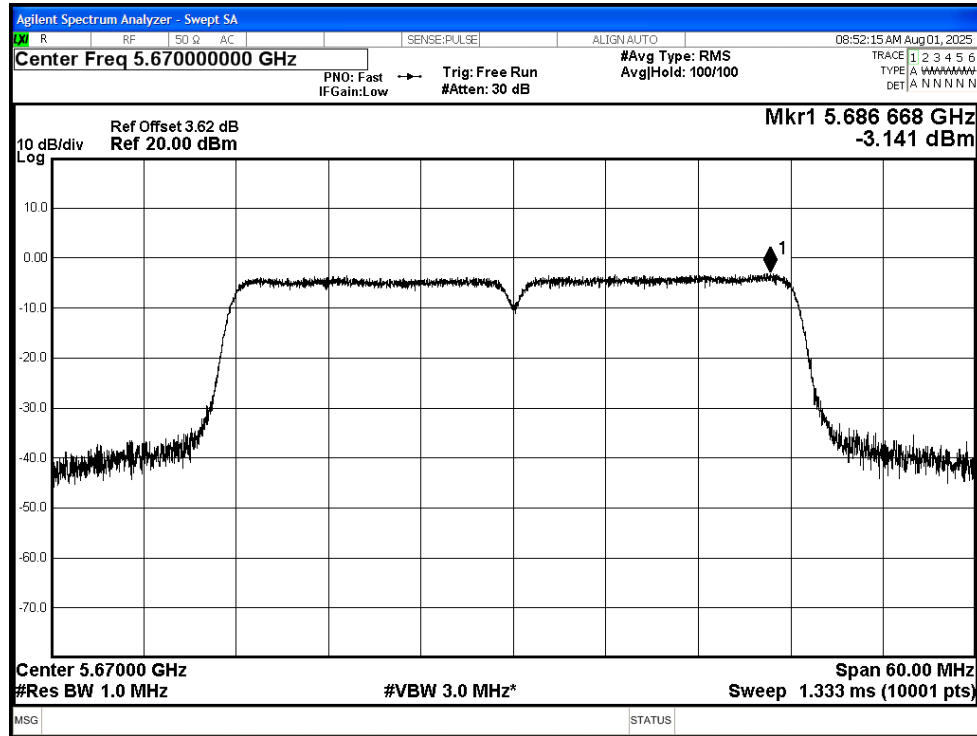


PSD NVNT ac20 5500MHz Ant1

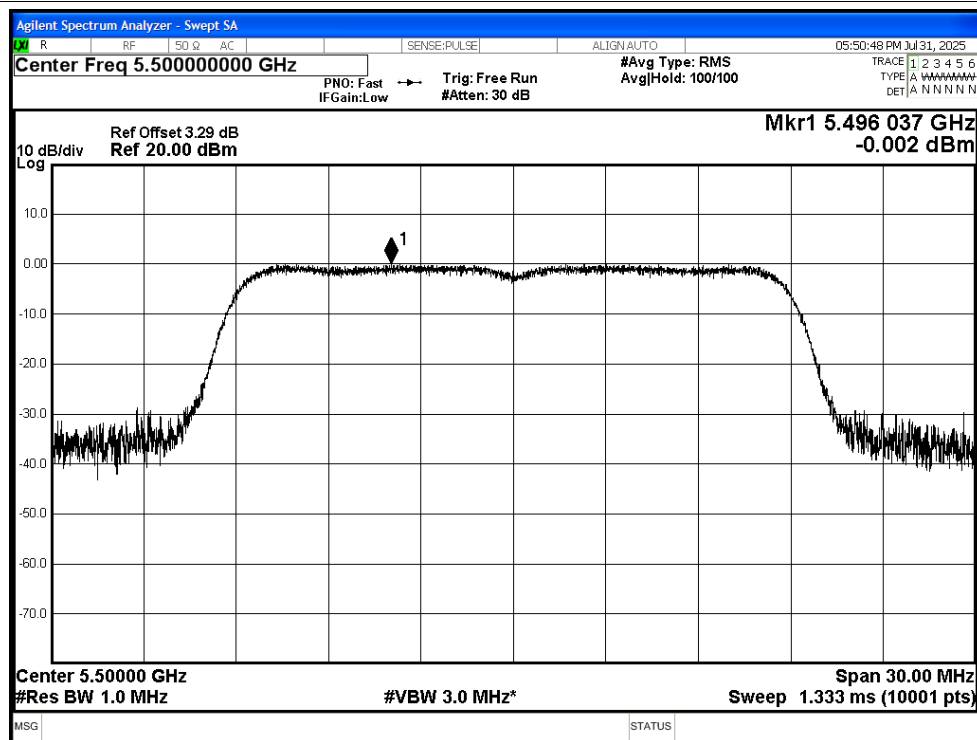


PSD NVNT ac20 5580MHz Ant1

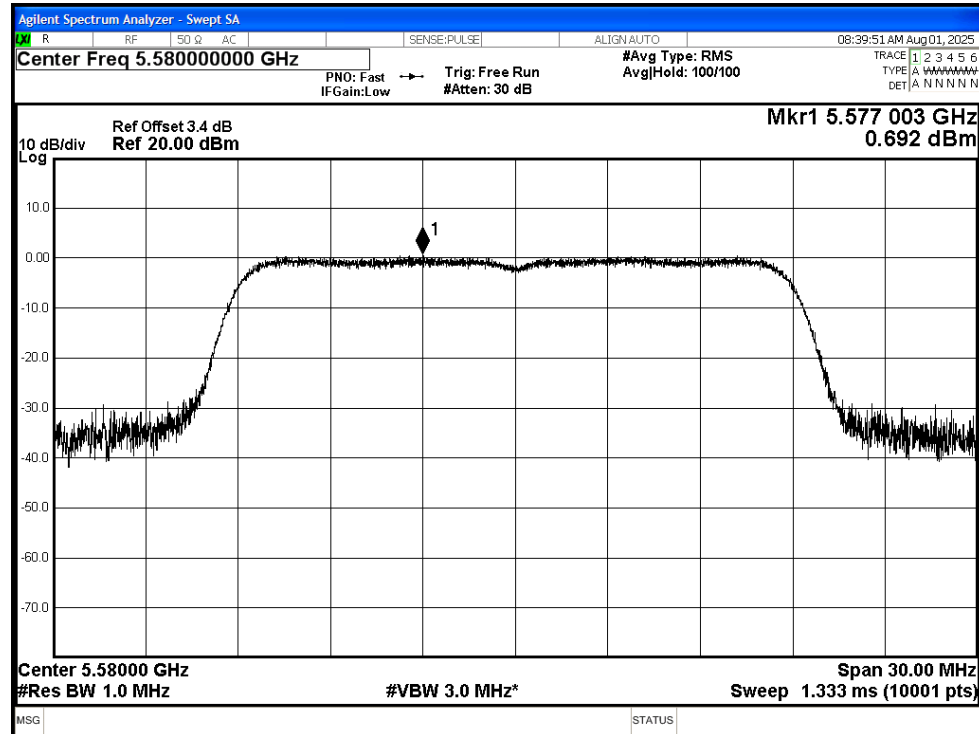


PSD NVNT ac20 5700MHz Ant1

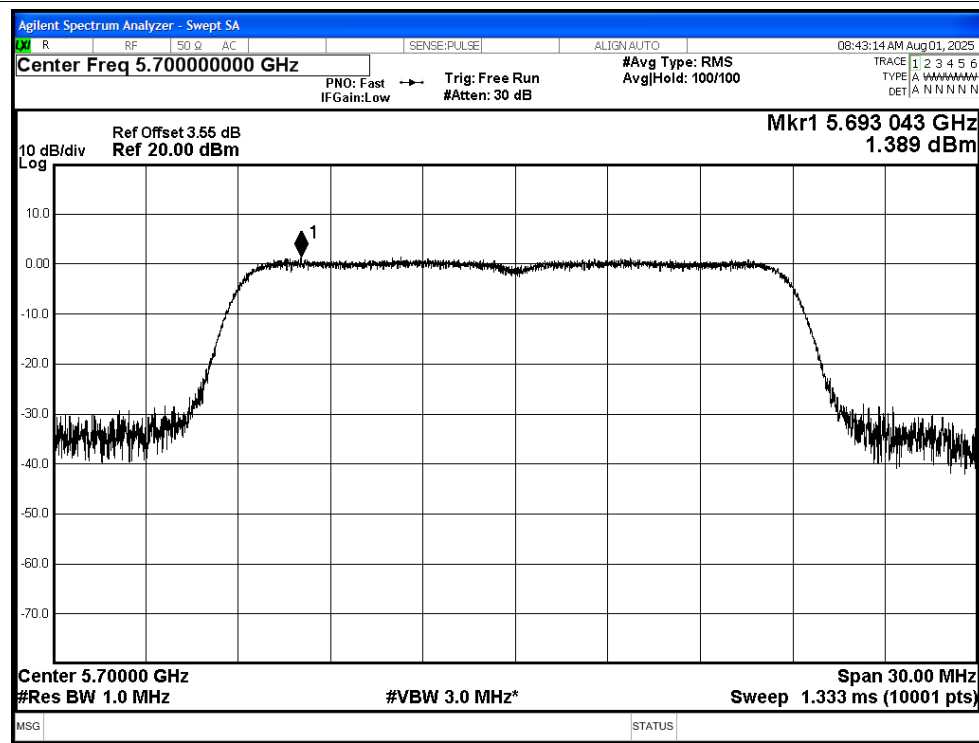


PSD NVNT ac40 5510MHz Ant1

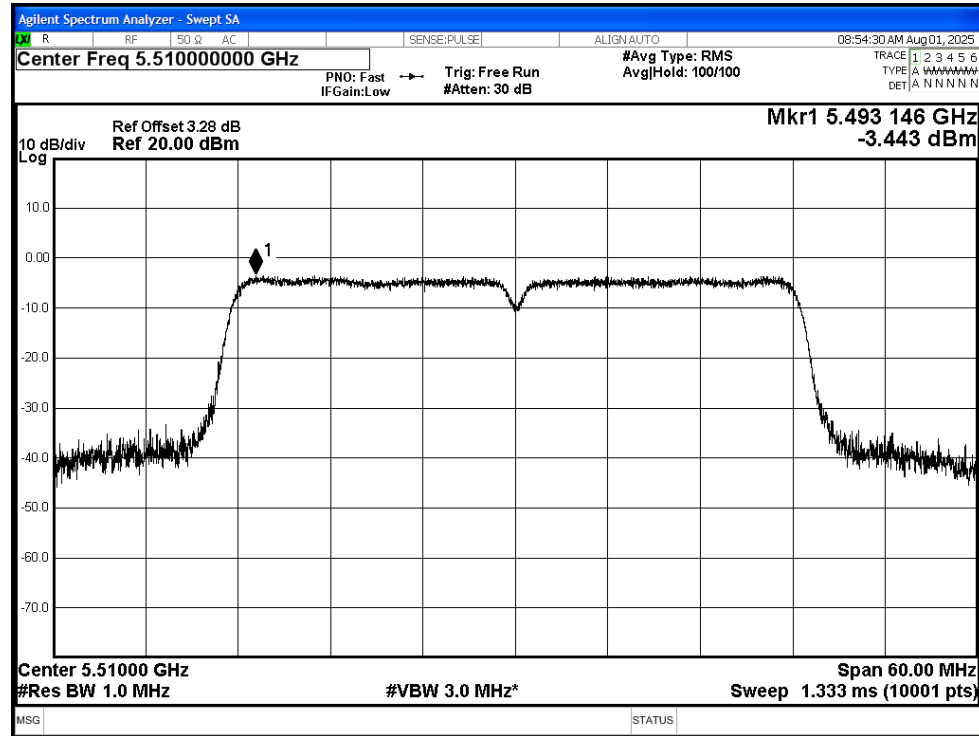


PSD NVNT ac40 5550MHz Ant1

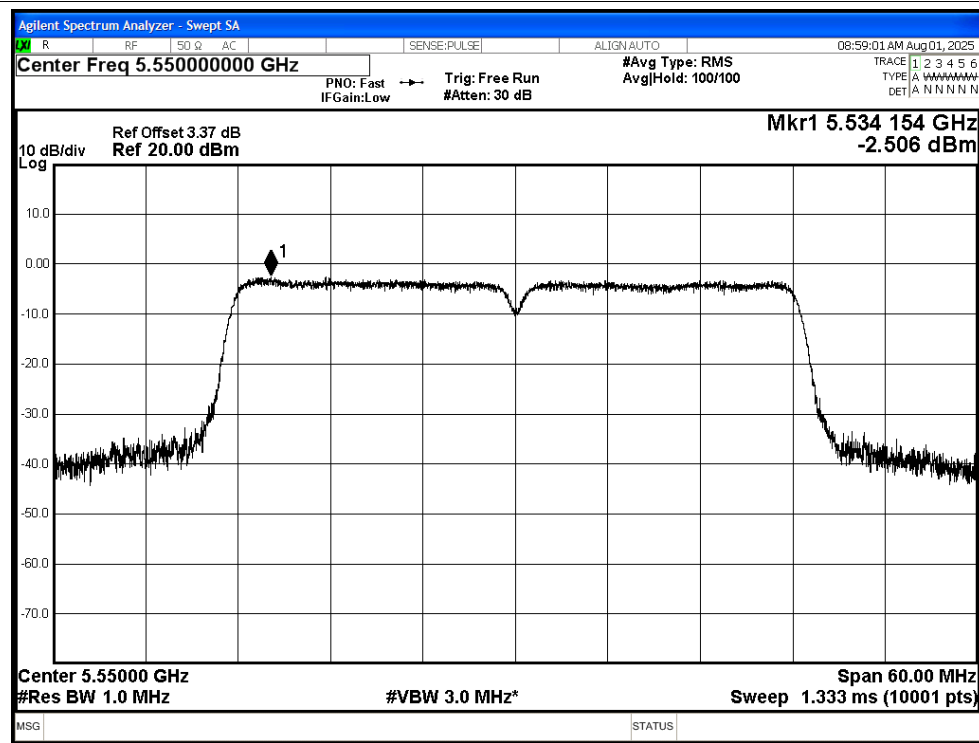


PSD NVNT ac40 5670MHz Ant1

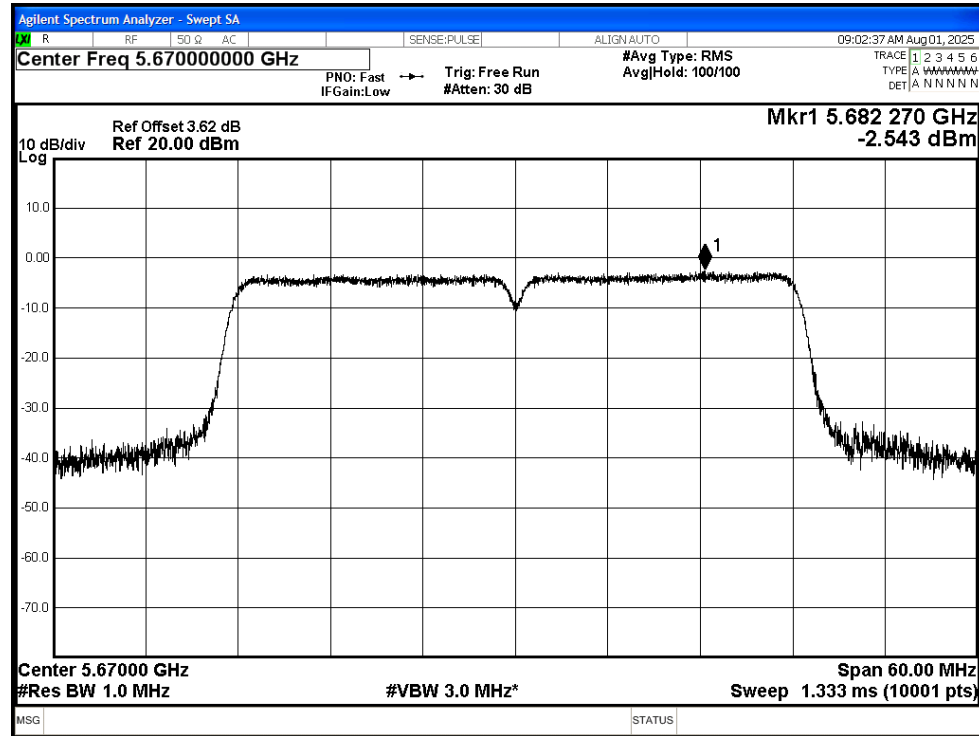


PSD NVNT ax20 5500MHz Ant1

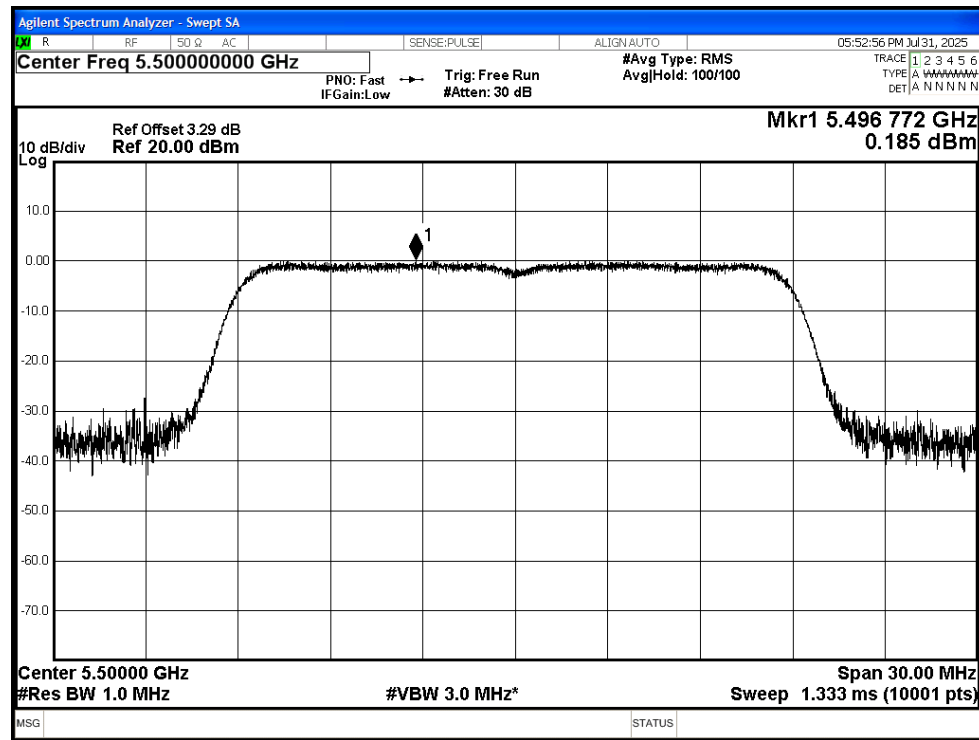


PSD NVNT ax20 5580MHz Ant1

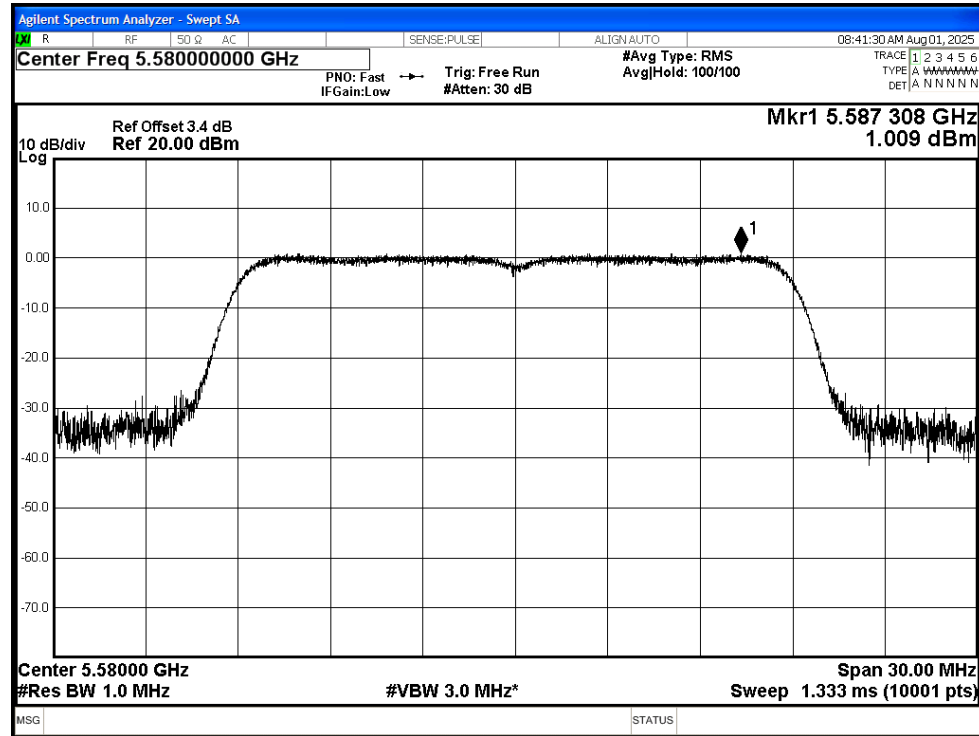


PSD NVNT ax20 5700MHz Ant1

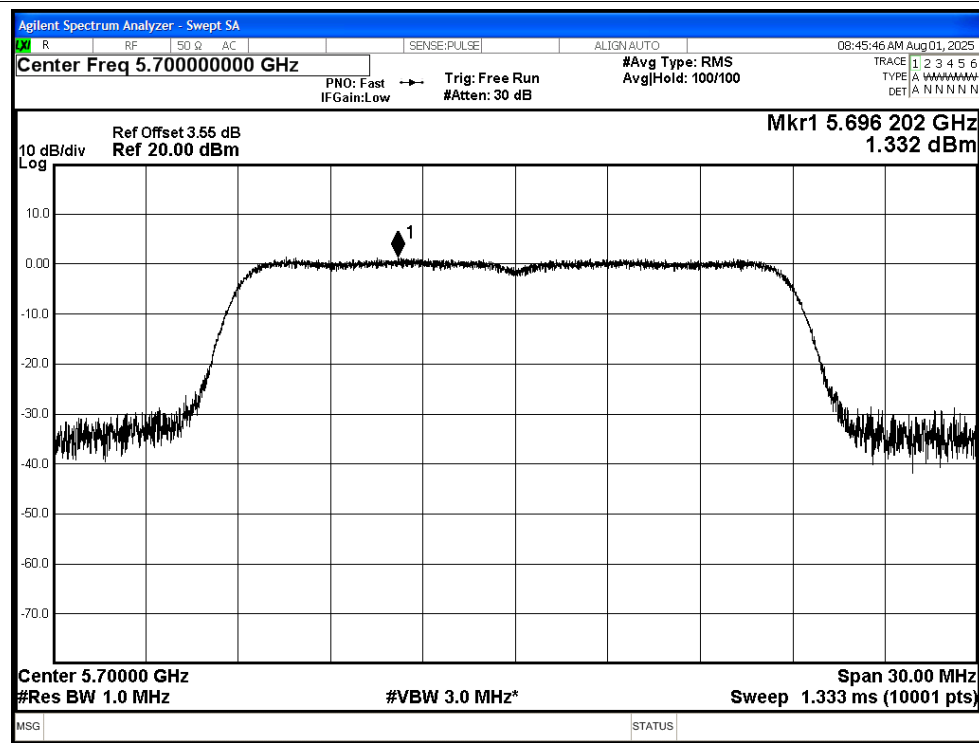


PSD NVNT ax40 5510MHz Ant1

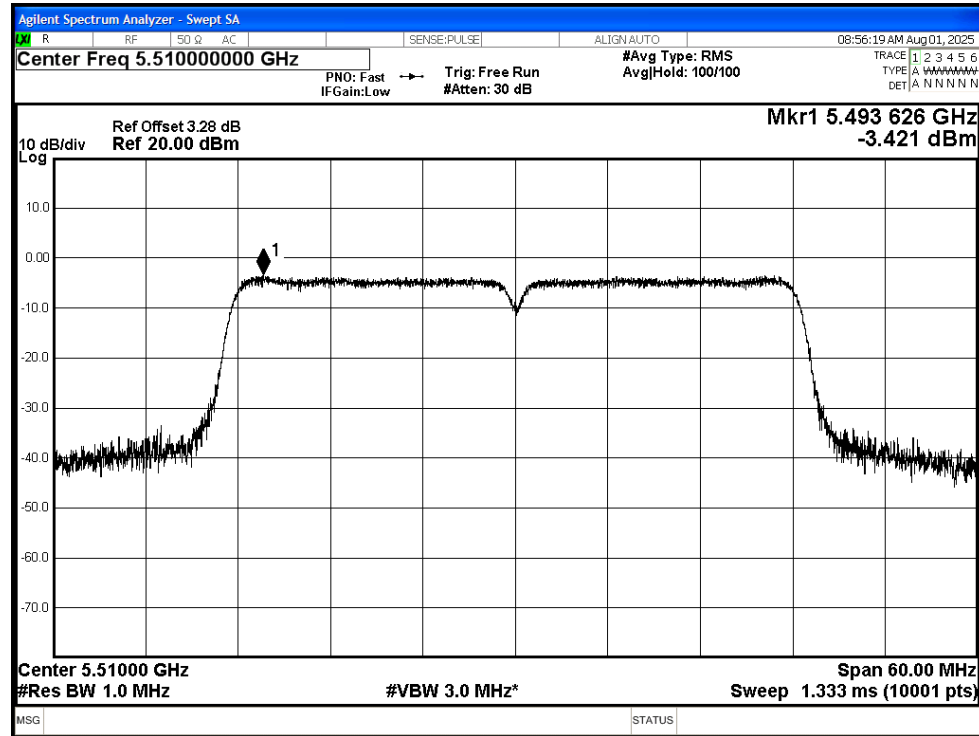


PSD NVNT ax40 5550MHz Ant1

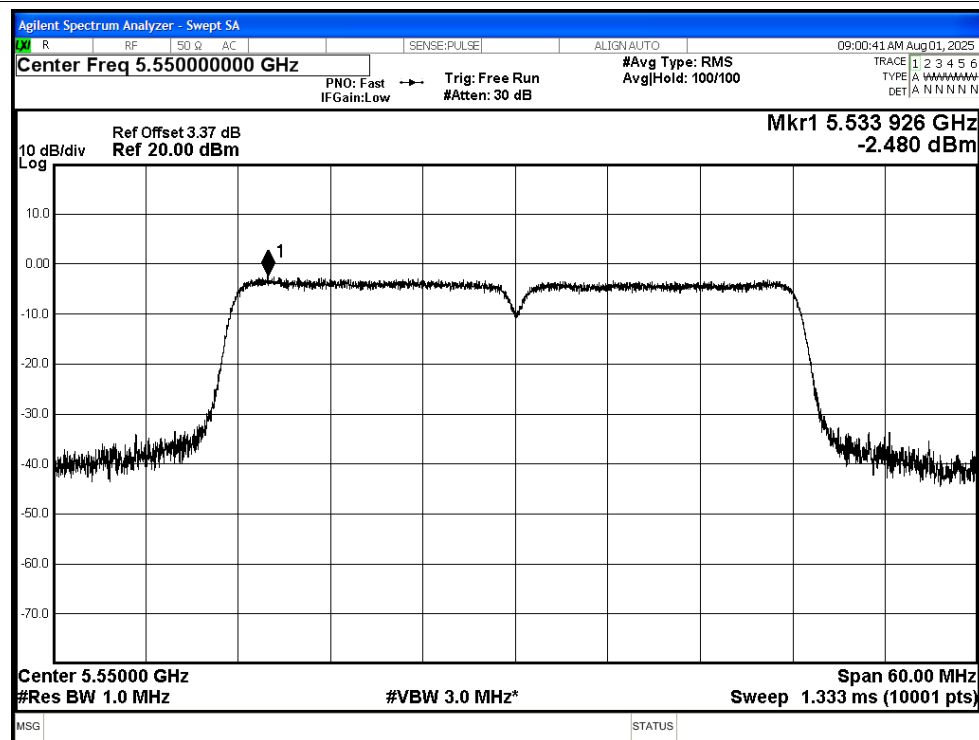


PSD NVNT ax40 5670MHz Ant1

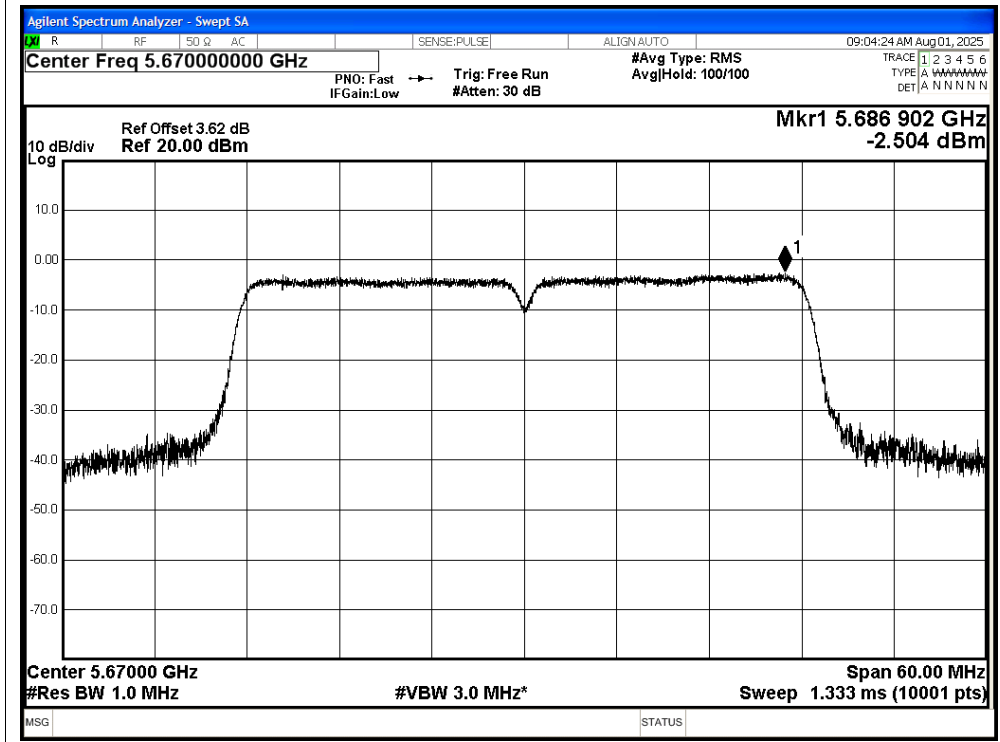


PSD NVNT a 5500MHz Ant2

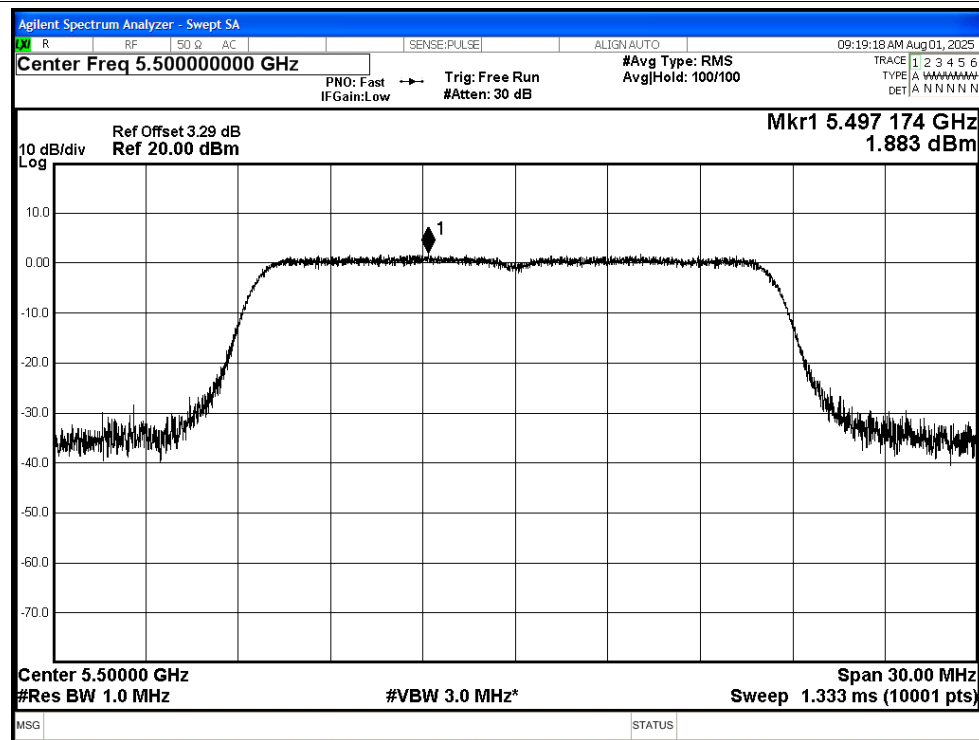


PSD NVNT a 5580MHz Ant2

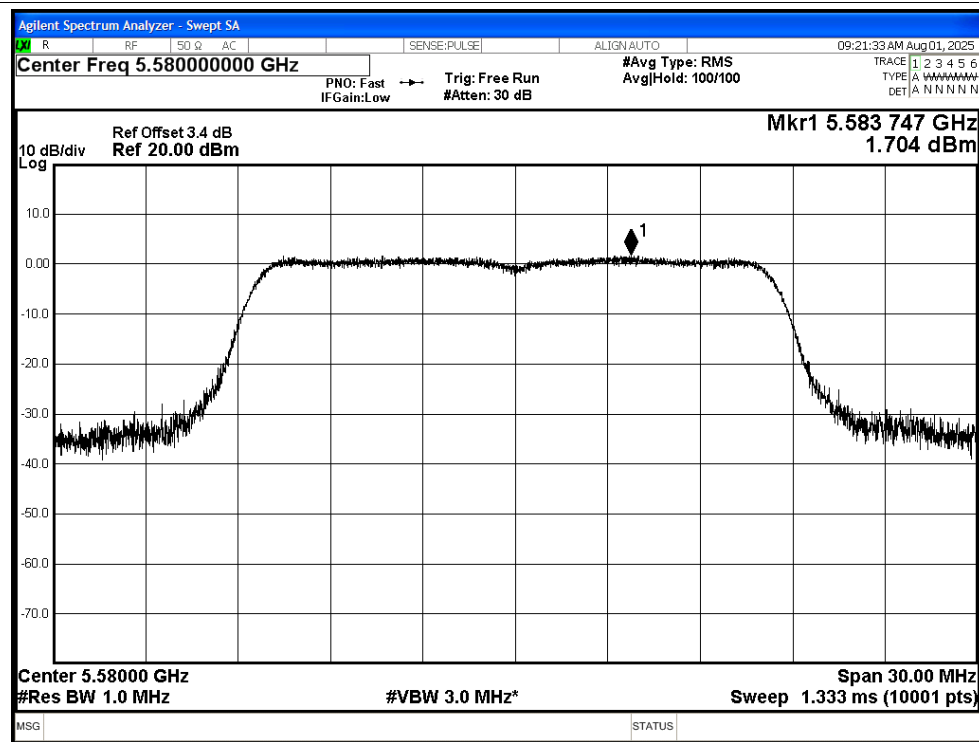


PSD NVNT a 5700MHz Ant2

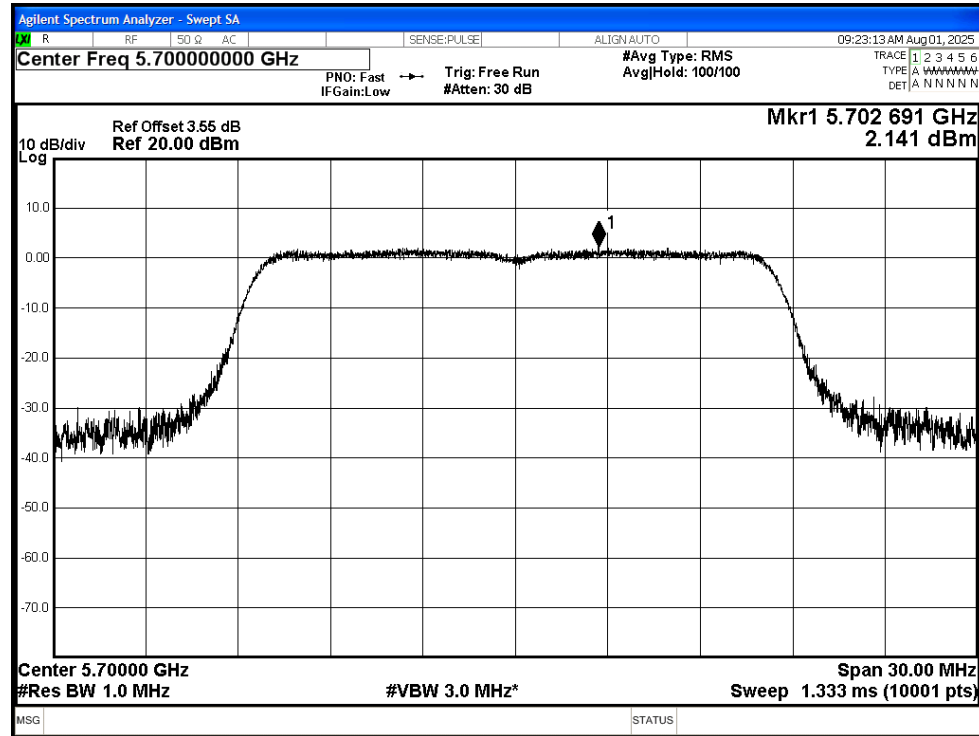


PSD NVNT n20 5500MHz Ant2

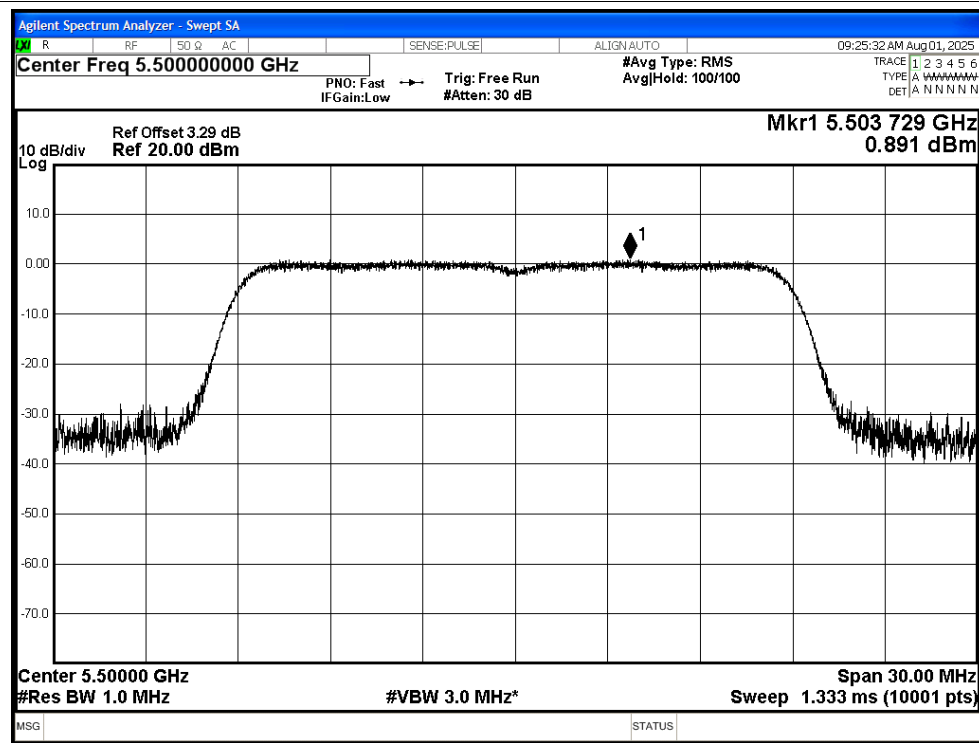


PSD NVNT n20 5580MHz Ant2

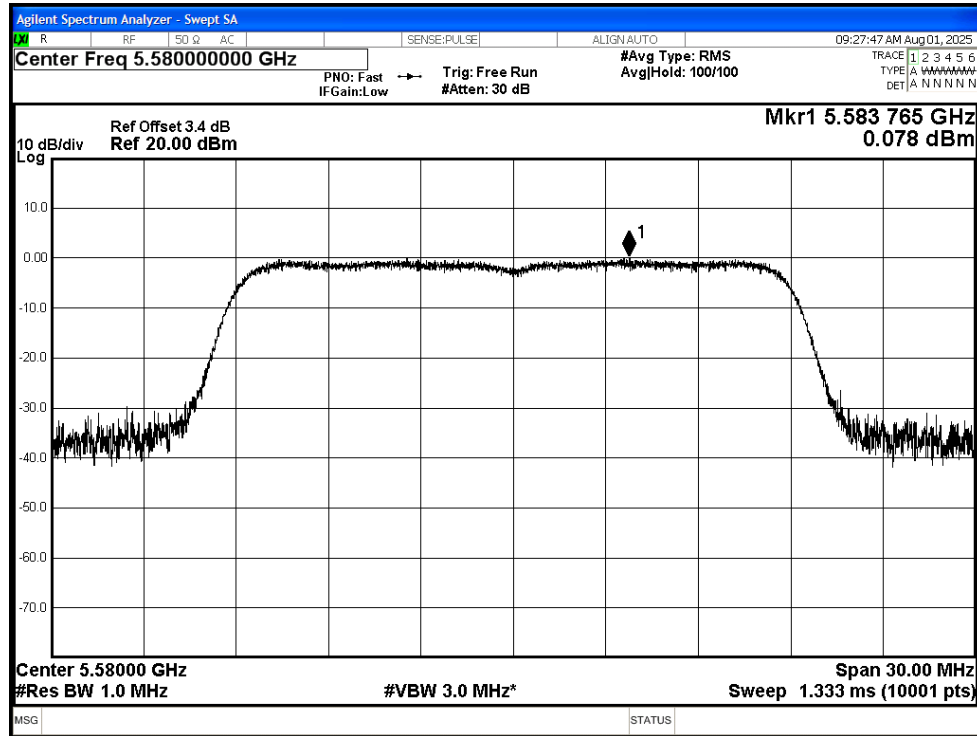


PSD NVNT n20 5700MHz Ant2

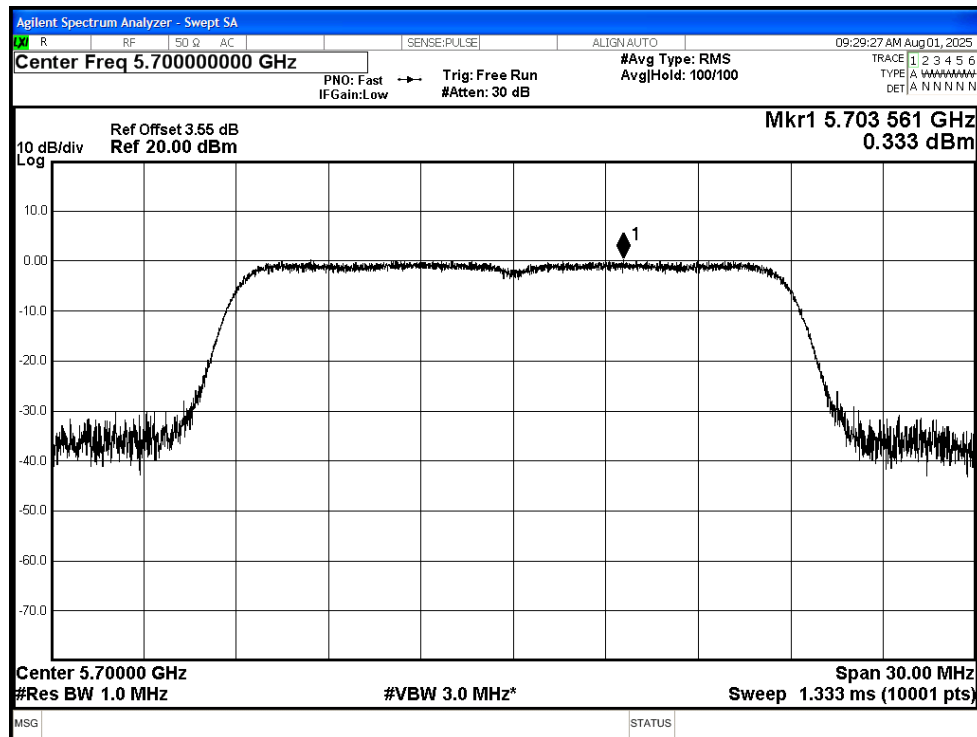


PSD NVNT n40 5510MHz Ant2

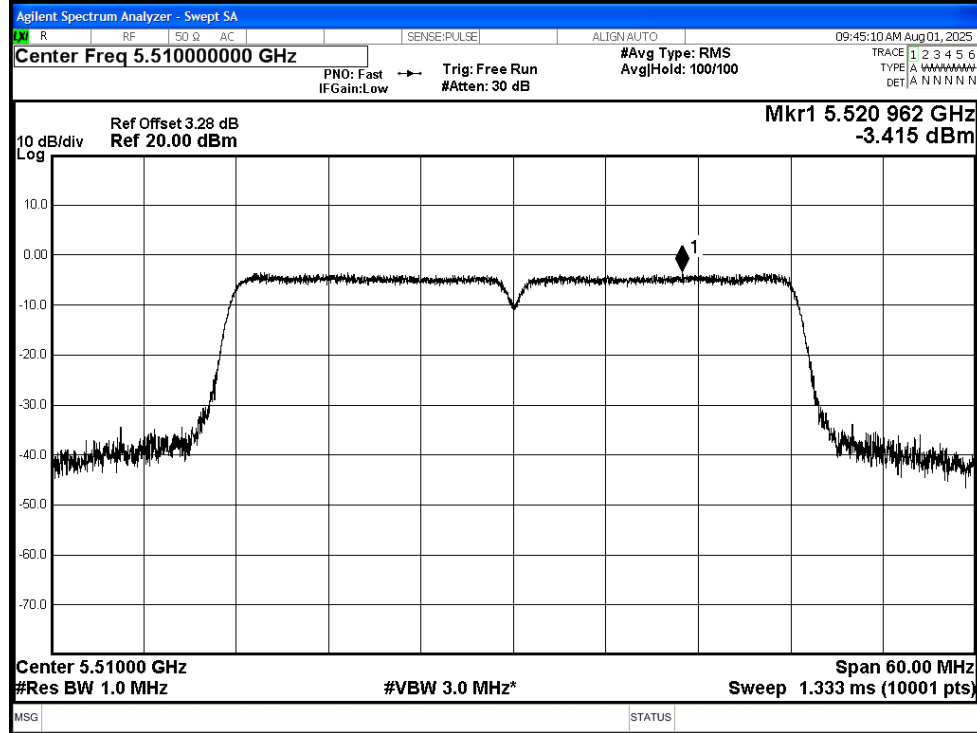


PSD NVNT n40 5550MHz Ant2

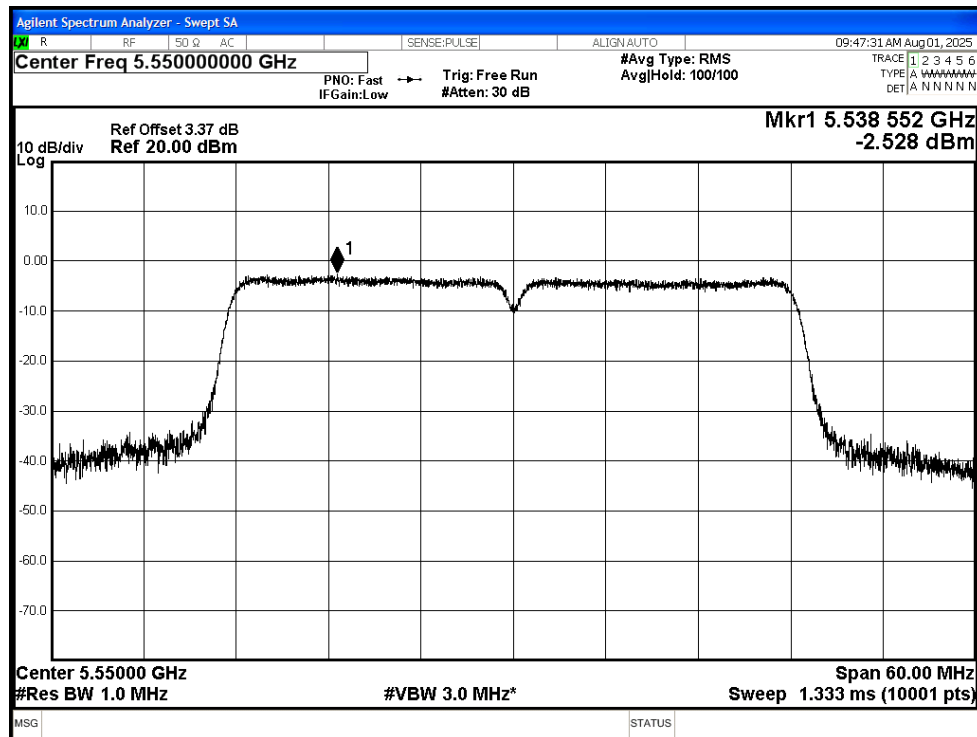


PSD NVNT n40 5670MHz Ant2

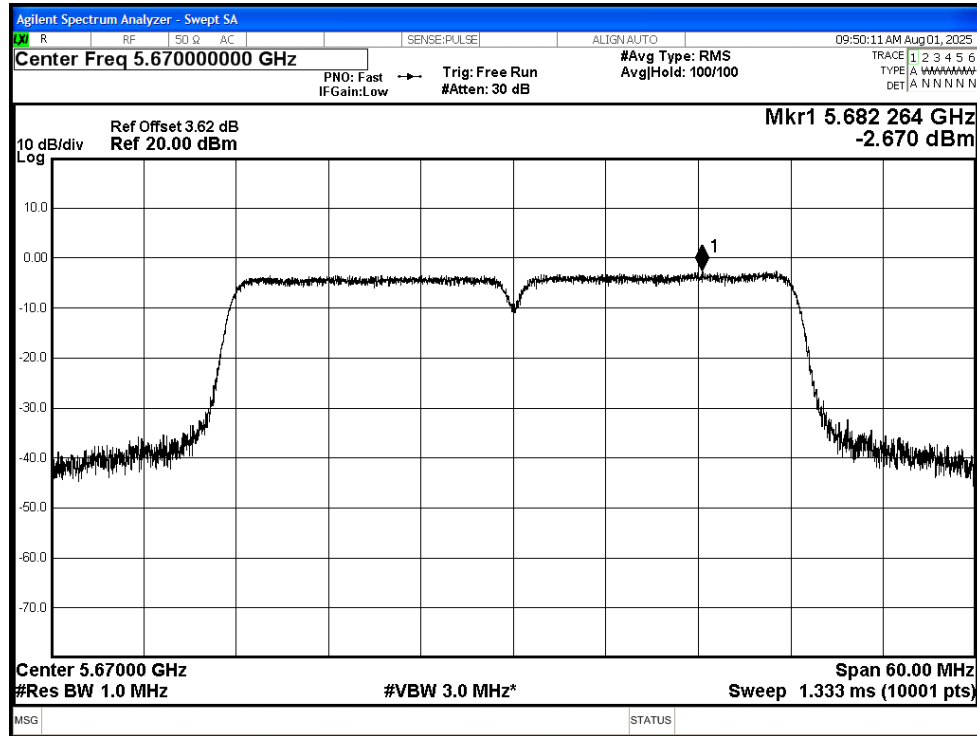


PSD NVNT ac20 5500MHz Ant2

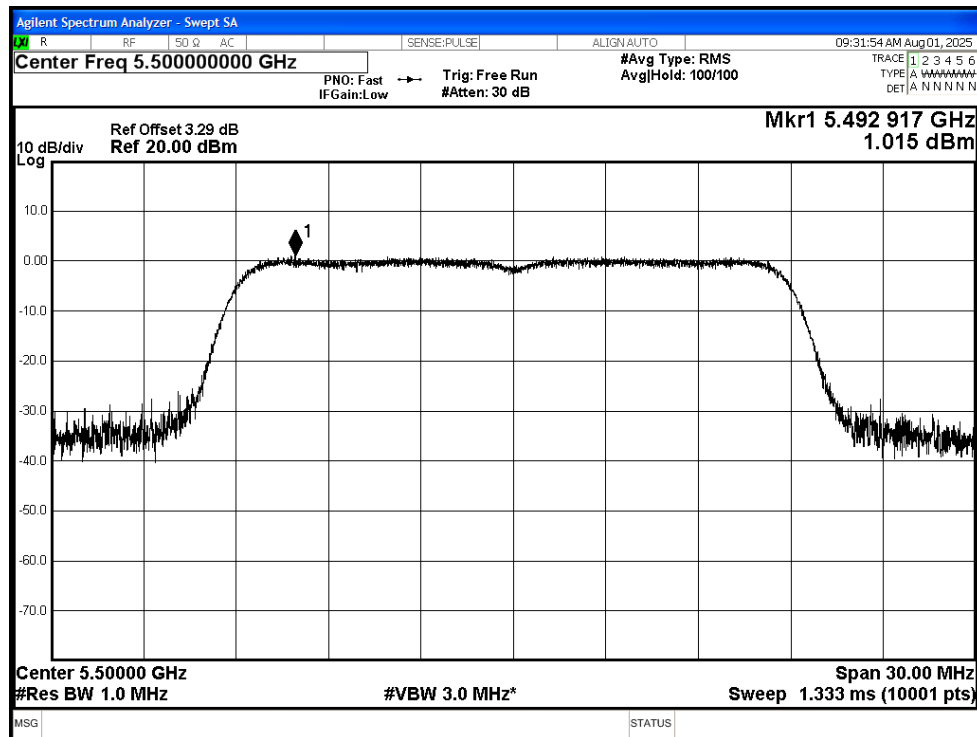


PSD NVNT ac20 5580MHz Ant2

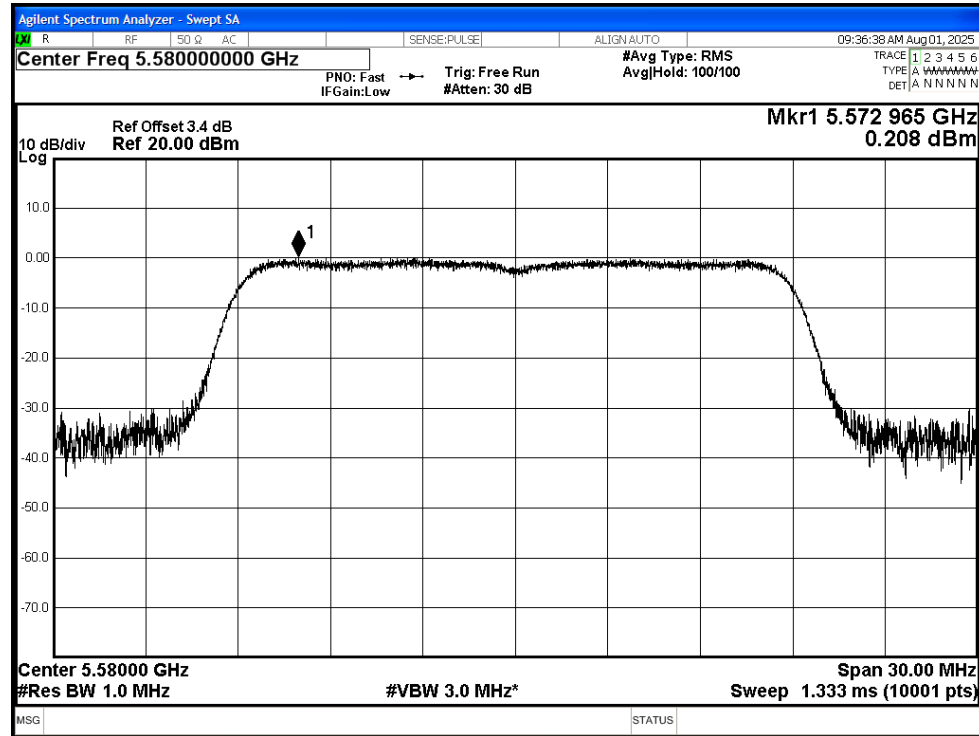


PSD NVNT ac20 5700MHz Ant2

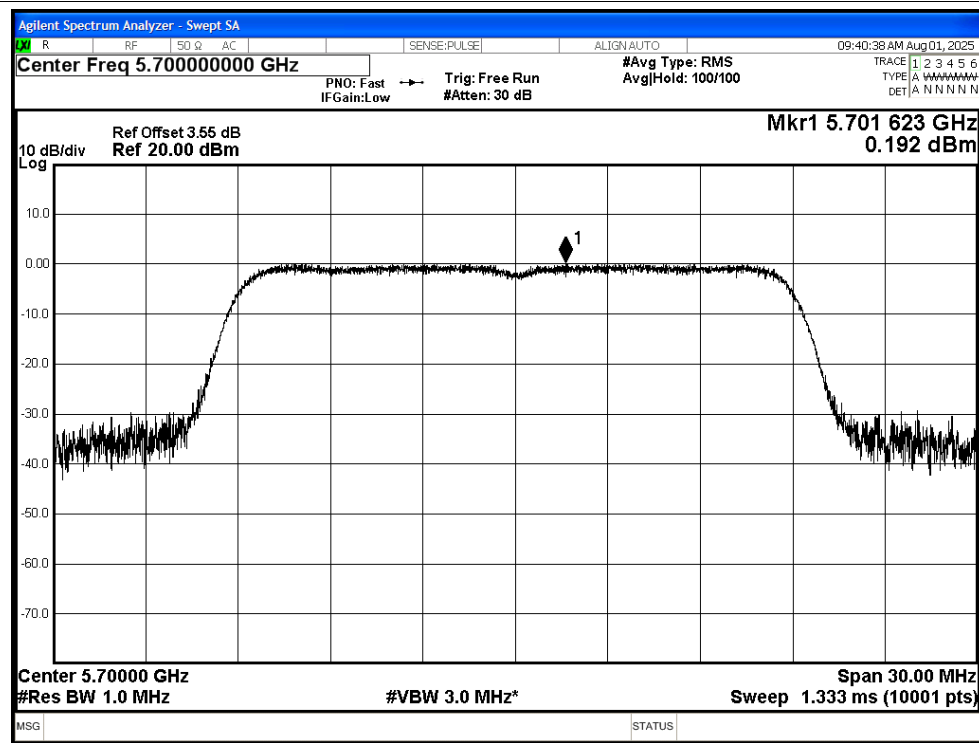


PSD NVNT ac40 5510MHz Ant2

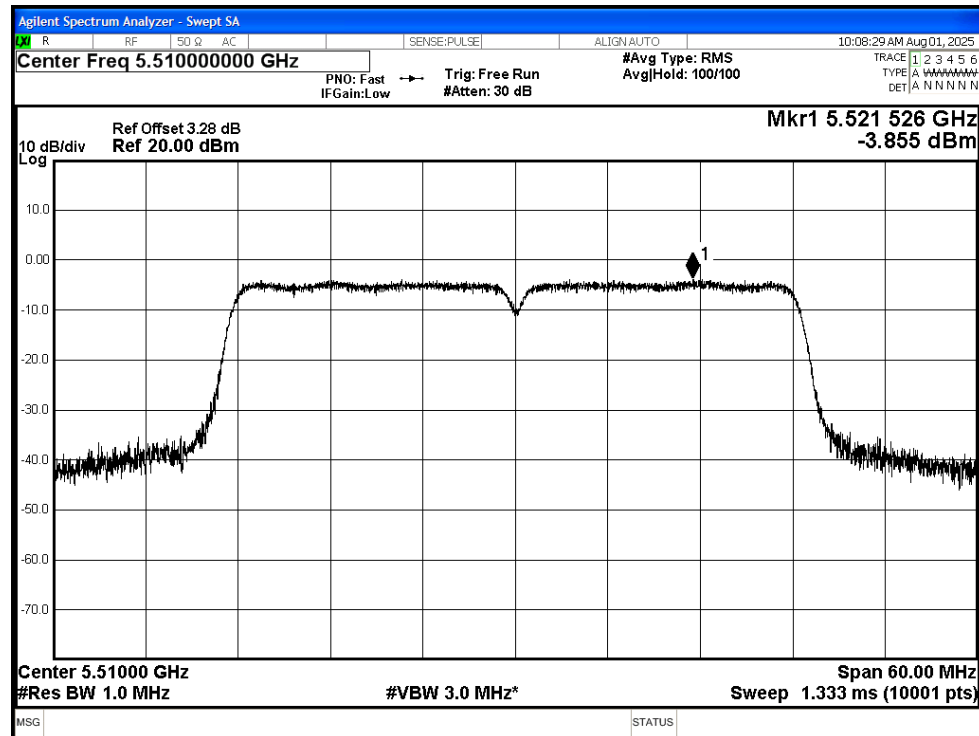


PSD NVNT ac40 5550MHz Ant2

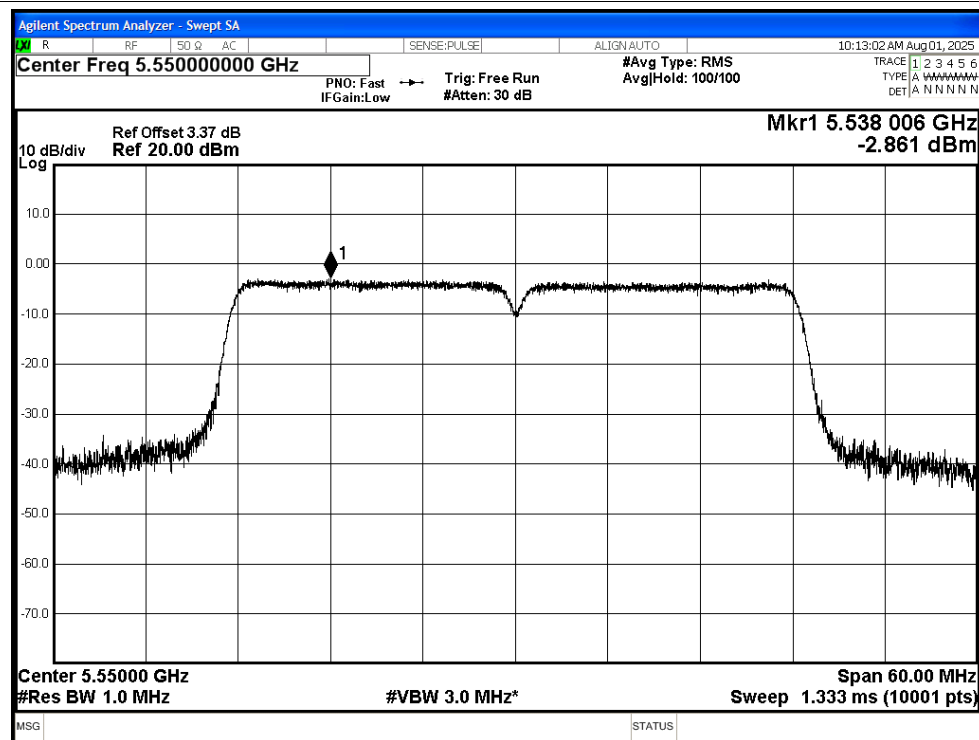


PSD NVNT ac40 5670MHz Ant2

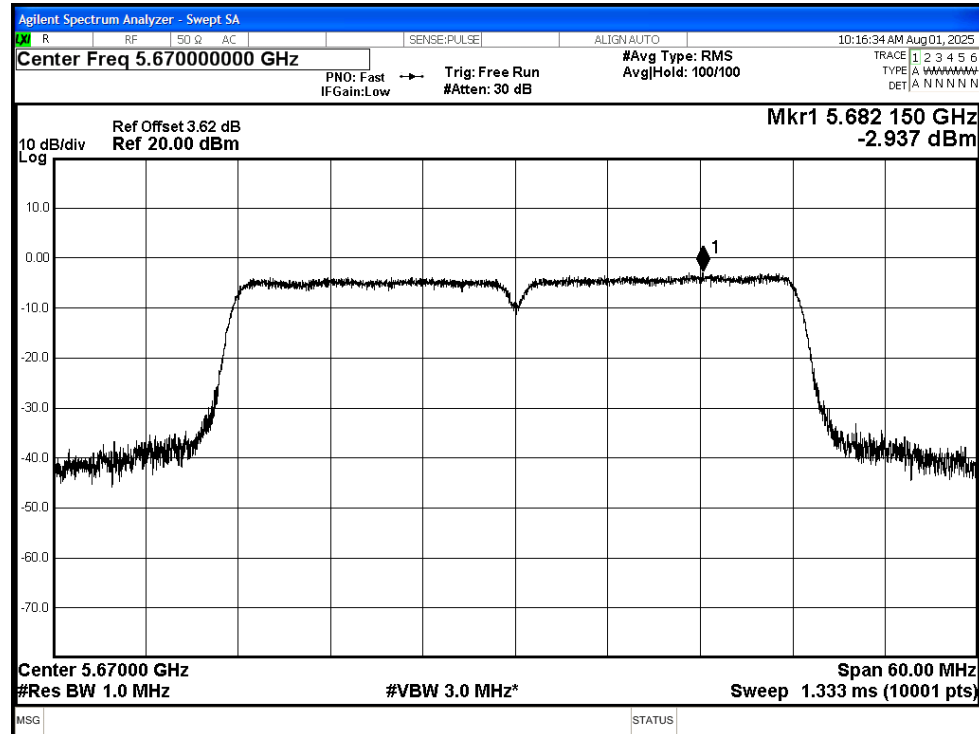


PSD NVNT ax20 5500MHz Ant2

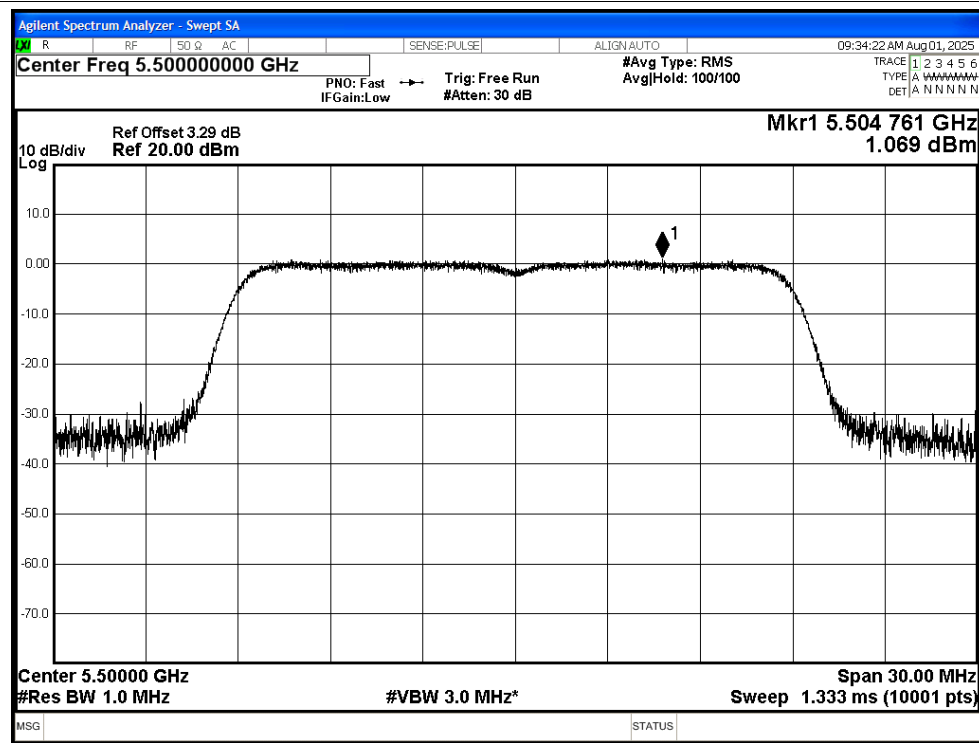


PSD NVNT ax20 5580MHz Ant2

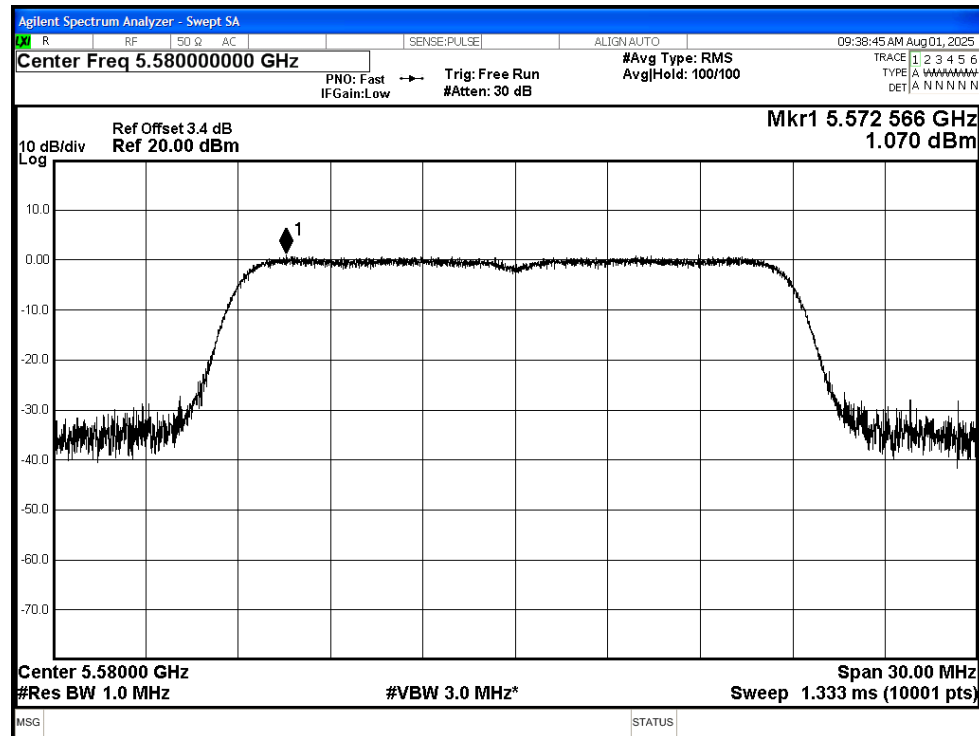


PSD NVNT ax20 5700MHz Ant2

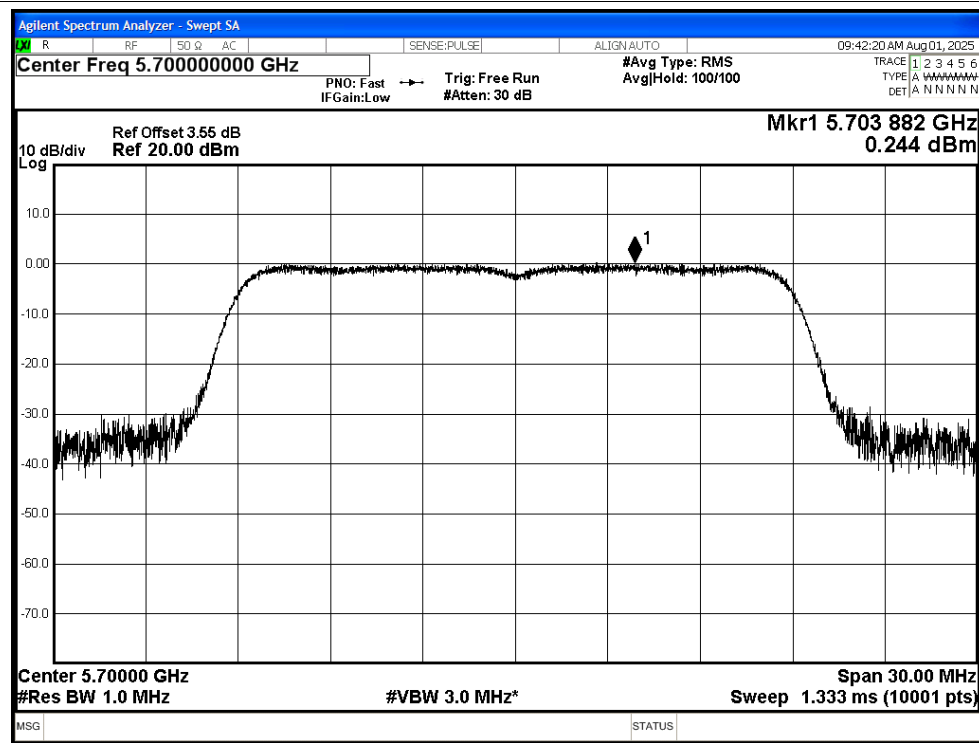


PSD NVNT ax40 5510MHz Ant2

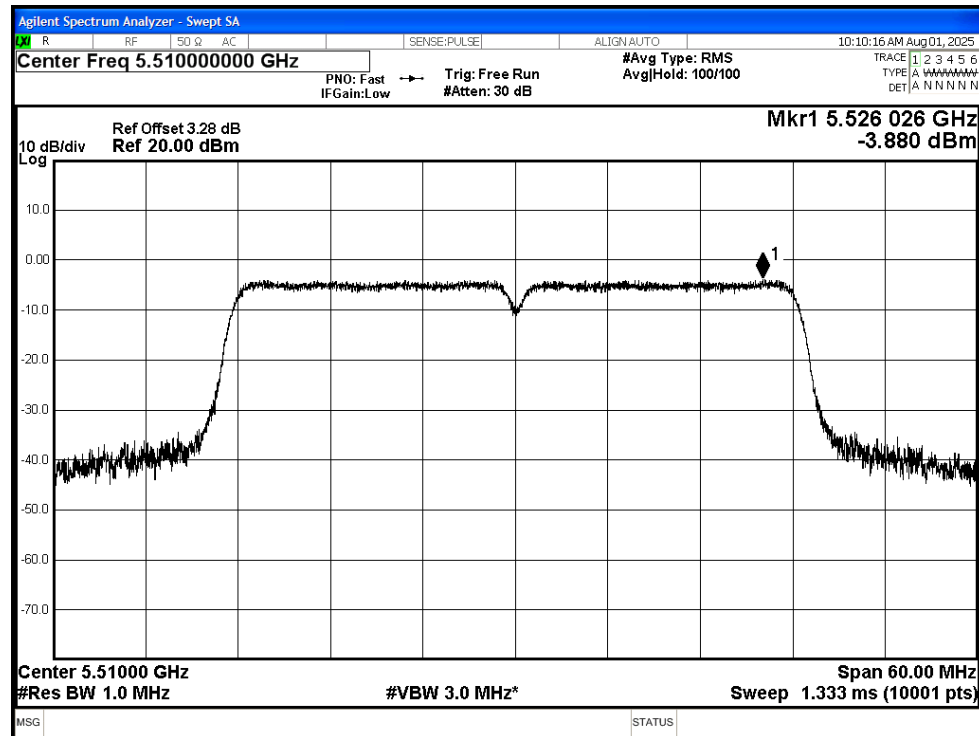

PSD NVNT ax40 5550MHz Ant2

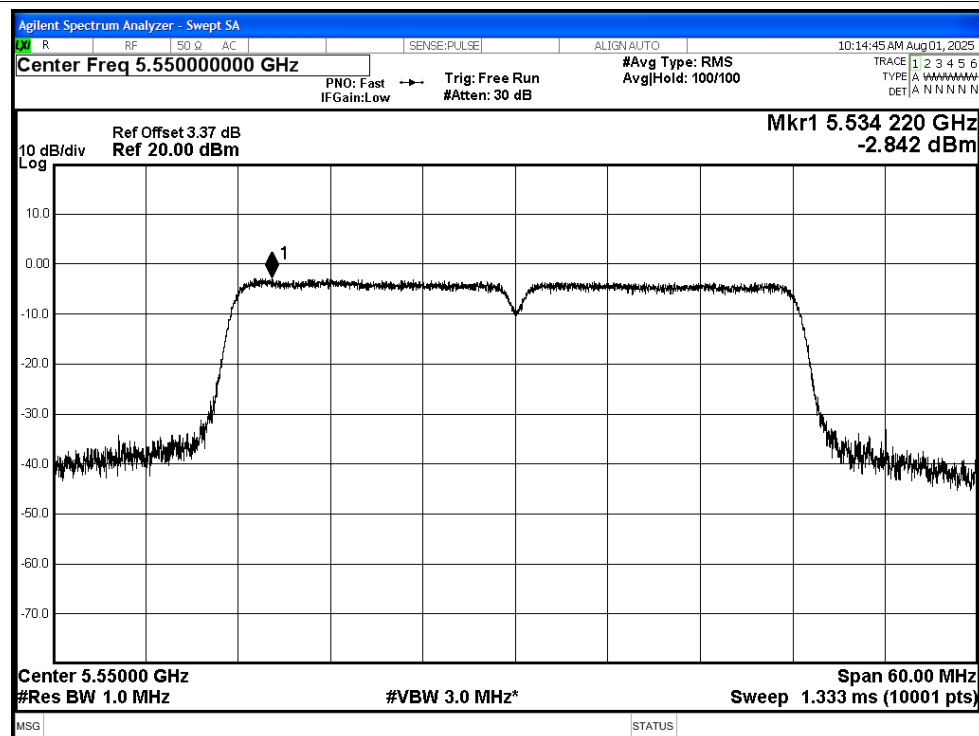

PSD NVNT ax40 5670MHz Ant2

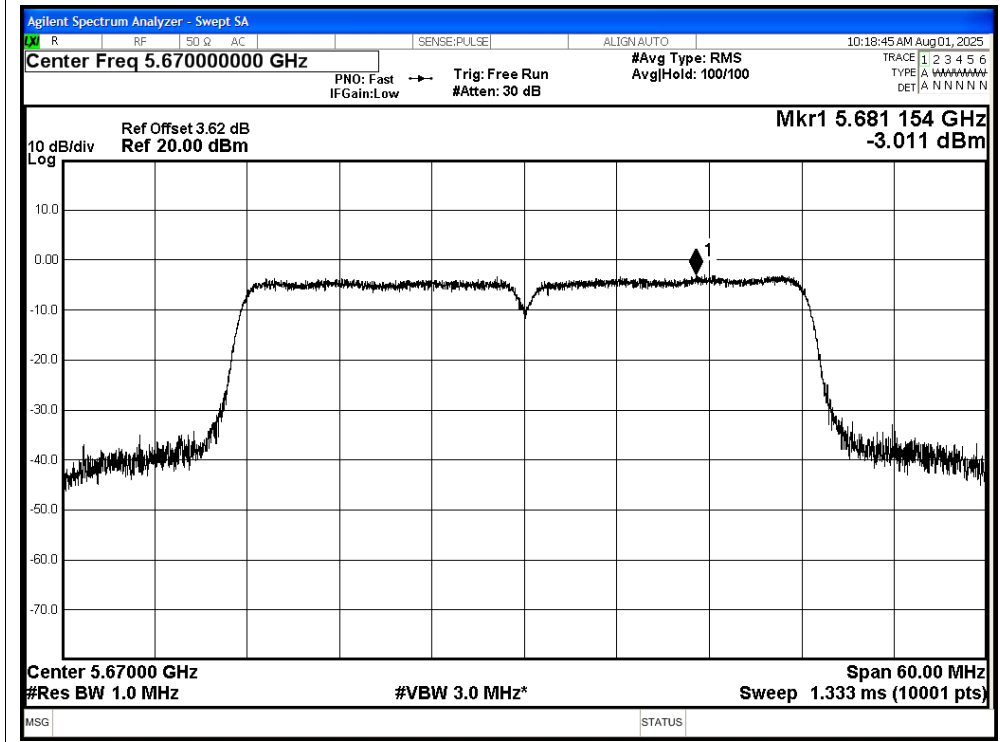


5 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5500	Ant1	5460	-49.62	3.4	-	49.04	Peak	68.2	Pass
NVNT	a	5500	Ant1	5460	-57.72	3.4	0.24	41.18	Average	54	Pass
NVNT	a	5500	Ant1	5469.6	-44.85	3.4	-	53.81	Peak	68.2	Pass
NVNT	a	5500	Ant1	5469.8	-56.09	3.4	0.24	42.81	Average	54	Pass
NVNT	a	5500	Ant1	5470	-48.99	3.4	-	49.67	Peak	68.2	Pass
NVNT	a	5500	Ant1	5470	-56.99	3.4	0.24	41.91	Average	54	Pass
NVNT	a	5700	Ant1	5725	-47.32	3.4	-	51.34	Peak	68.2	Pass
NVNT	a	5700	Ant1	5725	-53.9	3.4	0.24	45.00	Average	54	Pass
NVNT	a	5700	Ant1	5725.6	-39.99	3.4	-	58.67	Peak	68.2	Pass
NVNT	a	5700	Ant1	5725	-53.9	3.4	0.24	45.00	Average	54	Pass
NVNT	a	5700	Ant1	5735	-47.79	3.4	-	50.87	Peak	68.2	Pass
NVNT	a	5700	Ant1	5735	-57.06	3.4	0.24	41.84	Average	54	Pass
NVNT	n20	5500	Ant1	5460	-48.64	3.4	-	50.02	Peak	68.2	Pass
NVNT	n20	5500	Ant1	5460	-57.05	3.4	0.12	41.73	Average	54	Pass
NVNT	n20	5500	Ant1	5469	-44.74	3.4	-	53.92	Peak	68.2	Pass
NVNT	n20	5500	Ant1	5467	-56.06	3.4	0.12	42.72	Average	54	Pass
NVNT	n20	5500	Ant1	5470	-46.76	3.4	-	51.90	Peak	68.2	Pass
NVNT	n20	5500	Ant1	5470	-56.95	3.4	0.12	41.83	Average	54	Pass
NVNT	n20	5700	Ant1	5725	-38.95	3.4	-	59.71	Peak	68.2	Pass
NVNT	n20	5700	Ant1	5725	-54.39	3.4	0.12	44.39	Average	54	Pass
NVNT	n20	5700	Ant1	5725	-38.95	3.4	-	59.71	Peak	68.2	Pass
NVNT	n20	5700	Ant1	5725.8	-53.5	3.4	0.12	45.28	Average	54	Pass
NVNT	n20	5700	Ant1	5735	-49.33	3.4	-	49.33	Peak	68.2	Pass
NVNT	n20	5700	Ant1	5735	-56.73	3.4	0.12	42.05	Average	54	Pass
NVNT	n40	5510	Ant1	5460	-51.25	3.4	-	47.41	Peak	68.2	Pass
NVNT	n40	5510	Ant1	5460	-57.93	3.4	0.23	40.96	Average	54	Pass
NVNT	n40	5510	Ant1	5468.6	-41	3.4	-	57.66	Peak	68.2	Pass
NVNT	n40	5510	Ant1	5468.8	-55.55	3.4	0.23	43.34	Average	54	Pass
NVNT	n40	5510	Ant1	5470	-48.01	3.4	-	50.65	Peak	68.2	Pass
NVNT	n40	5510	Ant1	5470	-55.81	3.4	0.23	43.08	Average	54	Pass
NVNT	n40	5670	Ant1	5725	-49.63	3.4	-	49.03	Peak	68.2	Pass
NVNT	n40	5670	Ant1	5725	-57.4	3.4	0.24	41.50	Average	54	Pass
NVNT	n40	5670	Ant1	5733.2	-47.67	3.4	-	50.99	Peak	68.2	Pass
NVNT	n40	5670	Ant1	5725.4	-57.03	3.4	0.24	41.87	Average	54	Pass
NVNT	n40	5670	Ant1	5735	-50.71	3.4	-	47.95	Peak	68.2	Pass
NVNT	n40	5670	Ant1	5735	-57.54	3.4	0.24	41.36	Average	54	Pass
NVNT	ac20	5500	Ant1	5460	-48.72	3.4	-	49.94	Peak	68.2	Pass
NVNT	ac20	5500	Ant1	5460	-57.96	3.4	0	40.70	Average	54	Pass
NVNT	ac20	5500	Ant1	5469.8	-42.79	3.4	-	55.87	Peak	68.2	Pass
NVNT	ac20	5500	Ant1	5469.2	-56.55	3.4	0	42.11	Average	54	Pass


NVNT	ac20	5500	Ant1	5470	-43.59	3.4	-	55.07	Peak	68.2	Pass
NVNT	ac20	5500	Ant1	5470	-57.32	3.4	0	41.34	Average	54	Pass
NVNT	ac20	5700	Ant1	5725	-39.16	3.4	-	59.50	Peak	68.2	Pass
NVNT	ac20	5700	Ant1	5725	-54.25	3.4	0.12	44.53	Average	54	Pass
NVNT	ac20	5700	Ant1	5725	-39.16	3.4	-	59.50	Peak	68.2	Pass
NVNT	ac20	5700	Ant1	5726	-53.2	3.4	0.12	45.58	Average	54	Pass
NVNT	ac20	5700	Ant1	5735	-49.52	3.4	-	49.14	Peak	68.2	Pass
NVNT	ac20	5700	Ant1	5735	-56.96	3.4	0.12	41.82	Average	54	Pass
NVNT	ac40	5510	Ant1	5460	-48.69	3.4	-	49.97	Peak	68.2	Pass
NVNT	ac40	5510	Ant1	5460	-57.68	3.4	0.24	41.22	Average	54	Pass
NVNT	ac40	5510	Ant1	5469.8	-45.19	3.4	-	53.47	Peak	68.2	Pass
NVNT	ac40	5510	Ant1	5470	-55.5	3.4	0.24	43.40	Average	54	Pass
NVNT	ac40	5510	Ant1	5470	-47.22	3.4	-	51.44	Peak	68.2	Pass
NVNT	ac40	5510	Ant1	5470	-55.5	3.4	0.24	43.40	Average	54	Pass
NVNT	ac40	5670	Ant1	5725	-49.12	3.4	-	49.54	Peak	68.2	Pass
NVNT	ac40	5670	Ant1	5725	-57.62	3.4	0.24	41.28	Average	54	Pass
NVNT	ac40	5670	Ant1	5727.4	-47.07	3.4	-	51.59	Peak	68.2	Pass
NVNT	ac40	5670	Ant1	5729.2	-57.05	3.4	0.24	41.85	Average	54	Pass
NVNT	ac40	5670	Ant1	5735	-51.15	3.4	-	47.51	Peak	68.2	Pass
NVNT	ac40	5670	Ant1	5735	-58.11	3.4	0.24	40.79	Average	54	Pass
NVNT	ax20	5500	Ant1	5460	-48.48	3.4	-	50.18	Peak	68.2	Pass
NVNT	ax20	5500	Ant1	5460	-58.02	3.4	0	40.64	Average	54	Pass
NVNT	ax20	5500	Ant1	5470	-45.24	3.4	-	53.42	Peak	68.2	Pass
NVNT	ax20	5500	Ant1	5469.6	-56.75	3.4	0	41.91	Average	54	Pass
NVNT	ax20	5500	Ant1	5470	-45.24	3.4	-	53.42	Peak	68.2	Pass
NVNT	ax20	5500	Ant1	5470	-56.86	3.4	0	41.80	Average	54	Pass
NVNT	ax20	5700	Ant1	5725	-44.19	3.4	-	54.47	Peak	68.2	Pass
NVNT	ax20	5700	Ant1	5725	-53.98	3.4	0.12	44.80	Average	54	Pass
NVNT	ax20	5700	Ant1	5725.4	-40.13	3.4	-	58.53	Peak	68.2	Pass
NVNT	ax20	5700	Ant1	5725	-53.98	3.4	0.12	44.80	Average	54	Pass
NVNT	ax20	5700	Ant1	5735	-50.21	3.4	-	48.45	Peak	68.2	Pass
NVNT	ax20	5700	Ant1	5735	-57.4	3.4	0.12	41.38	Average	54	Pass
NVNT	ax40	5510	Ant1	5460	-50.1	3.4	-	48.56	Peak	68.2	Pass
NVNT	ax40	5510	Ant1	5460	-58.14	3.4	0.23	40.75	Average	54	Pass
NVNT	ax40	5510	Ant1	5470	-43.32	3.4	-	55.34	Peak	68.2	Pass
NVNT	ax40	5510	Ant1	5469	-55.73	3.4	0.23	43.16	Average	54	Pass
NVNT	ax40	5510	Ant1	5470	-43.32	3.4	-	55.34	Peak	68.2	Pass
NVNT	ax40	5510	Ant1	5470	-55.92	3.4	0.23	42.97	Average	54	Pass
NVNT	ax40	5670	Ant1	5725	-49.85	3.4	-	48.81	Peak	68.2	Pass
NVNT	ax40	5670	Ant1	5725	-56.99	3.4	0.24	41.91	Average	54	Pass
NVNT	ax40	5670	Ant1	5732	-48.01	3.4	-	50.65	Peak	68.2	Pass
NVNT	ax40	5670	Ant1	5735	-56.9	3.4	0.24	42.00	Average	54	Pass
NVNT	ax40	5670	Ant1	5735	-50.44	3.4	-	48.22	Peak	68.2	Pass
NVNT	ax40	5670	Ant1	5735	-56.9	3.4	0.24	42.00	Average	54	Pass

Test Graphs


Restrict Band NVNT a 5500MHz Ant1 Peak

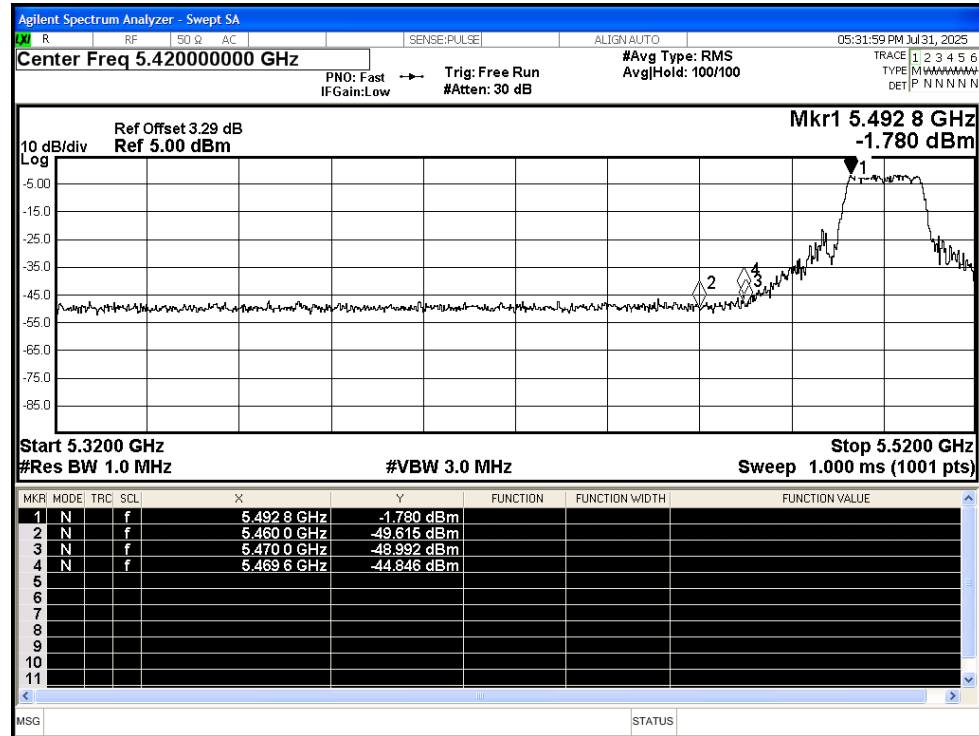


Restrict Band NVNT a 5500MHz Ant1 Average

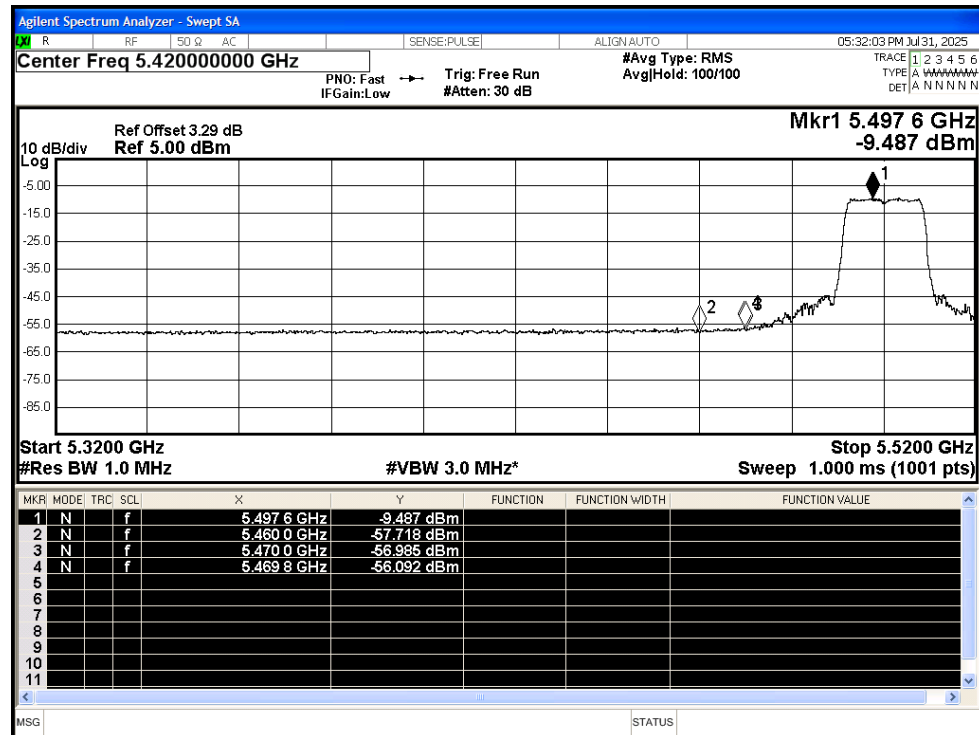


Restrict Band NVNT a 5700MHz Ant1 Peak

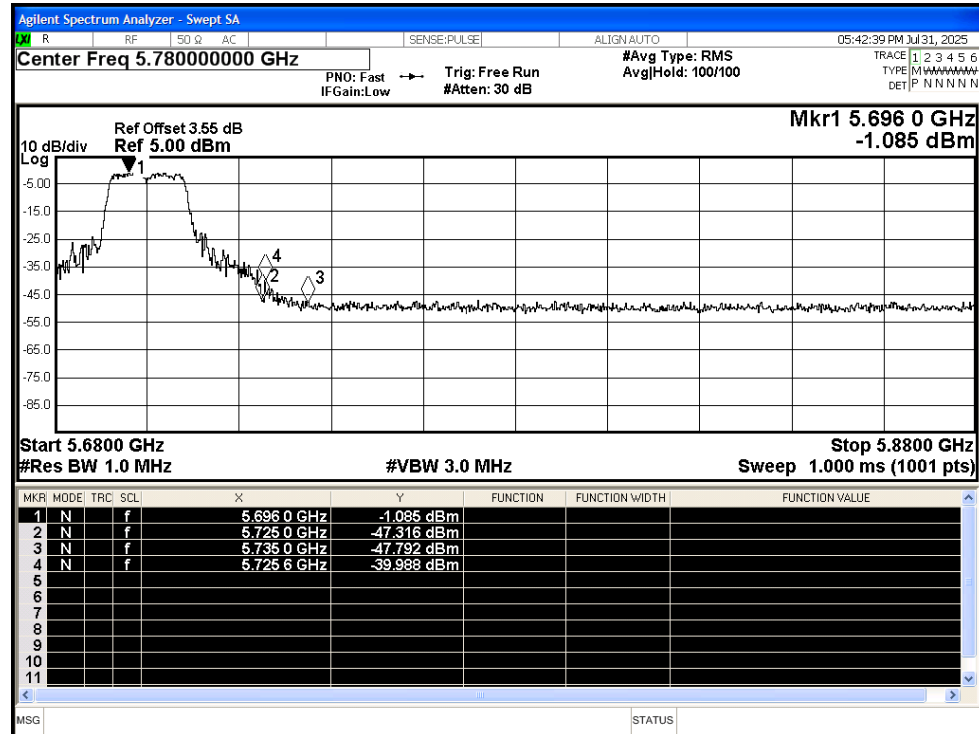


Restrict Band NVNT a 5700MHz Ant1 Average

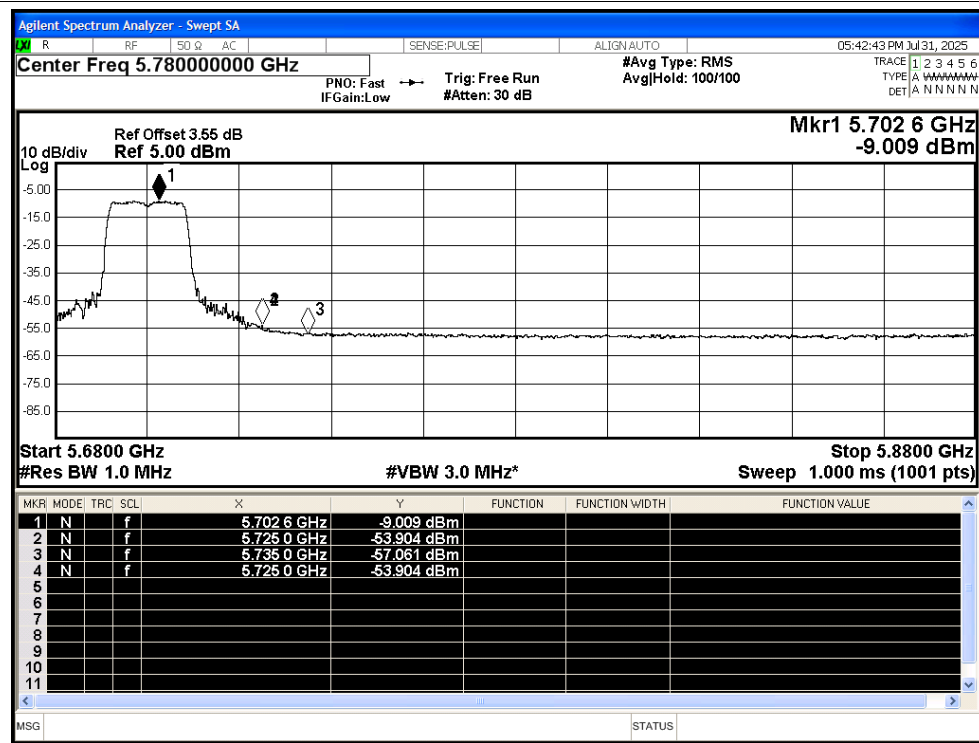


Restrict Band NVNT n20 5500MHz Ant1 Peak

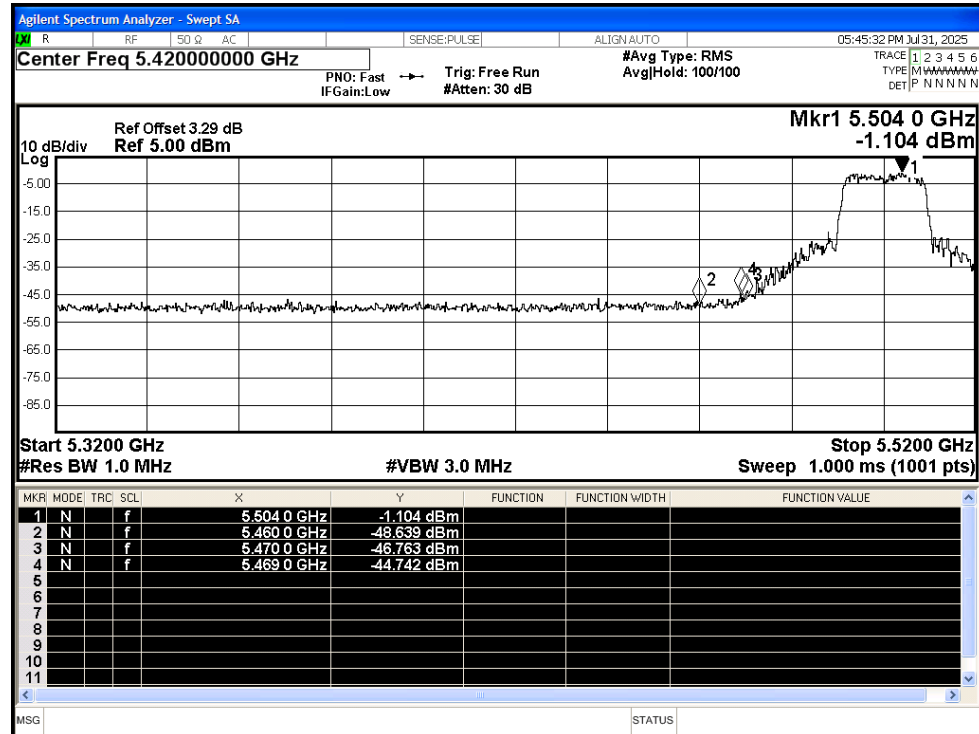


Restrict Band NVNT n20 5500MHz Ant1 Average

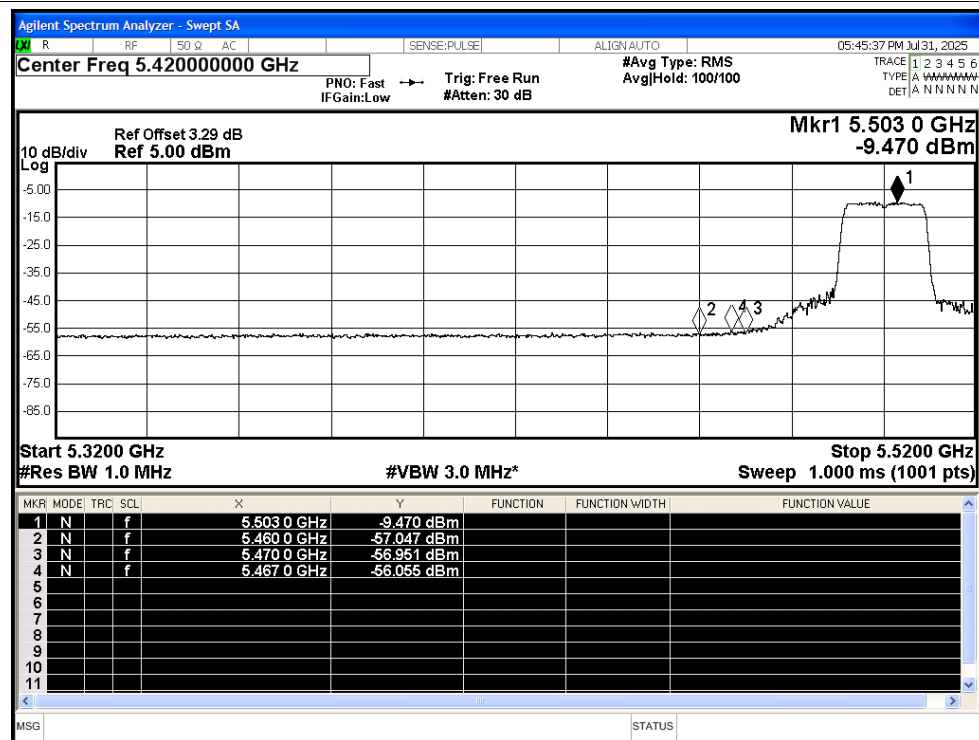


Restrict Band NVNT n20 5700MHz Ant1 Peak

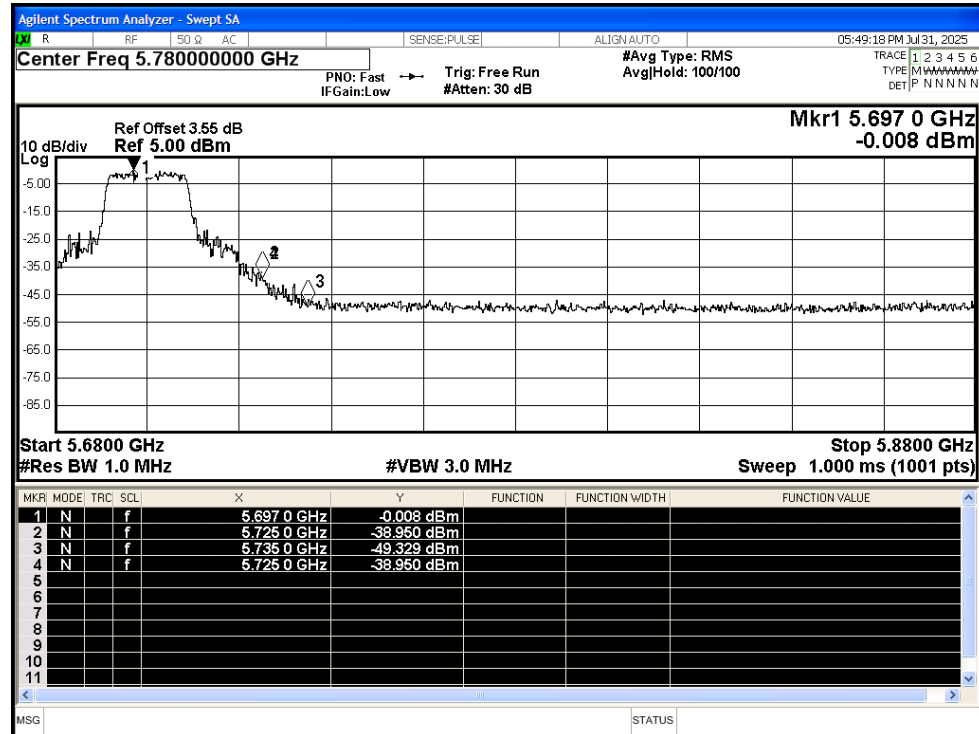


Restrict Band NVNT n20 5700MHz Ant1 Average

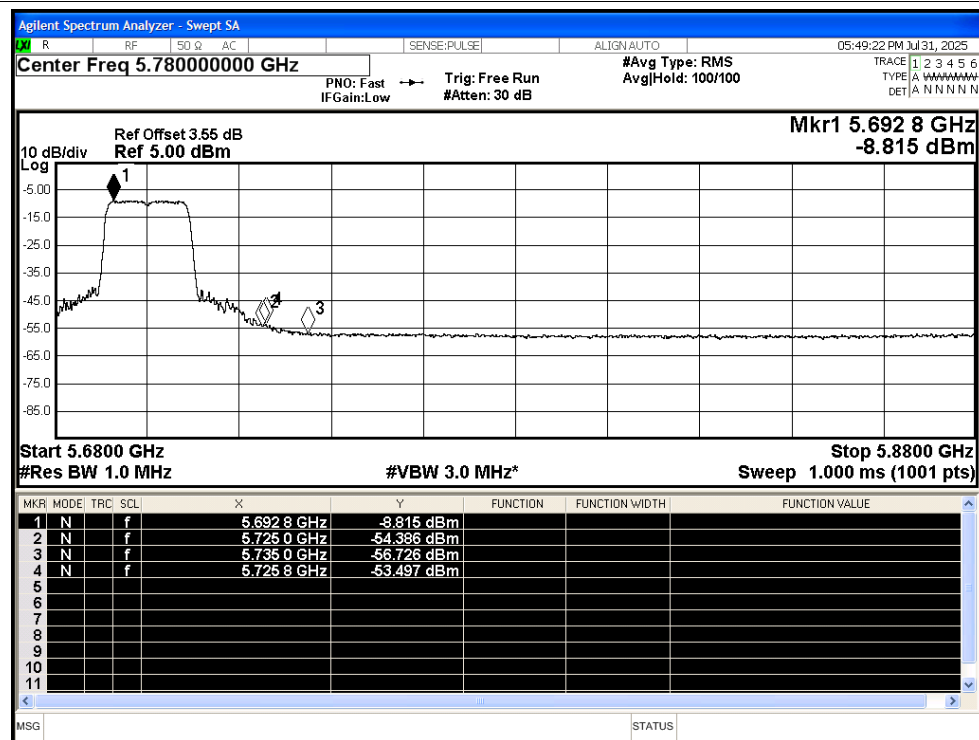


Restrict Band NVNT n40 5510MHz Ant1 Peak

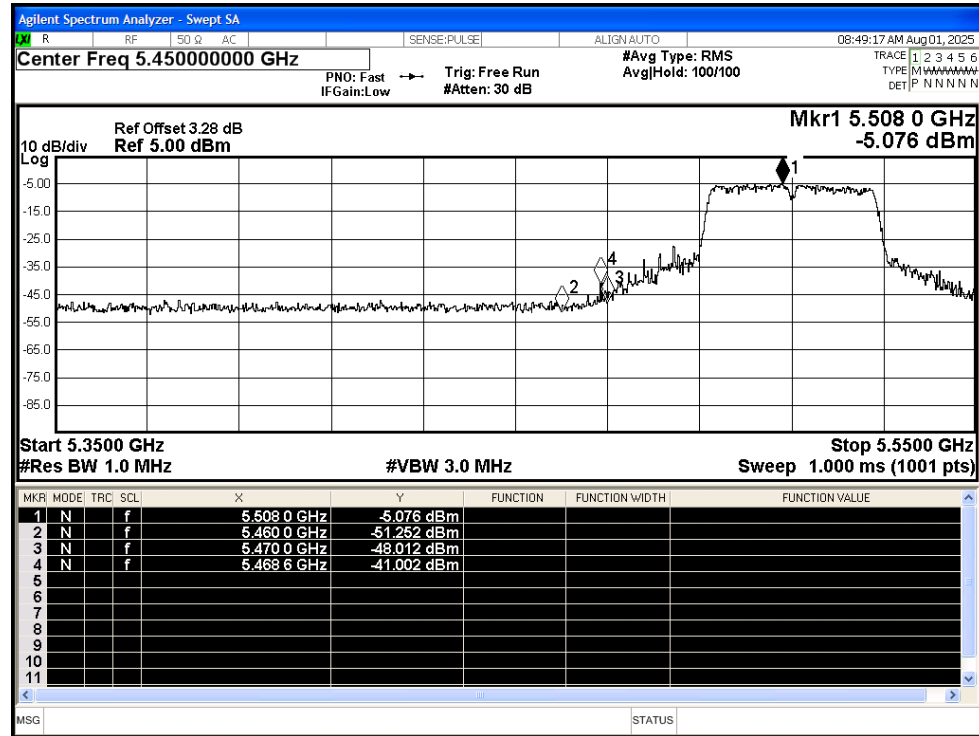


Restrict Band NVNT n40 5510MHz Ant1 Average

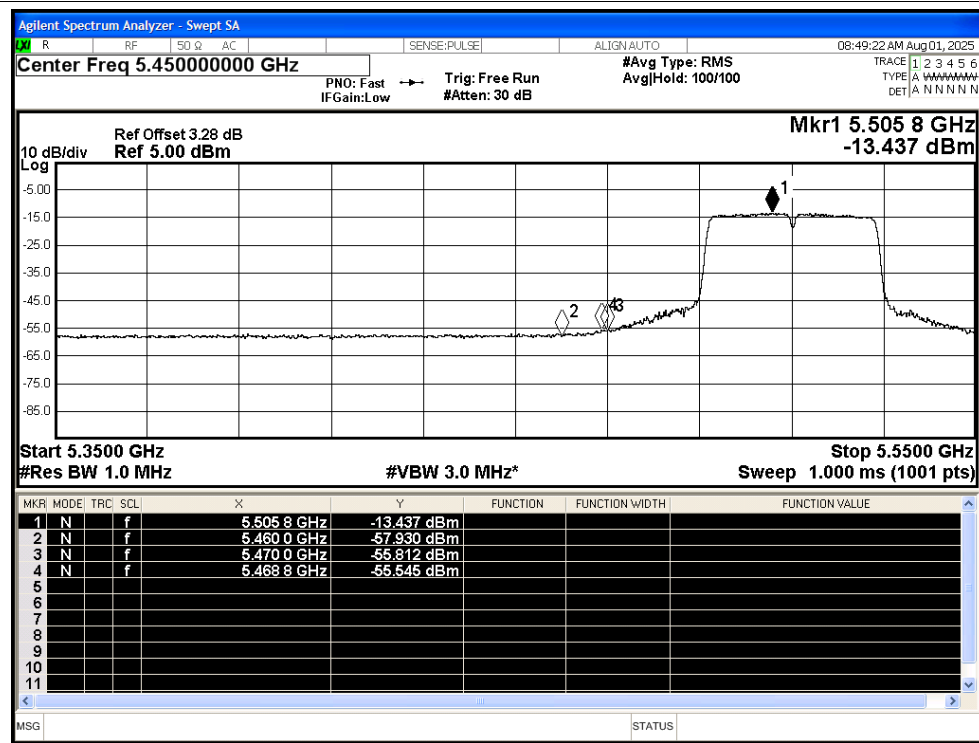


Restrict Band NVNT n40 5670MHz Ant1 Peak

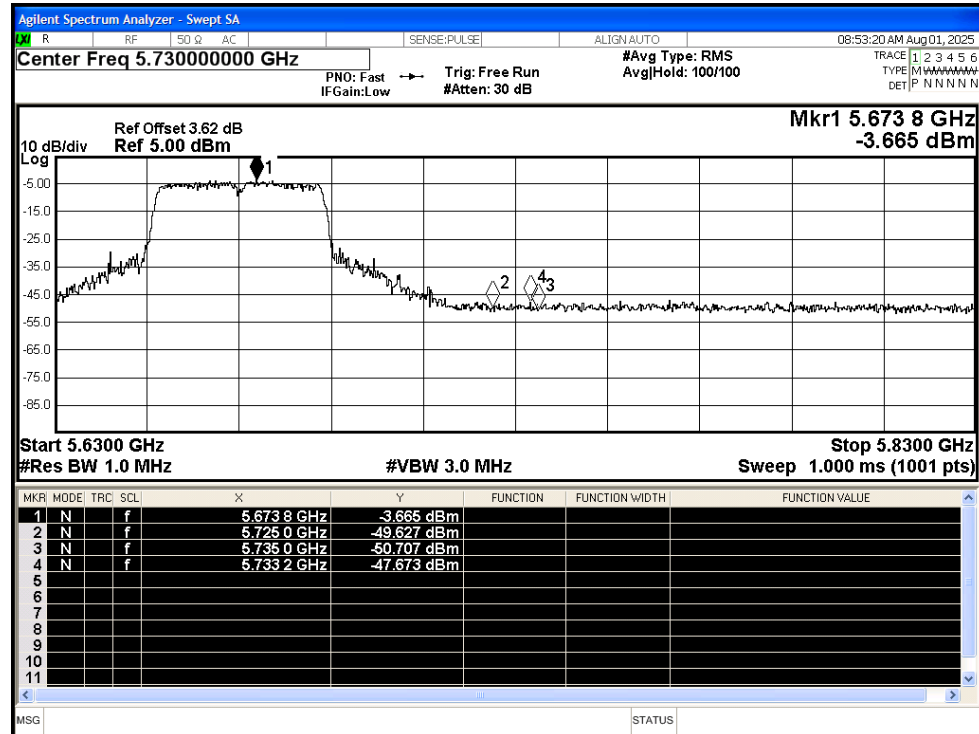


Restrict Band NVNT n40 5670MHz Ant1 Average

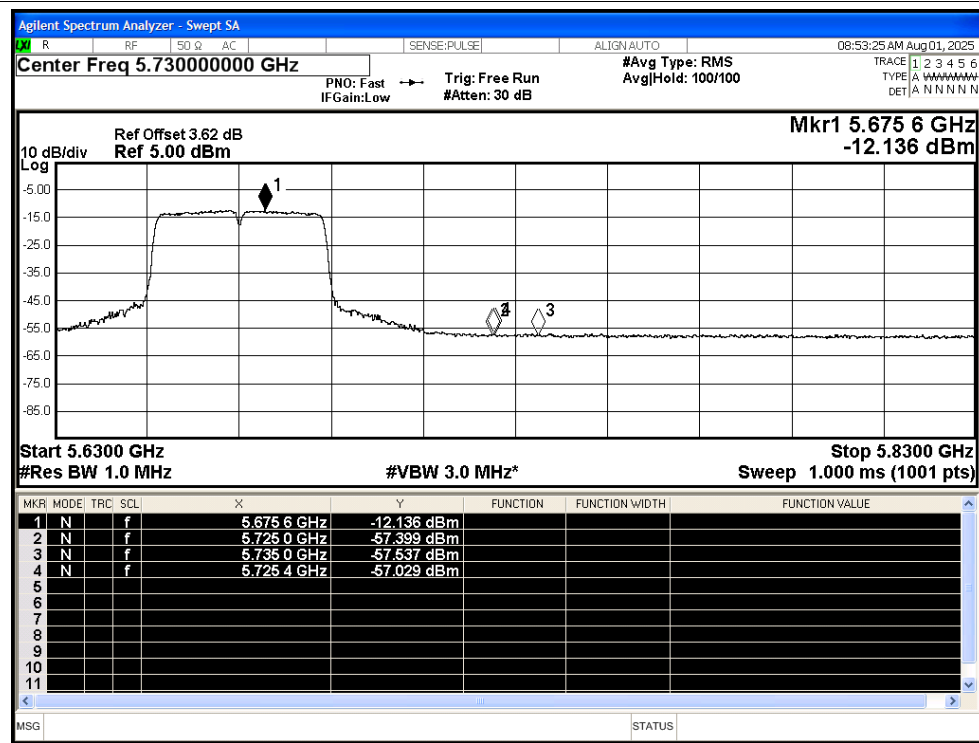


Restrict Band NVNT ac20 5500MHz Ant1 Peak

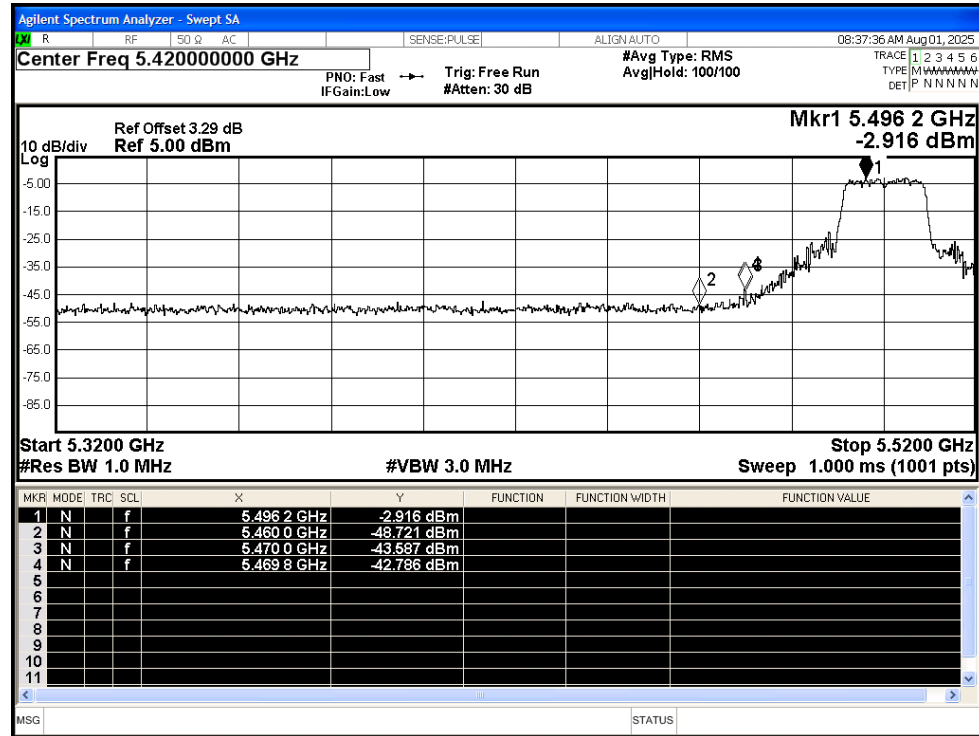


Restrict Band NVNT ac20 5500MHz Ant1 Average

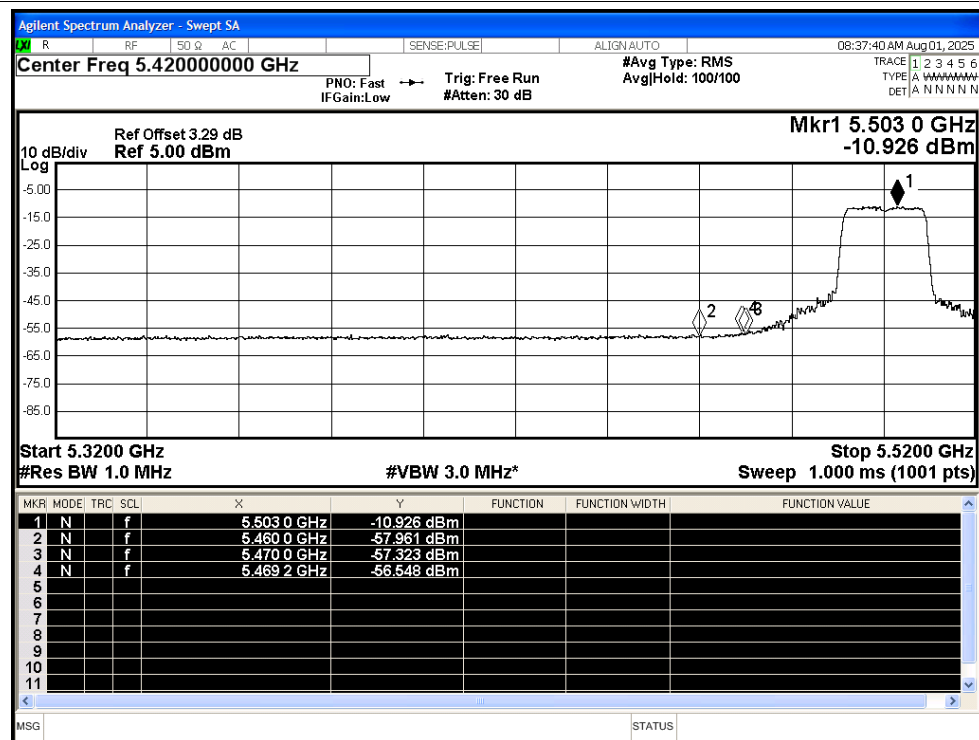


Restrict Band NVNT ac20 5700MHz Ant1 Peak

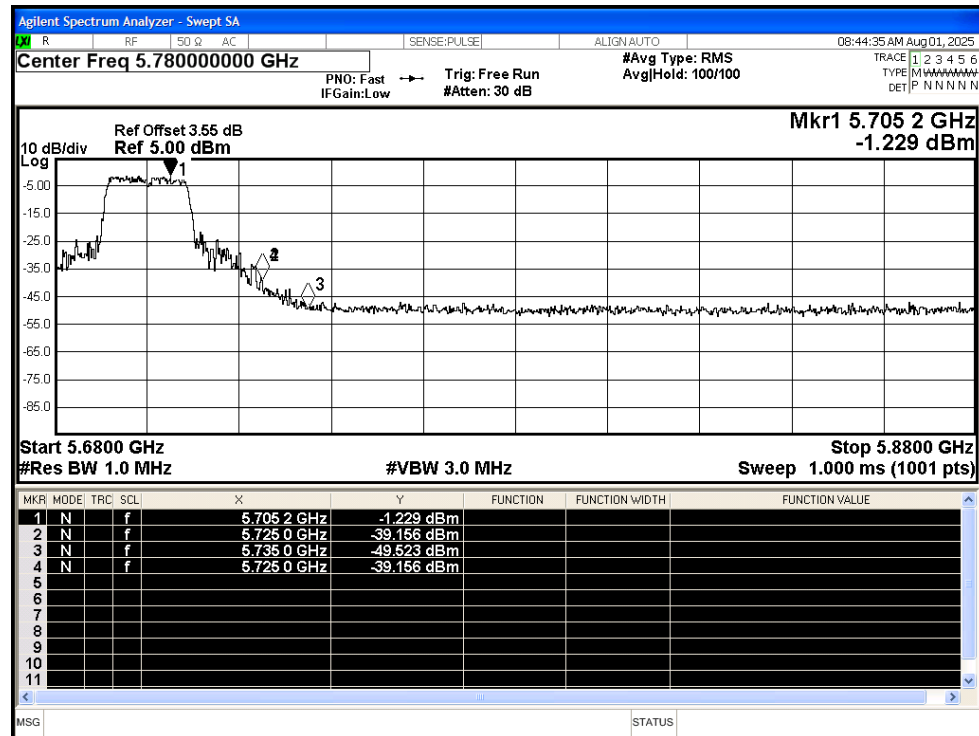


Restrict Band NVNT ac20 5700MHz Ant1 Average

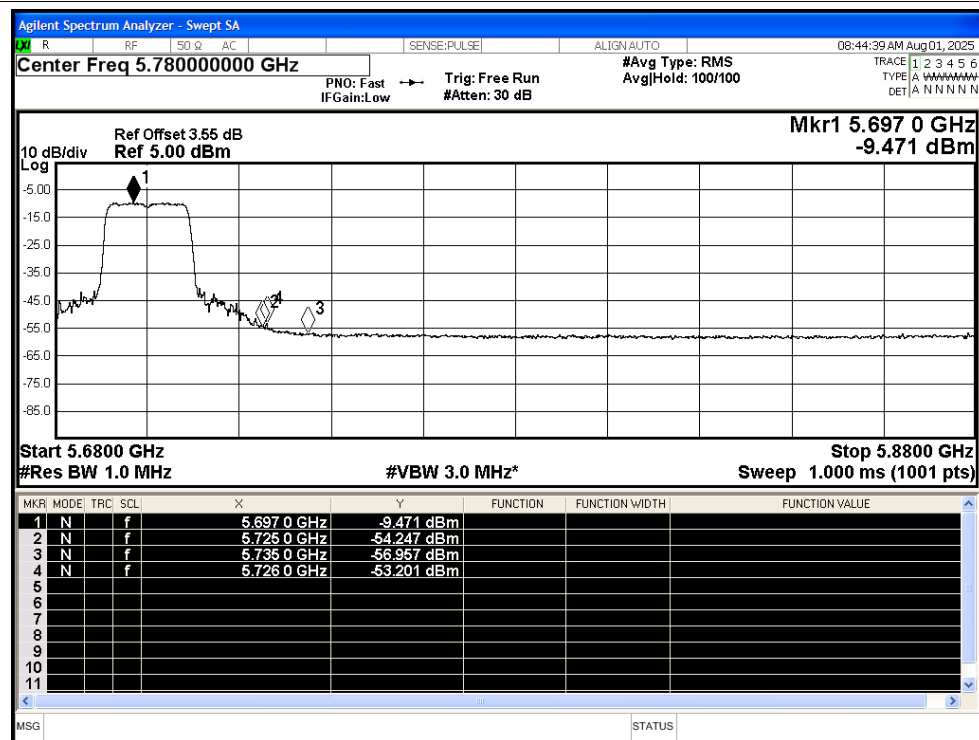


Restrict Band NVNT ac40 5510MHz Ant1 Peak

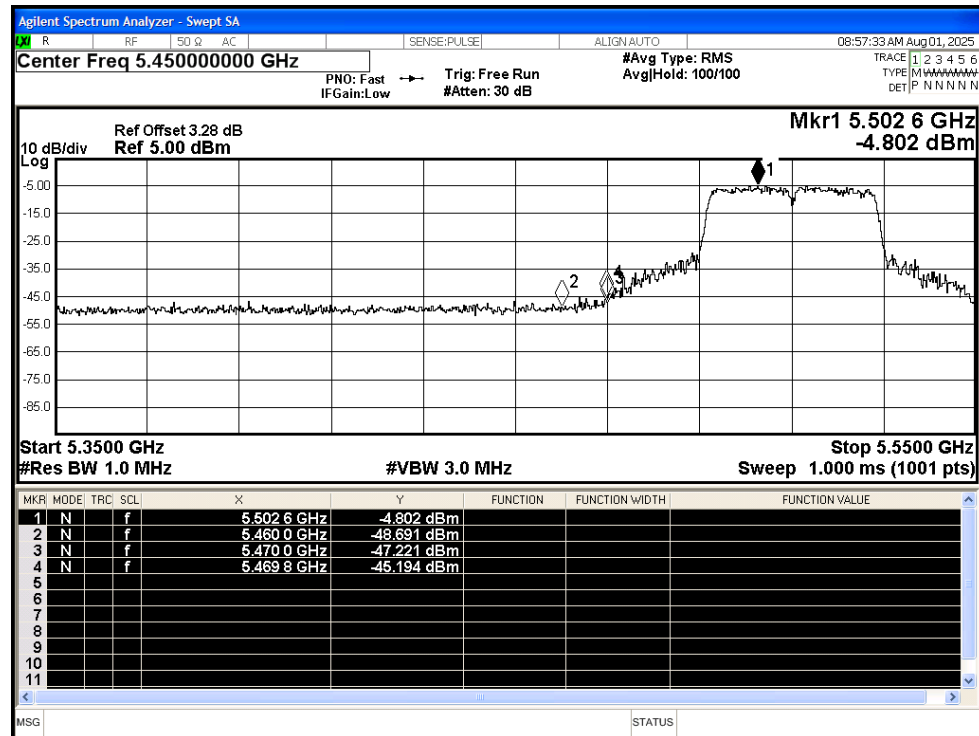


Restrict Band NVNT ac40 5510MHz Ant1 Average

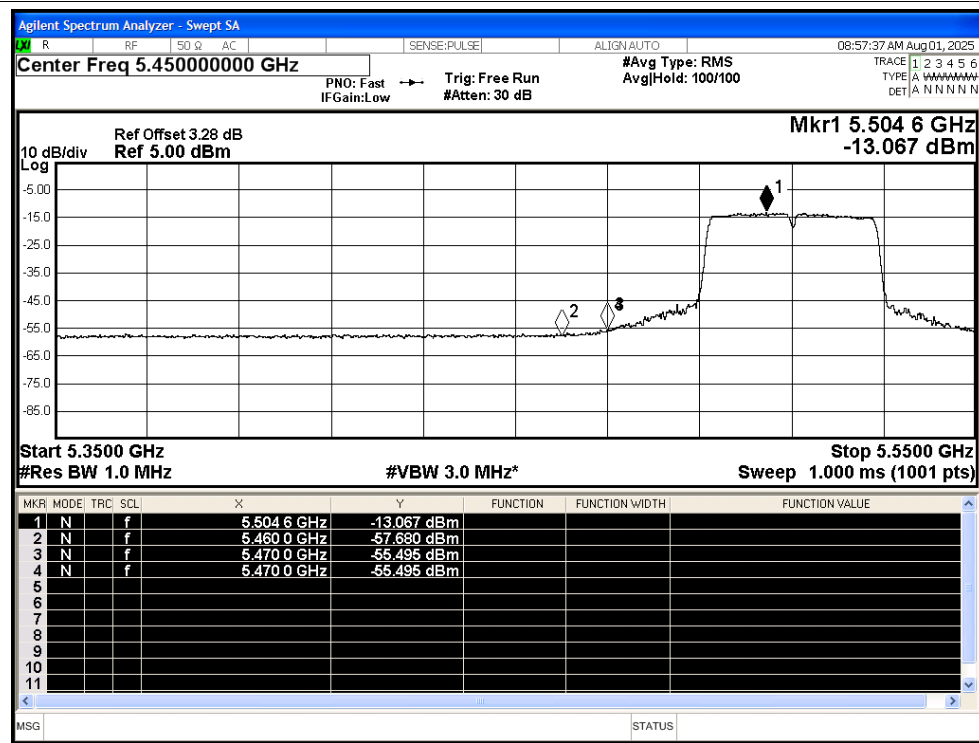


Restrict Band NVNT ac40 5670MHz Ant1 Peak

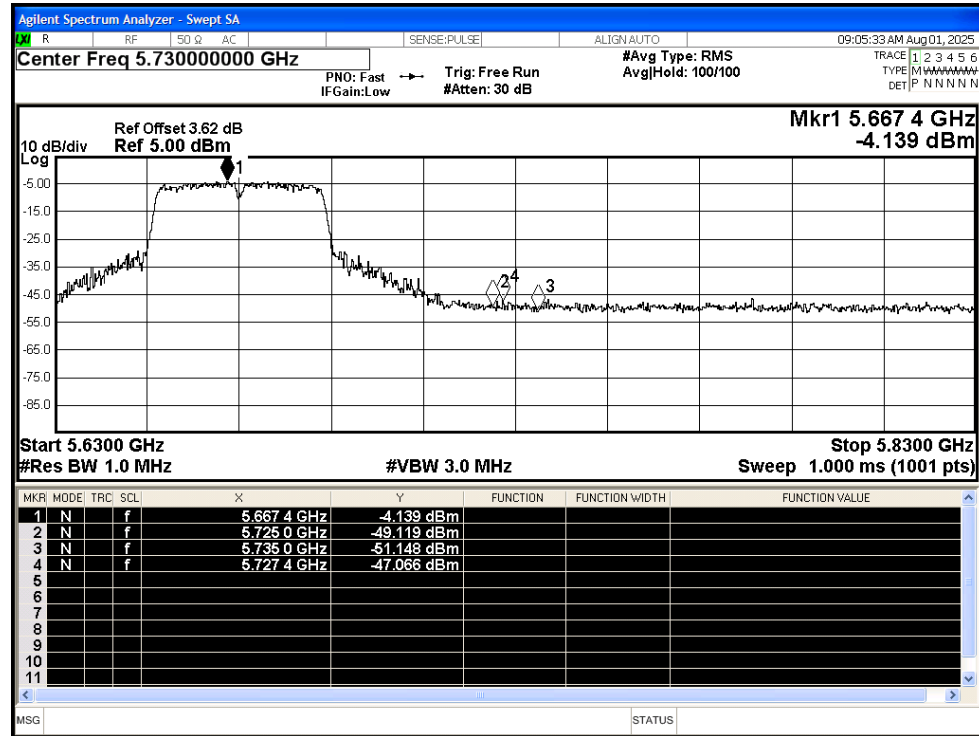


Restrict Band NVNT ac40 5670MHz Ant1 Average

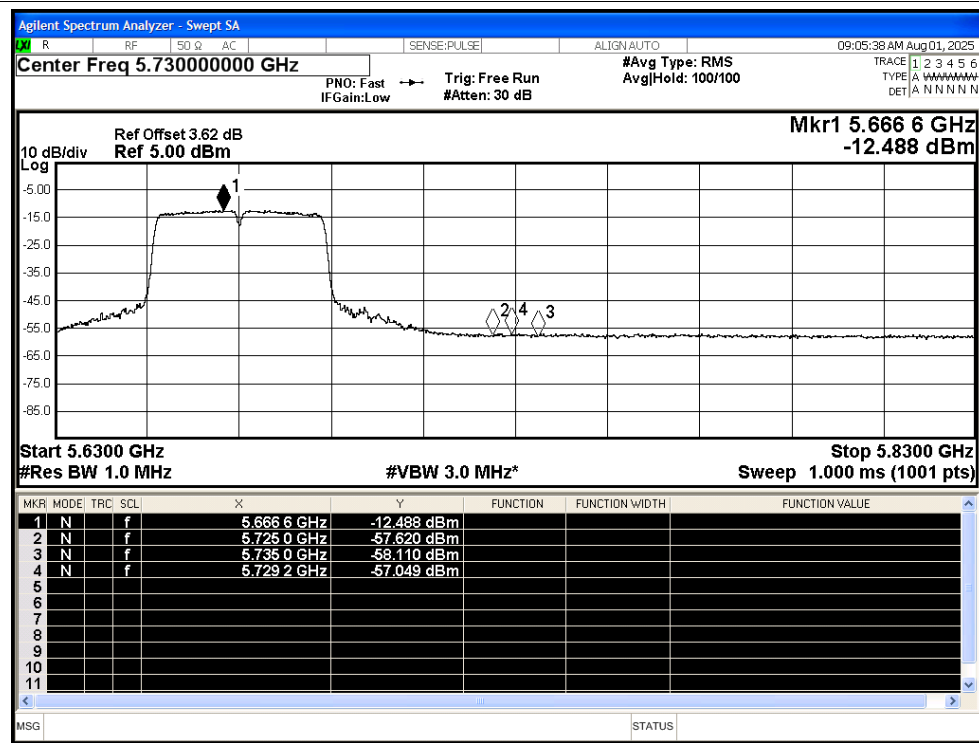


Restrict Band NVNT ax20 5500MHz Ant1 Peak

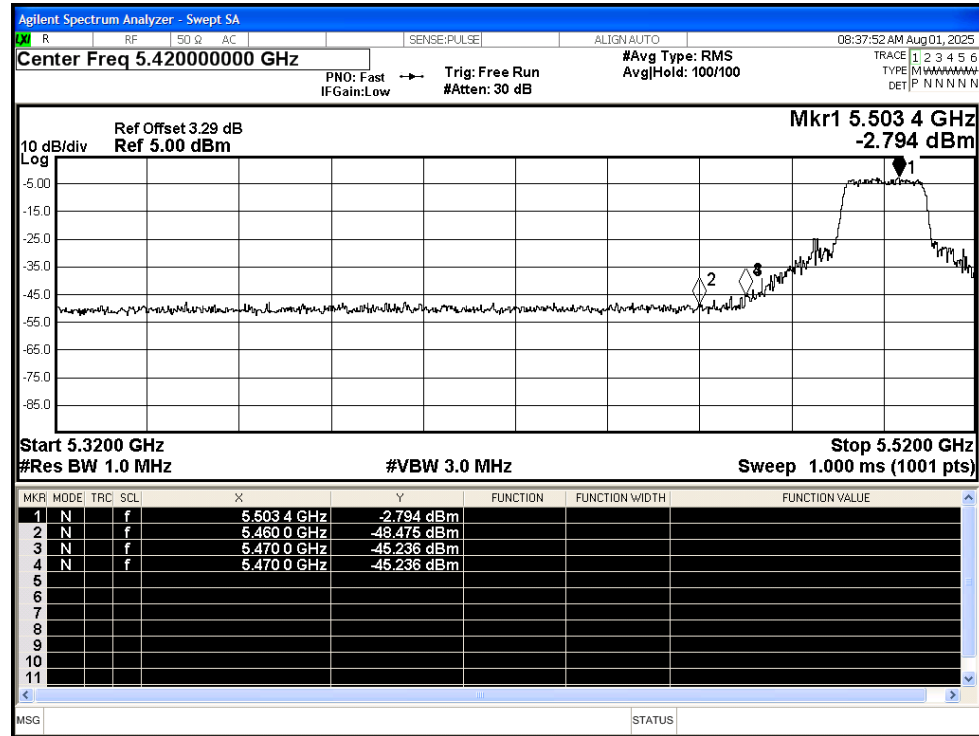


Restrict Band NVNT ax20 5500MHz Ant1 Average

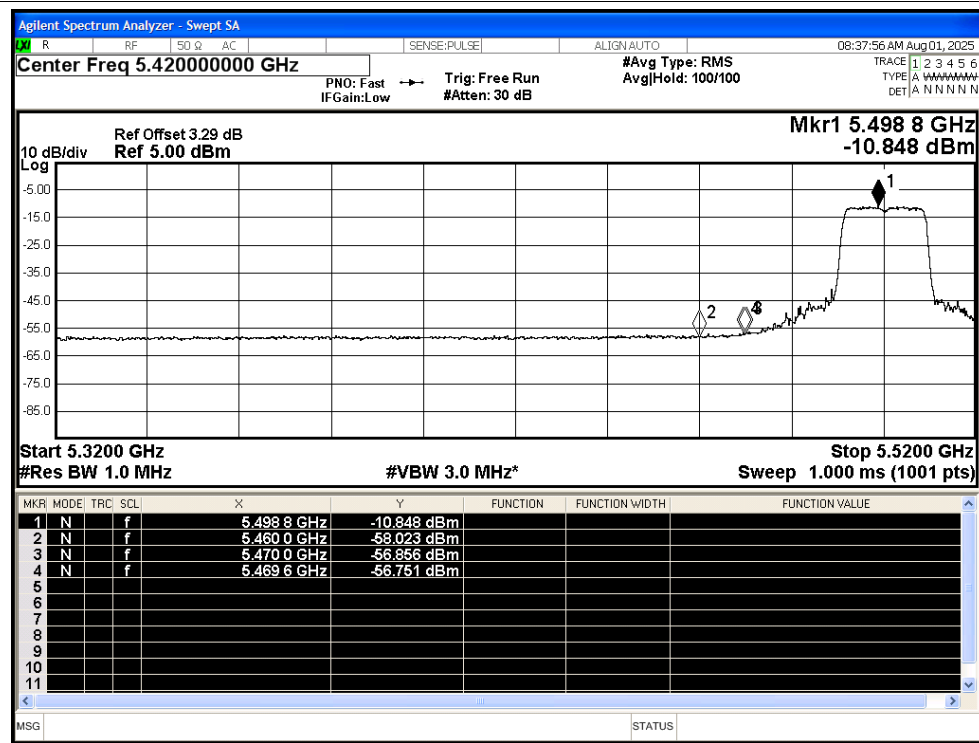


Restrict Band NVNT ax20 5700MHz Ant1 Peak

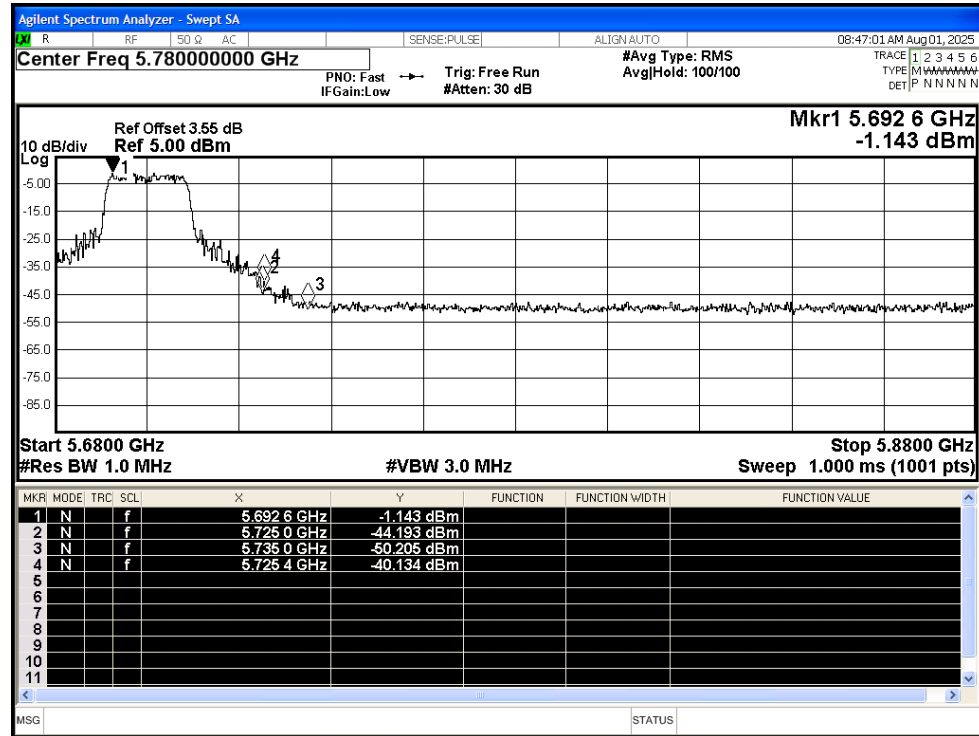


Restrict Band NVNT ax20 5700MHz Ant1 Average

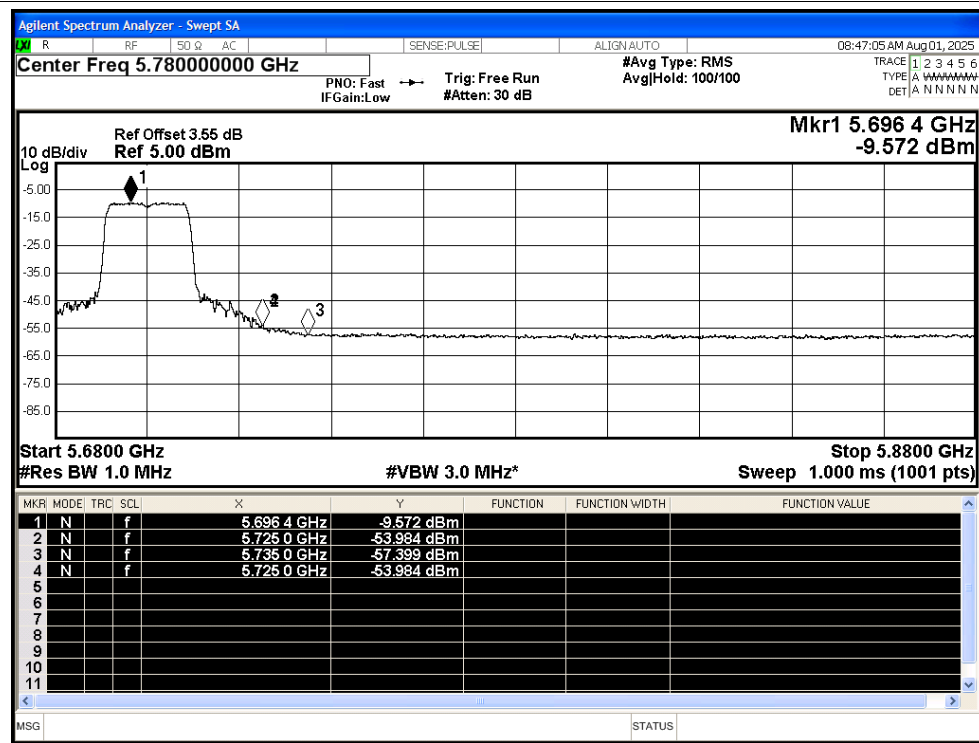


Restrict Band NVNT ax40 5510MHz Ant1 Peak

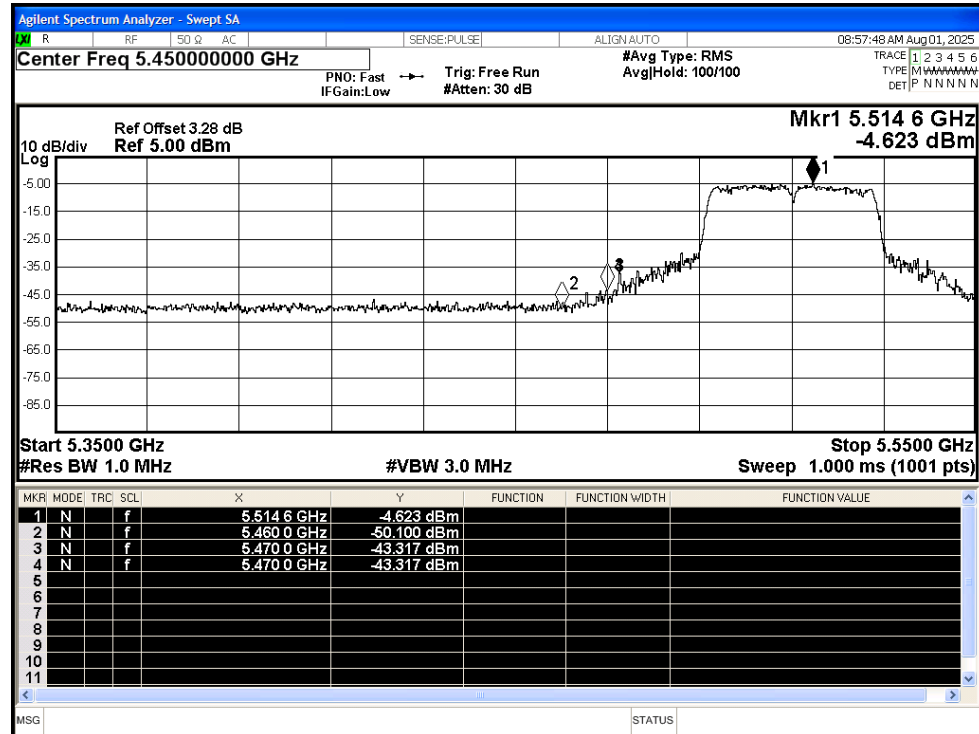


Restrict Band NVNT ax40 5510MHz Ant1 Average

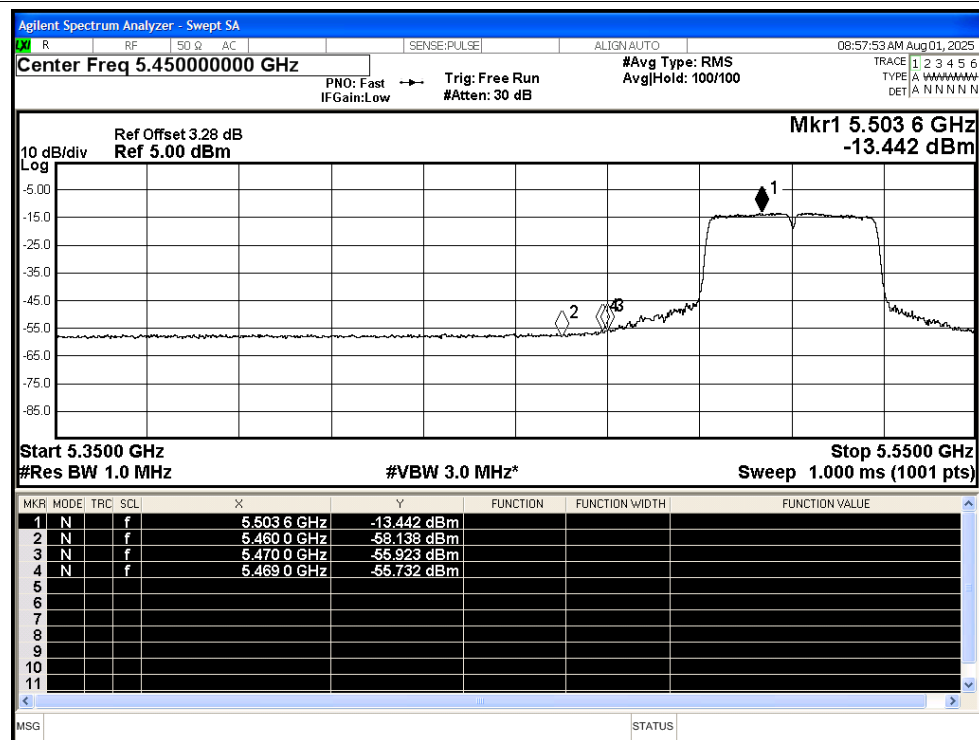

Restrict Band NVNT ax40 5670MHz Ant1 Peak

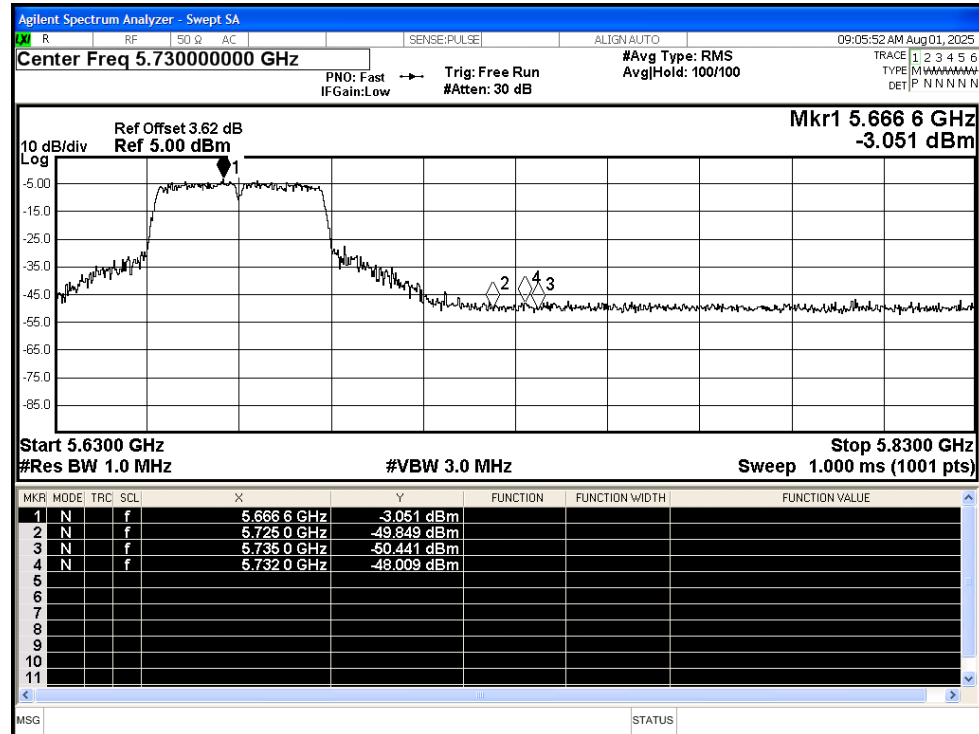

Restrict Band NVNT ax40 5670MHz Ant1 Average

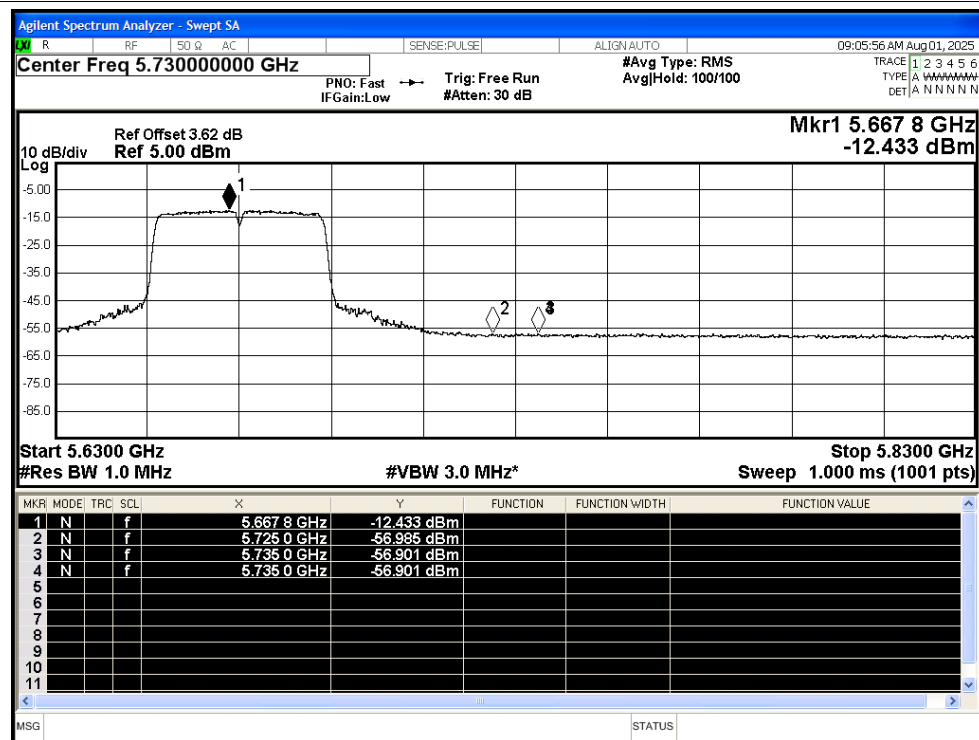


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5500	Ant2	5460	-48.44	3.4	-	50.22	Peak	68.2	Pass
NVNT	a	5500	Ant2	5460	-58.05	3.4	0.24	40.85	Average	54	Pass
NVNT	a	5500	Ant2	5470	-44.4	3.4	-	54.26	Peak	68.2	Pass
NVNT	a	5500	Ant2	5467.6	-56.54	3.4	0.24	42.36	Average	54	Pass
NVNT	a	5500	Ant2	5470	-44.4	3.4	-	54.26	Peak	68.2	Pass
NVNT	a	5500	Ant2	5470	-57.47	3.4	0.24	41.43	Average	54	Pass
NVNT	a	5700	Ant2	5725	-46.98	3.4	-	51.68	Peak	68.2	Pass
NVNT	a	5700	Ant2	5725	-55.45	3.4	0.24	43.45	Average	54	Pass
NVNT	a	5700	Ant2	5725.6	-42.3	3.4	-	56.36	Peak	68.2	Pass
NVNT	a	5700	Ant2	5725.8	-54.09	3.4	0.24	44.81	Average	54	Pass
NVNT	a	5700	Ant2	5735	-48.55	3.4	-	50.11	Peak	68.2	Pass
NVNT	a	5700	Ant2	5735	-57.41	3.4	0.24	41.49	Average	54	Pass
NVNT	n20	5500	Ant2	5460	-48.93	3.4	-	49.73	Peak	68.2	Pass
NVNT	n20	5500	Ant2	5460	-56.81	3.4	0.12	41.97	Average	54	Pass
NVNT	n20	5500	Ant2	5469.8	-41.3	3.4	-	57.36	Peak	68.2	Pass
NVNT	n20	5500	Ant2	5469	-56.14	3.4	0.12	42.64	Average	54	Pass
NVNT	n20	5500	Ant2	5470	-46.91	3.4	-	51.75	Peak	68.2	Pass
NVNT	n20	5500	Ant2	5470	-56.74	3.4	0.12	42.04	Average	54	Pass
NVNT	n20	5700	Ant2	5725	-41.24	3.4	-	57.42	Peak	68.2	Pass
NVNT	n20	5700	Ant2	5725	-53.57	3.4	0.12	45.21	Average	54	Pass
NVNT	n20	5700	Ant2	5725.6	-39.46	3.4	-	59.20	Peak	68.2	Pass
NVNT	n20	5700	Ant2	5725.8	-52.88	3.4	0.12	45.90	Average	54	Pass
NVNT	n20	5700	Ant2	5735	-47.9	3.4	-	50.76	Peak	68.2	Pass
NVNT	n20	5700	Ant2	5735	-57.11	3.4	0.12	41.67	Average	54	Pass
NVNT	n40	5510	Ant2	5460	-48.26	3.4	-	50.40	Peak	68.2	Pass
NVNT	n40	5510	Ant2	5460	-57.49	3.4	0.23	41.40	Average	54	Pass
NVNT	n40	5510	Ant2	5470	-44.38	3.4	-	54.28	Peak	68.2	Pass
NVNT	n40	5510	Ant2	5470	-55.36	3.4	0.23	43.53	Average	54	Pass
NVNT	n40	5510	Ant2	5470	-44.38	3.4	-	54.28	Peak	68.2	Pass
NVNT	n40	5510	Ant2	5470	-55.36	3.4	0.23	43.53	Average	54	Pass
NVNT	n40	5670	Ant2	5725	-50.22	3.4	-	48.44	Peak	68.2	Pass
NVNT	n40	5670	Ant2	5725	-58.06	3.4	0.24	40.84	Average	54	Pass
NVNT	n40	5670	Ant2	5733.4	-47.28	3.4	-	51.38	Peak	68.2	Pass
NVNT	n40	5670	Ant2	5734.2	-56.99	3.4	0.24	41.91	Average	54	Pass
NVNT	n40	5670	Ant2	5735	-50.35	3.4	-	48.31	Peak	68.2	Pass
NVNT	n40	5670	Ant2	5735	-57.13	3.4	0.24	41.77	Average	54	Pass
NVNT	ac20	5500	Ant2	5460	-48.96	3.4	-	49.70	Peak	68.2	Pass
NVNT	ac20	5500	Ant2	5460	-57.58	3.4	0.12	41.20	Average	54	Pass
NVNT	ac20	5500	Ant2	5467.6	-45.18	3.4	-	53.48	Peak	68.2	Pass
NVNT	ac20	5500	Ant2	5469	-56.04	3.4	0.12	42.74	Average	54	Pass
NVNT	ac20	5500	Ant2	5470	-47.1	3.4	-	51.56	Peak	68.2	Pass


NVNT	ac20	5500	Ant2	5470	-56.42	3.4	0.12	42.36	Average	54	Pass
NVNT	ac20	5700	Ant2	5725	-41.66	3.4	-	57.00	Peak	68.2	Pass
NVNT	ac20	5700	Ant2	5725	-53.53	3.4	0.12	45.25	Average	54	Pass
NVNT	ac20	5700	Ant2	5725.6	-39.94	3.4	-	58.72	Peak	68.2	Pass
NVNT	ac20	5700	Ant2	5725.6	-52.88	3.4	0.12	45.90	Average	54	Pass
NVNT	ac20	5700	Ant2	5735	-47.96	3.4	-	50.70	Peak	68.2	Pass
NVNT	ac20	5700	Ant2	5735	-56.84	3.4	0.12	41.94	Average	54	Pass
NVNT	ac40	5510	Ant2	5460	-49.92	3.4	-	48.74	Peak	68.2	Pass
NVNT	ac40	5510	Ant2	5460	-57.25	3.4	0.24	41.65	Average	54	Pass
NVNT	ac40	5510	Ant2	5466	-42.68	3.4	-	55.98	Peak	68.2	Pass
NVNT	ac40	5510	Ant2	5469.6	-55.61	3.4	0.24	43.29	Average	54	Pass
NVNT	ac40	5510	Ant2	5470	-47.82	3.4	-	50.84	Peak	68.2	Pass
NVNT	ac40	5510	Ant2	5470	-55.91	3.4	0.24	42.99	Average	54	Pass
NVNT	ac40	5670	Ant2	5725	-46.86	3.4	-	51.80	Peak	68.2	Pass
NVNT	ac40	5670	Ant2	5725	-57.47	3.4	0.24	41.43	Average	54	Pass
NVNT	ac40	5670	Ant2	5725	-46.86	3.4	-	51.80	Peak	68.2	Pass
NVNT	ac40	5670	Ant2	5733	-56.99	3.4	0.24	41.91	Average	54	Pass
NVNT	ac40	5670	Ant2	5735	-49.22	3.4	-	49.44	Peak	68.2	Pass
NVNT	ac40	5670	Ant2	5735	-57.51	3.4	0.24	41.39	Average	54	Pass
NVNT	ax20	5500	Ant2	5460	-49.17	3.4	-	49.49	Peak	68.2	Pass
NVNT	ax20	5500	Ant2	5460	-57.12	3.4	0.12	41.66	Average	54	Pass
NVNT	ax20	5500	Ant2	5468.4	-44.21	3.4	-	54.45	Peak	68.2	Pass
NVNT	ax20	5500	Ant2	5470	-55.95	3.4	0.12	42.83	Average	54	Pass
NVNT	ax20	5500	Ant2	5470	-46.83	3.4	-	51.83	Peak	68.2	Pass
NVNT	ax20	5500	Ant2	5470	-55.95	3.4	0.12	42.83	Average	54	Pass
NVNT	ax20	5700	Ant2	5725	-38	3.4	-	60.66	Peak	68.2	Pass
NVNT	ax20	5700	Ant2	5725	-54.13	3.4	0.12	44.65	Average	54	Pass
NVNT	ax20	5700	Ant2	5725	-38	3.4	-	60.66	Peak	68.2	Pass
NVNT	ax20	5700	Ant2	5725.6	-53.54	3.4	0.12	45.24	Average	54	Pass
NVNT	ax20	5700	Ant2	5735	-48.39	3.4	-	50.27	Peak	68.2	Pass
NVNT	ax20	5700	Ant2	5735	-56.82	3.4	0.12	41.96	Average	54	Pass
NVNT	ax40	5510	Ant2	5460	-50.22	3.4	-	48.44	Peak	68.2	Pass
NVNT	ax40	5510	Ant2	5460	-56.91	3.4	0.24	41.99	Average	54	Pass
NVNT	ax40	5510	Ant2	5469.6	-42.93	3.4	-	55.73	Peak	68.2	Pass
NVNT	ax40	5510	Ant2	5469.8	-55.55	3.4	0.24	43.35	Average	54	Pass
NVNT	ax40	5510	Ant2	5470	-46.94	3.4	-	51.72	Peak	68.2	Pass
NVNT	ax40	5510	Ant2	5470	-56.06	3.4	0.24	42.84	Average	54	Pass
NVNT	ax40	5670	Ant2	5725	-49.35	3.4	-	49.31	Peak	68.2	Pass
NVNT	ax40	5670	Ant2	5725	-57.39	3.4	0.24	41.51	Average	54	Pass
NVNT	ax40	5670	Ant2	5732	-48.05	3.4	-	50.61	Peak	68.2	Pass
NVNT	ax40	5670	Ant2	5732.4	-56.67	3.4	0.24	42.23	Average	54	Pass
NVNT	ax40	5670	Ant2	5735	-50.87	3.4	-	47.79	Peak	68.2	Pass
NVNT	ax40	5670	Ant2	5735	-57.75	3.4	0.24	41.15	Average	54	Pass

Test Graphs


Restrict Band NVNT a 5500MHz Ant2 Peak

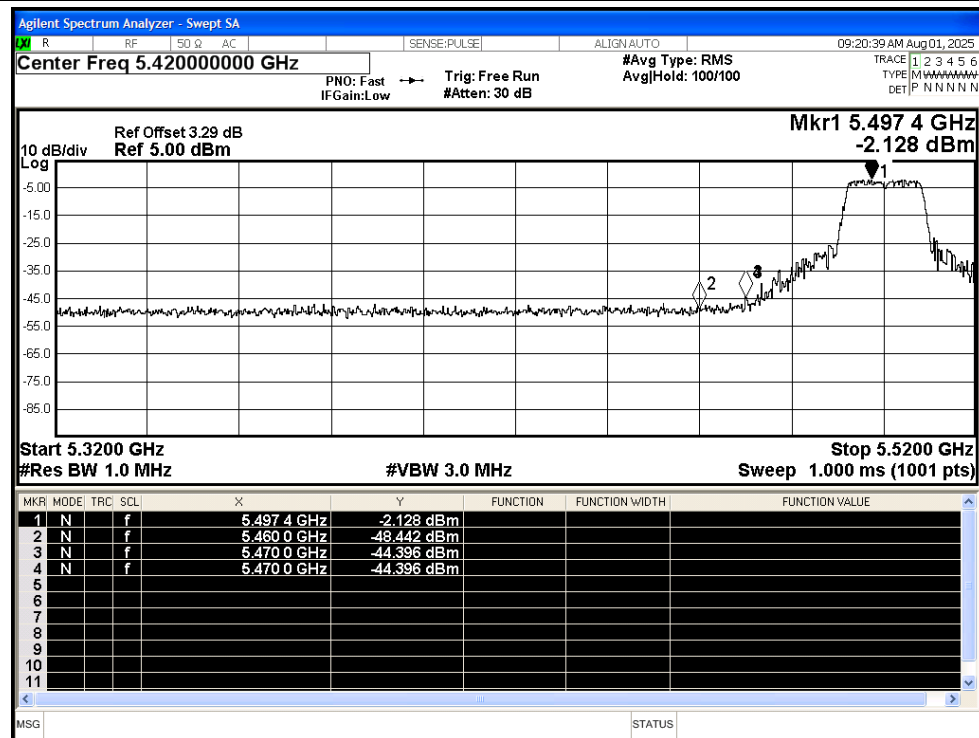

Restrict Band NVNT a 5500MHz Ant2 Average

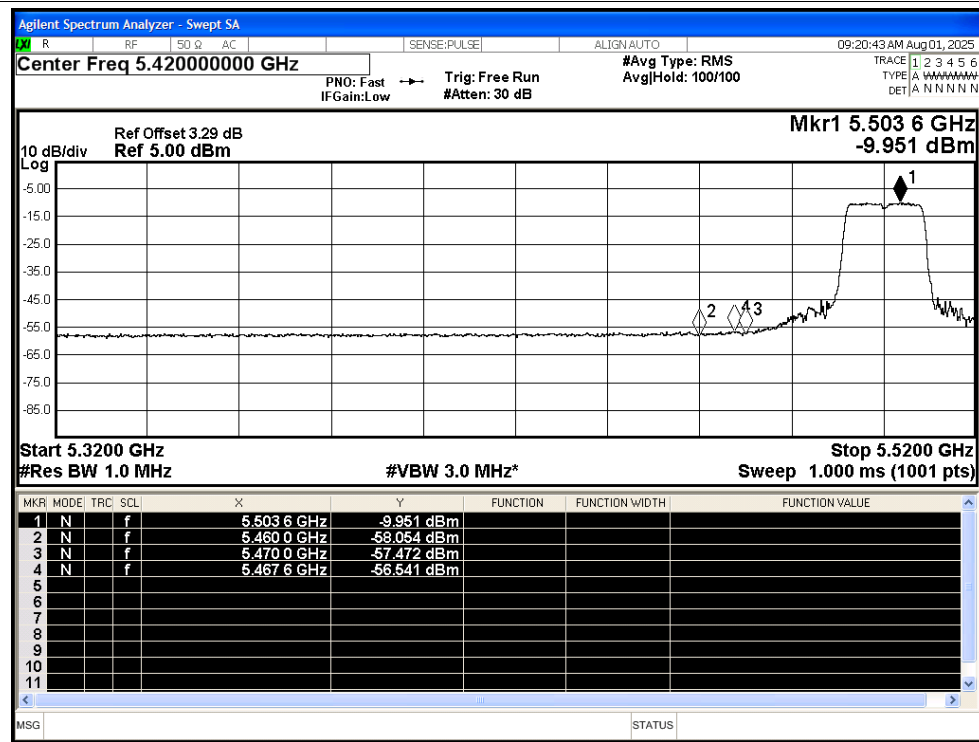

Restrict Band NVNT a 5700MHz Ant2 Peak

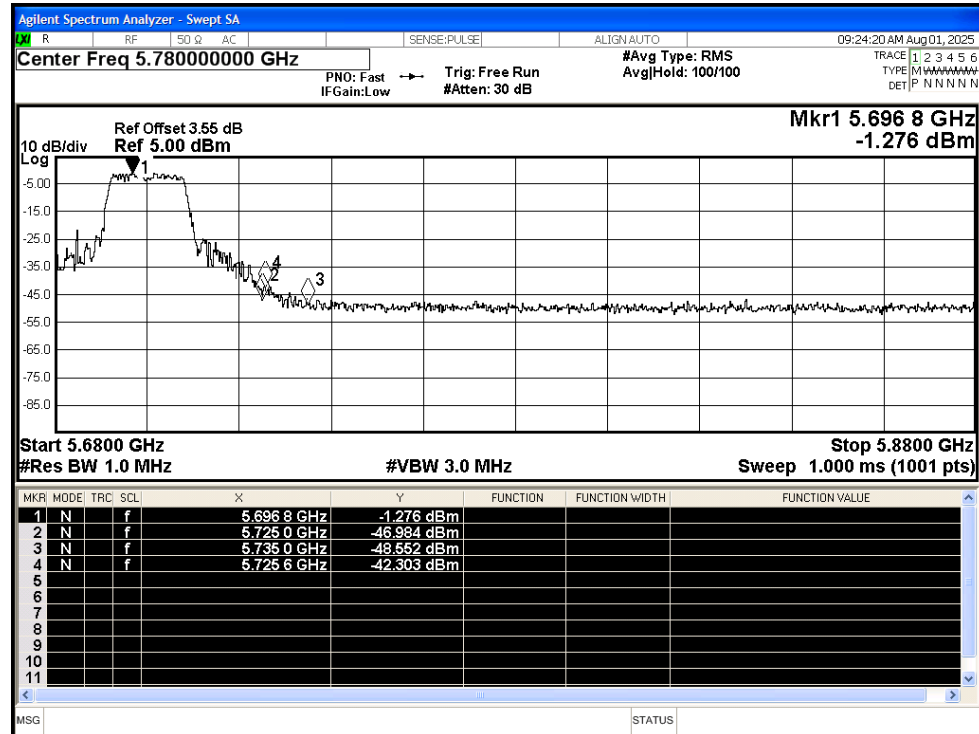

Restrict Band NVNT a 5700MHz Ant2 Average

