



Bluetooth Antenna
specification&Test report

Yichip Microelectronics
©2014


manufacturer : YichipMicroelectronics

Adress:Room 501, Floor 5, Area A, Building 1, No. 57, Jianger Road, Changhe
Street, Binjiang District, Hangzhou City, Zhejiang Province

model name:FR4

antenna design specification


Antenna dimensions as blow picture show: the material is FR4 and the thickness is 1.6mm of PCB.
ANT1:

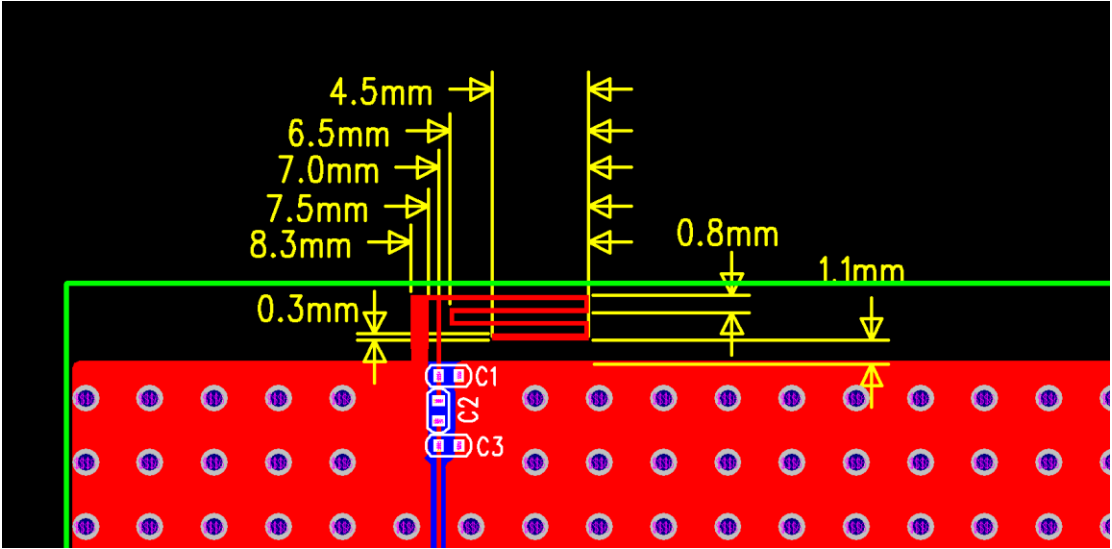


Gian and Efficiency

Frequency (MHz)	Efficiency(%)	Gain(dBi)
2300	13.17	-1.57
2320	19.08	-0.76
2340	22.65	-0.41
2360	22.62	-0.12
2380	18.03	-0.42
2400	14.86	-0.93
2420	12.54	-1.17
2440	9.92	-2.03
2460	7.46	-2.47
2480	6.11	-2.98
2500	5.39	-3.83

3D and 1D Radiation Patterns

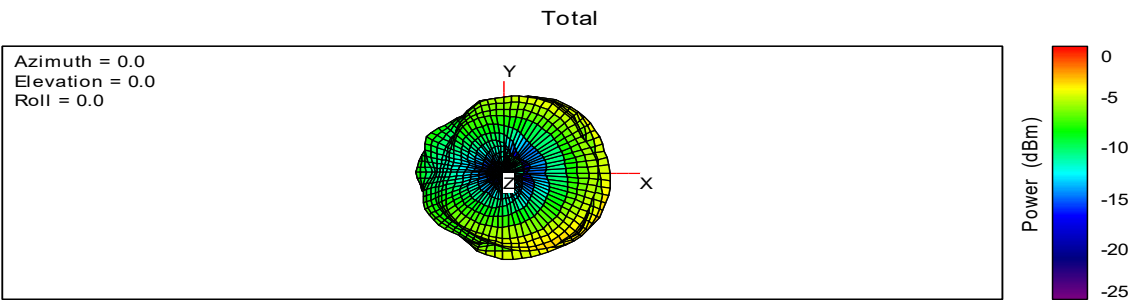


2440M TRP 1

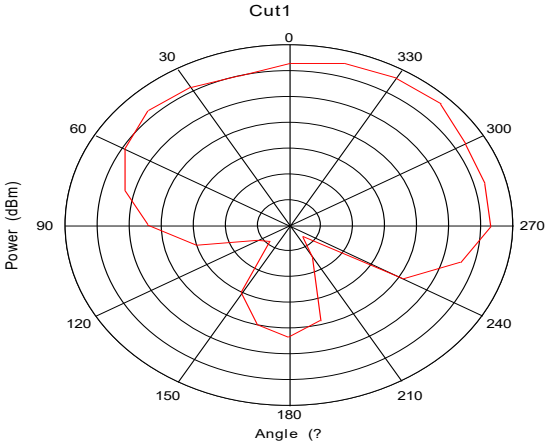


Max: -2
Min: -16
Scale: 2/div

Cut2

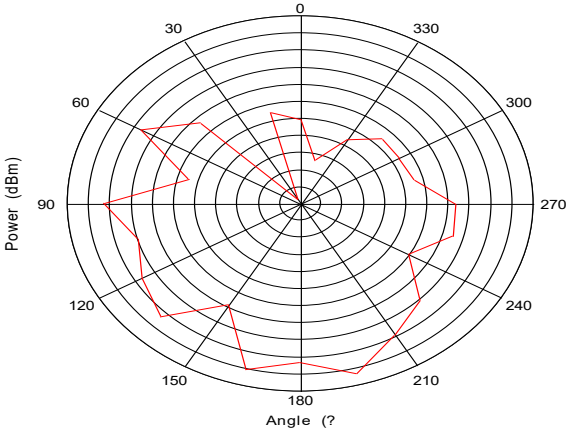

Max: 0
Min: -22
Scale: 2/div

Cut3

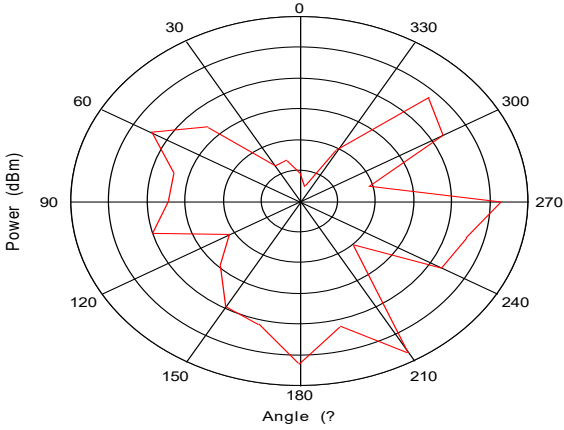

Max: -2
Min: -14
Scale: 2/div