

FCC Test Report

Client Name : Foshan Kaichengde Lighting CO.,LTD

Address : CN, 528225, Guangdong, Foshan, Shishan Town, Nanhai District, No.1, Workshop NO.16, Xingye West Road, Foshan, Guangdong, China

Product Name : LED SOLAR FLOOD LIGHT

Date : Feb. 23, 2022

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Mode.....	5
1.5. Test Summary.....	5
1.6. Test Equipment List.....	6
1.7. Description of Test Facility.....	7
1.8. Measurement Uncertainty.....	7
2. Power Line Conducted Emission Test.....	8
2.1. Test Standard and Limit.....	8
2.2. Test Setup.....	8
2.3. EUT Configuration on Measurement.....	8
2.4. Operating Condition of EUT.....	8
2.5. Test Procedure.....	9
2.6. Test Results.....	9
3. Radiated Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	11
3.3. EUT Configuration on Measurement.....	12
3.4. Operating Condition of EUT.....	12
3.5. Test Procedure.....	12
3.6. Test Results.....	12
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	15
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	16
APPENDIX III -- INTERNAL PHOTOGRAPH.....	20

TEST REPORT

Applicant : Foshan Kaichengde Lighting CO.,LTD
Manufacturer : Foshan Kaichengde Lighting CO.,LTD
Product Name : LED SOLAR FLOOD LIGHT
Model No. : TK08-300W, TK08-50W, TK08-100W, TK08-200W
Trade Mark : N.A.
Rating(s) : Input: DC 3.2V, 30000mAh Battery inside

Test Standard(s) : FCC Rules and Regulations Part 15 Subpart B

Test Method(s) : ANSI C63.4-2014

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited To determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited Is assumed full responsibility for the accuracy and completeness of these measurements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited

Date of Receipt
Date of Test

Dec. 21, 2021
Dec. 21~27, 2021

Prepared By


(Ella Liang)

Approved & Authorized Signer


(Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Foshan Kaichengde Lighting CO.,LTD
Address	:	CN, 528225, Guangdong, Foshan, Shishan Town, Nanhai District, No.1, Workshop NO.16, Xingye West Road, Foshan, Guangdong, China
Manufacturer	:	Foshan Kaichengde Lighting CO.,LTD
Address	:	CN, 528225, Guangdong, Foshan, Shishan Town, Nanhai District, No.1, Workshop NO.16, Xingye West Road, Foshan, Guangdong, China
Factory	:	Foshan Kaichengde Lighting CO.,LTD
Address	:	CN, 528225, Guangdong, Foshan, Shishan Town, Nanhai District, No.1, Workshop NO.16, Xingye West Road, Foshan, Guangdong, China

1.2. Description of Device (EUT)

Product Name	:	LED SOLAR FLOOD LIGHT
Model No.	:	TK08-300W, TK08-50W, TK08-100W, TK08-200W (Note: All samples are the same except the model number, Lamp body power, Lamp body size, battery capacity, solar panel power and solar panel size, so we prepare "TK08-300W" for test only.)
Trade Mark	:	N.A.
Test Power Supply	:	DC 3.2V Battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	:	Adapter: N/A
Remark: (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

N/A

1.4. Description of Test Mode

Pretest Mode	Description
Mode 1	Lighting+remote control

For Mode 1 Block Diagram of Test Setup



1.5. Test Summary

Test Items	Standard Section	Test Mode	Status
Power Line Conducted Emission Test (150KHz To 30MHz)	Part 15.107	Mode 1	N
Radiated Emission Test (30MHz To 960MHz)	Part 15.109	Mode 1	P
Radiated Emission Test (above 960MHz)	Part 15.109	Mode 1	N
P) Indicates "PASS".			
N) Indicates "Not applicable".			



1.6. Test Equipment List

Conducted Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 22, 2021	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040D T001	Jul 05, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A

Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
3.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
4.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A
5.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Oct. 22, 2021	1 Year
6.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year

1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518128

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

2. Power Line Conducted Emission Test

2.1. Test Standard and Limit

Test Standard	FCC Part 15 Subpart B	
---------------	-----------------------	--


Power Line Conducted Emission Measurement Limits (FCC Part 15 Class B)

Test Limit	Frequency (MHz)	At mains terminals (dB μ V)	
		Quasi-peak Level	Average Level
	0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
	0.50 ~ 5.00	56	46
	5.00 ~ 30.00	60	50

Remark: (1) The lower limit shall apply at the transition frequencies.

(2) * Decreasing linearly with logarithm of frequency.

2.2. Test Setup

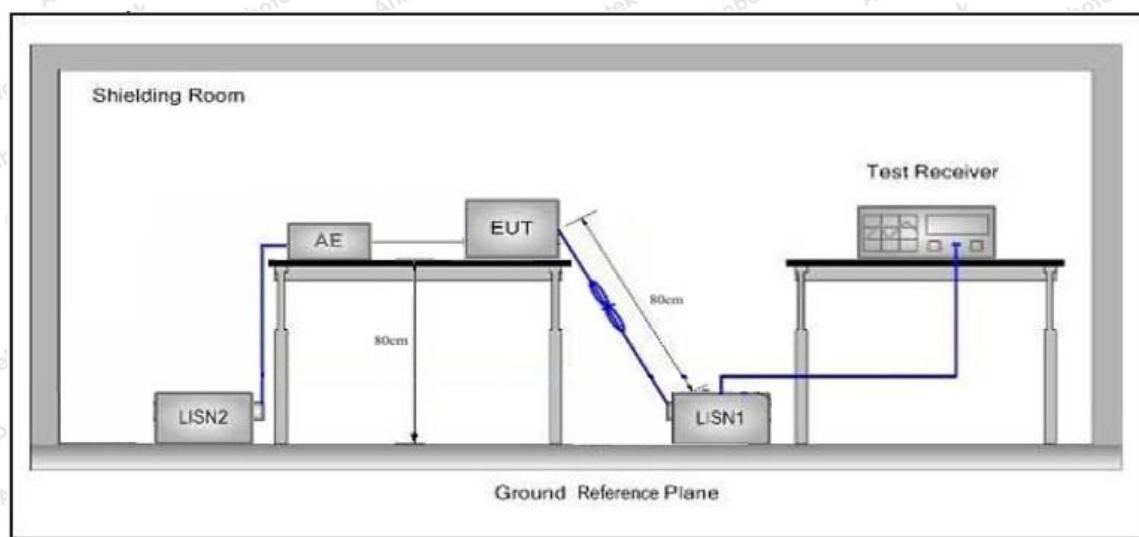

2.3. EUT Configuration on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

2.4. Operating Condition of EUT

- 2.4.1. Setup the EUT as shown in Section 2.2.
- 2.4.2. Turn on the power of all equipments.
- 2.4.3. Let the EUT work in test mode and measure it.

2.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

All the test results are listed in Section 2.6.

2.6. Test Results

Not applicable for equipment operated with DC power supply.

3. Radiated Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part 15 Subpart B				
---------------	-----------------------	--	--	--	--

Radiated Emission Test Limit (Subpart B Class B)

Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
Above 960MHz		500	54.0	Average	3
		-	74.0	Peak	3

Remark:

- (1)The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

3.2. Test Setup

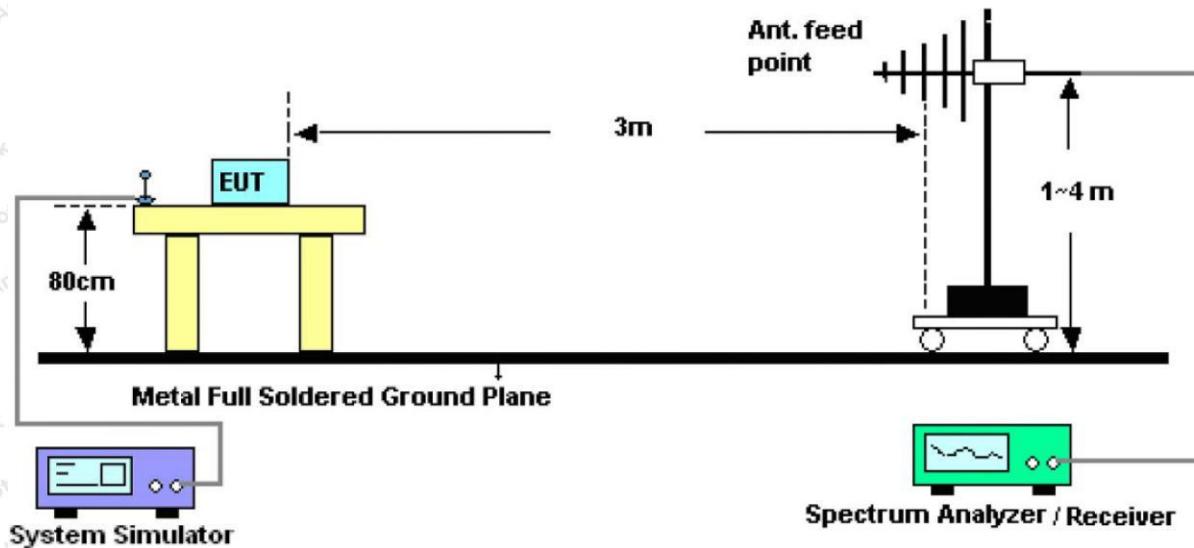


Figure 1. 30MHz to 1GHz

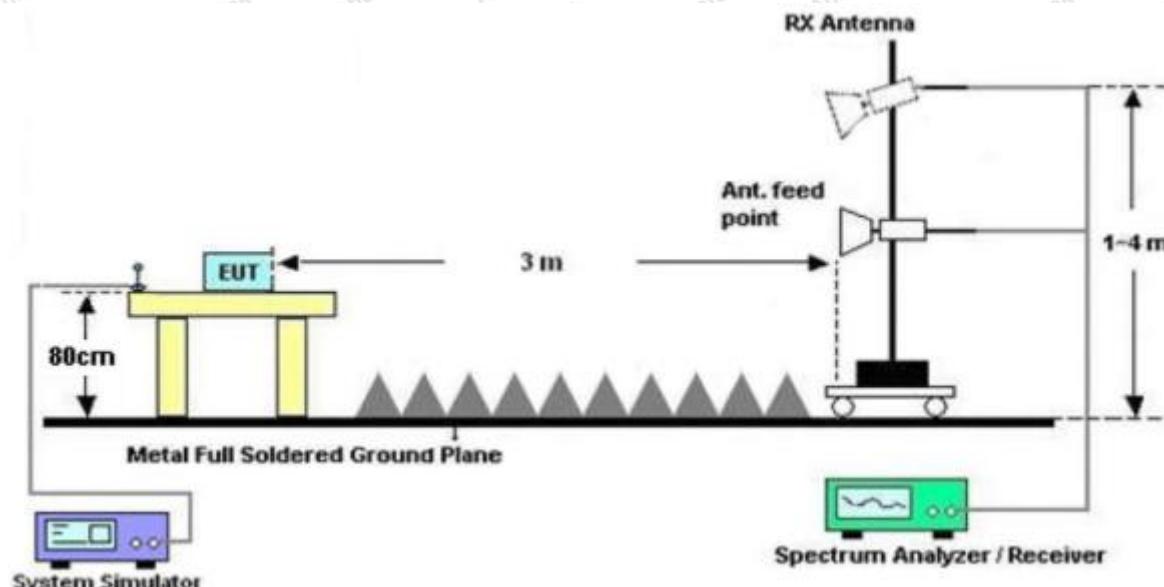


Figure 2. Above 1GHz

3.3. EUT Configuration on Measurement

The following equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT as shown in Section 3.2.
- 3.4.2. Turn on the power of all equipments.
- 3.4.3. Let the EUT work in test mode and measure it.

3.5. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (Trilog Broadband Antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.

The bandwidth of the EMI test receiver (ESCI) is set at 120kHz.

The frequency range from 30MHz to 6000MHz is checked.

The test results are listed in Section 3.6.


3.6. Test Results

PASS

The test curves are shown in the following pages.

Only the worst case data was showed in the report, please to see the following pages.


Test item:	Radiation Test	Polarization:	Horizontal
Standard:	(RE)FCC Part 15 Subpart B	Power Source:	DC 3.2V Battery inside
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	23.4 °C/50%RH

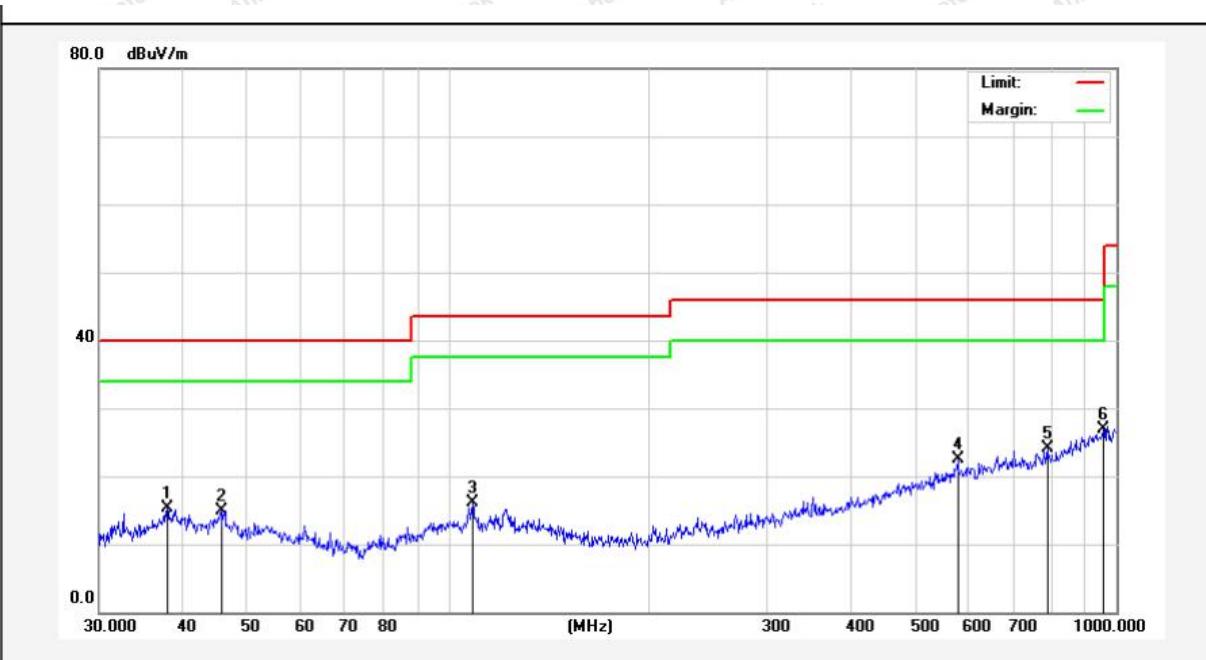

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.9450	32.43	-17.03	15.40	40.00	-24.60	QP			
2	45.6948	30.21	-15.28	14.93	40.00	-25.07	QP			
3	108.6470	39.02	-22.94	16.08	43.50	-27.42	QP			
4	578.6698	33.53	-11.06	22.47	46.00	-23.53	QP			
5	787.8513	32.54	-8.49	24.05	46.00	-21.95	QP			
6	955.4379	32.48	-5.55	26.93	46.00	-19.07	QP			

Note: Result=Reading+Factor Over Limit=Result-Limit

Test item:	Radiation Test	Polarization:	Vertical
Standard:	(RE)FCC Part 15 Subpart B	Power Source:	DC 3.2V Battery inside
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	23.4 °C/50%RH

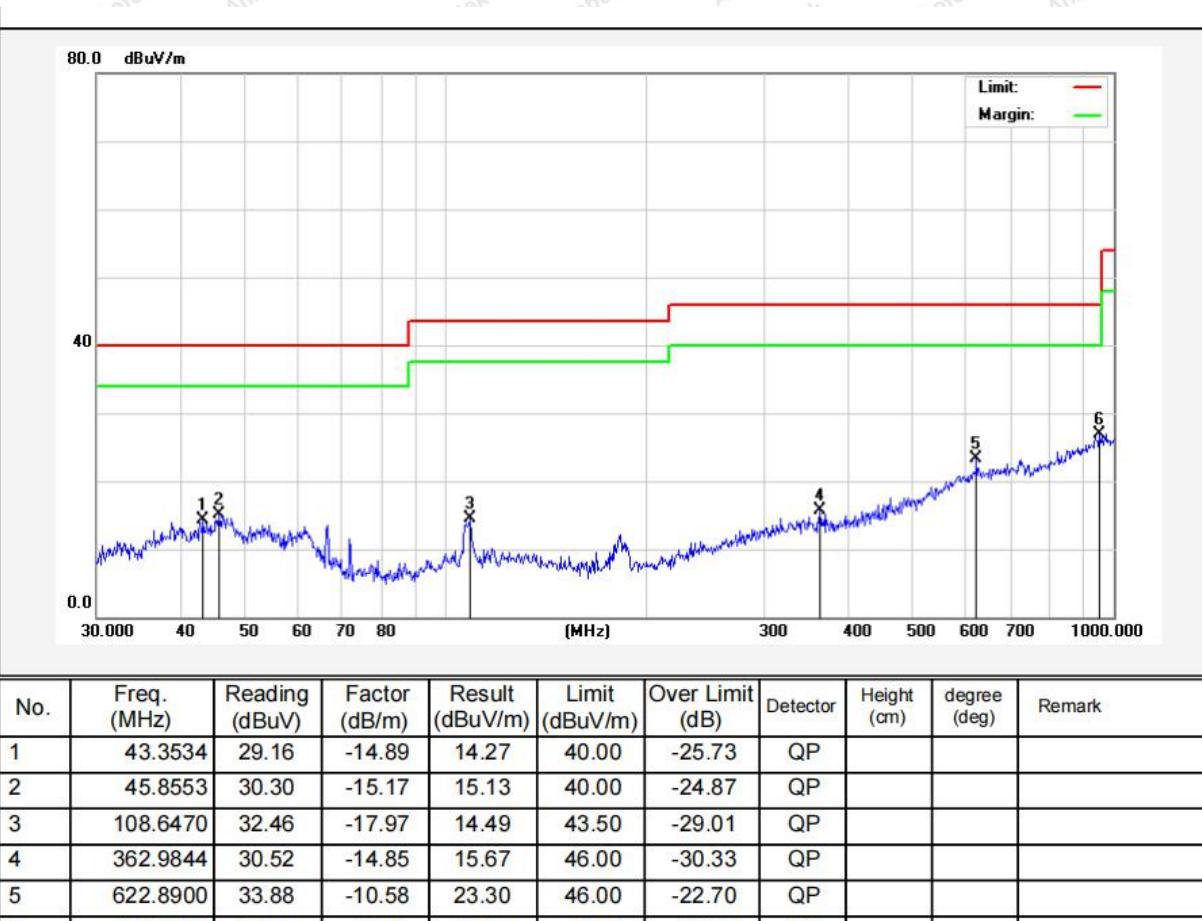



Note: Result=Reading+Factor Over Limit=Result-Limit


APPENDIX I -- TEST SETUP PHOTOGRAPH


Photo of Radiation Emission Test





APPENDIX II -- EXTERNAL PHOTOGRAPH

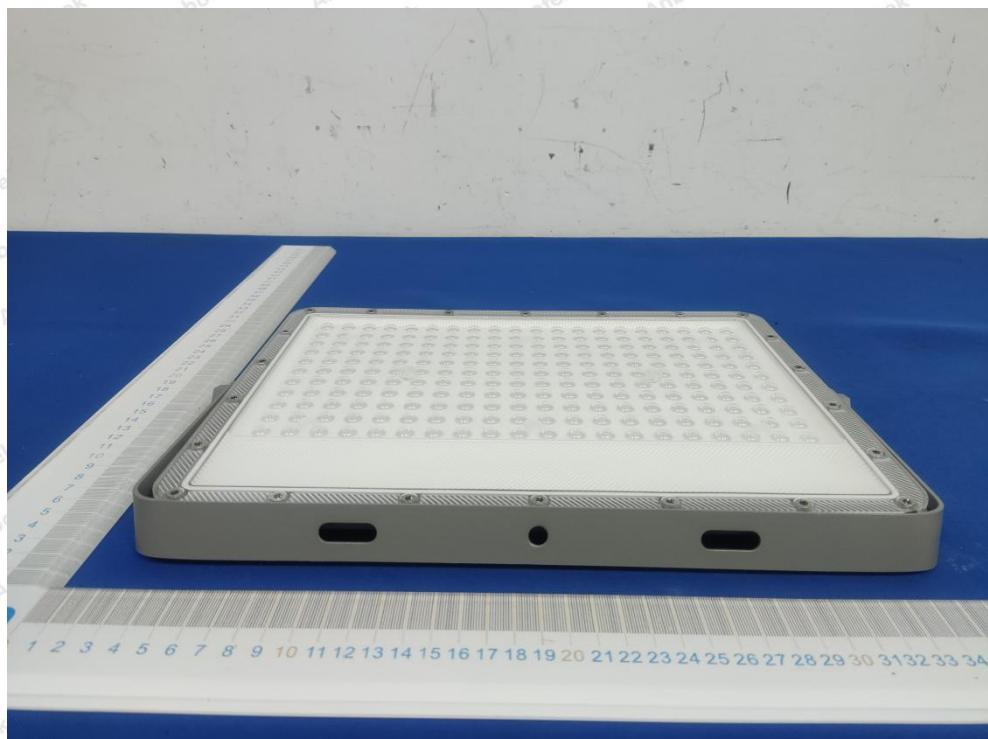
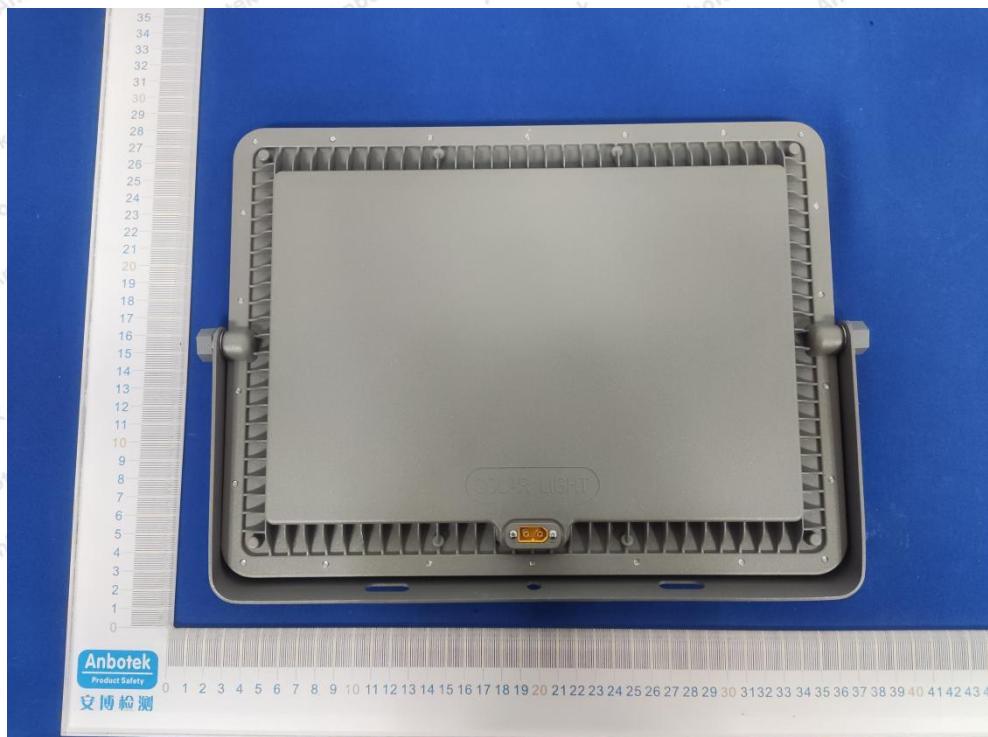



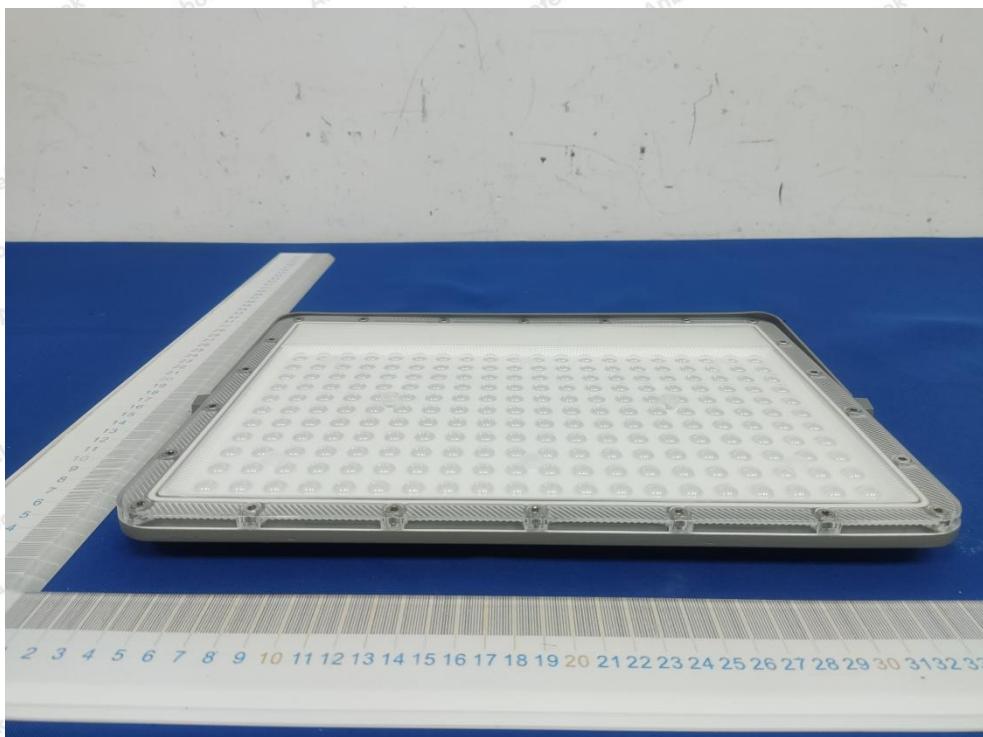


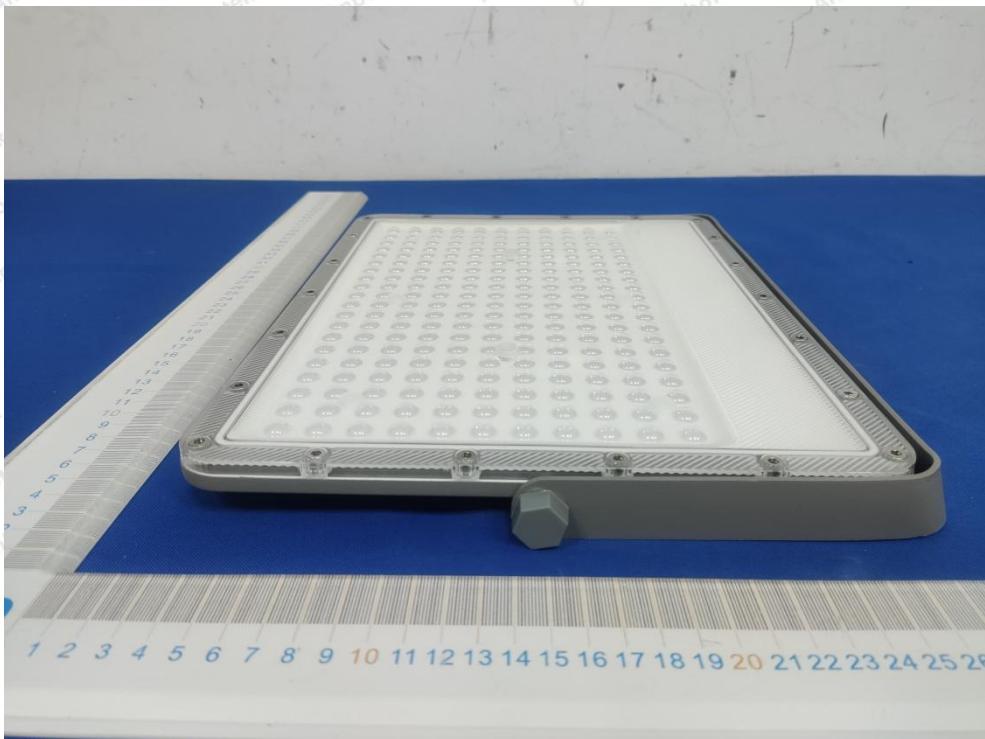

APPENDIX III -- INTERNAL PHOTOGRAPH

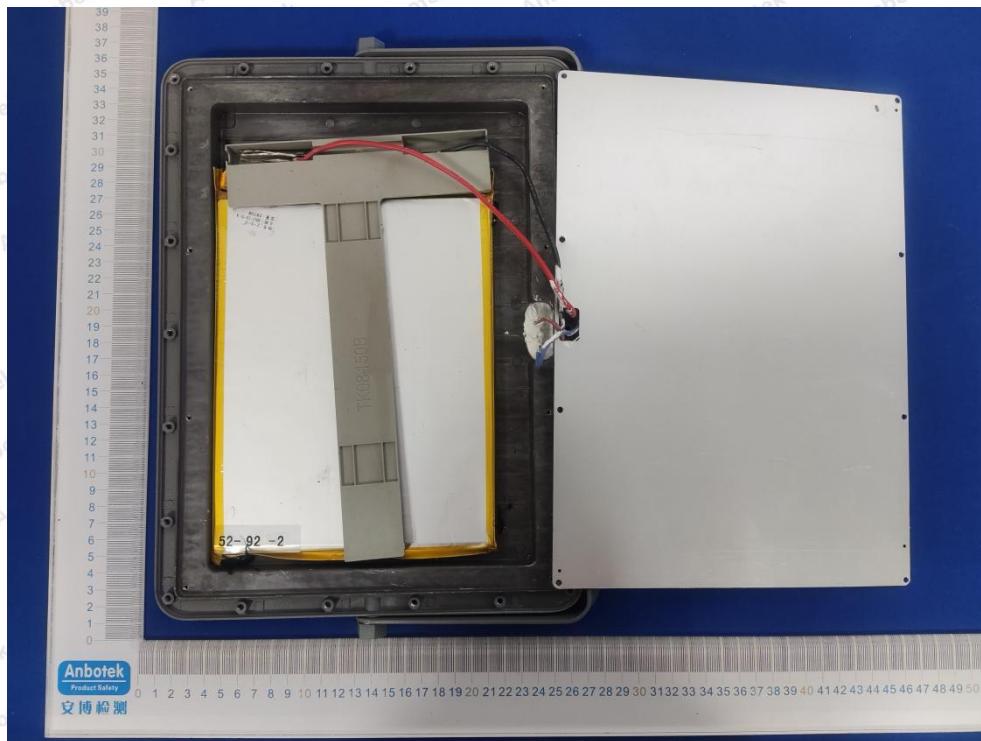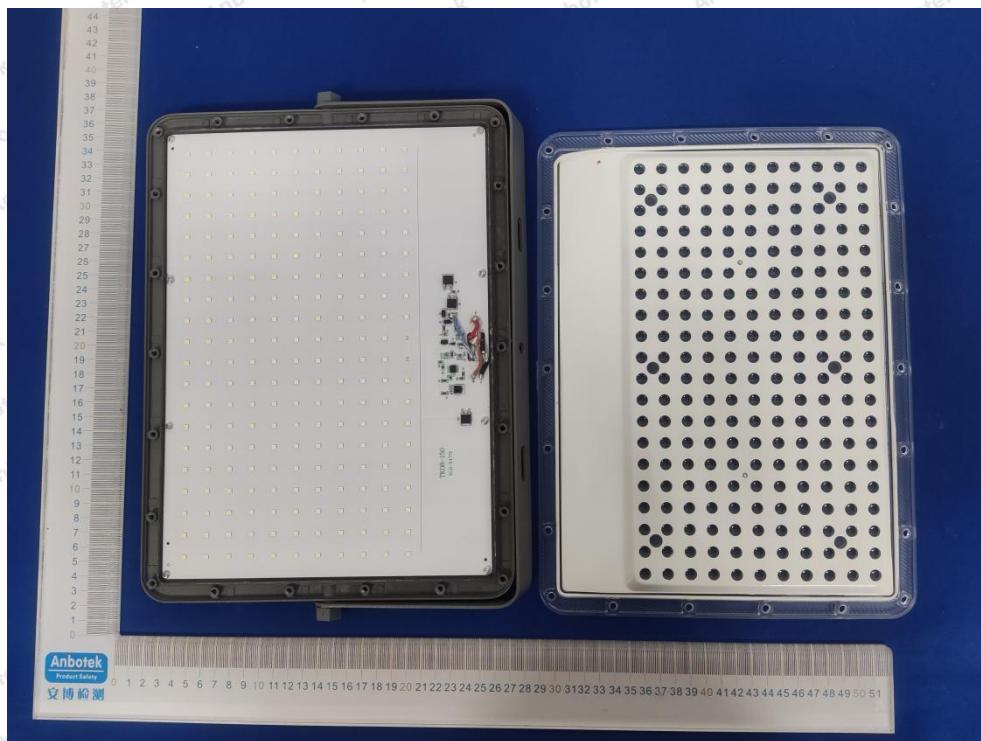

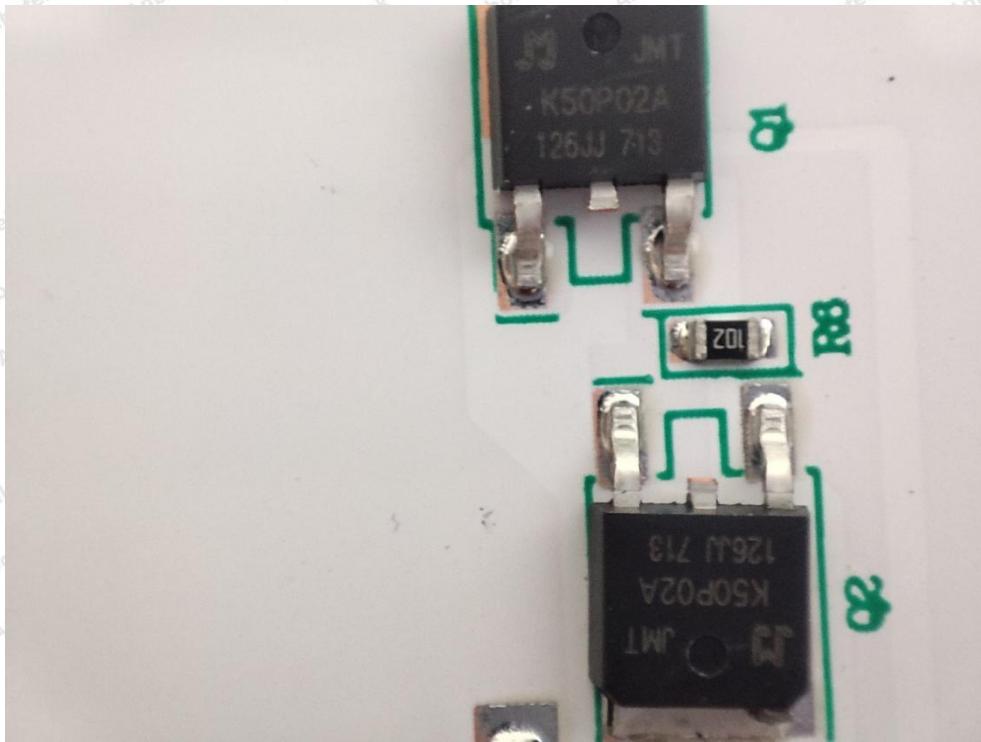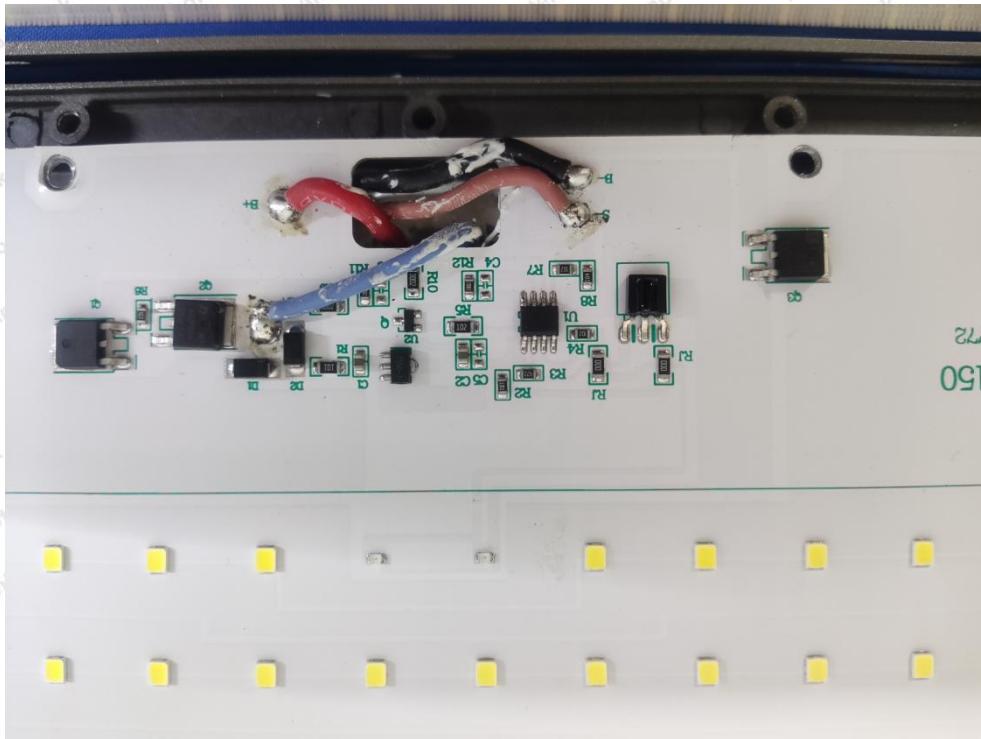

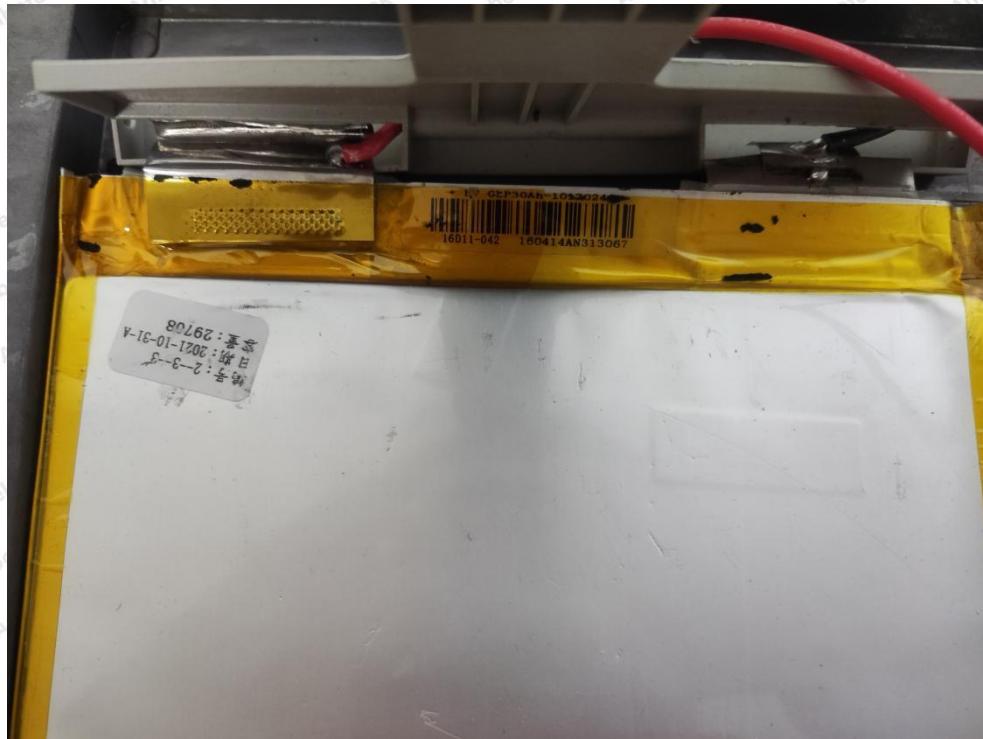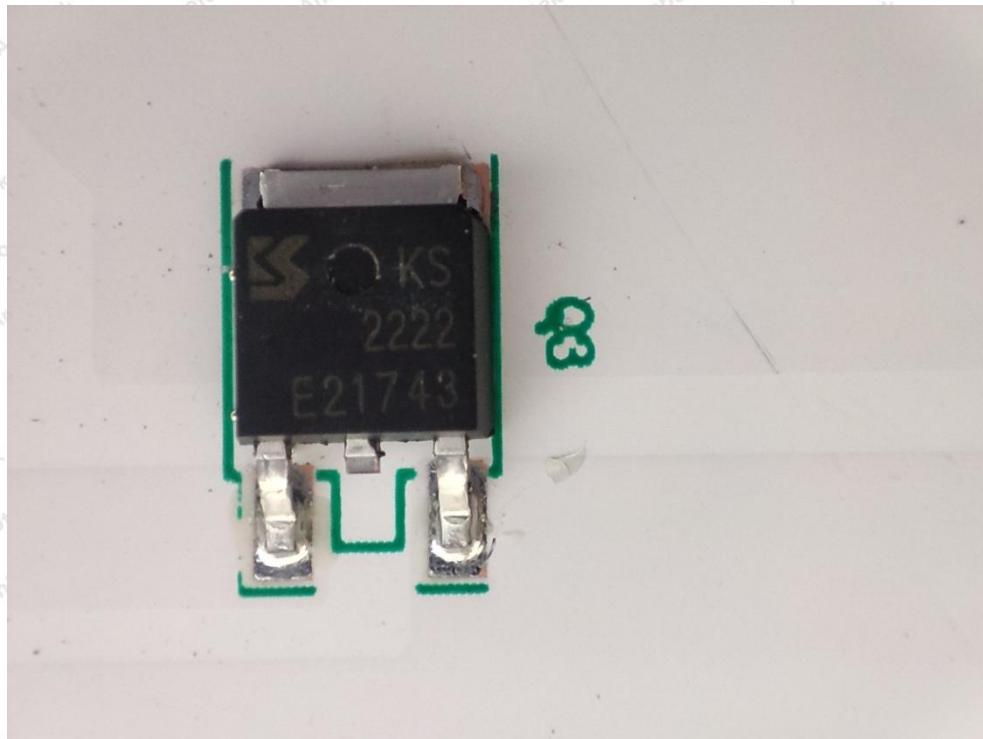

----- End of Report -----