

## Manual

## Charging

Red LED: Charging

Blue LED: Fully charged

## **Power On/Off**


Music Button + Center Button for 1 sec

## **Volume Adjustment**

### Music Button - Increase the volume

Phone Button - Decrease the volume

## **Battery Check**

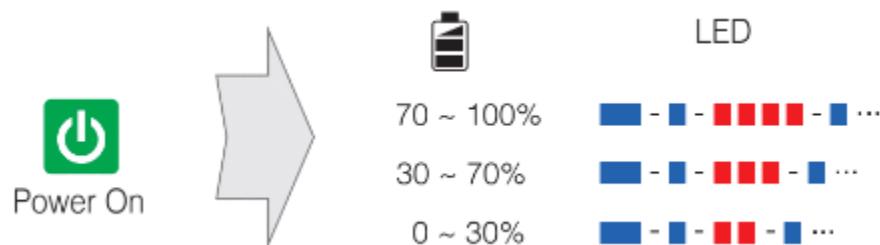

## **Phone, Music Pairing**

1. To access Configuration Menu, press and hold the Center Button for 10 seconds.
2. To enter Phone Pairing, tap the Music Button for 1 second.
3. Search for Bluetooth devices on your mobile phone. Select the **headset** in the list of the devices detected on the mobile phone.
4. Enter 0000 for the PIN. Some mobile phones may not ask for the PIN.

## **Music Operation**

Play music: Press the Center Button for 1 second.

Pause music: Press the Center Button for 1 second.

Track back: Press the Music Button for 1 second.

Track forward: Press the Phone Button for 1 second.

## **Mobile Phone Call Making and Answering**

Answering a call: Tap the Phone Button

Ending a call: Press the Phone Button for 2 seconds.

Speed dial: Press the Phone Button for 3 seconds.

Rejecting a call: Press the Phone Button for 2 seconds.

## **Intercom Pairing**

1. Press and hold the Center Button of two Bluetooth systems for 5 seconds until red LEDs of both units start to flash rapidly.
2. The two headsets will be automatically paired.

## **Intercom Start/End**

1st Friend: Tap the Center Button once.

2nd Friend: Tap the Center Button twice.

3rd Friend: Tap the Center Button triple times

## **Setting**

**Configuration Menu:** Press the Center Button for 10 seconds.

### **Using the Device Manager**

Connect the headset to your computer via a USB cable. Launch the Device Manager and click DEVICE SETTING to configure the headset settings.

For details about downloading the Sena Manager, please refer to the leaflet included in the package.

## **Troubleshooting**

### **Factory Reset**

If you want to restore the headset to factory default settings, use the Factory Reset in the configuration menu. The headset automatically restores the default settings and turns off.

### **Certification and Safety Approvals FCC Compliance Statement**

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antennae

- Increase the separation between the equipment and the receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### **FCC RF Exposure Statement**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. The antenna used for this transmitter must not transmit simultaneously with any other antenna or transmitter, except in accordance with FCC multi-transmitter product procedures.

When equipped, the distance between antenna and one's head surface is 61mm.

### **FCC Caution**

Any changes or modifications to the equipment not expressly approved by the party responsible for compliance could void user's authority to operate the equipment.

### **Industry Canada(IC) Statement**

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

### **IC RF Exposure Statement**

Cet équipement est conforme aux limites d'exposition aux radiations de la FCC définies pour un environnement non contrôlé. Les utilisateurs finaux doivent suivre les instructions d'utilisation spécifiques pour satisfaire à la conformité d'exposition RF. L'antenne utilisée pour cet émetteur ne doit pas émettre simultanément avec d'autres antennes ou émetteurs, sauf en conformité avec les procédures FCC relatives aux produits multi-émetteurs.

Lorsque équipé, la distance entre l'antenne et la surface de la tête est de 61mm.