



ShenZhen Eastong Electronic technology Co., LTD

Antenna Report

Project: C11

Date: 2025/3/15

Test Model: XS19Pro

Manufacturer: Shenzhen SOYES Premium Technology limited

Address: Building 521, 305, Bagualing Industrial Zone, 255 Baguagsan Road, Hualin Community, Yuanling, Futian Shenzhen. 518000 China

Project: C11		Author: XuXiaorong	File Name: C11-APP-RA
Date: 2025-3-15			
Rev:	Language:	Check:	
A	ENG		
CONFIDENTIAL			
ShenZhen Eastong Electronic technology Co., LTD			

Revision History

Date	Revision	Description of Changes
2025-03-15	R:A	Antenna performance approved by customer

1 SUMMARY

2 GENERAL DESCRIPTION

2.1 Definitions

3 MECHANICAL DESCRIPTION

4 ELECTRICAL PERFORMANCE

4.1 Set-up

- 4.1.1 VSWR and return loss
- 4.1.2 Efficiency, Gain and TRP/TIS
- 4.1.3 Matching Circuit Description

4.2 Measurement Data

- 4.2.1 VSWR
- 4.2.2 Active result

5 MECHANICAL DRAWING

6 CONCLUSION

Project: C11		Author: XuXiaorong	File Name: C11-APP-RA
Date: 2025-3-15			
Rev:	Language:	Check:	
A	ENG		
CONFIDENTIAL ShenZhen Eastong Electronic technology Co., LTD			

1 Summary

This report summarizes the electrical results of the proposed antenna to support the C11 program. We test the antenna with the latest version handset .

2 General Description

2.1 Definitions

VSWR: Voltage Standing Wave Rate

3 Mechanical Description

4 Electrical Performance

4.1 Set-up

4.1.1 VSWR and return loss

VSWR measurements (S_{11}) were performed using an Agilent E5070B Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

4.1.2 Efficiency, Gain and TRP/TIS

The gain of the antenna was measured in Dong Xin's 3D anechoic chamber in Shenzhen. The chamber is capable of doing tests from 380MHz to 6GHz. Coaxial chokes on the feed cable were used to mitigate surface currents. The measurement results are calibrated using dipole standards. For TRP and TIS the chamber uses a Agilent 8960 to establish the connection with the mobile device. During TRP tests the 8960 reads the power received through the chamber probes whilst during TIS tests the 8960 transmits through the probe. All data is afterwards corrected by a calibration table.

4.1.3 Matching Circuit Description

No matching.

Project: C11		Author: XuXiaorong	File Name: C11-APP-RA
Date: 2025-3-15			
Rev:	Language:	Check:	
A	ENG		
CONFIDENTIAL			
ShenZhen Eastong Electronic technology Co., LTD			

4.2 Measurement Data

Effective Radiated Power Summation (TRP)

GSM	EGSM900			DCS1800		
Let	1	62	124	512	698	885
TRP	25.4	25.3	25.1	22.0	22.3	23.4
TIS			-101.3			-102.5

GSM	EGSM850			PCS1900		
Let	128	190	251	512	661	810
TRP	22.6	23.5	24.3	24.0	23.5	22.4
TIS			-102.1			-101.8

WCDMA	W850			W900		
Let	4357	4408	4458	2937	3013	3088
TRP	14.5	14.6	15.3	16.2	16.0	15.3
TIS			-102.9			-102.1

WCDMA	W2100			W1900		
Let	10562	10700	10838	9662	9800	9938
TRP	16.2	15.5	15.1	15.3	15.6	16.1
TIS			-101.9			-102.4

FDD	B1			B2		
	L	M	H	L	M	H
Let						
TRP	15.5	14.2	14.0	14.1	14.5	15.3
TIS			-86.0			-87.1

Project: C11		Author: XuXiaorong	File Name: C11-APP-RA	
Date: 2025-3-15				
Rev:	Language:	Check:		
A	ENG			
CONFIDENTIAL ShenZhen Eastong Electronic technology Co., LTD				

FDD		B3			B4		
Let		L	M	H	L	M	H
TRP		14. 2	14. 8	15. 6	15. 5	15. 1	15. 0
TIS				-87. 5			-87. 2

FDD		B5			B7		
Let		L	M	H	L	M	H
TRP		15. 3	15. 5	14. 6	17. 1	17. 3	17. 0
TIS				-86. 8			-88. 4


FDD		B8			B12		
Let		L	M	H	L	M	H
TRP		15. 5	14. 6	14. 3	10. 7	11. 2	11. 6
TIS				-86. 5			-85. 5

FDD		B20		
Let		L	M	H
TRP		16. 5	16. 8	15. 2
TIS				-87. 3

Project: C11	Author:	File Name:
Date: 2025-3-15	XuXiaorong	C11-APP-RA
Rev:	Language:	
A	ENG	
CONFIDENTIAL		
ShenZhen Eastong Electronic technology Co., LTD		

TDD		B38					
Let		L		M		H	
TRP		17.1		16.5		16.2	
TIS				-87.3			

Test Point ID	Freq. (MHz)	TRP (dBm)	Gain (dBi)	Directivity (dBi)	Efficiency (%)	Efficiency (dB)	Max (dBm)
1	2400.0	2400.00	-0.57	4.61	30.3%	-5.18	-0.57
2	2410.0	2410.00	-0.68	4.32	31.7%	-4.99	-0.68
3	2420.0	2420.00	1.48	6.15	34.1%	-4.67	1.48
4	2430.0	2430.00	0.41	5.09	34.0%	-4.69	0.41
5	2440.0	2440.00	0.02	5.10	31.1%	-5.08	0.02
6	2450.0	2450.00	-0.09	4.35	36.0%	-4.44	-0.09
7	2460.0	2460.00	-0.63	4.00	34.4%	-4.63	-0.63
8	2470.0	2470.00	0.24	4.98	33.6%	-4.74	0.24
9	2480.0	2480.00	-0.97	3.10	39.2%	-4.06	-0.97
10	2490.0	2490.00	0.92	4.42	44.7%	-3.49	0.92
11	2500.0	2500.00	2.41	5.19	52.7%	-2.78	2.41

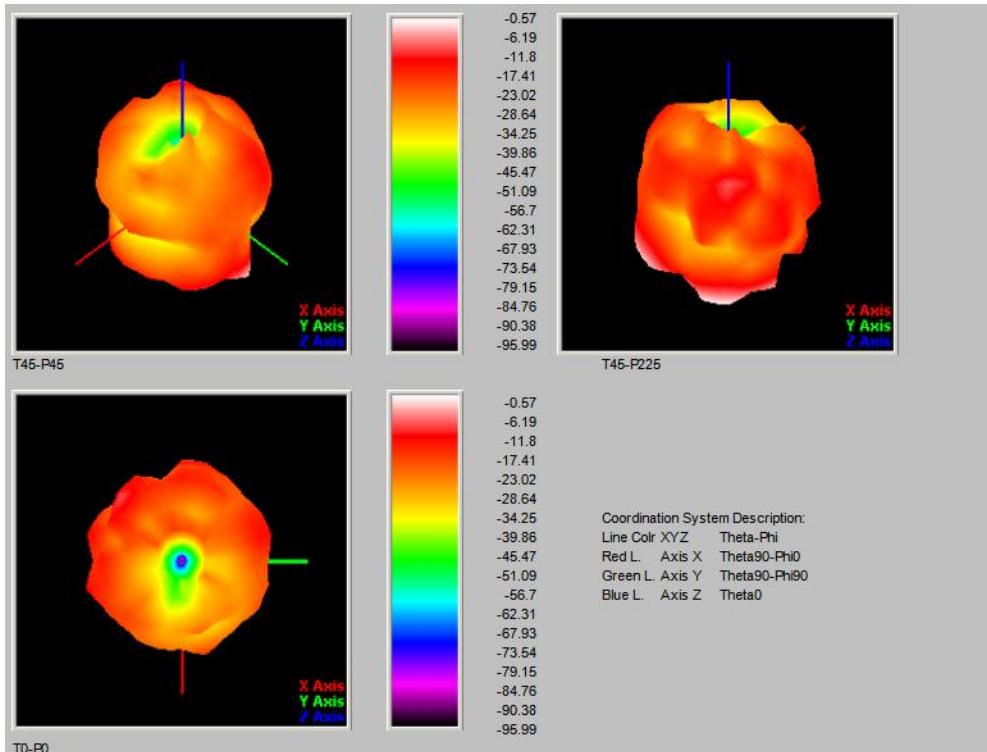


Project: C11	Author:	File Name:
Date: 2025-3-15	XuXiaorong	C11-APP-RA
Rev:	Language:	
A	ENG	

CONFIDENTIAL
ShenZhen Eastong Electronic technology Co., LTD


Standard	Band	Gain(dbi)
GSM	850	-1.62
GSM	900	-1.54
GSM	1800	-1.77
GSM	1900	-1.68
WCDMA	W1	-1.63
WCDMA	W2	-1.68
WCDMA	W5	-1.62
WCDMA	W8	-1.54
4G	B1	-1.63
4G	B2	-1.68
4G	B3	-1.77
4G	B4	-1.66
4G	B5	-1.62
4G	B7	-1.35
4G	B8	-1.54
4G	B12	-1.81
4G	B20	-1.65
4G	B38	-1.36
GPS	1575M	-1.24

5 Mechanical drawing

Project: C11		Author: XuXiaorong	File Name: C11-APP-RA		
Date: 2025-3-15					
Rev:	Language:	Check:			
A	ENG				
CONFIDENTIAL					
ShenZhen Eastong Electronic technology Co., LTD					

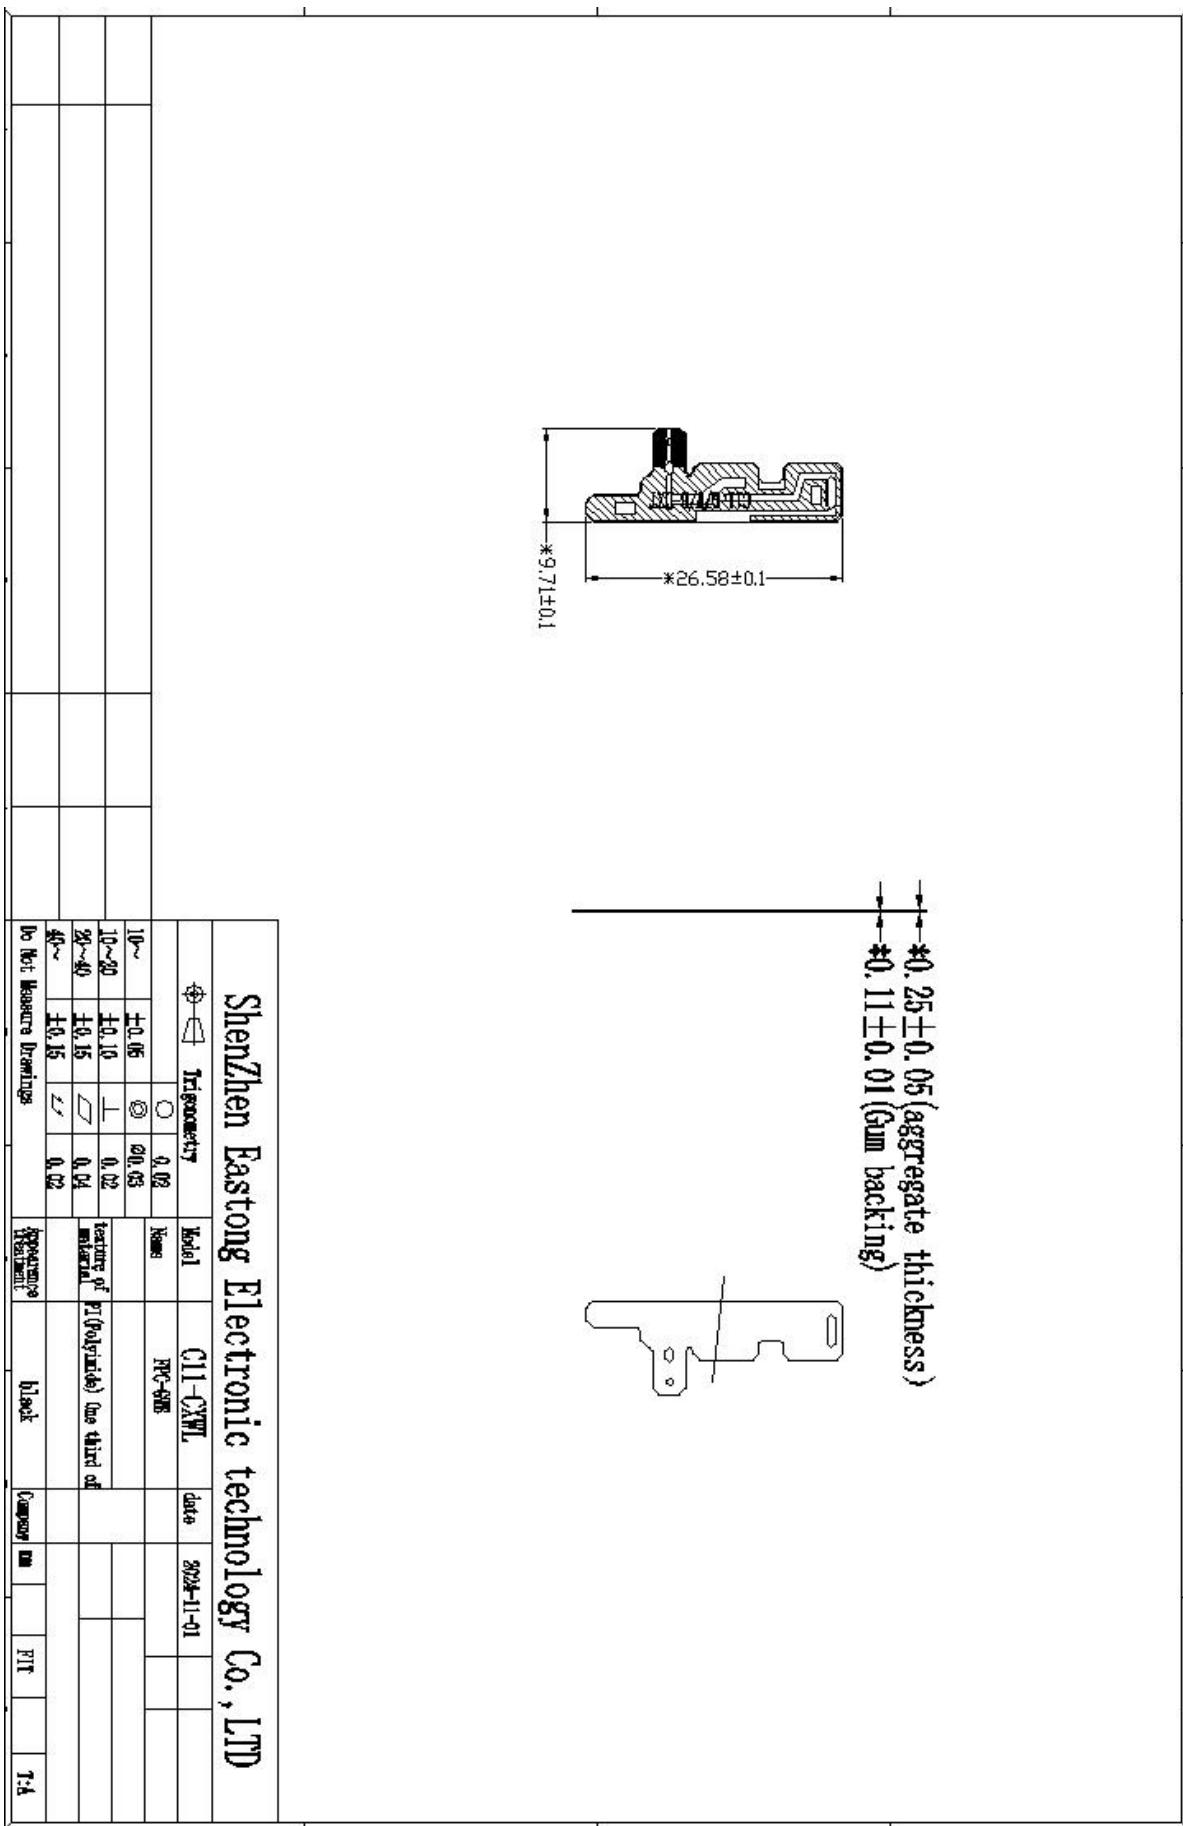


Project: C11		Author: XuXiaorong	File Name: C11-APP-RA
Date: 2025-3-15			
Rev: A	Language: ENG	Check:	
CONFIDENTIAL			
ShenZhen Eastong Electronic technology Co., LTD			

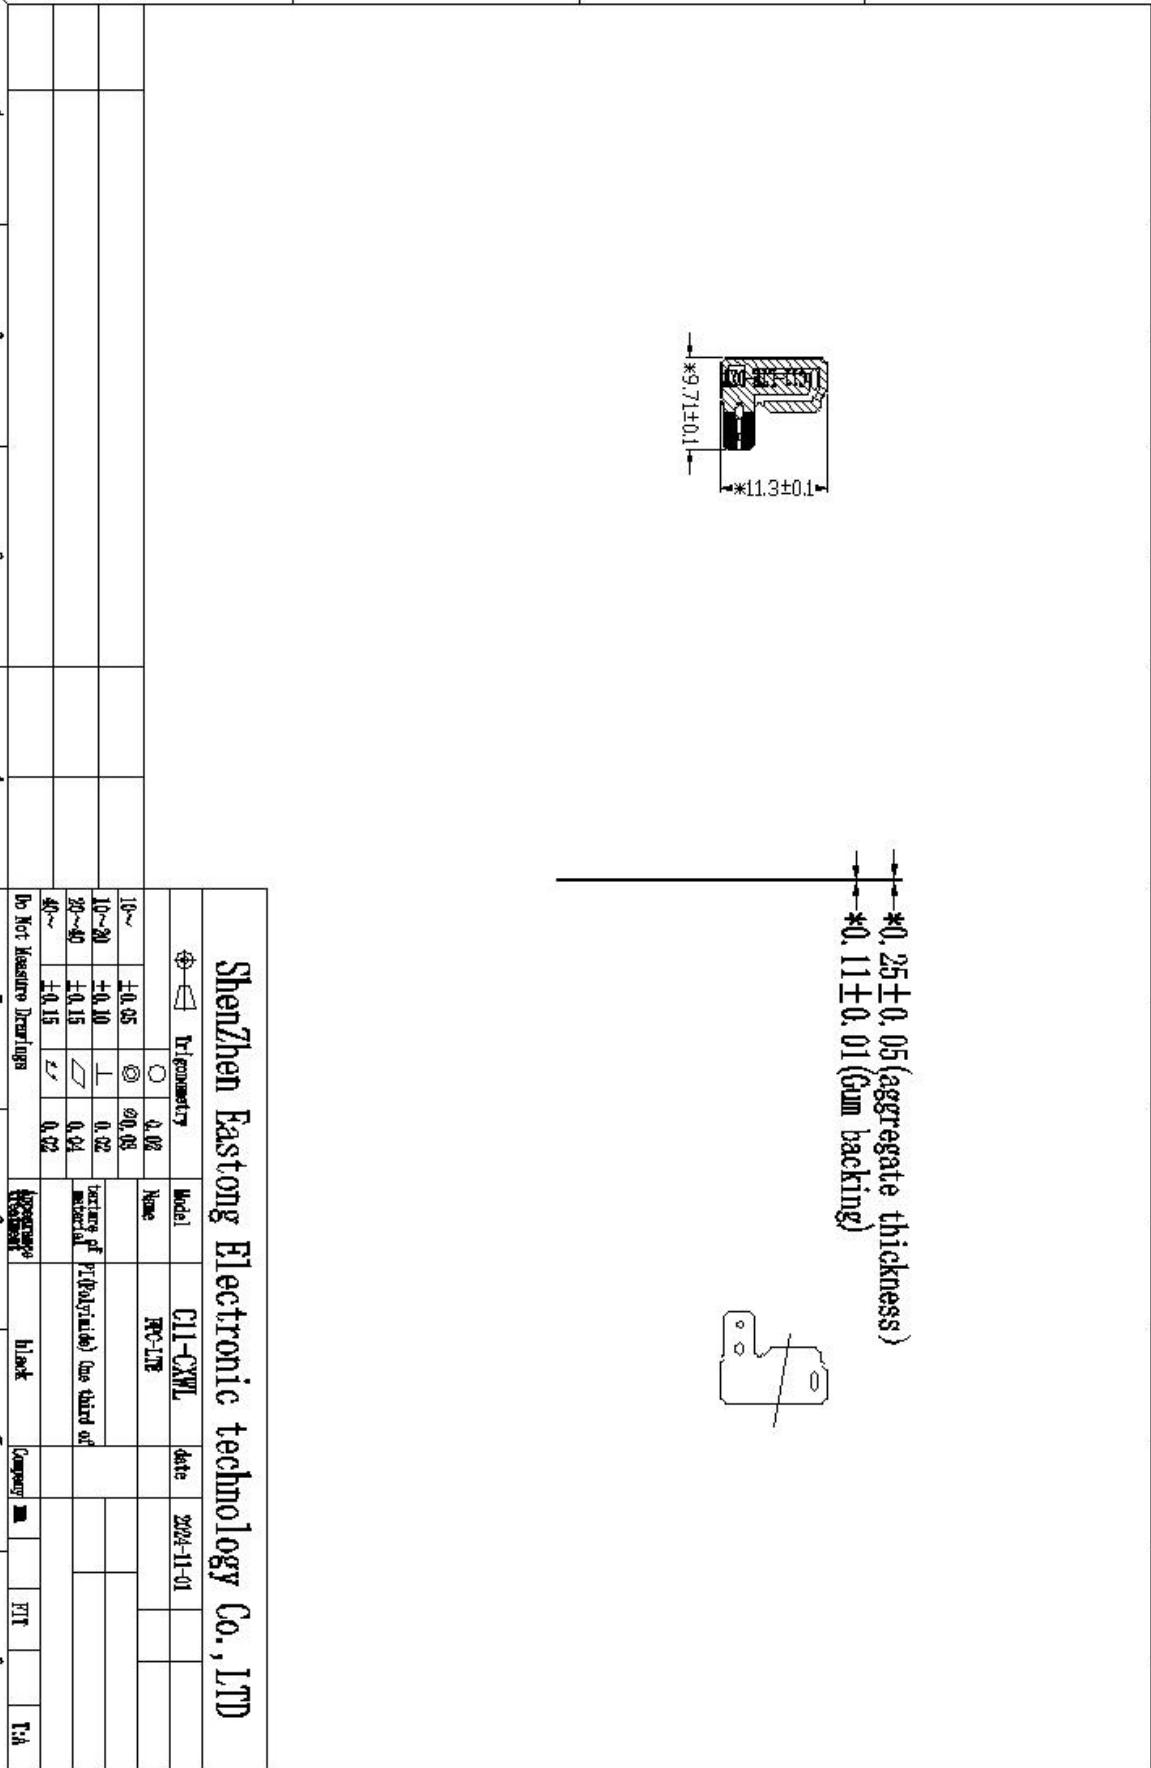

Project: C11	
Date: 2025-3-15	
Rev:	Language:
A	ENG

Author: XuXiaorong
 File Name: **C11-APP-RA**
 Check:
CONFIDENTIAL
 ShenZhen Eastong Electronic technology Co., LTD

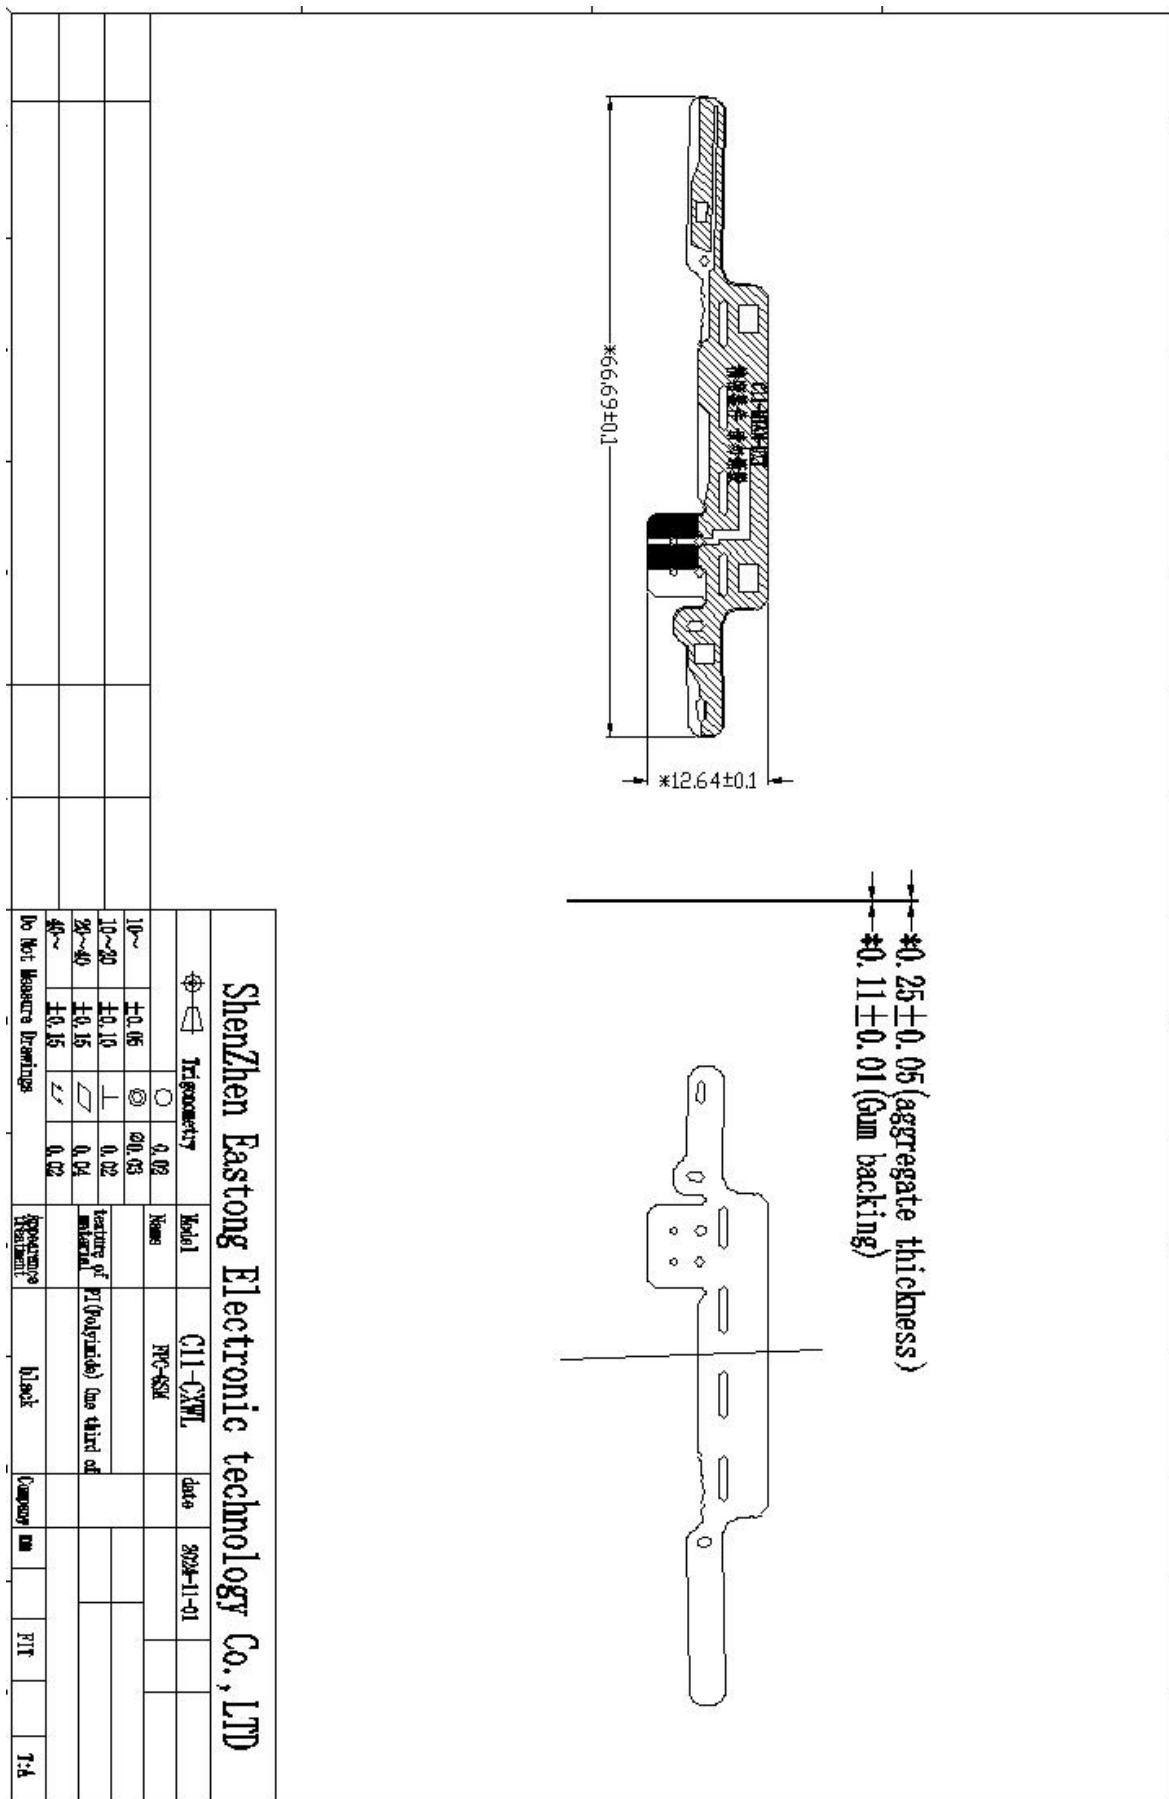

Project: C11		Author: XuXiaorong	File Name: C11-APP-RA
Date: 2025-3-15			
Rev:	Language:	Check:	
A	ENG		
CONFIDENTIAL ShenZhen Eastong Electronic technology Co., LTD			

CONFIDENTIAL
ShenZhen Eastong Electronic technology Co., LTD