



User Manual for Wireless Microphone

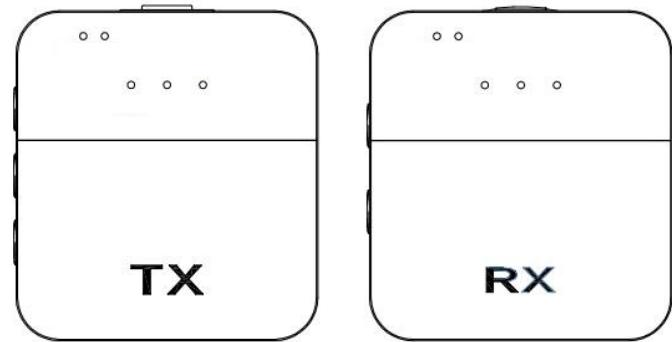

Cautions


Please read & keep this manual carefully to make full use of the product!

System Illustration of Receiver

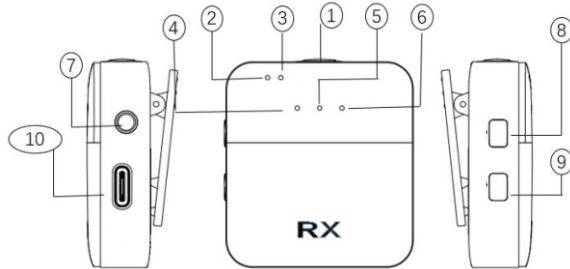

1. Power ON / OFF.
2. Battery indicator: Light on when charging; Off: Fully charged; Flashing: Low battery.
3. Connection status: Flashing: Transmitter & receiver are not paired; system will be powered off automatically if not paired more than 10 minutes. Light on: Transmitter & receiver are paired successfully.
4. Echo Indicator: Light on when echo is ready.
5. BT indicator: Flash: no device paired, and BT will be in sleep mode if no device paired in 5 mins, light off. Light on when device paired.
6. Ducking: Light on: Mic works and music volume down. Light off: Mic works & music volume as preset.
7. Output to earphone, speaker, or camera.
8. Volume up for TB sound: short press to volume up, long press to switch on/off BT.
9. Volume down for TB sound: short press to volume down, long press for Ducking on/off.
10. Charging Input / Connection to Smartphone.

System Illustration of Transmitter

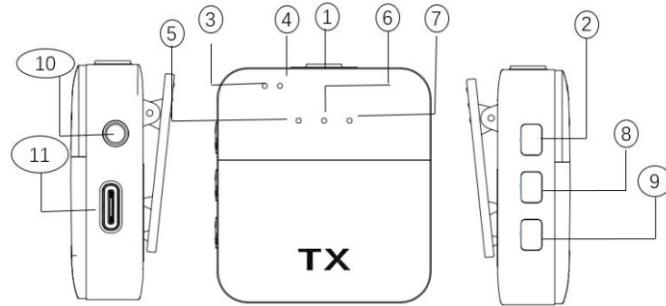

1. Cartridge: Point it to mount for better sound pickup.
2. Power / Mode switch: long press to power on/off, short press to MUTE.
3. Battery indicator: Light on when charging; Off: Fully charged; Flash: Low battery.
4. Connection status: Flashing: Transmitter & receiver are not paired;
system will be powered off automatically if not paired more than 5 minutes.
Light on: Transmitter & receiver are paired successfully.
5. Echo Indicator: Light on when echo is ready, better for singing (KTV model).
6. Noise Reduce: Noise reduce enabled when light on. Better for noisy environment. (Outdoor)
7. Mute Indicator: Mute mic.
8. Volume up for Mic: Short press to volume up, and press & hold to activate "Noise Reduce".
9. Volume down for Mic: Short press to volume down, and press & hold to activate "Echo".
10. Input for external Mic.
11. Charging port/ Earphone (TYPC C).

SETUP TIPS

1. Audio/Video recording with Smartphone

- a. Power both transmitter and receiver to pair successfully.
- b. Connect receiver to smartphone with included cable.
- c. Press volume control on transmitter to select models (Noise Reducing/ KTV), then start recording with desired Apps.

2. Livestream with Smartphone

- a. Power both transmitter and receiver to pair successfully.
- b. Connect receiver to smartphone with included cable.
- c. Press volume control on transmitter to select models (Noise Reducing/ KTV), meanwhile pair the BT to another smartphone as music input, and then start livestream with desired Apps.
- d. Plug an earphone to transmitter to listen to music from BT, and sound from Mic input.

3. Video recording with Camera

- a. Power both transmitter and receiver to pair successfully.
- b. Connect the receiver to camera with included cable (TRRS – TRS).
- c. Press volume control on transmitter to select models (Noise Reducing/ KTV), meanwhile pair the BT to another smartphone as music input, and then start livestream with desired Apps.
- d. Plug an earphone to transmitter to listen to music from BT
- e. Mic input & BT sound shall be recorded simultaneously.

System Parameter

Polar Pattern:	Omnidirectional
Frequency Range:	2.4G
Frequency Response:	50Hz-18kHz
Working Range:	7~20m
S/N:	>64dB
Charging Port:	Type-C
Current Input:	DC 5V/1A

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction