




Smart Home Security Camera

K04 Quick Start Guide


Contents

1. What's In The Box	01
2. Product Diagram	02
3. Light Indicators	04
4. Quick Start	05
5. Install The Device	18
6. Share The Camera	21
7. Play The Camera	23
8. Setup Your Home And Rooms	26
9. Product Specification	28
10. FAQ	29
11. Contact Us	30


What's In The Box

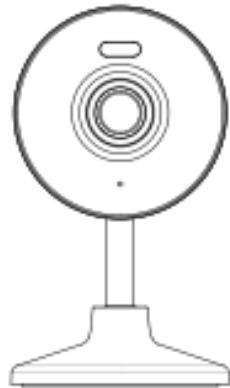

Camera
(With mounting bracket)



Pack of Screws



USB Cable



Power
Adapter




Bracket



Quick Start
Guide


Product Diagram

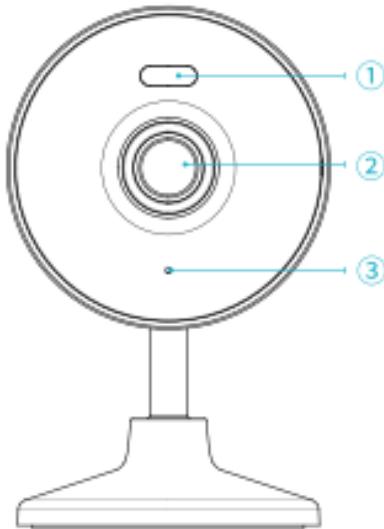

- ① White Light
- ② Camera Lens



- ③ Microphone
- ④ Speaker
- ⑤ Type-C Power Port

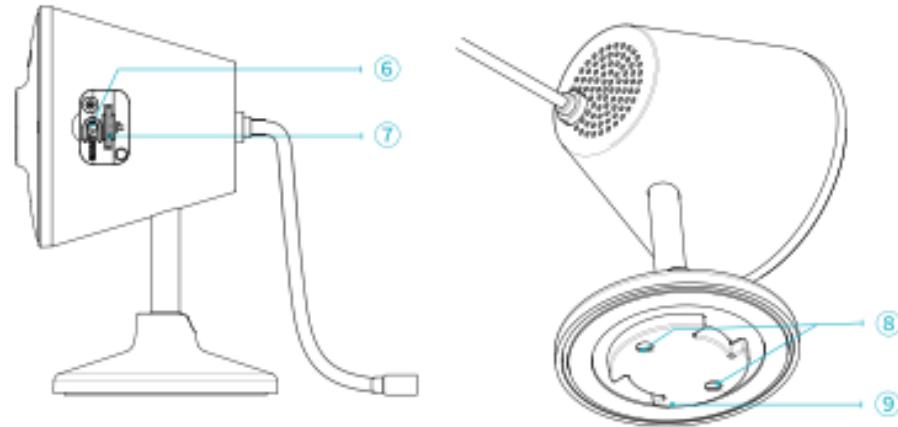

⑥ Reset Button
⑦ MicroSD Card Slot

⑧ Mounting Hole
⑨ Mounting Bracket

Light Indicators

Light Indicators	Camera Status
Flashing blue light	The device is connecting
Blue light always on	The device has successfully connected
Blue light off	Not connected to the power supply

Quick Start

Download & Add

Search the app store for 'TinoSec' app or use your browser to scan the QR code below to download, register and use. (by email, agree to the user agreement and obtain a verification code)

Scan the QR code to go to the link:



CAUTION

DO NOT use 3rd party QR code scanning tool or app to avoid scam or malware! Use QR code scanning app provided by your mobile phone system, e.g. the system camera app.

Add camera

There are three ways to add a camera: Bluetooth adding, QR code scanning, and hotspot adding.




(1) Add device by Bluetooth


- ① Turn on your "Bluetooth"
- ② Click on the "Add" button
- ③ Enter the Wifi name and password
- ④ Waiting for connecting



Step 1

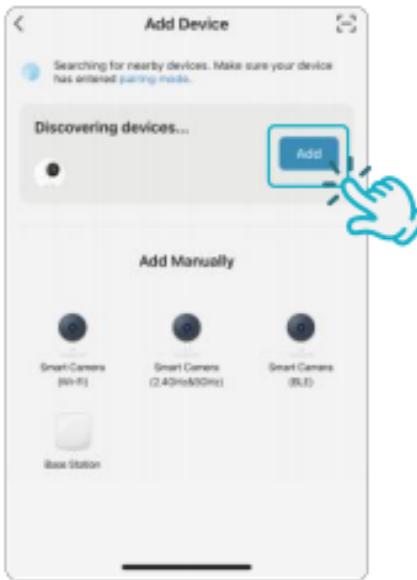


Step 2

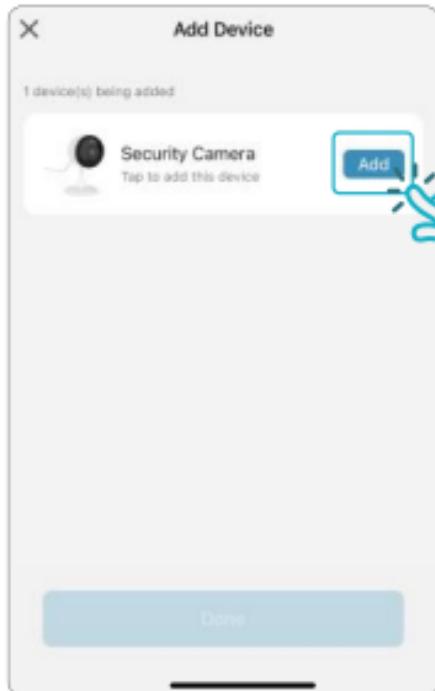


Step 3




Step 4

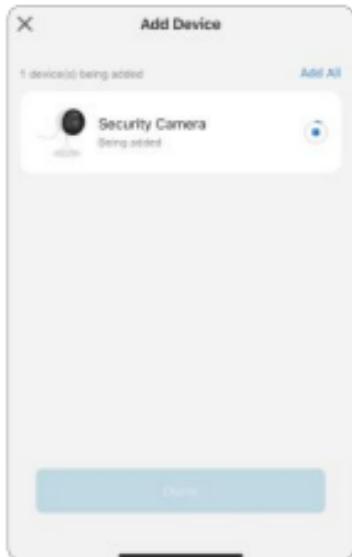

Step 5

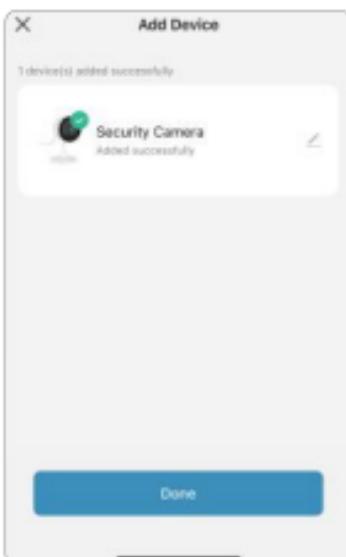

Step 6

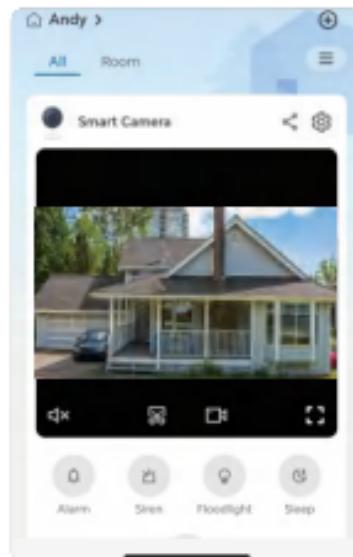


Step 7


After the success connection to Wi-Fi, you can place the camera at the colcation you wish to set it up.

(2) Add device by QR code


- ① Click on the "Add a device" button
- ② Select the "Smart Camera (2.4GHz&5GHz)"
- ③ Enter the wifi name and password
- ④ Scan the QR code that appears on the phone with the device

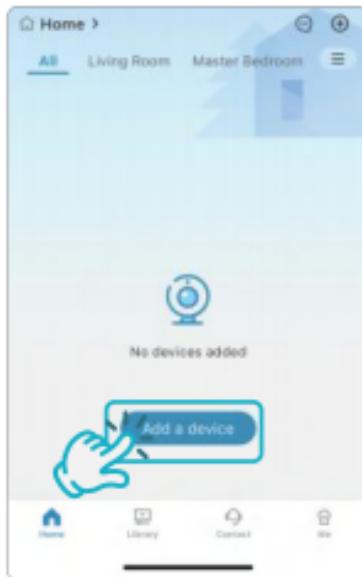


Step 1

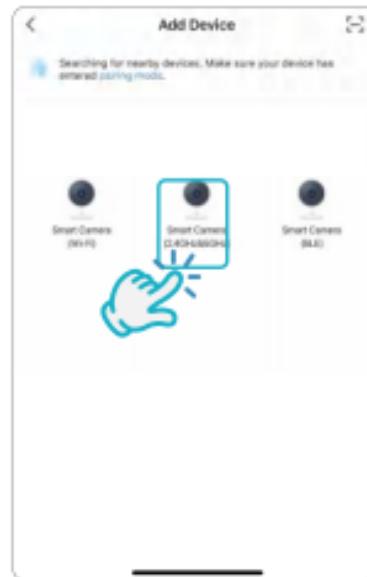


Step 2

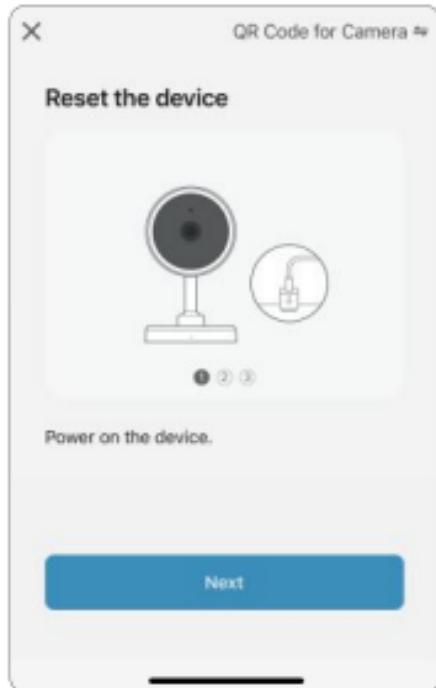

Step 3

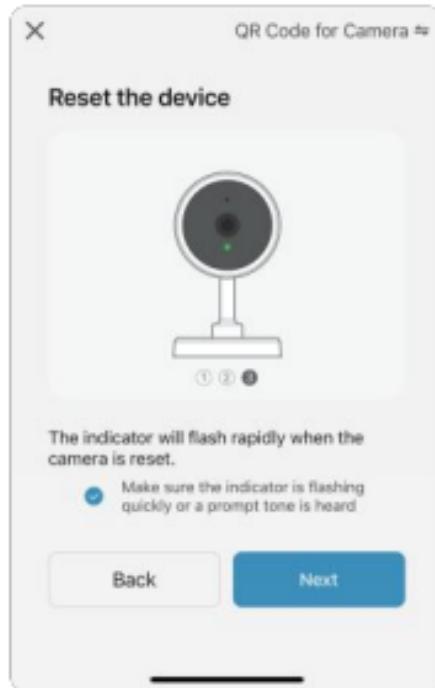


Step 4

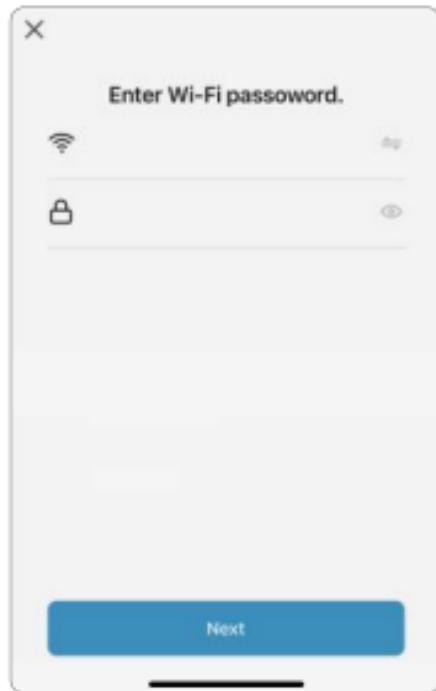


Step 5




Step 6

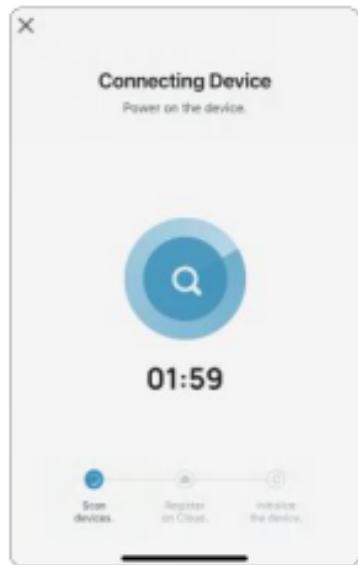

Step 7

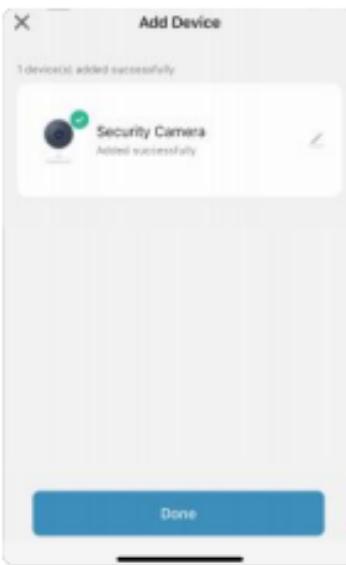

Step 8

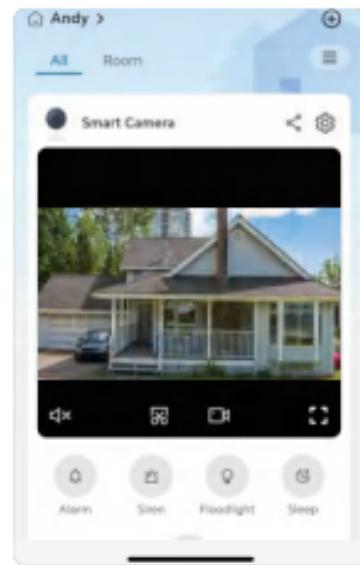


Step 9


After the success connection to Wi-Fi, you can place the camera at the colcation you wish to set it up.

(3) Add device by Hotspot


- ① Click on the "Add a device" button
- ② Select the "Smart Camera (2.4GHz&5GHz)"
- ③ Select AP mode
- ④ Enter the wifi name and password
- ⑤ Select AP hotspot "Smartlife-XXXX", and return to the APP

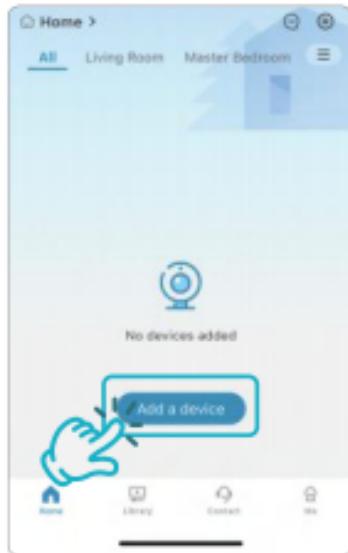


Step 1

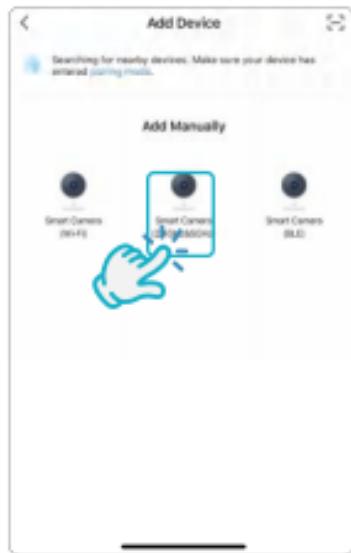


Step 2

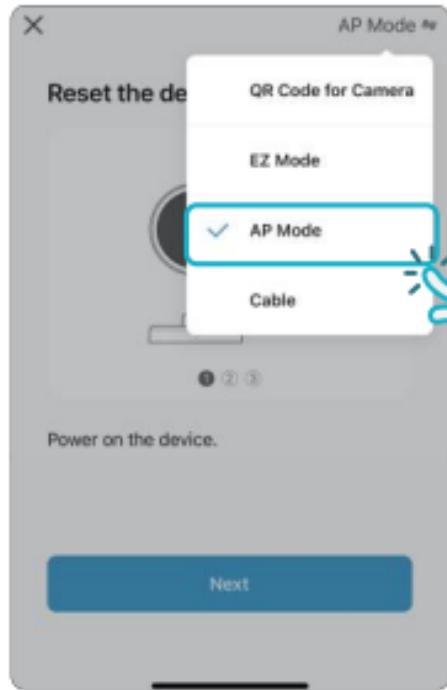


Step 3

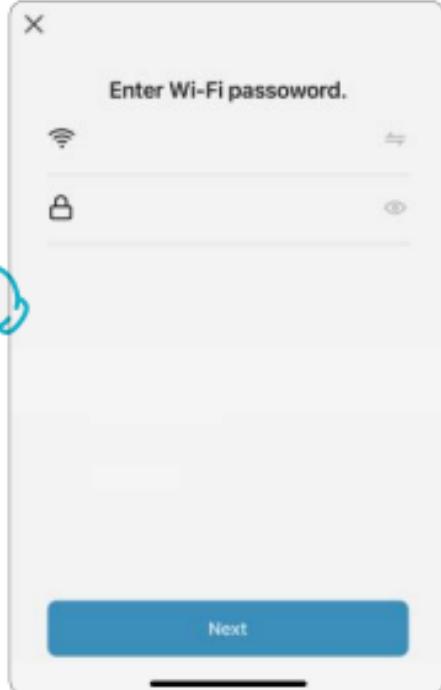


Step 4

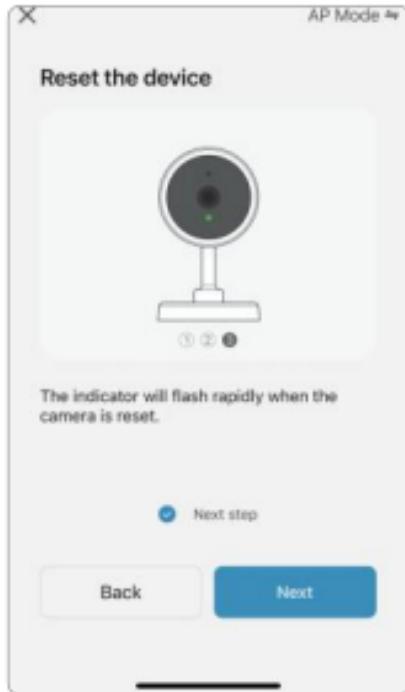


Step 5

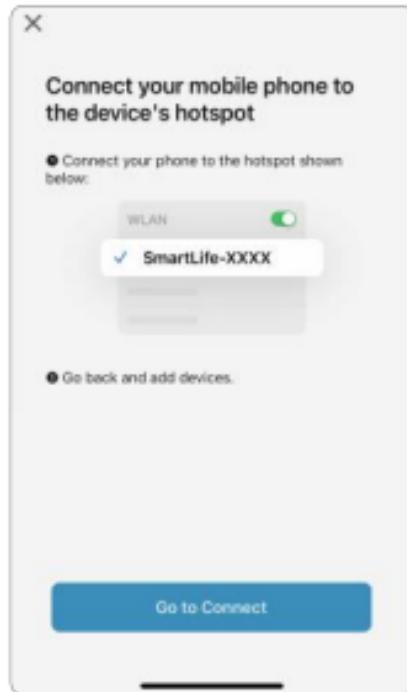

Step 6

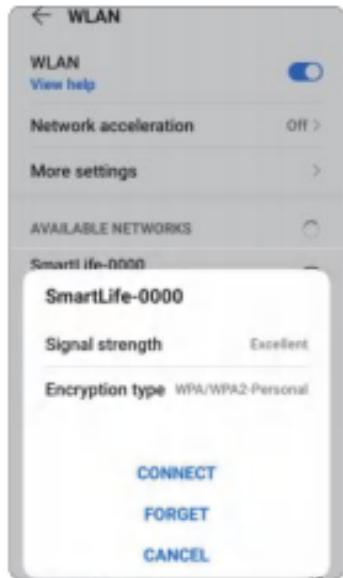

Step 7

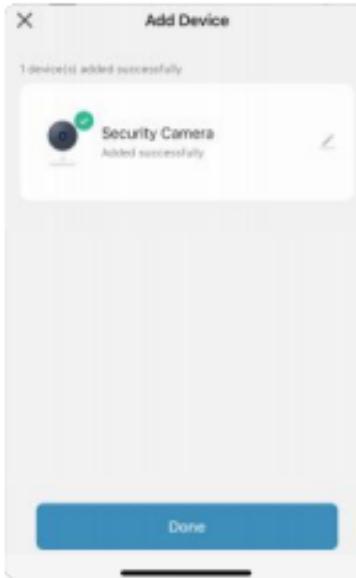

Step 8



Step 9

After the success connection to Wi-Fi, you can place the camera at the colcation you wish to set it up.

Install The Device

Please install the camera in a position where its view will not be blocked, make sure it is within the coverage of the Wi-Fi network.

The device can be placed on a shelf or other surfaces to use, and also can be installed on a wall.

You can install the camera on a wall by the below method.




1) Mounting Bracket

a)Taking the bracket out of the package




b)Use screws to mount the bracket to the target position

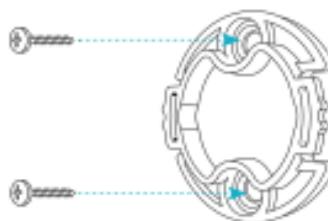


2) Install the camera

c) Align the screws on the camera with the screw holes on the bracket and rotate to screw them on

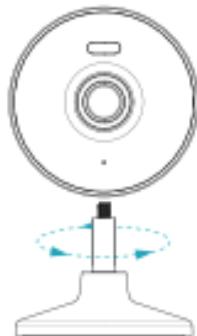

d) Align the snap of the camera base with the snap of the wall bracket and push firmly until locked

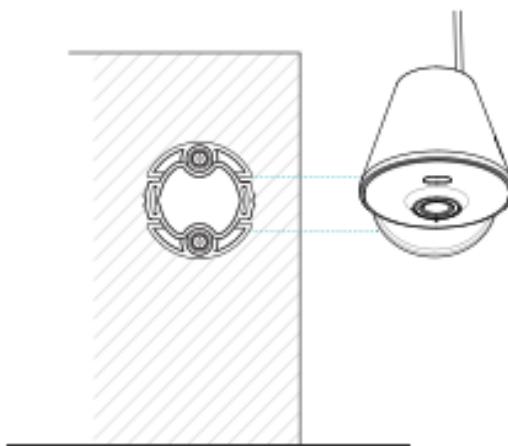




Share The Camera

You can provide access to the camera live stream as well as previously recorded footage to family and friends using the camera share function. (Only the administrator account that initially set up the camera can invite other users to share.)

- ① Select the home menu
- ② Select the menu bar in the upper right corner
- ③ Select Single View
- ④ Select the share button
- ⑤ Enter the corresponding region and account
- ⑥ Click share


(Please note: Sharing only works for accounts registered in the same country)

Share The Camera

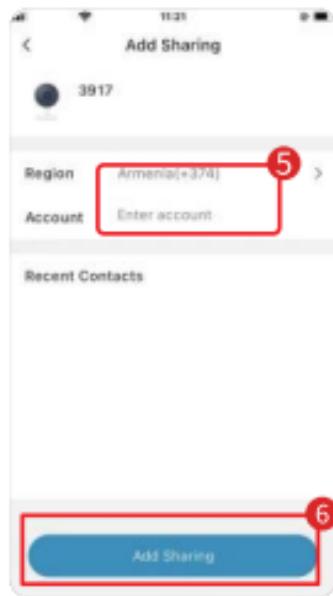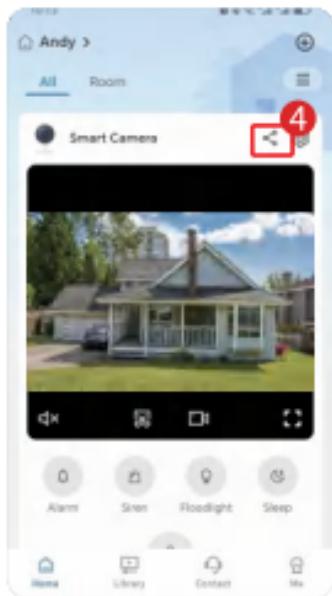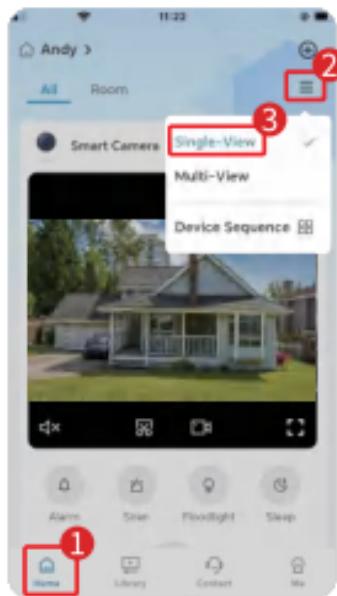


Play The Camera


1. You can tap ① to get more about the camera. On this screen you can tap different icons for different functions to play the cameras.

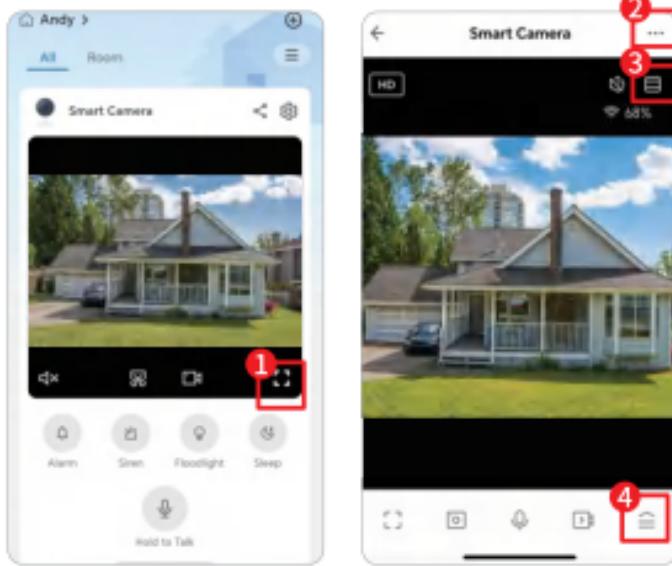

Play The Camera

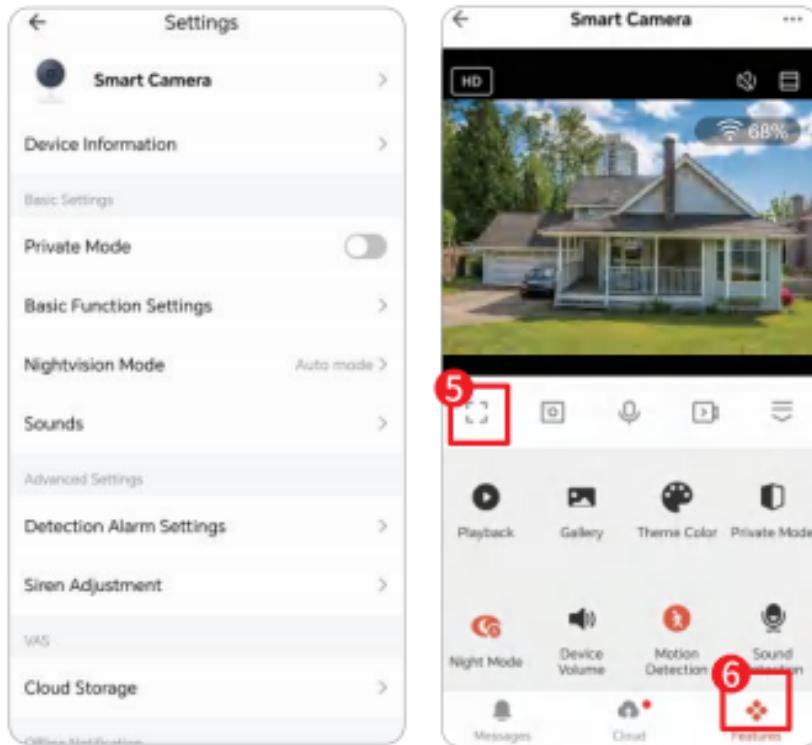

Play The Camera


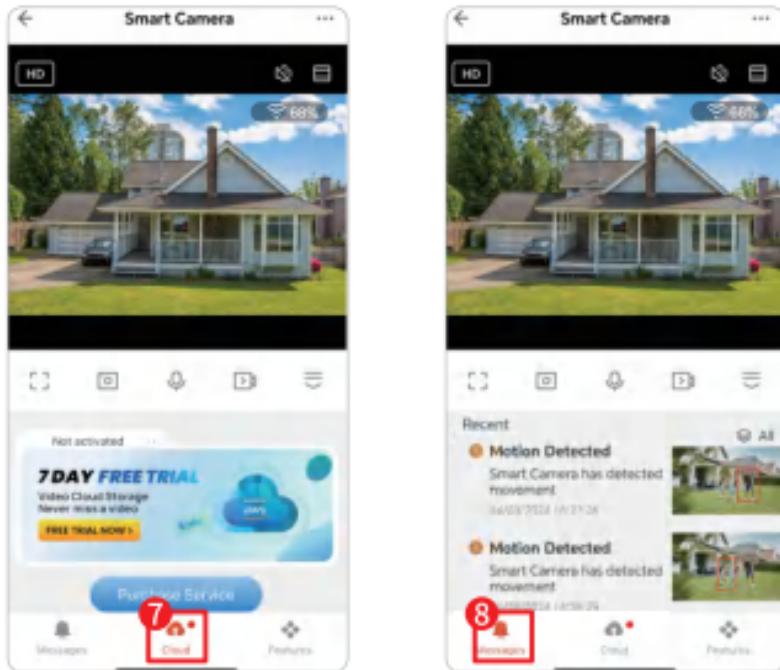


1. Go to Camera Control Panel
4. Features Control Panel
7. Cloud Storage

2. Camera Setting
5. Full Screen
3. Zoom Up
6. Features
8. Alarm Messages

Setup Your Home And Rooms

Follow steps below you can add Homes and Rooms to set your cameras in different houses and different locations in the houses.

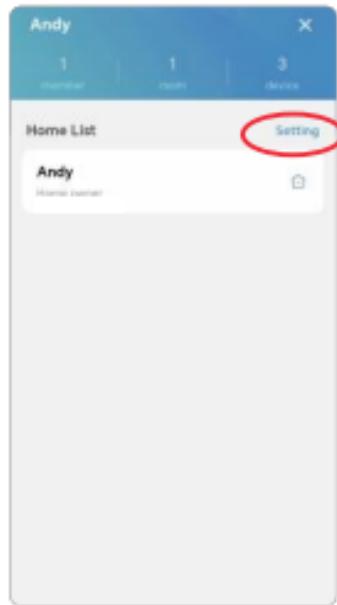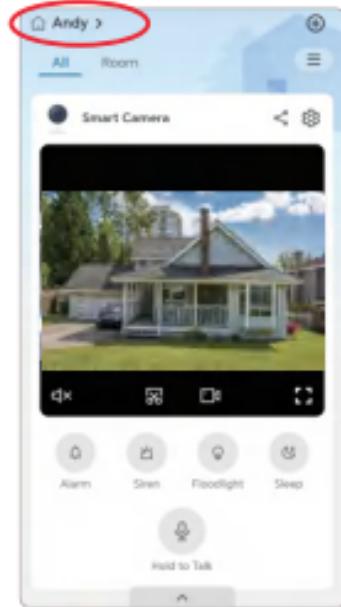

Setup Your Home And Rooms

Home Settings

Home Name: Andy

Room Management: 1 Room(s)

Location: To Be Set

Manage Permissions

Home Member: Andy support@inseeec.com Home Owner

Add Member

Delete Home

Room Management

Front Door

Backyard

Add Room

Product Specification

Item	Specification
Image resolution	FHD
Image coding	H.264
Audio	Two-way audio
Storage media	Micro SD card (Up to 128GB)
Night vision light	Infrared light, Spotlight
Network	Wi-Fi (2.4GHz&5GHz 802.11b/g/n)
Power	DC 5V/1A
Operating	-10° ~ 45° C

FAQ

Q: **The camera is netless or offline?**

A:

1. Check whether the power supply is working properly
2. Power off, restart the device and reconnect to the network (press the reset button for no less than 3 seconds)
3. Areas with weak signal coverage
4. Signal interference shielding in special places

Q: **How does the camera store the video**

A:

1. The camera supports FAT32 format, the maximum capacity is 128G, automatic video recording after recognition to the card, automatic overwriting the original video and cyclic recording after the storage is full;
2. Support the opening of cloud storage service to store video.

Contact Us

Contact Customer Service

Contact Us: on the App or support@tinosec.com

FAQs: [FAQs](#) and [demo videos](#) on using the camera
are on the APP

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

The equipment complies with FCC Radiation exposure limits set forth for uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

.