



# FCC TEST REPORT

**Test report  
On Behalf of  
Shenzhen Kula Technology Co.,LTD.**

**For  
5000mAh Pocket Portable Charger for Apple Watch  
Model No.: KL-YD46  
FCC ID: 2A5T7-KLYD46**

**Prepared For : Shenzhen Kula Technology Co.,LTD.  
Room 306,3 Floor,Block C,Gangzhilong Business Center,No.6, Shenzhen  
Guangdong, China**

**Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.  
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,  
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China**

**Date of Test: Apr. 10, 2023 ~ Apr. 17, 2023**

**Date of Report: Apr. 17, 2023**

**Report Number: HK2304101347-1E**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## TEST RESULT CERTIFICATION

**Applicant's name** .....: Shenzhen Kula Technology Co.,LTD.

Address .....: Room 306,3 Floor,Block C,Gangzhilong Business Center,No.6, Shenzhen Guangdong, China

**Manufacture's Name** .....: Shenzhen Kula Technology Co.,LTD.

Address .....: Room 306,3 Floor,Block C,Gangzhilong Business Center,No.6, Shenzhen Guangdong, China

### Product description

Trade Mark: N/A

Product name .....: 5000mAh Pocket Portable Charger for Apple Watch

Model and/or type reference : KL-YD46

**Standards** .....: FCC CFR 47 PART 18

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** .....:

Date (s) of performance of tests .....: Apr. 10, 2023 ~ Apr. 17, 2023

Date of Issue .....: Apr. 17, 2023

Test Result .....: Pass

Testing Engineer : 

(Gary Qian)

Technical Manager : 

(Eden Hu)

Authorized Signatory : 

(Jason Zhou)

**Table of Contents**

|  | <b>Page</b> |
|--|-------------|
| 1 . TEST SUMMARY                         | 5           |
| 1.1 . Test Procedures And Results        | 5           |
| 1.2 . Information of the Test Laboratory | 5           |
| 1.3 . Measurement Uncertainty            | 5           |
| 2. GENERAL INFORMATION                   | 6           |
| 2.1. General Description of EUT          | 6           |
| 2.2. Carrier Frequency of Channels       | 7           |
| 2.3. Operation of EUT during testing     | 7           |
| 2.4. Description of Test Setup           | 8           |
| 2.5. Measurement Instruments List        | 9           |
| 3. CONDUCTED EMISSION TEST               | 10          |
| 3.1. Block Diagram of Test Setup         | 10          |
| 3.2. Conducted Power Line Emission Limit | 10          |
| 3.3. Test Procedure                      | 10          |
| 4. RADIATED EMISSIONS                    | 13          |
| 4.1. Block Diagram of Test Setup         | 13          |
| 4.2. Rules and specifications            | 13          |
| 4.3. Test Procedure                      | 14          |
| 5. ANTENNA REQUIREMENT                   | 19          |
| 6. PHOTOGRAPH OF TEST                    | 20          |
| 7. PHOTOS OF THE EUT                     | 23          |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**\*\* Modified History \*\***

| Revision     | Description                 | Issued Data   | Remark     |
|--------------|-----------------------------|---------------|------------|
| Revision 1.0 | Initial Test Report Release | Apr. 17, 2023 | Jason Zhou |
|              |                             |               |            |
|              |                             |               |            |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 1. TEST SUMMARY

### 1.1. Test Procedures And Results

| DESCRIPTION OF TEST      | SECTION NUMBER | RESULT    |
|--------------------------|----------------|-----------|
| CONDUCTED EMISSIONS TEST | 18.307         | COMPLIANT |
| RADIATED EMISSION TEST   | 18.305         | COMPLIANT |

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 1.2. Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

### 1.3. Measurement Uncertainty

#### Measurement Uncertainty

|   |               |
|---|---------------|
| Conducted Emission Expanded Uncertainty               | = 2.71dB, k=2 |
| Radiated emission expanded uncertainty(9kHz-30MHz)    | = 3.90dB, k=2 |
| Radiated emission expanded uncertainty(30MHz-1000MHz) | = 3.90dB, k=2 |
| Radiated emission expanded uncertainty(Above 1GHz)    | = 4.28dB, k=2 |



## 2. GENERAL INFORMATION

### 2.1. General Description of EUT

|                      |   |
|----------------------|---|
| Equipment:           | 5000mAh Pocket Portable Charger for Apple Watch   |
| Model Name:          | KL-YD46   |
| Series Models:       | N/A   |
| Model Difference:    | N/A   |
| Trade Mark:          | N/A   |
| FCC ID:              | 2A5T7-KLYD46  |
| Antenna Type:        | Coil Antenna  |
| Antenna Gain:        | 0dBi  |
| Operation frequency: | 111.5KHz~205KHz   |
| Test frequency:      | 118KHz  |
| Number of Channels:  | 1   |
| Modulation Type:     | ASK   |
| Power Source:        | Battery Capacity: 5000mAh(3.7V/18.5Wh)<br>Conversion Rate: 60% (5V2A)<br>Type-C Port Input: 5V=2.4A<br>Lightning Port Input: 5V=2.4A<br>Type-C Port Output: 5V=2.4A<br>Lightning Cable Output: 5V=2.4A<br>Wireless Charging for Apple Watch: 3W |
| Power Rating:        | Battery Capacity: 5000mAh(3.7V/18.5Wh)<br>Conversion Rate: 60% (5V2A)<br>Type-C Port Input: 5V=2.4A<br>Lightning Port Input: 5V=2.4A<br>Type-C Port Output: 5V=2.4A<br>Lightning Cable Output: 5V=2.4A<br>Wireless Charging for Apple Watch: 3W |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



## 2.2. Carrier Frequency of Channels

| Operation Frequency each of channel |           |
|-------------------------------------|-----------|
| Channel                             | Frequency |
| 1                                   | 118KHz    |

## 2.3. Operation of EUT during testing

The equipment under test(EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

| Test Mode | Description  | Remark                 |
|-----------|--|------------------------|
| DC mode:  | OUT Wireless: 3W                                     |                        |
|           | OUT Wireless: 3W+ Type-C Port Output:<br>5V=2.4A     |                        |
|           | OUT Wireless: 3W+ Lightning Cable Output:<br>5V=2.4A |                        |
| AC mode:  | OUT Wireless: 3W                                     | Connect to the adapter |
|           | OUT Wireless: 3W+ Type-C Port Output:<br>5V=2.4A     |                        |
|           | OUT Wireless: 3W+ Lightning Cable Output:<br>5V=2.4A |                        |


Note: All modes are tested, and the report shows only the worst mode data.



## 2.4. Description of Test Setup

DC mode:

Operation of EUT during testing:



AC mode:

Operation of EUT during testing:



### Adapter information

Model: GD2B9

Input: 100-240V~ 50/60Hz, 2A Max

USB-C1 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A, 28V 5A 140W MAX

USB-C2 Output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A 100W MAX

USB-A Output: 5V 4.5A, 4.5V 5A, 5V 3A, 9V 2A, 12V 1.5A 22.5W MAX

Total output power: 140W Max

Model: HW-059200CHQ

Input: 100-240V, 50/60Hz 0.5A

Output: 5VDC, 2A

Model: BD-F1

Input: AC100-240V~50/60Hz, 1.5A

USB-C Output: (65W PD) DC5V 3A or 9V 3A or 12V 3A or 15V 3A or 20V 3.25A MAX

USB-A Output: DC5V 2.4A

The sample was placed (0.8m (30MHz~1GHz), 0.8m (9KHz~30MHz) ) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



## 2.5. Measurement Instruments List

| Item | Equipment                               | Manufacturer    | Model No.           | Serial No. | Last Cal.     | Cal. Interval |
|------|---|-----------------|---------------------|------------|---------------|---------------|
| 1.   | L.I.S.N.<br>Artificial Mains<br>Network | R&S             | ENV216              | HKE-002    | Feb. 17, 2023 | 1 Year        |
| 2.   | Receiver                                | R&S             | ESR-7               | HKE-010    | Feb. 17, 2023 | 1 Year        |
| 3.   | RF automatic<br>control unit            | Tonscend        | JS0806-2            | HKE-060    | Feb. 17, 2023 | 1 Year        |
| 4.   | Spectrum analyzer                       | R&S             | FSP40               | HKE-025    | Feb. 17, 2023 | 1 Year        |
| 5.   | Spectrum analyzer                       | Agilent         | N9020A              | HKE-048    | Feb. 17, 2023 | 1 Year        |
| 6.   | Preamplifier                            | Schwarzbeck     | BBV 9743            | HKE-006    | Feb. 17, 2023 | 1 Year        |
| 7.   | EMI Test Receiver                       | Rohde & Schwarz | ESCI 7              | HKE-010    | Feb. 17, 2023 | 1 Year        |
| 8.   | Bilog Broadband<br>Antenna              | Schwarzbeck     | VULB9163            | HKE-012    | Feb. 17, 2023 | 1 Year        |
| 9.   | Loop Antenna                            | Schwarzbeck     | FMZB 1519<br>B      | HKE-014    | Feb. 17, 2023 | 1 Year        |
| 10.  | Horn Antenna                            | Schwarzbeck     | 9120D               | HKE-013    | Feb. 17, 2023 | 1 Year        |
| 11.  | Pre-amplifier                           | EMCI            | EMC051845<br>SE     | HKE-015    | Feb. 17, 2023 | 1 Year        |
| 12.  | Pre-amplifier                           | Agilent         | 83051A              | HKE-016    | Feb. 17, 2023 | 1 Year        |
| 13.  | EMI Test Software<br>EZ-EMC             | Tonscend        | JS1120-B<br>Version | HKE-083    | N/A           | N/A           |
| 14.  | Power Sensor                            | Agilent         | E9300A              | HKE-086    | Feb. 17, 2023 | 1 Year        |
| 15.  | Spectrum analyzer                       | Agilent         | N9020A              | HKE-048    | Feb. 17, 2023 | 1 Year        |
| 16.  | Signal generator                        | Agilent         | N5182A              | HKE-029    | Feb. 17, 2023 | 1 Year        |
| 17.  | Signal Generator                        | Agilent         | 83630A              | HKE-028    | Feb. 17, 2023 | 1 Year        |
| 18.  | Shielded room                           | Shiel Hong      | 4*3*3               | HKE-039    | Dec. 09, 2021 | 3 Year        |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



### 3. CONDUCTED EMISSION TEST

#### 3.1. Block Diagram of Test Setup

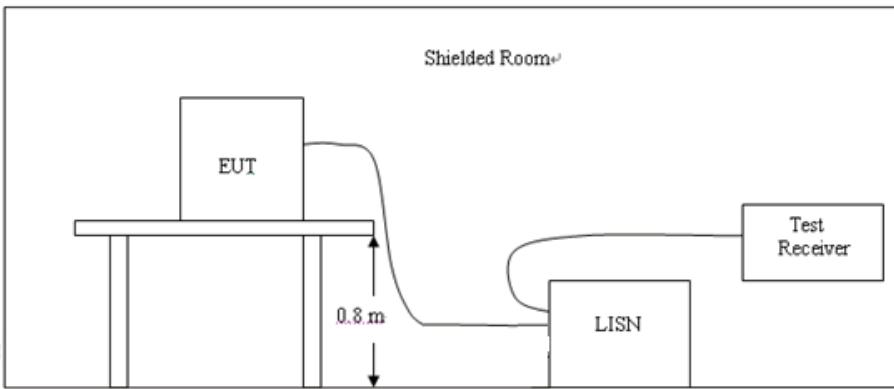

#### 3.2. Conducted Power Line Emission Limit

According to FCC Part 18.307(b)

| Frequency<br>(MHz) | Maximum RF Line Voltage (dB $\mu$ V) |      |         |        |
|--------------------|--------------------------------------|------|---------|--------|
|                    | CLASS A                              |      | CLASS B |        |
|                    | Q.P.                                 | Ave. | Q.P.    | Ave.   |
| 0.15 - 0.50        | 79                                   | 66   | 66-56*  | 56-46* |
| 0.50 - 5.00        | 73                                   | 60   | 56      | 46     |
| 5.00 - 30.0        | 73                                   | 60   | 60      | 50     |

\* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §18.307 Line Conducted Emission Limit is same as above table.

#### 3.3. Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.




## 3.4. Test Result

PASS

All the test modes completed for test. only the worst result was reported as below:

Test Specification: Line

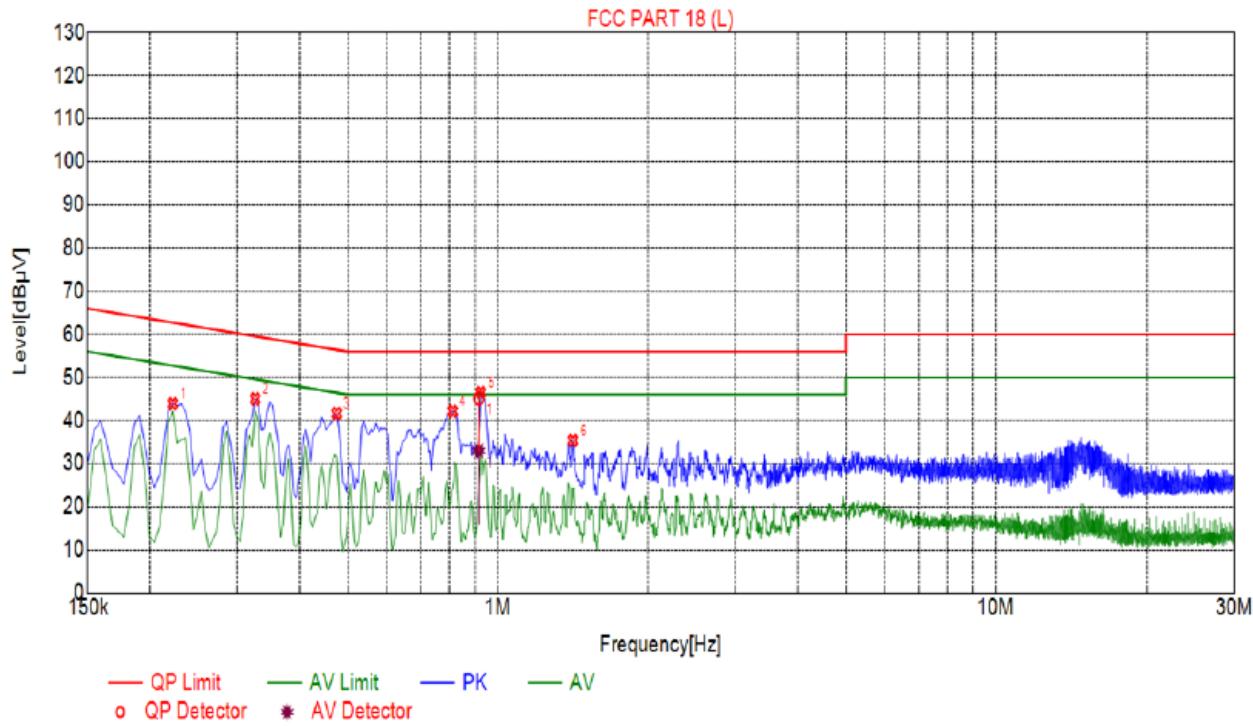

### Suspected List

| NO. | Freq. [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Reading [dBμV] | Detector | Type |
|-----|-------------|--------------|-------------|--------------|-------------|----------------|----------|------|
| 1   | 0.2220      | 43.89        | 20.04       | 62.82        | 18.93       | 23.85          | PK       | L    |
| 2   | 0.3255      | 45.02        | 20.05       | 59.58        | 14.56       | 24.97          | PK       | L    |
| 3   | 0.4740      | 41.62        | 20.04       | 56.48        | 14.86       | 21.58          | PK       | L    |
| 4   | 0.8115      | 42.14        | 20.06       | 56.00        | 13.86       | 22.08          | PK       | L    |
| 5   | 0.9240      | 46.48        | 20.06       | 56.00        | 9.52        | 26.42          | PK       | L    |
| 6   | 1.4145      | 35.36        | 20.11       | 56.00        | 20.64       | 15.25          | PK       | L    |

### Final Data List

| NO. | Freq. [MHz] | Correction factor [dB] | QP Value [dBμV] | QP Limit [dBμV] | QP Margin [dB] | QP Reading [dBμV] | AV Value [dBμV] | AV Limit [dBμV] | AV Margin [dB] | AV Reading [dBμV] | Type |
|-----|-------------|------------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|-------------------|------|
| 1   | 0.9153      | 20.06                  | 45.16           | 56.00           | 10.84          | 25.10             | 32.99           | 46.00           | 13.01          | 12.93             | L    |

Remark: Margin = Limit - Level


Correction factor = Cable loss + LISN insertion loss

Level=Test receiver reading + correction factor



Test Specification: Neutral

FCC PART 18 (N)

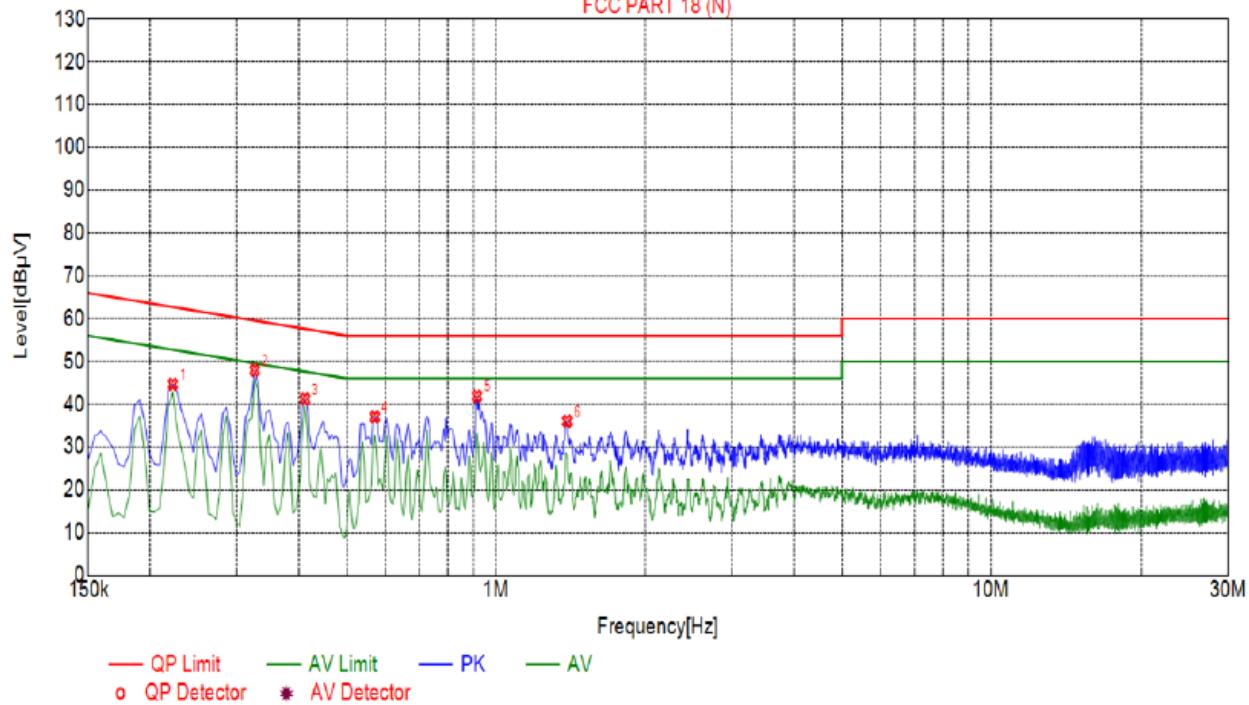

## Suspected List

| NO. | Freq. [MHz] | Level [dB $\mu$ V] | Factor [dB] | Limit [dB $\mu$ V] | Margin [dB] | Reading [dB $\mu$ V] | Detector | Type |
|-----|-------------|--------------------|-------------|--------------------|-------------|----------------------|----------|------|
| 1   | 0.2220      | 44.67              | 20.04       | 62.82              | 18.15       | 24.63                | PK       | N    |
| 2   | 0.3255      | 47.95              | 20.05       | 59.58              | 11.63       | 27.90                | PK       | N    |
| 3   | 0.4110      | 41.21              | 20.03       | 57.67              | 16.46       | 21.18                | PK       | N    |
| 4   | 0.5685      | 37.02              | 20.05       | 56.00              | 18.98       | 16.97                | PK       | N    |
| 5   | 0.9150      | 41.87              | 20.06       | 56.00              | 14.13       | 21.81                | PK       | N    |
| 6   | 1.3920      | 36.03              | 20.11       | 56.00              | 19.97       | 15.92                | PK       | N    |

Remark: Margin = Limit - Level



Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



#### 4. RADIATED EMISSIONS

##### 4.1. Block Diagram of Test Setup

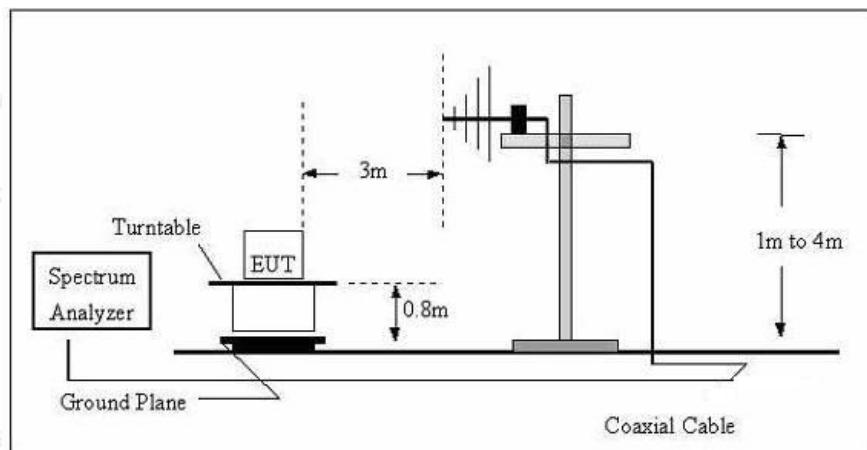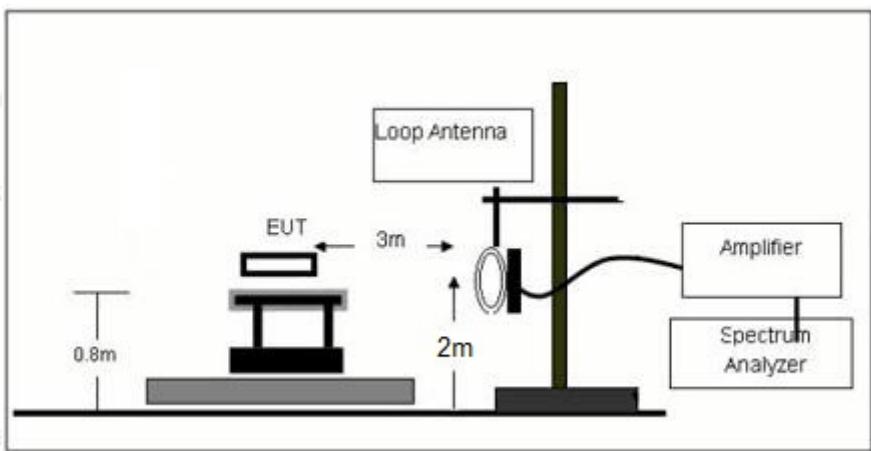

##### 4.2. Rules and specifications

Except as provided elsewhere in this Subpart 18.305 (b), the field strength levels of emissions which lie outside the bands specified in §18.301, unless otherwise indicated, shall not exceed the following table:

| Equipment       | Operating frequency   | RF Power generated by equipment (watts) | Field strength limit (uV/m)                   | Distance (meters) |
|-----------------|-----------------------|---|---|-------------------|
| (miscellaneous) |                       |   |   |                   |
|                 | Any non-ISM frequency | Below 500<br>500 or more                | 15<br>15 ×<br>$\text{SQRT}(\text{power}/500)$ | 300<br>1300       |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



Remark:

- (1) Emission level dB<sub>V</sub>/m for 0.009~30MHz = 20log (15) + 40log (300/3) dB<sub>V</sub>/m;
- (2) Calculated according FCC 18.305.
- (3) The smaller limit shall apply at the cross point between two frequency bands.
- (4) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

#### 4.3. Test Procedure

Measurement distance 3m

For the measurement range up to 30MHz in the following plots the field strength result from 3m Distance measurements are extrapolated to 300m and 30m distance respectively, by 40dB/decade, Per antenna factor scaling.

Measurements below 1000MHz are performed with a peak detector and compared to average limits, Measurements with an average detector are not required.

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

#### 4.4. Test Result


PASS

Note: All the test modes completed for test. Only the worst result (OUT Wireless: 3W+ Type-C Port Output: 5V=2.4A) was reported as below:



For 9KHz - 30MHz

DC Mode:

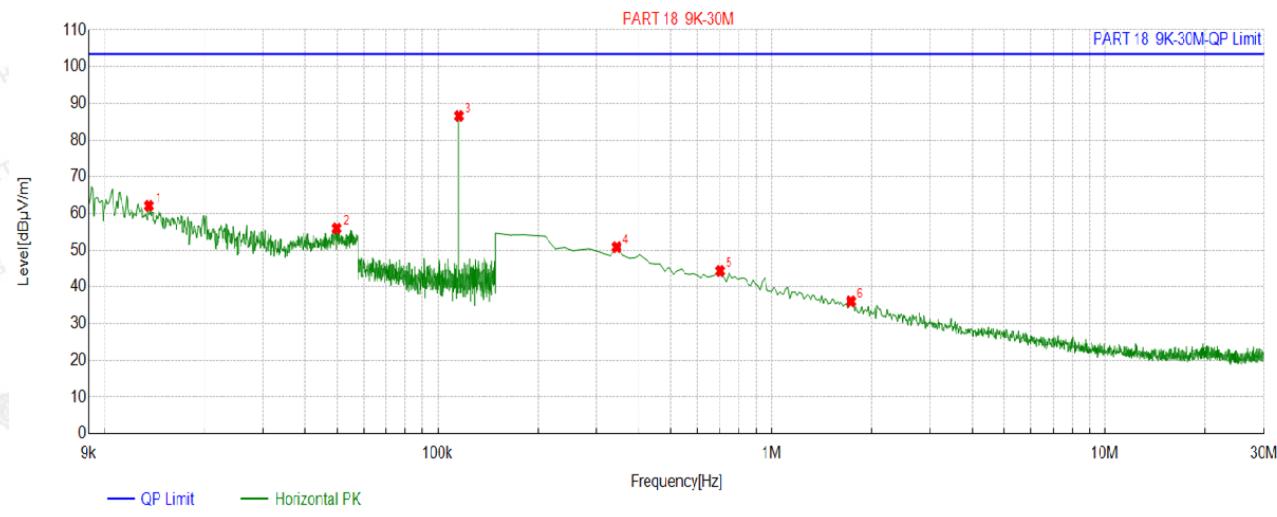


| Suspected List |             |             |                        |                      |                      |             |
|----------------|-------------|-------------|------------------------|----------------------|----------------------|-------------|
| NO.            | Freq. [MHz] | Factor [dB] | Reading [dB $\mu$ V/m] | Level [dB $\mu$ V/m] | Limit [dB $\mu$ V/m] | Margin [dB] |
| 1              | 0.0136      | 15.91       | 46.19                  | 62.10                | 103.50               | 41.40       |
| 2              | 0.0498      | 13.92       | 42.03                  | 55.95                | 103.50               | 47.55       |
| 3              | 0.1156      | 13.80       | 72.89                  | 86.69                | 103.50               | 16.81       |
| 4              | 0.3441      | 13.73       | 37.11                  | 50.84                | 103.50               | 52.66       |
| 5              | 0.7025      | 13.81       | 30.54                  | 44.35                | 103.50               | 59.15       |
| 6              | 1.7328      | 14.42       | 21.65                  | 36.07                | 103.50               | 67.43       |

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



AC Mode:

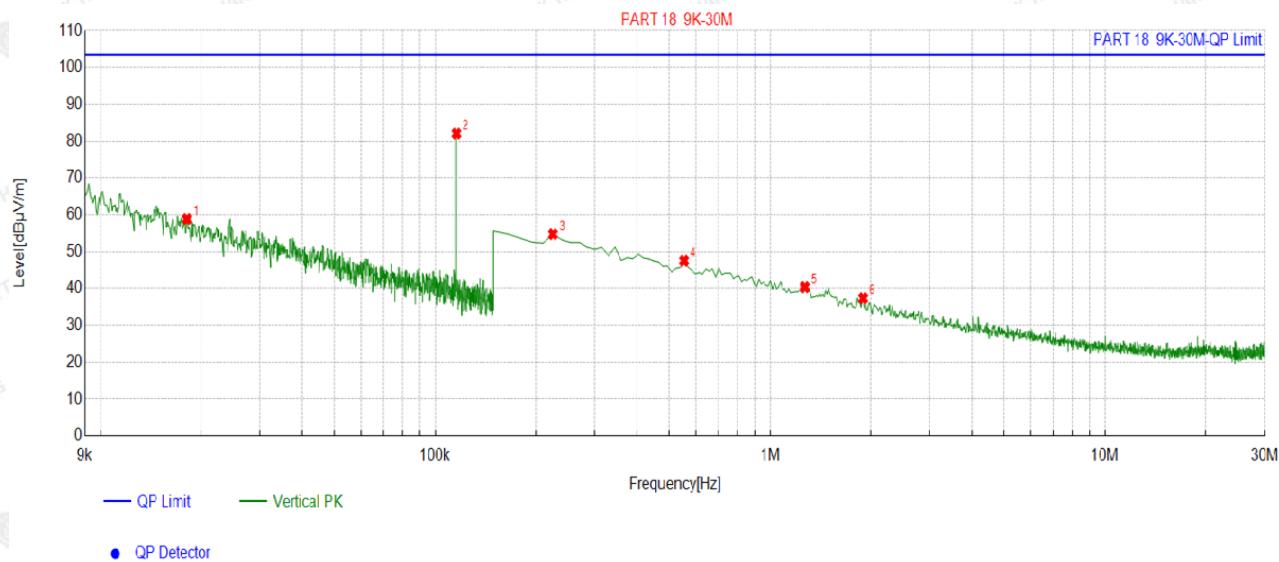

### Suspected List

| NO. | Freq. [MHz] | Factor [dB] | Reading [dB $\mu$ V/m] | Level [dB $\mu$ V/m] | Limit [dB $\mu$ V/m] | Margin [dB] |
|-----|-------------|-------------|------------------------|----------------------|----------------------|-------------|
| 1   | 0.0181      | 14.94       | 43.93                  | 58.87                | 103.50               | 44.63       |
| 2   | 0.1156      | 13.80       | 68.87                  | 82.67                | 103.50               | 20.83       |
| 3   | 0.2247      | 13.67       | 41.10                  | 54.77                | 103.50               | 48.73       |
| 4   | 0.5532      | 13.72       | 33.85                  | 47.57                | 103.50               | 55.93       |
| 5   | 1.2699      | 14.23       | 26.19                  | 40.42                | 103.50               | 63.08       |
| 6   | 1.8971      | 14.49       | 22.88                  | 37.37                | 103.50               | 66.13       |

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



For 30MHz-1GHz

Antenna polarity: H

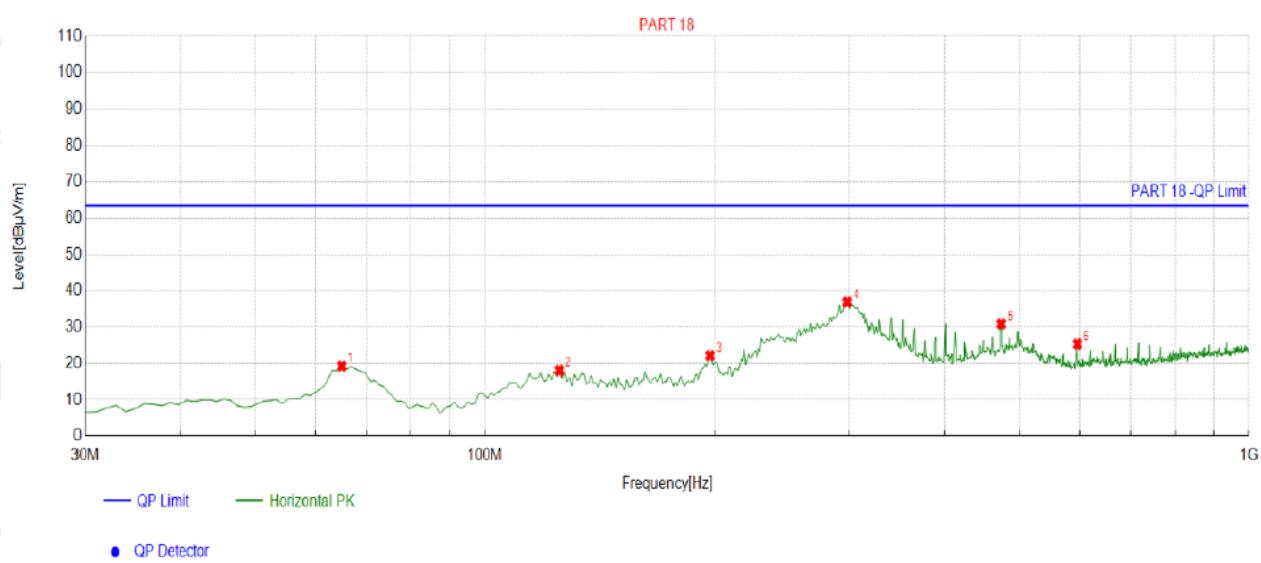


| Suspected List |             |             |                        |                      |                      |             |             |           |            |
|----------------|-------------|-------------|------------------------|----------------------|----------------------|-------------|-------------|-----------|------------|
| NO.            | Freq. [MHz] | Factor [dB] | Reading [dB $\mu$ V/m] | Level [dB $\mu$ V/m] | Limit [dB $\mu$ V/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
| 1              | 64.9550     | -14.59      | 33.86                  | 19.27                | 63.50                | 44.23       | 100         | 42        | Horizontal |
| 2              | 125.1552    | -16.10      | 34.17                  | 18.07                | 63.50                | 45.43       | 100         | 269       | Horizontal |
| 3              | 197.0070    | -16.27      | 38.44                  | 22.17                | 63.50                | 41.33       | 100         | 288       | Horizontal |
| 4              | 297.9880    | -11.99      | 48.93                  | 36.94                | 63.50                | 26.56       | 100         | 330       | Horizontal |
| 5              | 473.7337    | -7.94       | 38.80                  | 30.86                | 63.50                | 32.64       | 100         | 118       | Horizontal |
| 6              | 596.0761    | -5.21       | 30.55                  | 25.34                | 63.50                | 38.16       | 100         | 307       | Horizontal |

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor;  
 Margin = Limit – Level



## Antenna polarity: V

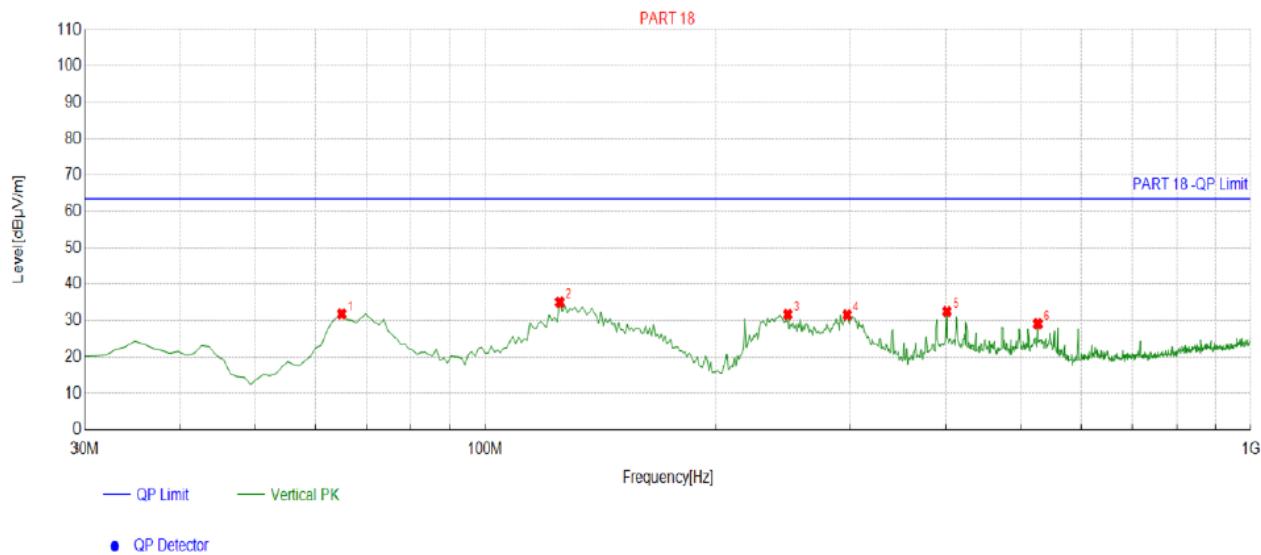

| Suspected List |             |             |                        |                      |                      |             |             |           |          |
|----------------|-------------|-------------|------------------------|----------------------|----------------------|-------------|-------------|-----------|----------|
| NO.            | Freq. [MHz] | Factor [dB] | Reading [dB $\mu$ V/m] | Level [dB $\mu$ V/m] | Limit [dB $\mu$ V/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1              | 64.9550     | -14.59      | 46.42                  | 31.83                | 63.50                | 31.67       | 100         | 343       | Vertical |
| 2              | 125.1552    | -16.10      | 51.23                  | 35.13                | 63.50                | 28.37       | 100         | 283       | Vertical |
| 3              | 248.4685    | -13.18      | 44.87                  | 31.69                | 63.50                | 31.81       | 100         | 351       | Vertical |
| 4              | 297.0170    | -12.04      | 43.61                  | 31.57                | 63.50                | 31.93       | 100         | 40        | Vertical |
| 5              | 400.9109    | -9.43       | 41.99                  | 32.56                | 63.50                | 30.94       | 100         | 36        | Vertical |
| 6              | 527.1371    | -7.02       | 36.13                  | 29.11                | 63.50                | 34.39       | 100         | 167       | Vertical |

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor;  
Margin = Limit – Level




## 5. ANTENNA REQUIREMENT

### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### Antenna Connected Construction

The antenna used in this product is a Coil Antenna, which permanently attached. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 0dBi.


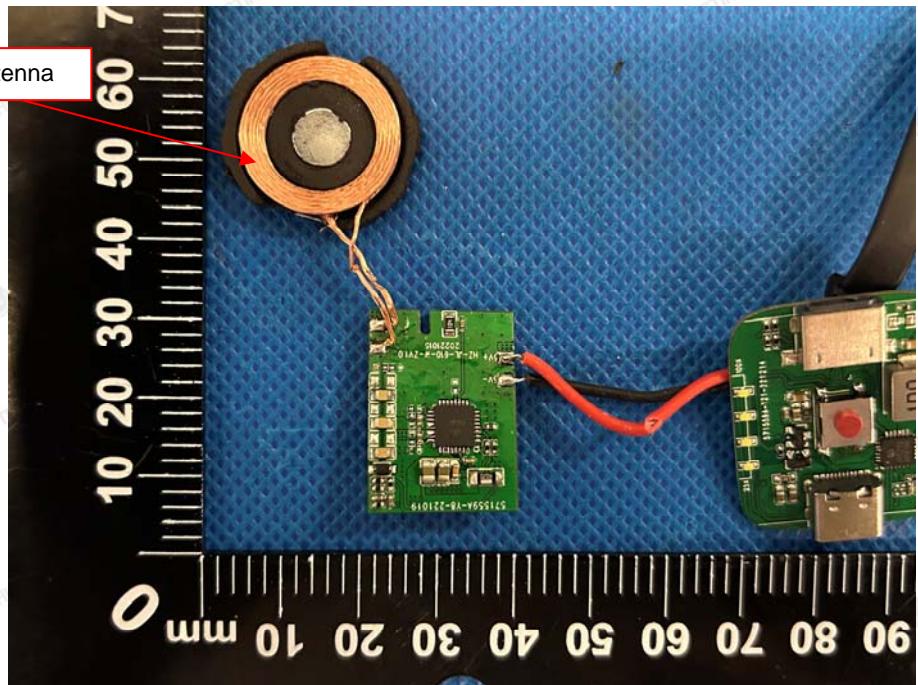




## 6. PHOTOGRAPH OF TEST

### Radiated Emission

#### DC Mode:

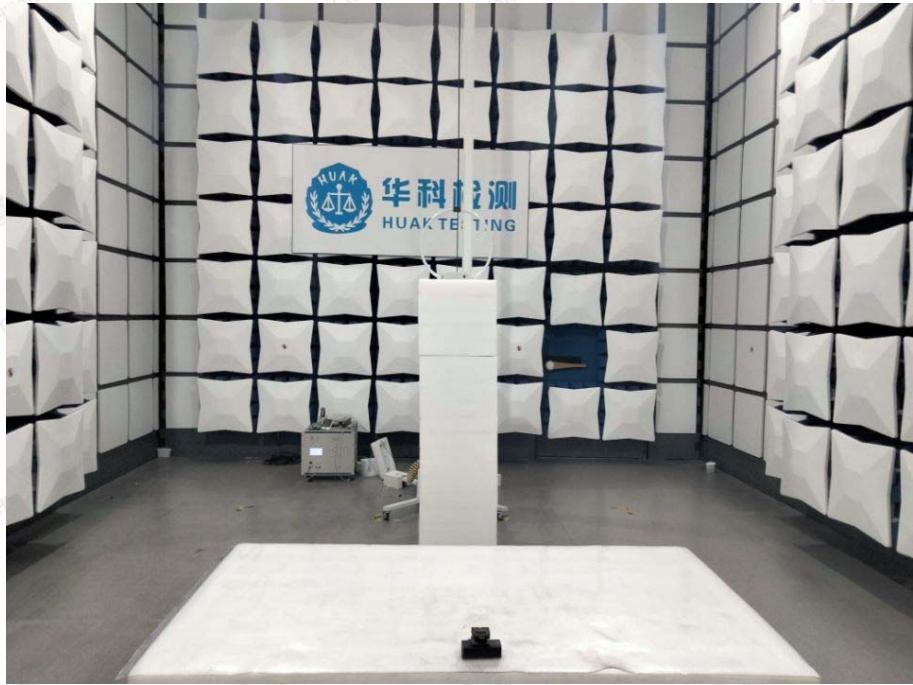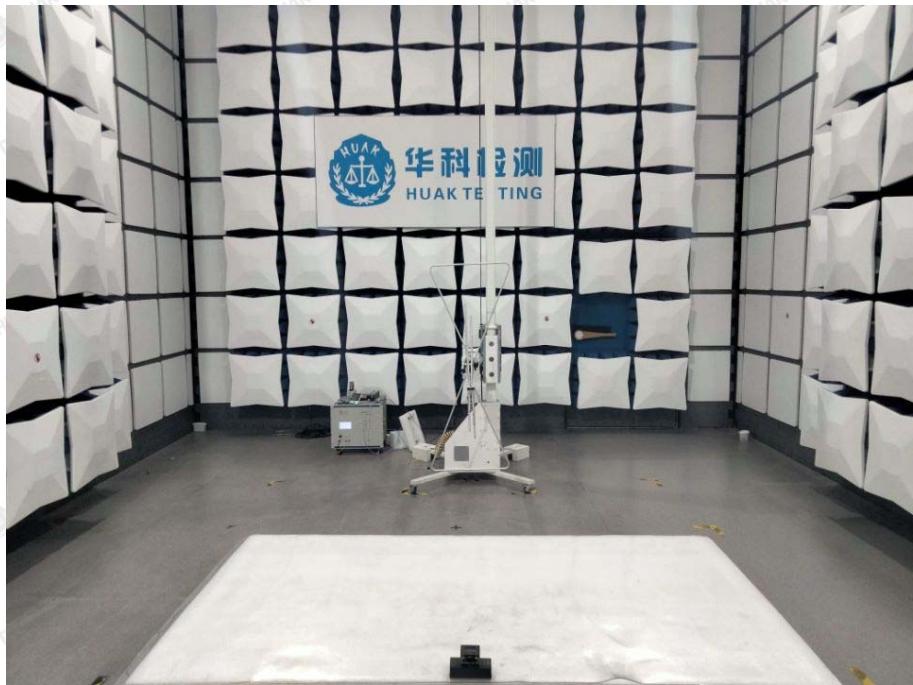



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



AC Mode:

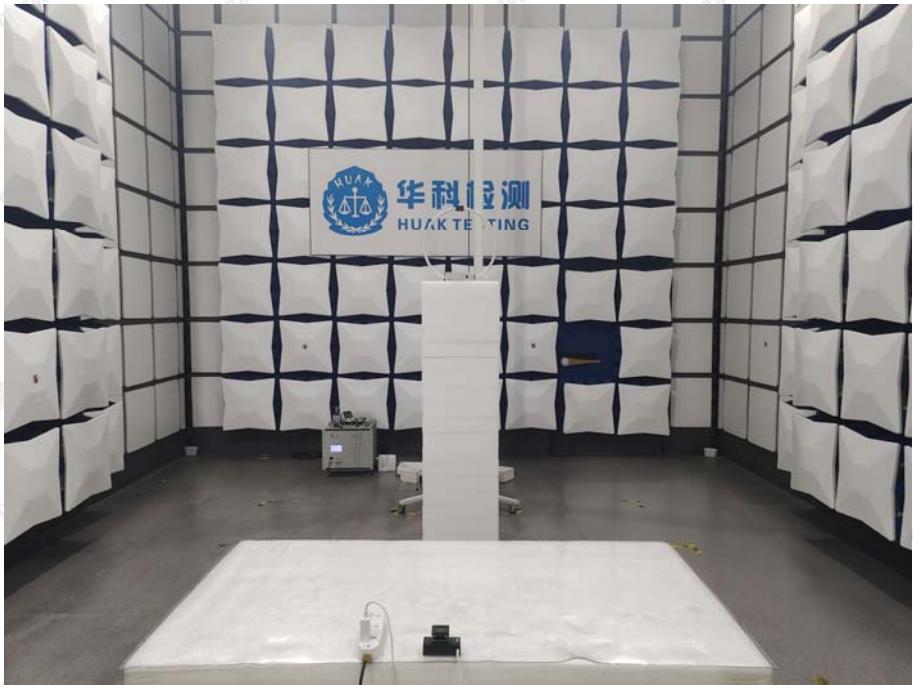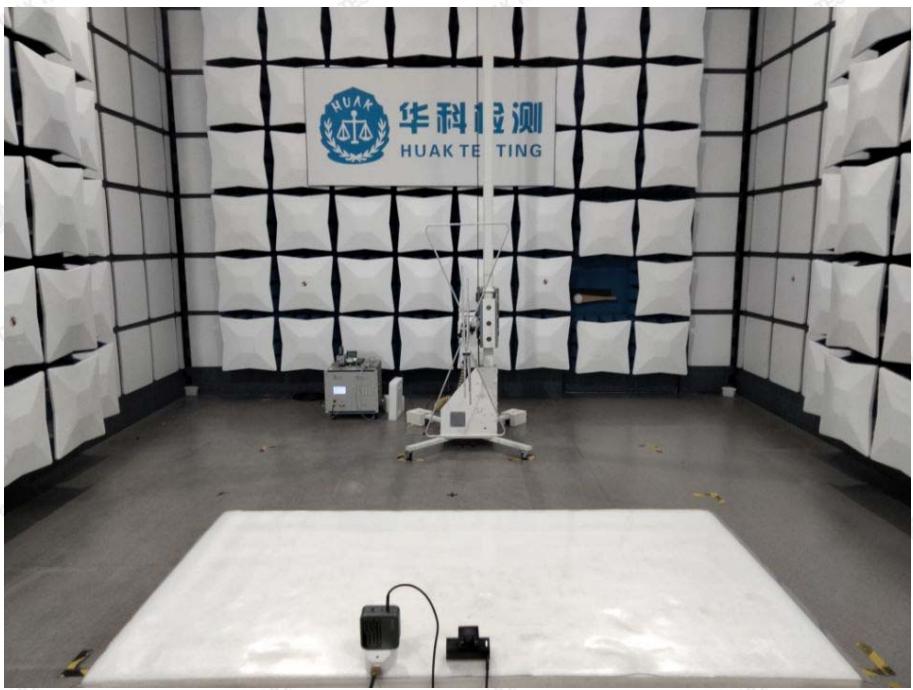

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Conducted Emissions**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 7. PHOTOS OF THE EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----