

Test Report

Report No.: MTi211125016-03E2

Date of issue: 2023-09-22

Applicant: Shenzhen Teneth Technology Co., Ltd

Product: Cutting Plotter

Model(s): X7-180GB, X7-230GB, C7-180GB, C7-230GB

FCC ID: 2A33R-X7-180GB

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

1	General Description	5
1.1	Description of EUT	5
1.2	Description of test modes	5
1.3	Environmental conditions for testing	7
1.4	Description of support units	7
2	Measurement uncertainty	8
3	Summary of Test Result.....	9
4	Test Laboratory	10
5	Equipment List	11
6	Test Result	14
6.1	Antenna requirement	14
6.2	AC power line conducted emissions.....	15
6.3	Radiated spurious emission	20
6.4	DTS bandwidth	29
6.5	Maximum conducted output power	30
6.6	Power spectral density	31
6.7	Band edge (Conducted)	32
6.8	Conducted spurious emissions	33
6.9	Duty Cycle	34
	Appendix A: DTS Bandwidth	35
	Appendix B: Maximum conducted output power.....	38
	Appendix C: Maximum power spectral density.....	40
	Appendix D: Band edge measurements	43
	Appendix E: Conducted Spurious Emission	44
	Appendix F: Duty Cycle	48
	Photographs of the Test Setup.....	50
	Photographs of the EUT.....	51


Test Result Certification	
Applicant:	Shenzhen Teneth Technology Co., Ltd
Address:	No.161, Pinghu Street, Pinghu Town, Longgang District, Shenzhen City, Guangdong Province, China.
Manufacturer:	Shenzhen Teneth Technology Co., Ltd
Address:	No.161, Pinghu Street, Pinghu Town, Longgang District, Shenzhen City, Guangdong Province, China.
Product description	
Product name:	Cutting Plotter
Trademark:	TENETH
Model name:	X7-180GB
Serial Model:	X7-230GB, C7-180GB, C7-230GB
Standards:	FCC 47 CFR Part 15 Subpart C
Test method:	ANSI C63.10-2013 KDB 558074 D01 D15.247 Meas Guidance v05r02
Date of Test	
Date of test:	2021-01-20 ~ 2022-07-25
Test result:	Pass

Test Engineer :



(Yanice Xie)

Reviewed By :



(Leon Chen)

Approved By :



(Tom Xue)

1 General Description

1.1 Description of EUT

Product name:	Cutting Plotter
Model name:	X7-180GB
Series Model:	X7-230GB, C7-180GB, C7-230GB
Model difference:	All the models are the same circuit and module, except the model name.
Electrical rating:	Input: DC 24V 1.75A
Hardware version:	VER161
Software version:	VER306
Accessories:	1. Adapter: Model: GM42-240175-D Input: 100-240V~ 50/60Hz 1.5A Output: 24V=1.75A
Test sample(s) number:	MTi211125016-03S1001
RF specification:	
Bluetooth version:	V4.2
Operation frequency:	2402 MHz ~ 2480 MHz
Modulation type:	GFSK
Antenna(s) information:	Antenna type: PCB antenna Antenna gain: -0.1 dBi
Max. peak conducted output power:	-1.42 dBm

1.2 Description of test modes

1.2.1 Operation channel list

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note: The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Mode	Test Software	fcc_test_tool v1.6		
	Channel	2402MHz	2440MHz	2480MHz
BLE_1M	Power setting	Default	Default	Default

1.3 Environmental conditions for testing

Environment of test site:

Temperature:	15°C~35°C
Humidity:	20 % RH ~ 75 % RH

1.4 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
/	/	/	/
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Measurement uncertainty
AC power line conducted emission (9 kHz~30 MHz)	± 2.5 dB
Occupied Bandwidth	± 3 %
Conducted RF output power	± 0.16 dB
Conducted spurious emissions	± 0.21 dB
Radiated emission (9 kHz ~ 30 MHz)	± 4.0 dB
Radiated emission (30 MHz~1 GHz)	± 4.2 dB
Radiated emission (above 1 GHz)	± 4.3 dB
Power spectral density	± 0.16 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§ 15.203	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	Pass
3	§ 15.247(d), 15.209, 15.205	Radiated spurious emissions	Pass
4	§ 15.247(a)(2)	DTS bandwidth	Pass
5	§ 15.247(b)(3)	Maximum conducted output power	Pass
6	§ 15.247(e)	Power Spectral Density	Pass
7	§ 15.247(d)	Conducted emission at the band edge	Pass
8	§ 15.247(d)	Conducted spurious emissions	Pass
9	/	Duty Cycle	Pass

4 Test Laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

5 Equipment List

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E043	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2020/05/05	2021/05/04
MTI-E043	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2021/05/05	2022/05/04
MTI-E043	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2022/05/05	2023/05/04
MTI-E044	TRILOG Broadband Antenna	schwarbeck	VULB 9163	9163-1338	2019/05/30	2021/05/29
MTI-E044	TRILOG Broadband Antenna	schwarbeck	VULB 9163	9163-1338	2021/05/30	2023/05/29
MTI-E047	Amplifier	Hewlett-Packard	8447F	3113A06150	2020/05/05	2021/05/04
MTI-E047	Amplifier	Hewlett-Packard	8447F	3113A06150	2021/05/05	2022/05/04
MTI-E047	Amplifier	Hewlett-Packard	8447F	3113A06150	2022/05/05	2023/05/04
MTI-E089	ESG Vector Signal Generator	Agilent	N5182A	MY49060455	2020/05/05	2021/05/04
MTI-E089	ESG Vector Signal Generator	Agilent	N5182A	MY49060455	2021/05/05	2022/05/04
MTI-E089	ESG Vector Signal Generator	Agilent	N5182A	MY49060455	2022/05/05	2023/05/04
MTI-E058	ESG Series Analog Signal Generator	Agilent	E4421B	GB40051240	2020/05/05	2021/05/04
MTI-E058	ESG Series Analog Signal Generator	Agilent	E4421B	GB40051240	2021/05/05	2022/05/04
MTI-E058	ESG Series Analog Signal Generator	Agilent	E4421B	GB40051240	2022/05/05	2023/05/04
MTI-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2020/05/05	2021/05/04
MTI-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2021/05/05	2022/05/04
MTI-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2022/05/05	2023/05/04
MTI-E066	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2020/05/05	2021/05/04
MTI-E066	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2021/05/05	2022/05/04
MTI-E066	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2022/05/05	2023/05/04
MTI-E078	Synthesized Sweeper	Agilent	83752A	3610A01957	2020/05/05	2021/05/04
MTI-E078	Synthesized Sweeper	Agilent	83752A	3610A01957	2021/05/05	2022/05/04
MTI-E078	Synthesized Sweeper	Agilent	83752A	3610A01957	2022/05/05	2023/05/04
MTI-E079	DC Power Supply	Agilent	E3632A	MY40027695	2020/05/05	2021/05/04
MTI-E079	DC Power Supply	Agilent	E3632A	MY40027695	2021/05/05	2022/05/04

MTI-E079	DC Power Supply	Agilent	E3632A	MY40027 695	2022/05/05	2023/05/04
MTI-E045	Double Ridged Broadband Horn Antenna	schwarab eck	BBHA 9120 D	9120D-22 78	2019/05/30	2021/05/29
MTI-E045	Double Ridged Broadband Horn Antenna	schwarab eck	BBHA 9120 D	9120D-22 78	2021/05/30	2023/05/29
MTI-E021	EMI Test Receiver	Rohde&sc hwarz	ESCS30	100210	2020/05/05	2021/05/04
MTI-E021	EMI Test Receiver	Rohde&sc hwarz	ESCS30	100210	2021/05/05	2022/05/04
MTI-E021	EMI Test Receiver	Rohde&sc hwarz	ESCS30	100210	2022/05/05	2023/05/04
MTI-E022	Pulse Limiter	Schwarzb eck	VSTD 9561-F	00679	2020/05/05	2021/05/04
MTI-E022	Pulse Limiter	Schwarzb eck	VSTD 9561-F	00679	2021/05/05	2022/05/04
MTI-E022	Pulse Limiter	Schwarzb eck	VSTD 9561-F	00679	2022/05/05	2023/05/04
MTI-E023	Artificial mains network	Schwarzb eck	NSLK 8127	NSLK 8127 #841	2020/05/05	2021/05/04
MTI-E023	Artificial mains network	Schwarzb eck	NSLK 8127	NSLK 8127 #841	2021/05/05	2022/05/04
MTI-E023	Artificial mains network	Schwarzb eck	NSLK 8127	NSLK 8127 #841	2022/05/05	2023/05/04
MTI-E046	Active Loop Antenna	Schwarzb eck	FMZB 1519 B	00044	2019/05/30	2021/05/29
MTI-E046	Active Loop Antenna	Schwarzb eck	FMZB 1519 B	00044	2021/05/30	2023/05/29
MTI-E048	Amplifier	Agilent	8449B	3008A024 00	2020/05/05	2021/05/04
MTI-E048	Amplifier	Agilent	8449B	3008A024 00	2021/05/05	2022/05/04
MTI-E048	Amplifier	Agilent	8449B	3008A024 00	2022/05/05	2023/05/04
MTI-E072	Thermometer Clock Humidity Monitor	-	HTC-1	/	2020/05/05	2021/05/04
MTI-E072	Thermometer Clock Humidity Monitor	-	HTC-1	/	2021/05/05	2022/05/04
MTI-E072	Thermometer Clock Humidity Monitor	-	HTC-1	/	2022/05/05	2023/05/04
Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).						

Note: the calibration interval of the test equipment is 12 or 24 months and the calibrations are traceable to international system unit(SI)

6 Test Result

6.1 Antenna requirement

§ 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Description of the antenna of EUT

The antenna of the EUT is permanently attached.

Conclusion:

The EUT complies with the requirement of § 15.203.

6.2 AC power line conducted emissions

6.2.1 Limits


Frequency (MHz)	Detector type / Bandwidth	Limit-Quasi-peak dB μ V	Limit-Average dB μ V
0.15 -0.5	Average / 9 kHz	66 to 56	56 to 46
0.5 -5		56	46
5 -30		60	50

Note 1: the limit decreases with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz.

6.2.2 Test Procedures

- Test method: ANSI C63.10-2013 Section 6.2.
- The EUT is connected to the main power through a line impedance stabilization network (LISN). All support equipment is powered from additional LISN(s).
- Emissions were measured on each current carrying line of the EUT using an EMI test receiver connected to the LISN powering the EUT.
- The test receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes described in Item 1.2.
- The test data of the worst-case condition(s) was recorded.

6.2.3 Test setup

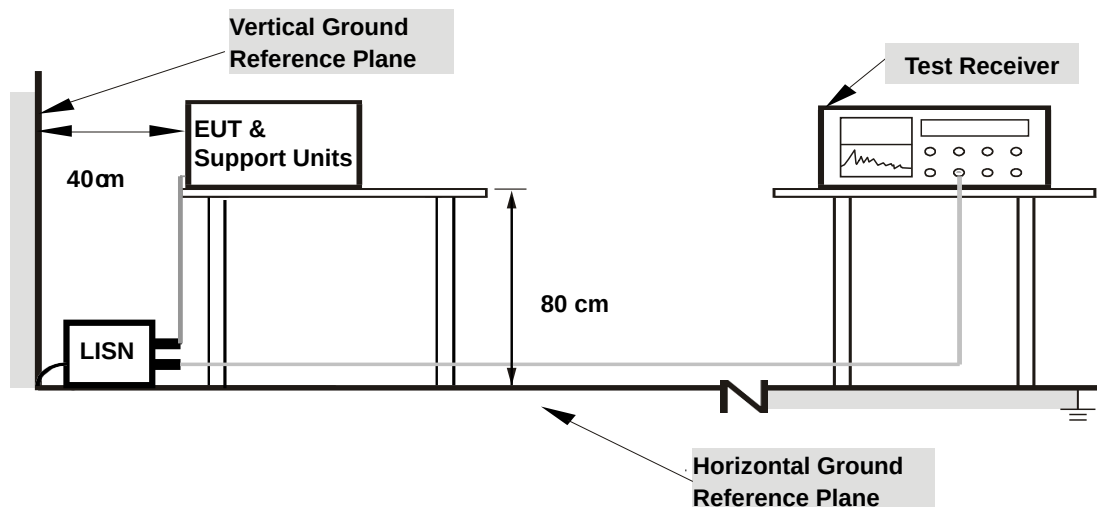

For the actual test configuration, please refer to the related item – Photographs of the test setup.

6.2.4 Test Result

Notes:


All modes of operation of the EUT were investigated, and only the worst-case results are reported.

Calculation formula:

Measurement (dB μ V) = Reading Level (dB μ V) + Correct Factor (dB)


Over (dB) = Measurement (dB μ V) – Limit (dB μ V)

Test mode:	TX	Phase:	L
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 1

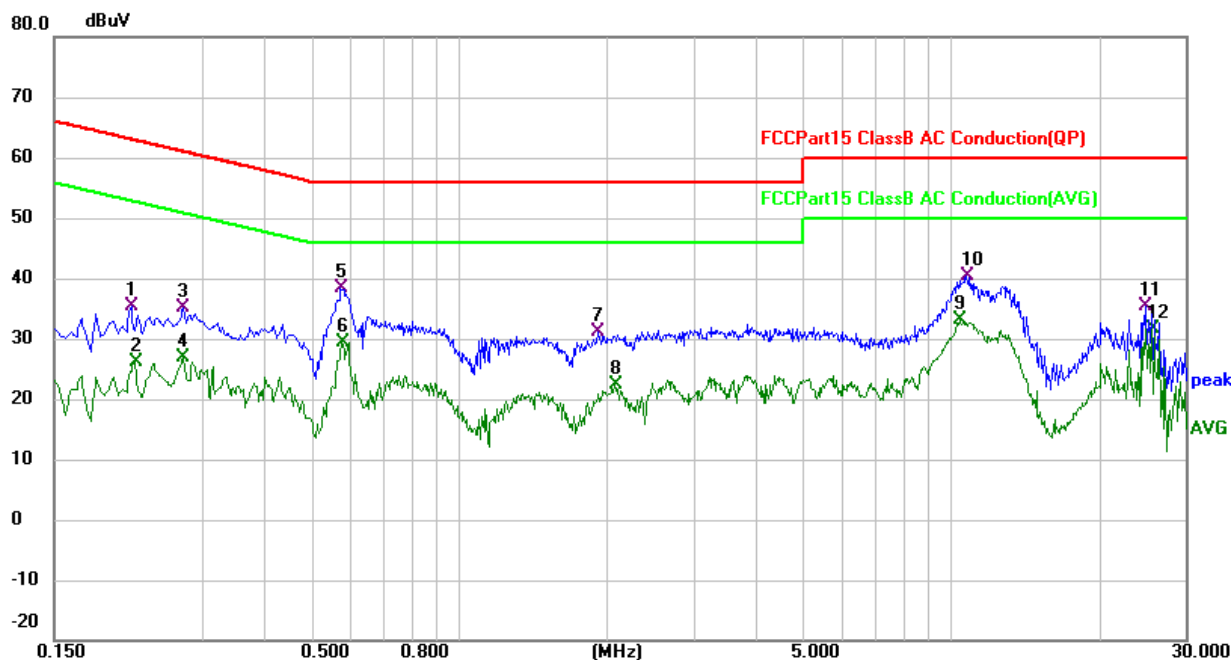


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2140	25.14	10.16	35.30	63.05	-27.75	QP
2		0.2180	15.90	10.16	26.06	52.89	-26.83	AVG
3		0.2740	24.98	10.15	35.13	61.00	-25.87	QP
4		0.2740	16.73	10.15	26.88	51.00	-24.12	AVG
5		0.5740	28.12	10.22	38.34	56.00	-17.66	QP
6	*	0.5780	19.23	10.21	29.44	46.00	-16.56	AVG
7		1.9180	20.72	10.29	31.01	56.00	-24.99	QP
8		2.0660	12.03	10.31	22.34	46.00	-23.66	AVG
9		10.4020	22.48	10.75	33.23	50.00	-16.77	AVG
10		10.7820	29.53	10.74	40.27	60.00	-19.73	QP
11		24.8980	24.66	10.69	35.35	60.00	-24.65	QP
12		25.6940	21.03	10.70	31.73	50.00	-18.27	AVG

Test mode:	TX	Phase:	N
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 1

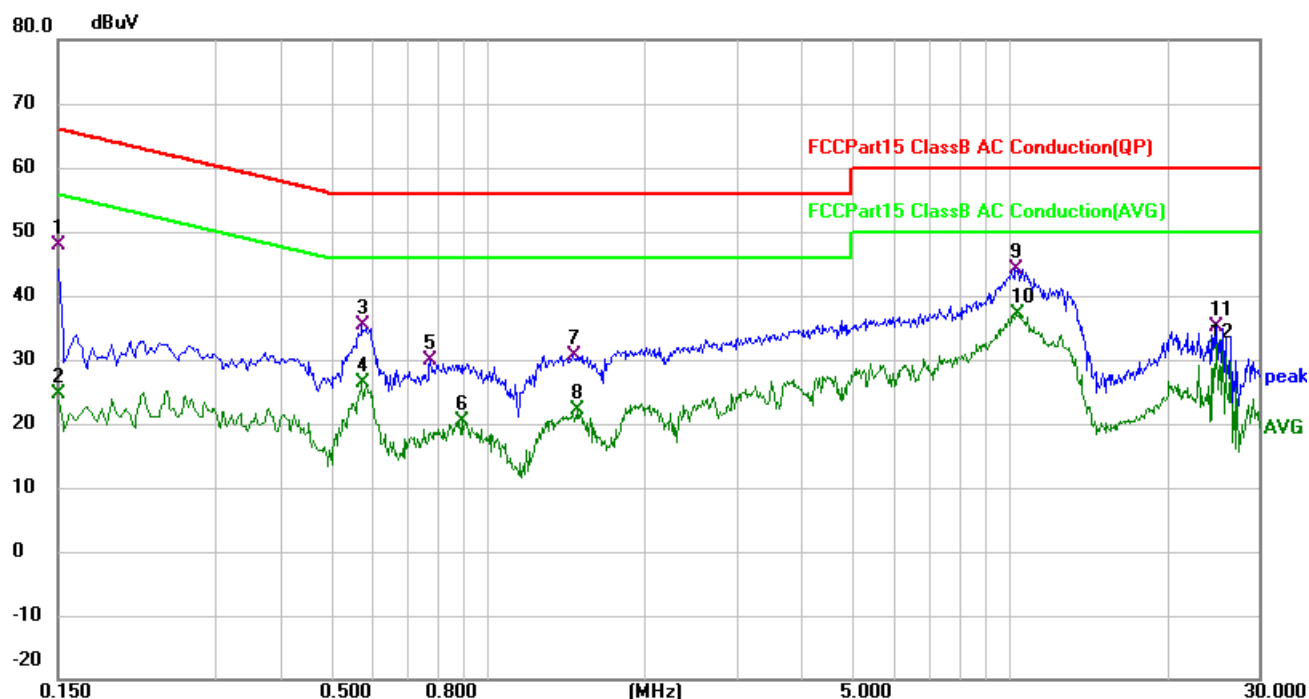


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	37.67	10.14	47.81	66.00	-18.19	QP
2		0.1500	14.58	10.14	24.72	56.00	-31.28	AVG
3		0.5740	25.18	10.08	35.26	56.00	-20.74	QP
4		0.5740	16.36	10.08	26.44	46.00	-19.56	AVG
5		0.7780	19.72	10.11	29.83	56.00	-26.17	QP
6		0.8940	10.41	10.08	20.49	46.00	-25.51	AVG
7		1.4620	20.54	10.20	30.74	56.00	-25.26	QP
8		1.4819	11.96	10.21	22.17	46.00	-23.83	AVG
9		10.2540	33.42	10.72	44.14	60.00	-15.86	QP
10	*	10.3020	26.30	10.72	37.02	50.00	-12.98	AVG
11		24.8980	24.46	10.67	35.13	60.00	-24.87	QP
12		24.8980	21.05	10.67	31.72	50.00	-18.28	AVG

Test mode:	TX	Phase:	L
Power supply:	Power by AC/DC adapter (AC 240V/60Hz)	Test site:	CE chamber 1

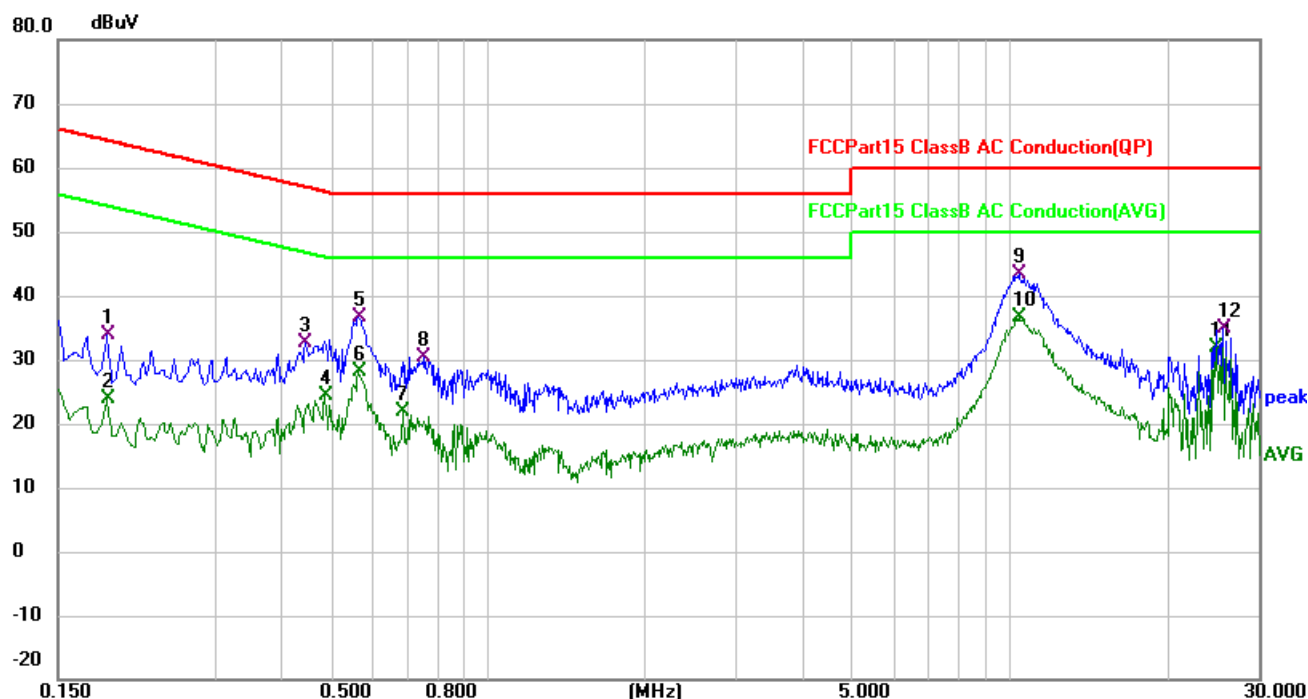

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1860	23.80	10.17	33.97	64.21	-30.24	QP
2		0.1860	13.65	10.17	23.82	54.21	-30.39	AVG
3		0.4460	22.34	10.21	32.55	56.95	-24.40	QP
4		0.4860	14.03	10.24	24.27	46.24	-21.97	AVG
5		0.5660	26.32	10.22	36.54	56.00	-19.46	QP
6		0.5660	17.79	10.22	28.01	46.00	-17.99	AVG
7		0.6860	11.61	10.17	21.78	46.00	-24.22	AVG
8		0.7580	20.20	10.15	30.35	56.00	-25.65	QP
9		10.4140	32.53	10.75	43.28	60.00	-16.72	QP
10	*	10.4140	25.88	10.75	36.63	50.00	-13.37	AVG
11		24.8980	21.15	10.69	31.84	50.00	-18.16	AVG
12		25.6940	24.17	10.70	34.87	60.00	-25.13	QP

Test mode:	TX	Phase:	N
Power supply:	Power by AC/DC adapter (AC 240V/60Hz)	Test site:	CE chamber 1

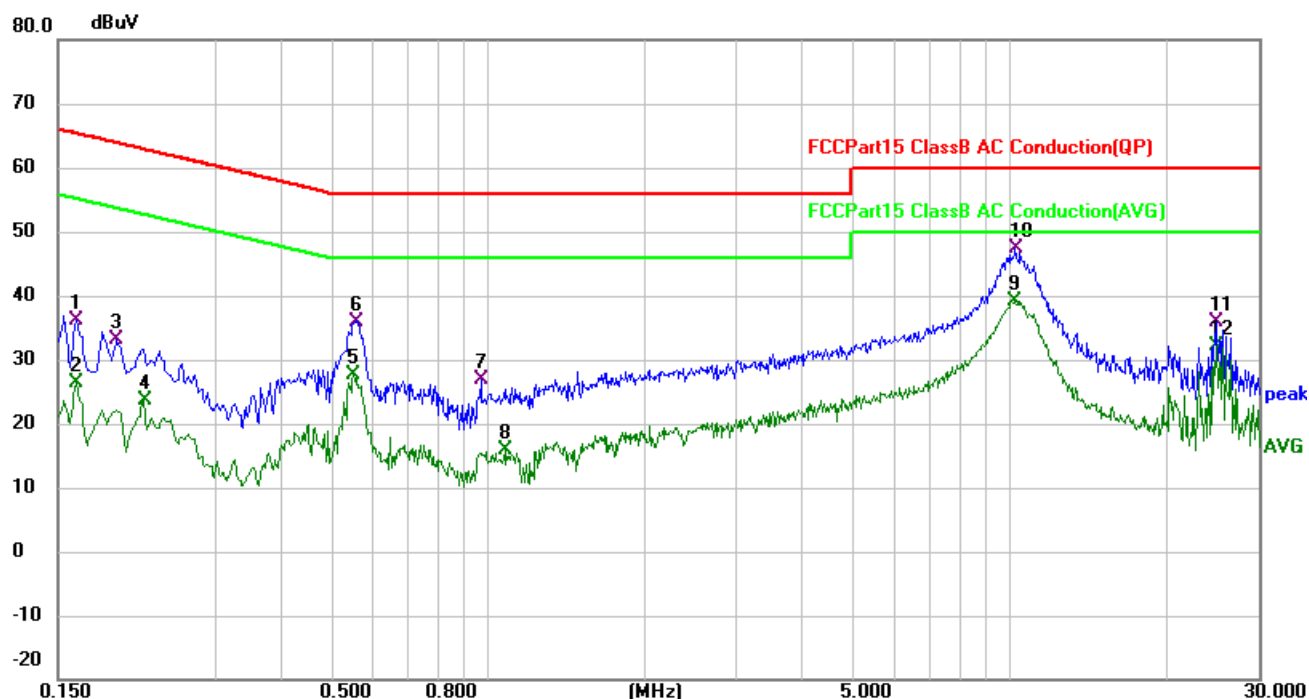

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1620	25.94	10.13	36.07	65.36	-29.29	QP
2		0.1620	16.17	10.13	26.30	55.36	-29.06	AVG
3		0.1940	23.00	10.09	33.09	63.86	-30.77	QP
4		0.2180	13.44	10.07	23.51	52.89	-29.38	AVG
5		0.5540	17.51	10.07	27.58	46.00	-18.42	AVG
6		0.5620	25.93	10.07	36.00	56.00	-20.00	QP
7		0.9700	16.74	10.07	26.81	56.00	-29.19	QP
8		1.0780	5.69	10.09	15.78	46.00	-30.22	AVG
9	*	10.2100	28.40	10.72	39.12	50.00	-10.88	AVG
10		10.2780	36.69	10.72	47.41	60.00	-12.59	QP
11		24.8980	25.26	10.67	35.93	60.00	-24.07	QP
12		24.8980	21.49	10.67	32.16	50.00	-17.84	AVG

6.3 Radiated spurious emission

6.3.1 Limits

§ 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

§ 15.209 Radiated emission limits at restricted bands:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note 1: the tighter limit applies at the band edges.

Note 2: the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

§ 15.35 (b) requirements:

When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

According to ANSI C63.10-2013, the tests shall be performed in the frequency range shown in the following table:

Frequency range of measurements for unlicensed wireless device


Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Frequency range of measurements for unlicensed wireless device with digital device


Highest frequency generated or used in the device or on which the device operates or tunes	Upper frequency range of measurement
Below 1.705 MHz	30 MHz
1.705 MHz to 108 MHz	1000 MHz
108 MHz to 500 MHz	2000 MHz
500 MHz to 1000 MHz	5000 MHz
Above 1000 MHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower

6.3.2 Test setup


Below 30MHz:

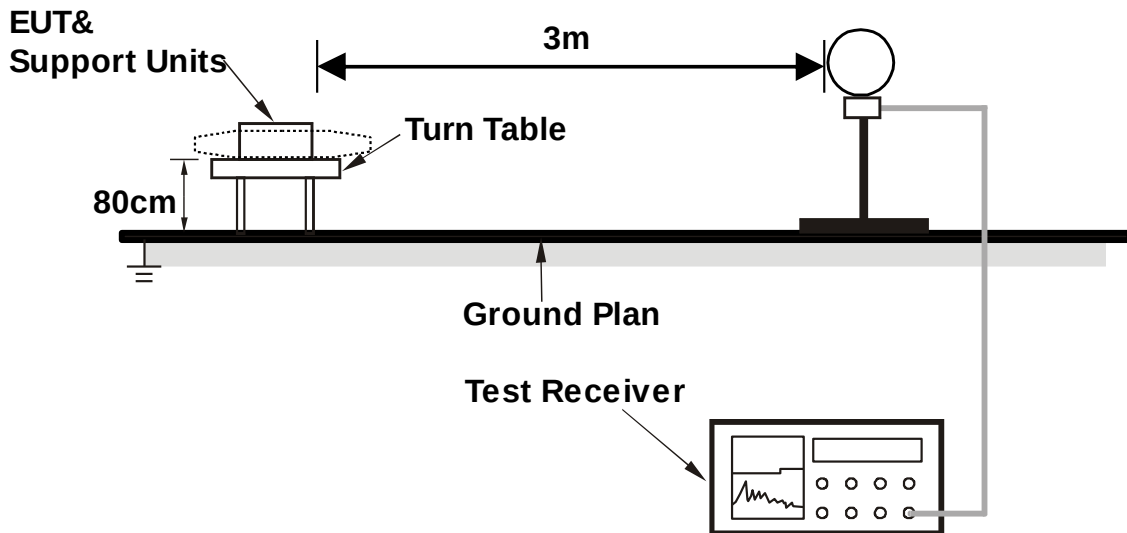

30MHz~1GHz:

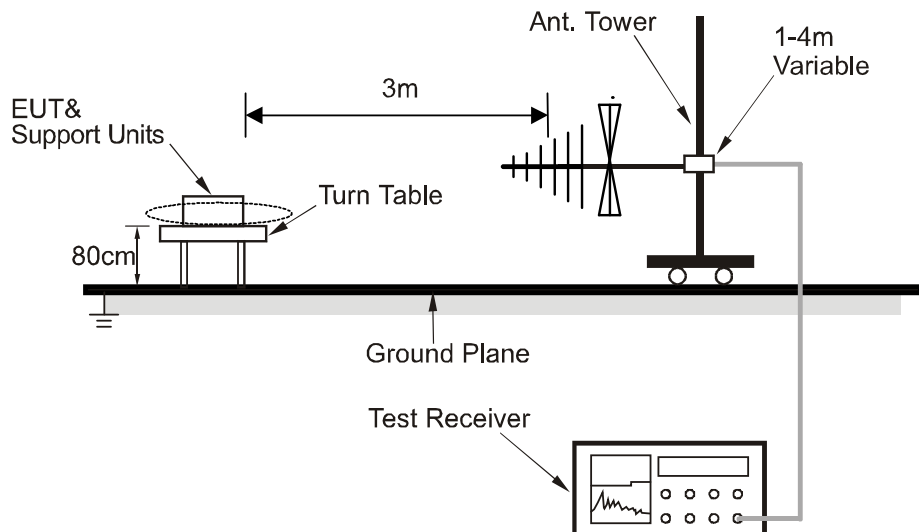

Above 1GHz:

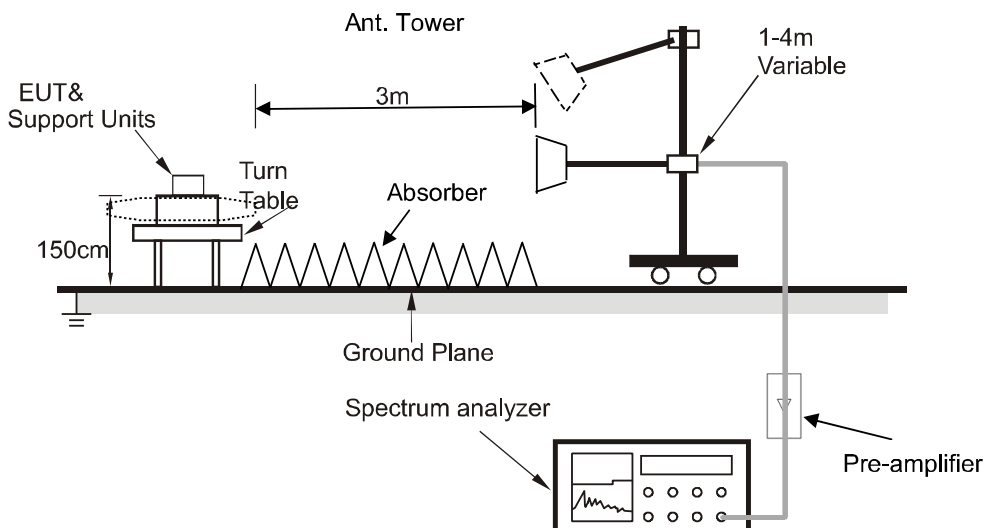

For the actual test configuration, please refer to the related item – Photographs of the test setup.

6.3.3 Test procedure

- a) Test method: ANSI C63.10-2013 Section 6.3, 6.4, 6.5, 6.6, 11.11, 11.12, 11.13.
- b) The EUT is placed on an on-conducting table 0.8 meters above the ground plane for measurement below 1GHz, 1.5 meters above the ground plane for measurement above 1GHz.
- c) Emission blew 18 GHz were measured at a 3 meters test distance, above 18 GHz were measured at 1-meter test distance with the application of a distance correction factor
- d) The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Test instrument setup

Frequency	Test receiver / Spectrum analyzer setting
9 kHz ~ 150 kHz	Quasi Peak / RBW: 200 Hz
150 kHz ~ 30 MHz	Quasi Peak / RBW: 9 kHz
30 MHz ~ 1 GHz	Quasi Peak / RBW: 120 kHz
Above 1 GHz	Peak / RBW: 1 MHz, VBW: 3MHz, Peak detector AVG / RBW: 1 MHz, VBW: 3MHz, Average detector

6.3.4 Test results

Notes:

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

All modes of operation of the EUT were investigated, and only the worst-case results are reported. There were no emissions found below 30MHz within 20dB of the limit.


Calculation formula:

Measurement (dB μ V/m) = Reading Level (dB μ V) + Correct Factor (dB/m)

Over (dB) = Measurement (dB μ V/m) – Limit (dB μ V/m)

Radiated emissions between 30MHz – 1GHz


Test mode:	BLE 1Mbps – 2480 MHz TX mode	Polarization:	Horizontal
Power supply:	DC 24V	Test site:	RE chamber 2

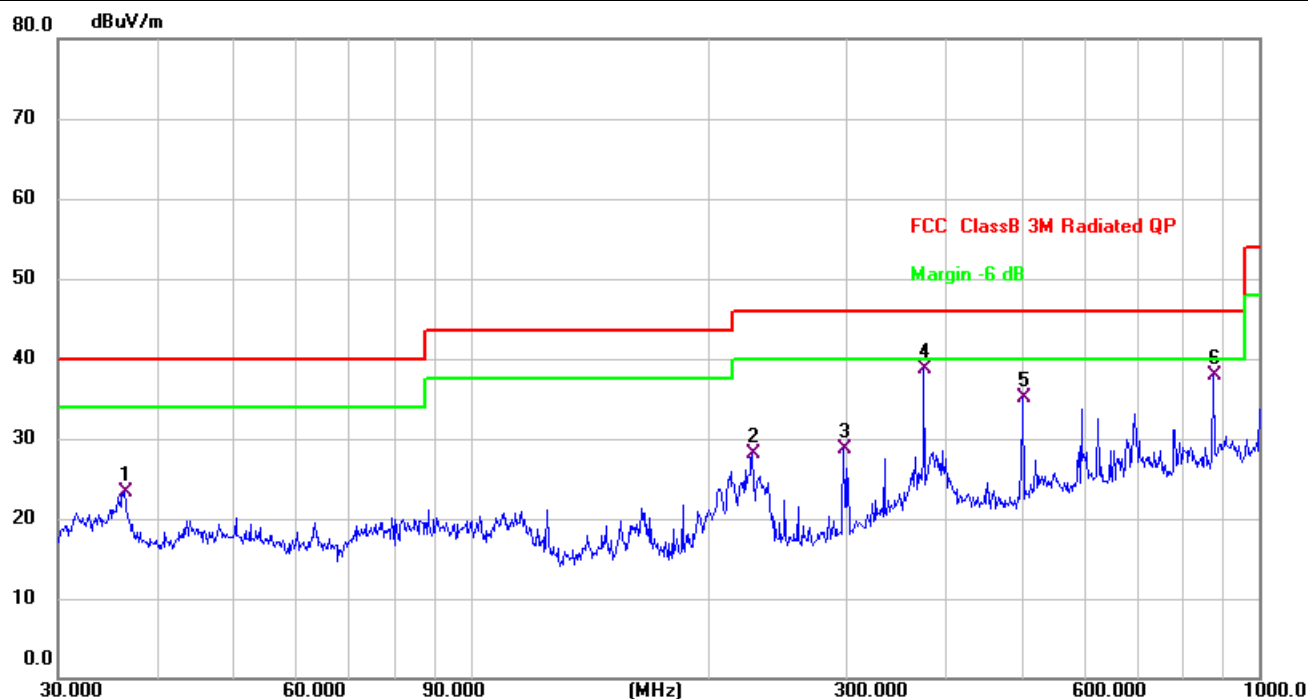

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		36.3814	33.21	-9.94	23.27	40.00	-16.73	QP
2		227.6906	37.00	-8.88	28.12	46.00	-17.88	QP
3		297.2241	36.05	-7.32	28.73	46.00	-17.27	QP
4	*	375.9385	44.25	-5.55	38.70	46.00	-7.30	QP
5		501.1790	38.26	-3.19	35.07	46.00	-10.93	QP
6		875.2470	34.40	3.47	37.87	46.00	-8.13	QP

Radiated emissions between 30MHz – 1GHz

Test mode:	BLE 1Mbps – 2480 MHz TX mode	Polarization:	Vertical
Power supply:	DC 24V	Test site:	RE chamber 2

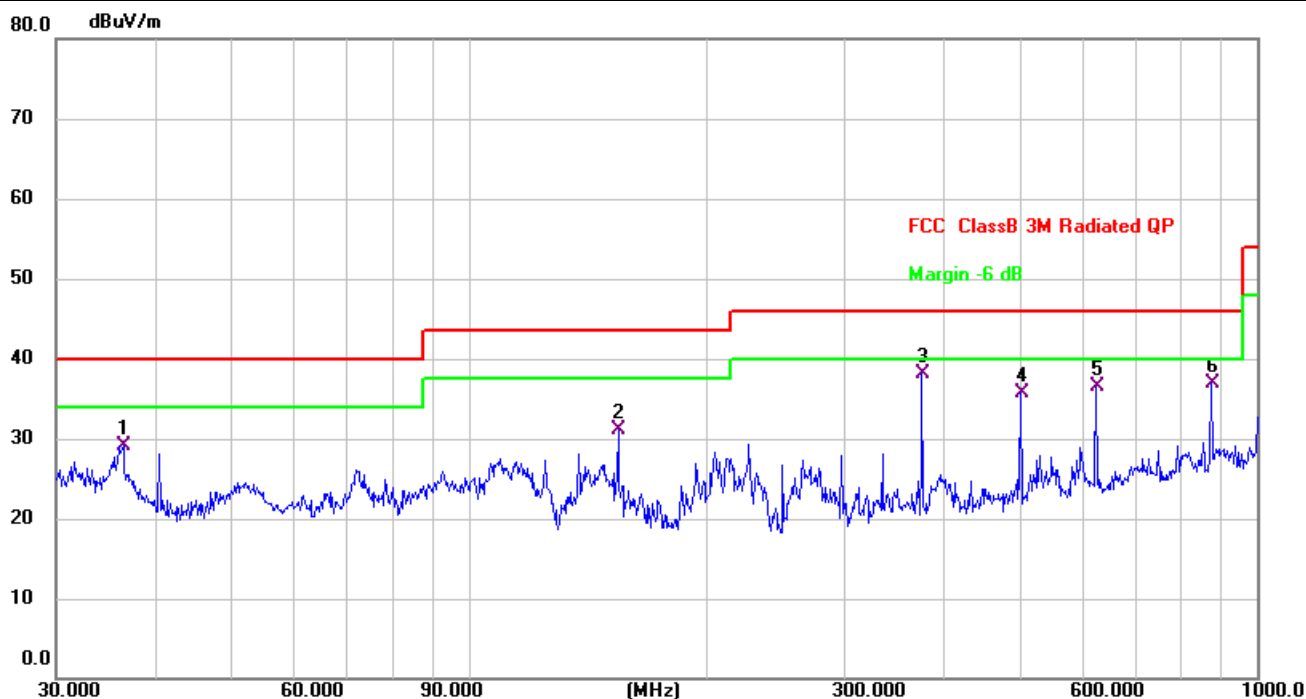

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		38.5092	39.05	-9.91	29.14	40.00	-10.86	QP
2		154.8204	43.84	-12.79	31.05	43.50	-12.45	QP
3	*	375.9385	43.62	-5.55	38.07	46.00	-7.93	QP
4		501.1790	38.86	-3.19	35.67	46.00	-10.33	QP
5		625.0780	38.73	-0.31	38.42	46.00	-9.58	QP
6		875.2470	33.48	3.47	36.95	46.00	-9.05	QP

Radiated emissions 1 GHz ~ 25 GHz

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
BLE 1Mbps - 2402 MHz TX mode							
4804	49.67	1.52	51.19	74.00	-22.81	Peak	V
4804	35.35	1.52	36.87	54.00	-17.13	AVG	V
7206	49.60	5.46	55.06	74.00	-18.94	Peak	V
7206	35.53	5.46	40.99	54.00	-13.01	AVG	V
9608	49.89	6.33	56.22	74.00	-17.78	Peak	V
9608	35.38	6.33	41.71	54.00	-12.29	AVG	V
4804	49.51	1.52	51.03	74.00	-22.97	Peak	H
4804	35.68	1.52	37.20	54.00	-16.80	AVG	H
7206	49.58	5.46	55.04	74.00	-18.96	Peak	H
7206	35.30	5.46	40.76	54.00	-13.24	AVG	H
9608	49.54	6.33	55.87	74.00	-18.13	Peak	H
9608	35.49	6.33	41.82	54.00	-12.18	AVG	H
BLE 1Mbps - 2440 MHz TX mode							
4880	41.42	1.68	43.10	74.00	-30.90	Peak	V
4880	29.35	1.68	31.03	54.00	-22.97	AVG	V
7320	41.12	5.45	46.57	74.00	-27.43	Peak	V
7320	29.13	5.45	34.58	54.00	-19.42	AVG	V
9760	41.29	6.37	47.66	74.00	-26.34	Peak	V
9760	29.16	6.37	35.53	54.00	-18.47	AVG	V
4880	41.23	1.68	42.91	74.00	-31.09	Peak	H
4880	29.39	1.68	31.07	54.00	-22.93	AVG	H
7320	41.22	5.45	46.67	74.00	-27.33	Peak	H
7320	29.25	5.45	34.70	54.00	-19.30	AVG	H
9760	41.14	6.37	47.51	74.00	-26.49	Peak	H
9760	29.50	6.37	35.87	54.00	-18.13	AVG	H

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
BLE 1Mbps - 2480 MHz TX mode							
4960	41.58	1.83	43.41	74.00	-30.59	Peak	V
4960	29.49	1.83	31.32	54.00	-22.68	AVG	V
7440	41.21	5.43	46.64	74.00	-27.36	Peak	V
7440	29.32	5.43	34.75	54.00	-19.25	AVG	V
9920	41.19	6.41	47.60	74.00	-26.40	Peak	V
9920	29.27	6.41	35.68	54.00	-18.32	AVG	V
4960	41.46	1.83	43.29	74.00	-30.71	Peak	H
4960	29.21	1.83	31.04	54.00	-22.96	AVG	H
7440	41.21	5.43	46.64	74.00	-27.36	Peak	H
7440	29.58	5.43	35.01	54.00	-18.99	AVG	H
9920	41.23	6.41	47.64	74.00	-26.36	Peak	H
9920	29.59	6.41	36.00	54.00	-18.00	AVG	H

Radiated emissions at band edge


Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
BLE 1Mbps – Low band-edge							
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
2310	49.26	-6.6	42.66	74	-31.34	Peak	V
2310	39.40	-6.6	32.80	54	-21.20	AVG	V
2390	49.14	-6.23	42.91	74	-31.09	Peak	V
2390	39.41	-6.23	33.18	54	-20.82	AVG	V
2310	49.13	-6.6	42.53	74	-31.47	Peak	H
2310	39.18	-6.6	32.58	54	-21.42	AVG	H
2390	49.30	-6.23	43.07	74	-30.93	Peak	H
2390	39.12	-6.23	32.89	54	-21.11	AVG	H
BLE 1Mbps – High band-edge							
2483.5	51.20	-5.79	45.41	74	-28.59	Peak	V
2483.5	42.53	-5.79	36.74	54	-17.26	AVG	V
2500	51.42	-5.72	45.70	74	-28.30	Peak	V
2500	42.37	-5.72	36.65	54	-17.35	AVG	V
2483.5	51.32	-5.79	45.53	74	-28.47	Peak	H
2483.5	42.44	-5.79	36.65	54	-17.35	AVG	H
2500	51.16	-5.72	45.44	74	-28.56	Peak	H
2500	42.44	-5.72	36.72	54	-17.28	AVG	H

6.4 DTS bandwidth

6.4.1 Limits

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.4.2 Test setup



6.4.3 Test procedures

Test method: ANSI C63.10-2013 Section 11.8.1

6.4.4 Test results


Note: See the appendix A

6.5 Maximum conducted output power

6.5.1 Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

6.5.2 Test setup



6.5.3 Test procedure

Test method for peak power: ANSI C63.10-2013 Section 11.9.1.1

Test method for average power: ANSI C63.10-2013 Section 11.9.2.3.1 Method AVGPM

6.5.4 Test results


Note: see the appendix B

6.6 Power spectral density

6.6.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.6.2 Test setup



6.6.3 Test Procedure

Test method: ANSI C63.10-2013 Section 11.10.2

6.6.4 Test Results


Note: see the appendix C

6.7 Band edge (Conducted)

6.7.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.7.2 Test setup



6.7.3 Test procedure

Test method: ANSI C63.10-2013 Section 11.13

6.7.4 Test results


Note: see the appendix D

6.8 Conducted spurious emissions

6.8.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.8.2 Test setup



6.8.3 Test procedure

Test method: ANSI C63.10-2013 Section 11.11

6.8.4 Test results


Note: see the appendix E

6.9 Duty Cycle

6.9.1 Conformance Limit

None, for reporting purposes only.

6.9.2 Test setup



6.9.3 Test procedure

Test method: KDB 558074 section 6, zero-span spectrum analyzer method.

6.9.4 Test Results

Note: see the appendix F

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.672	0.5	PASS
		2440	0.660	0.5	PASS
		2480	0.672	0.5	PASS

Test Graphs

BLE 1M Ant1 2402



BLE 1M Ant1 2440



BLE 1M Ant1 2480




Appendix B: Maximum conducted output power

Test Result-Peak

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	-1.42	≤30	PASS
		2440	-1.63	≤30	PASS
		2480	-2.89	≤30	PASS

Test Graphs

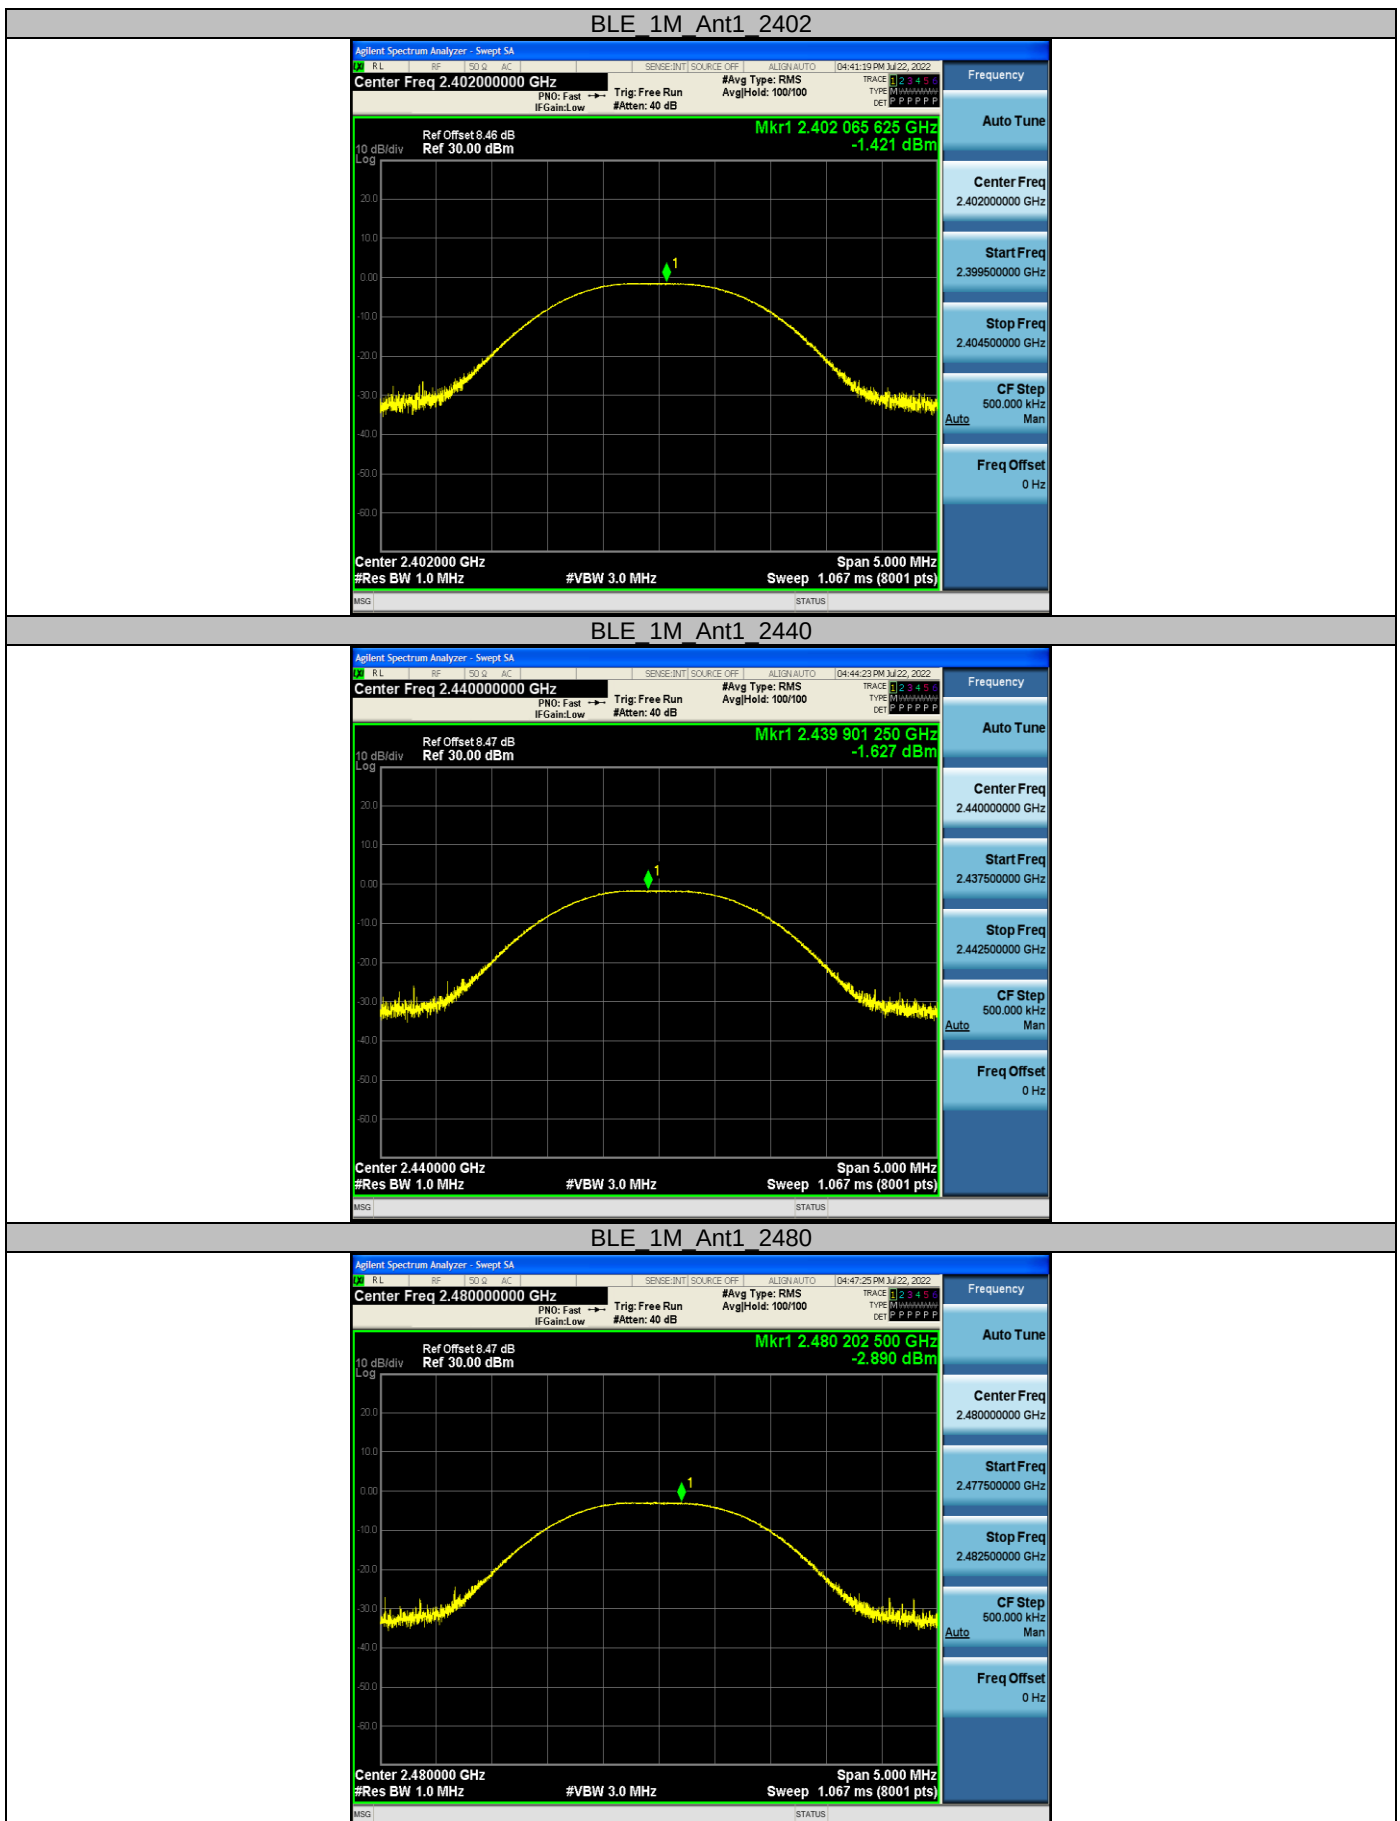

Appendix C: Maximum power spectral density

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-18.190	≤8.00	PASS
		2440	-17.876	≤8.00	PASS
		2480	-17.439	≤8.00	PASS

Test Graphs


BLE_1M_Ant1_2402



BLE_1M_Ant1_2440




BLE_1M_Ant1_2480

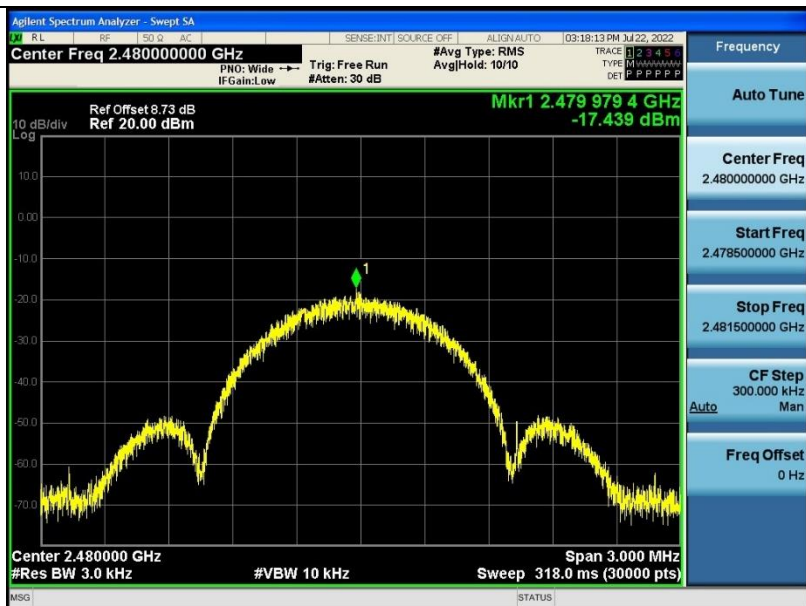

Appendix D: Band edge measurements


Test Graphs

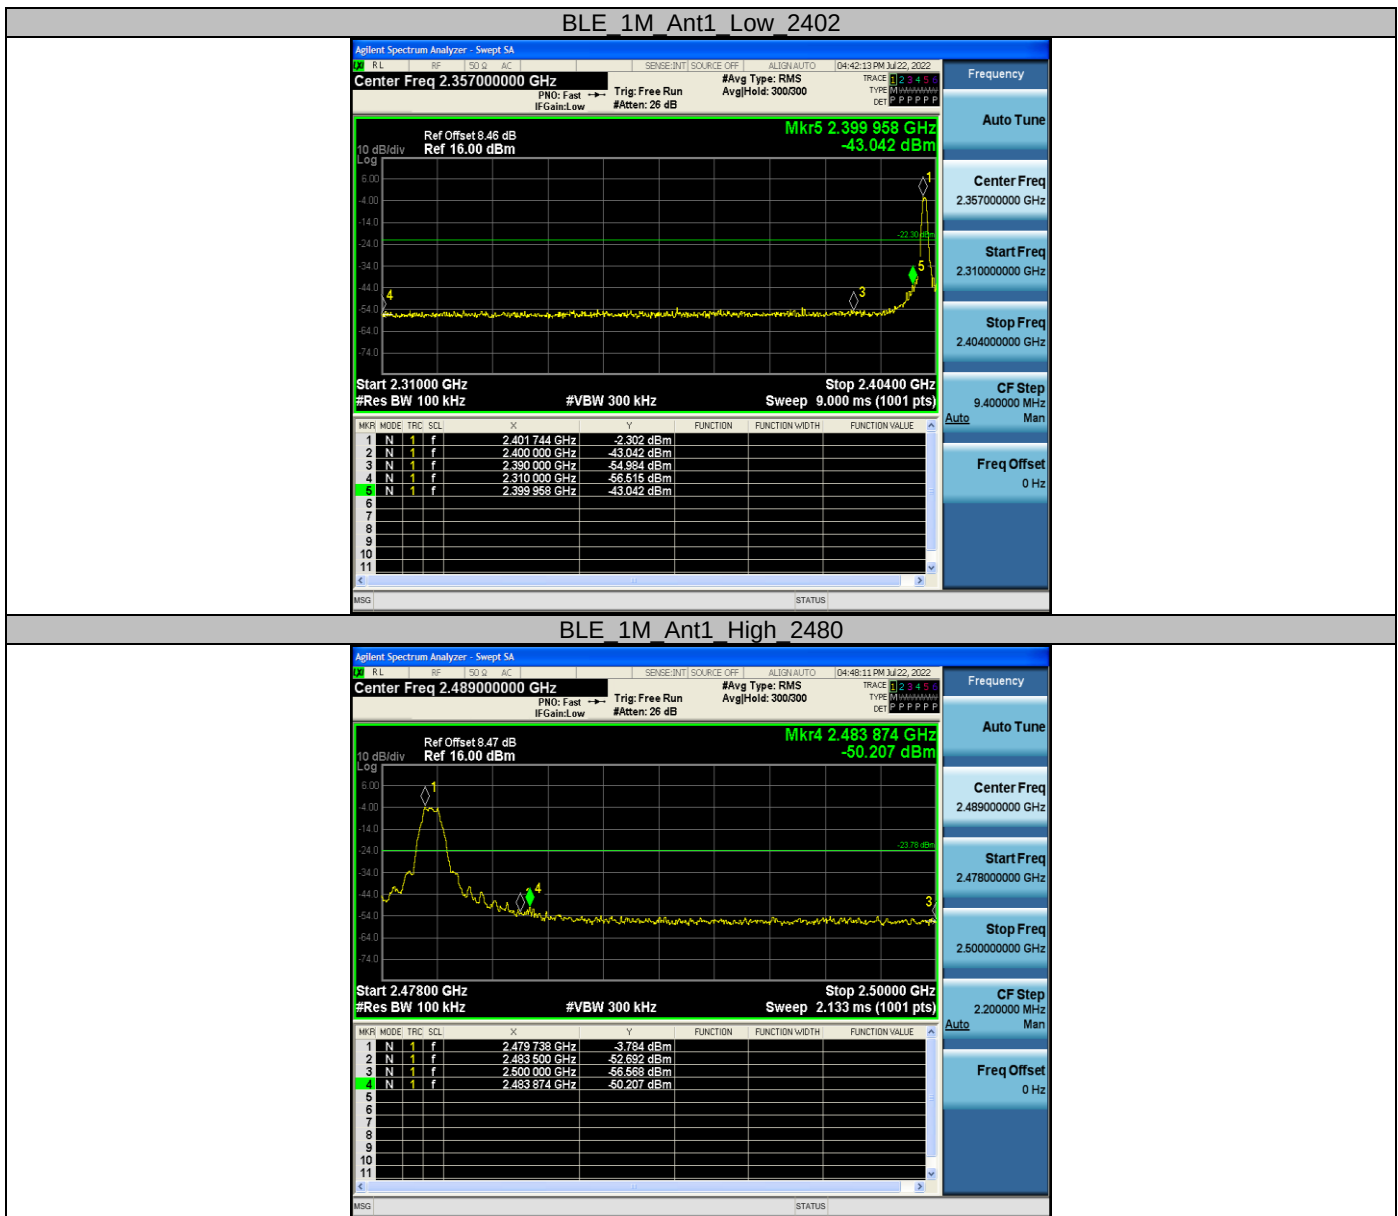


Appendix E: Conducted Spurious Emission


Test Graphs

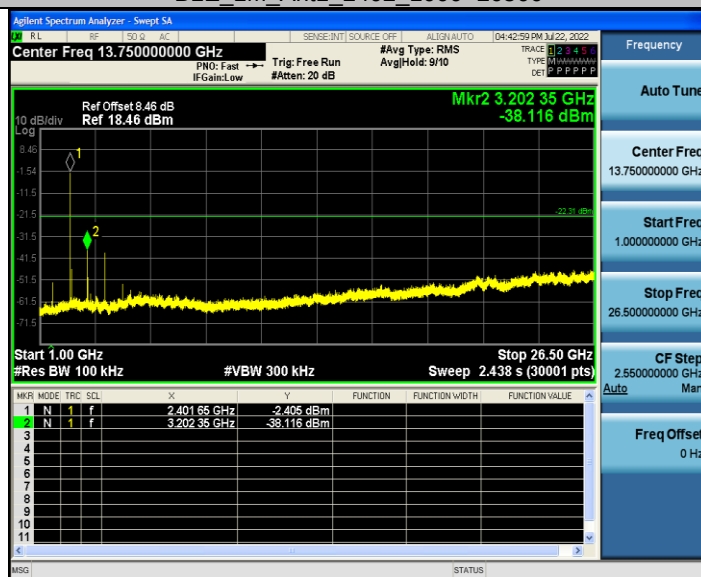

BLE_1M_Ant1_2402_1000~26500

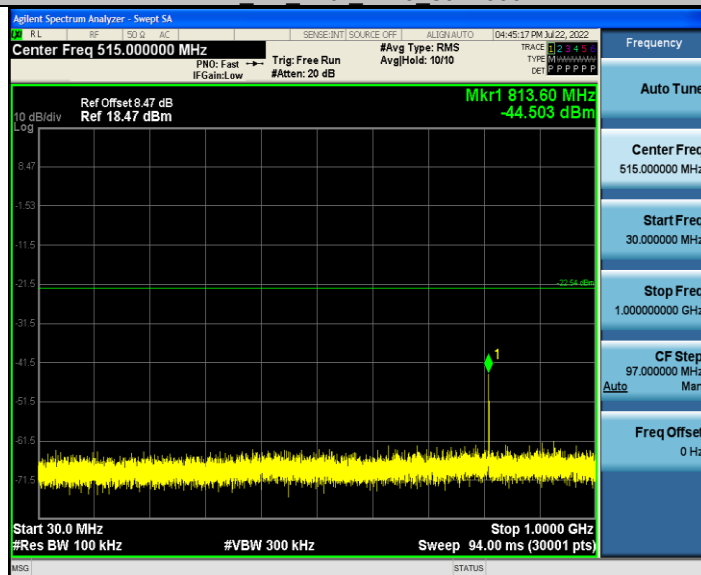BLE_1M_Ant1_2440_0~Reference

BLE_1M_Ant1_2440_30~1000

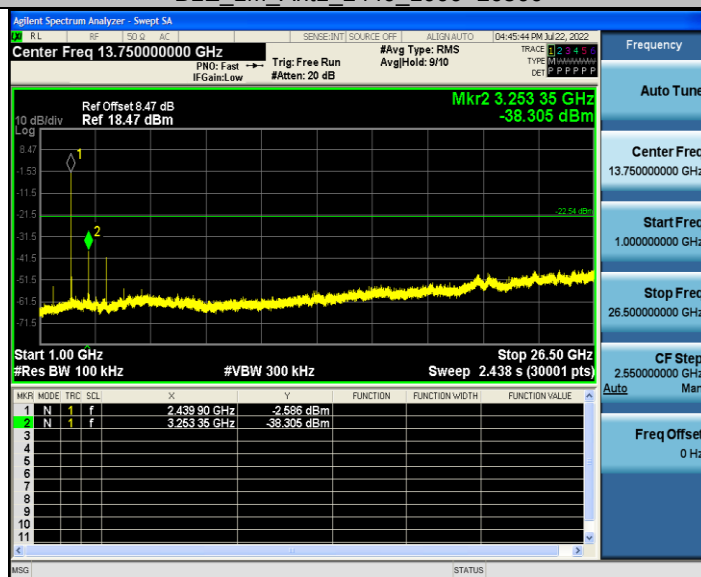
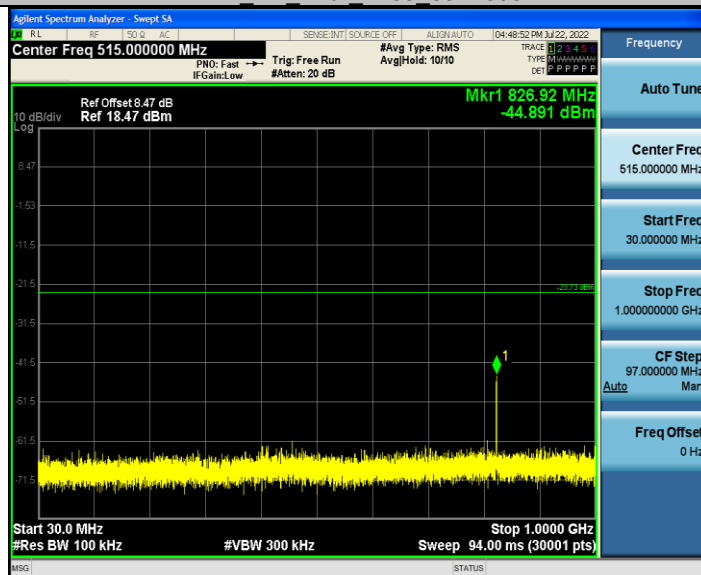
BLE_1M_Ant1_2440_1000~26500




BLE_1M_Ant1_2480_0~Reference



BLE_1M_Ant1_2480_30~1000



\

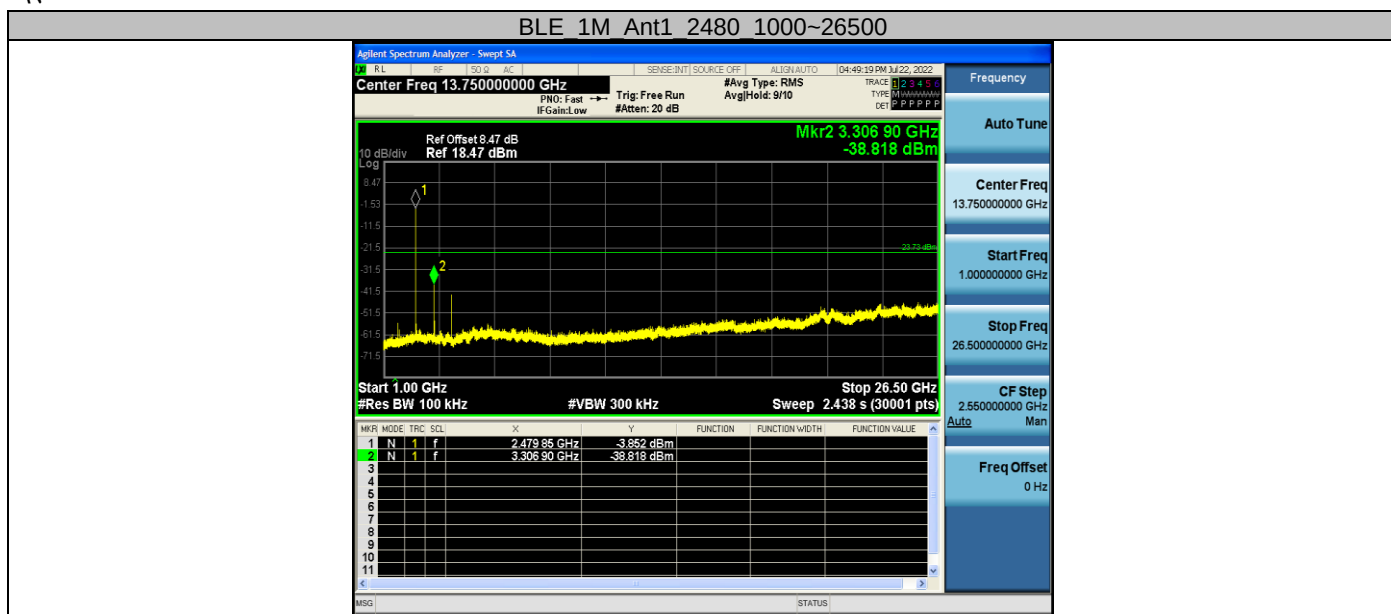

Appendix F: Duty Cycle

Test Result

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	2.83	2.96	95.61	0.19
		2440	2.82	2.95	95.59	0.20
		2480	2.81	2.96	94.93	0.23

Test Graphs



Photographs of the Test Setup

See the Appendix – Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----