



Appendix A

RF Test Data for BT (Conducted Measurement)

Product Name: Amplifier

Test Model: LP-S51T

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.5%
ATM Pressure:	100.0 kPa
Test Engineer:	Kay Hu
Supervised by:	Li Huan





A.1 -20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit (MHz)
NVNT	1-DH5	2402	Ant1	0.947	/
NVNT	1-DH5	2441	Ant1	0.957	/
NVNT	1-DH5	2480	Ant1	1.031	/
NVNT	2-DH5	2402	Ant1	1.308	/
NVNT	2-DH5	2441	Ant1	1.313	/
NVNT	2-DH5	2480	Ant1	1.304	/
NVNT	3-DH5	2402	Ant1	1.276	/
NVNT	3-DH5	2441	Ant1	1.306	/
NVNT	3-DH5	2480	Ant1	1.303	/






Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

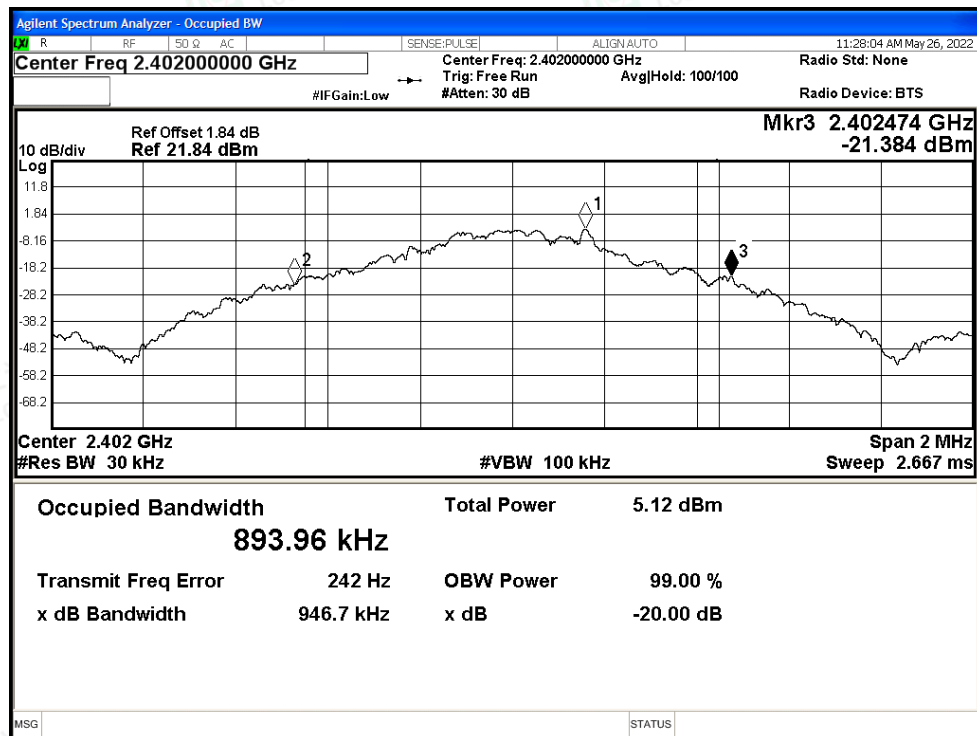


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

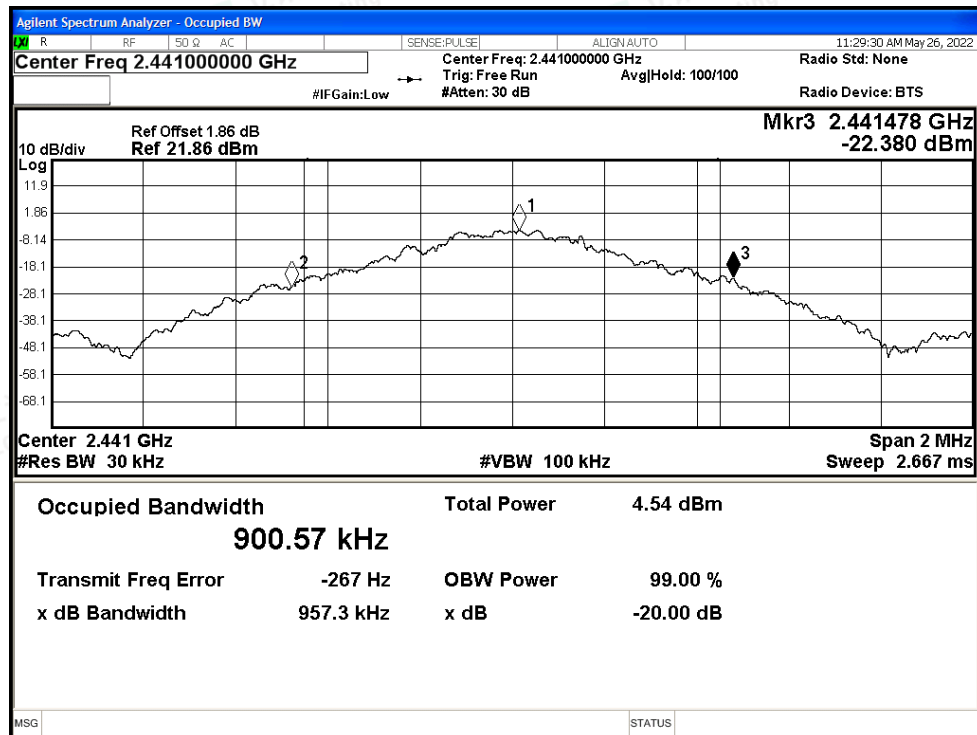




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

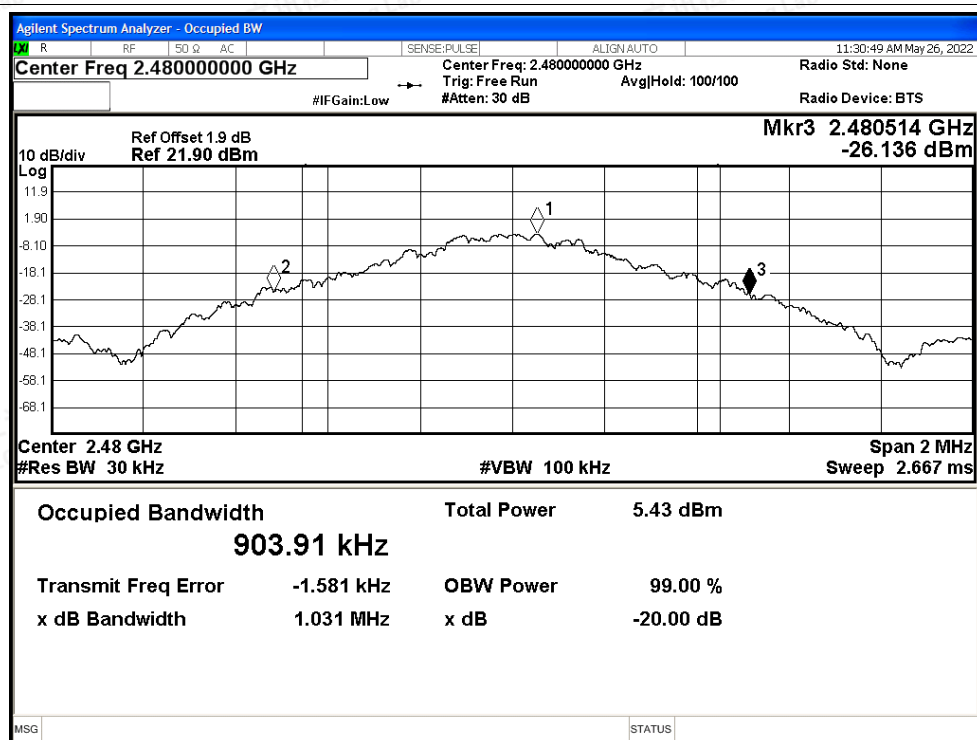


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

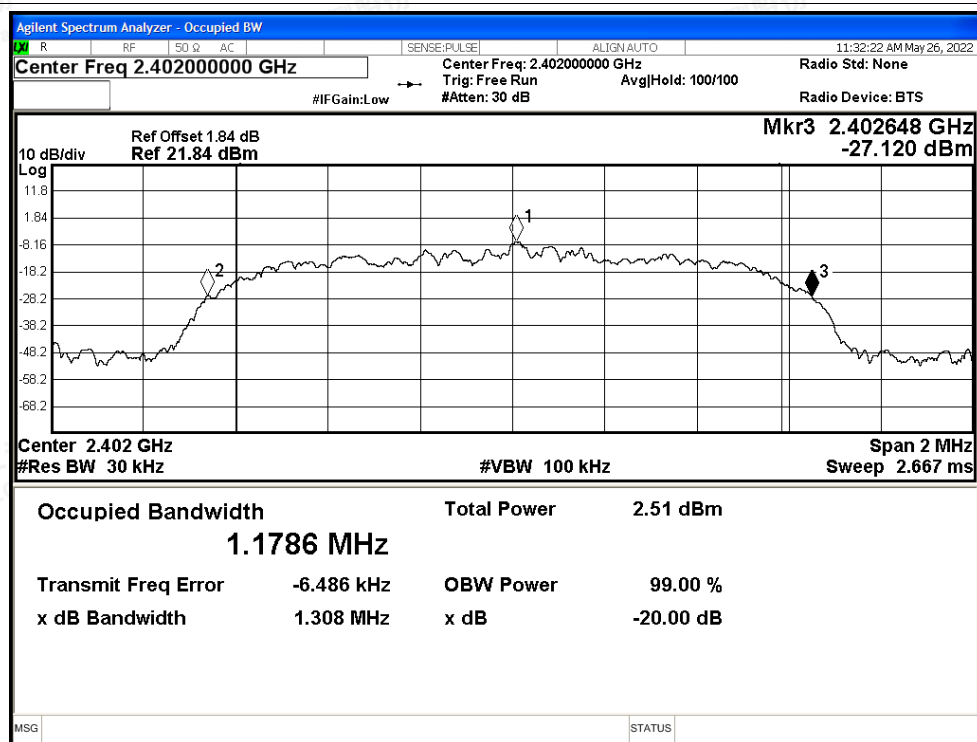




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

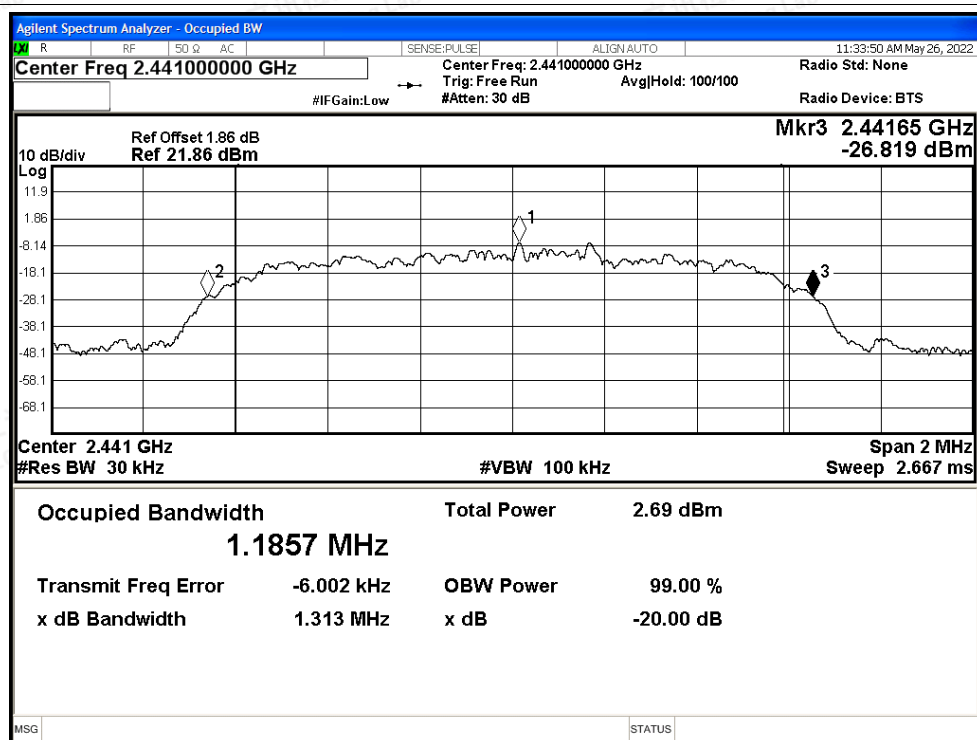

-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

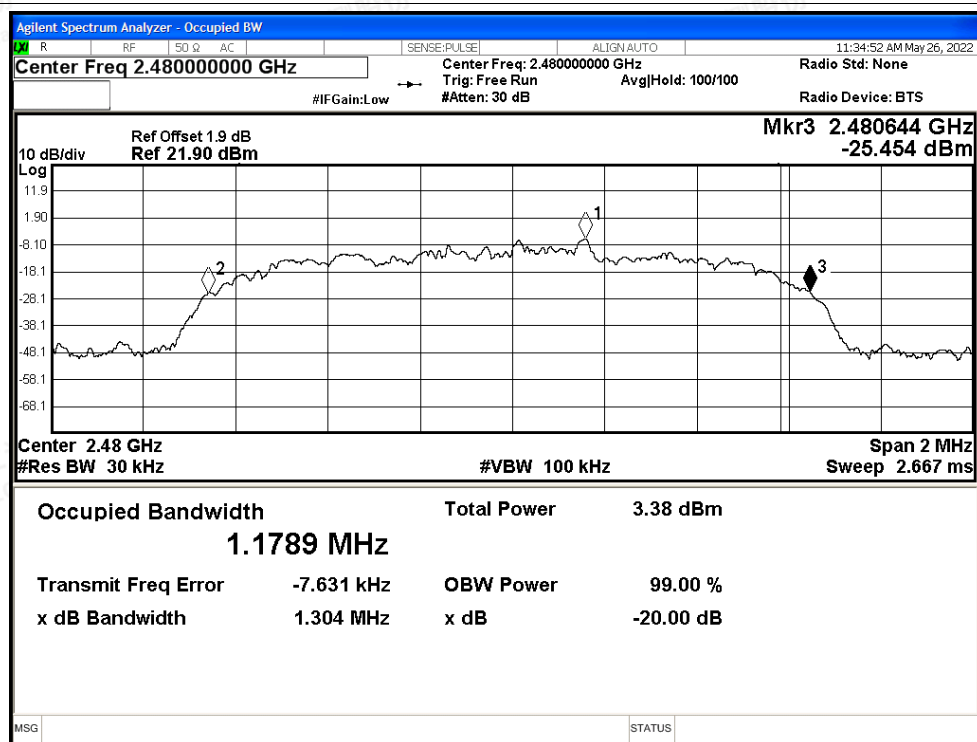

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity




-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

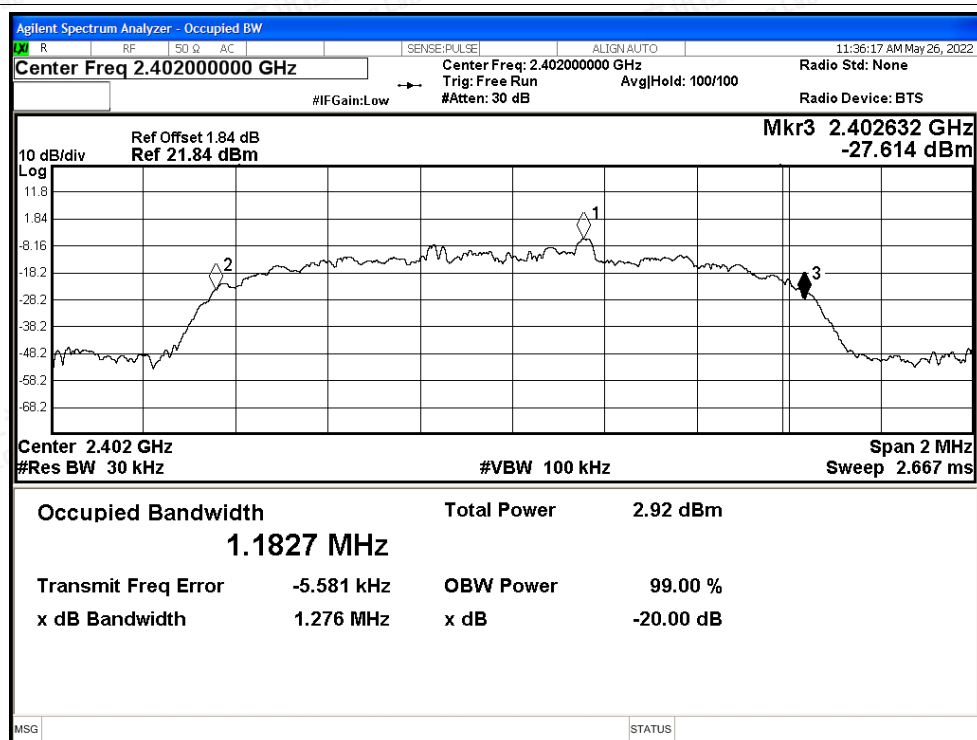

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

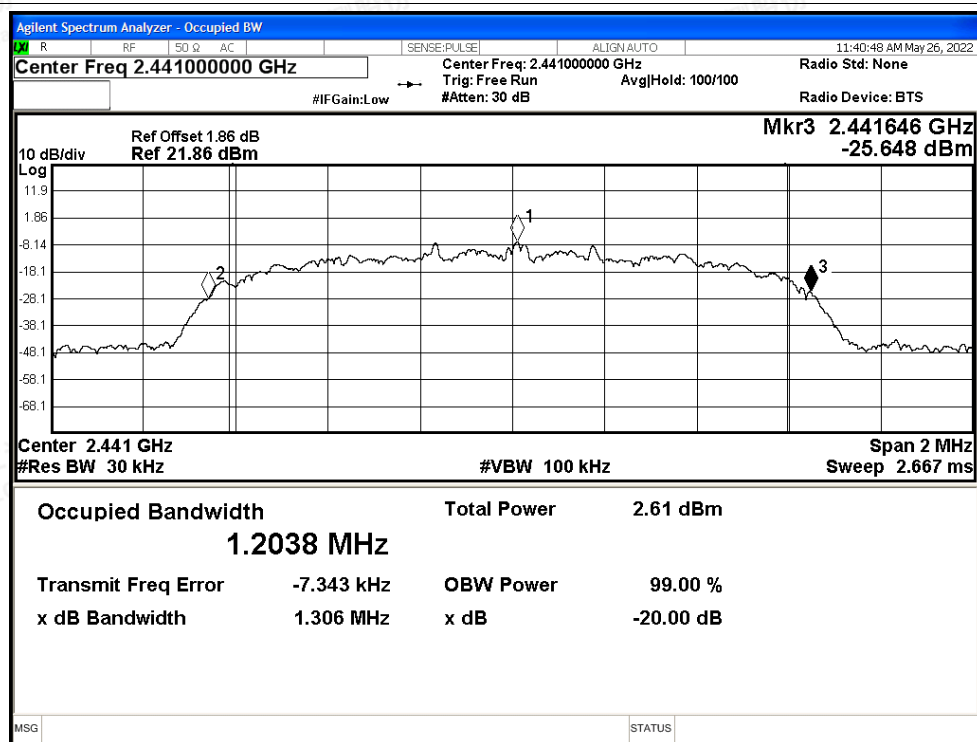

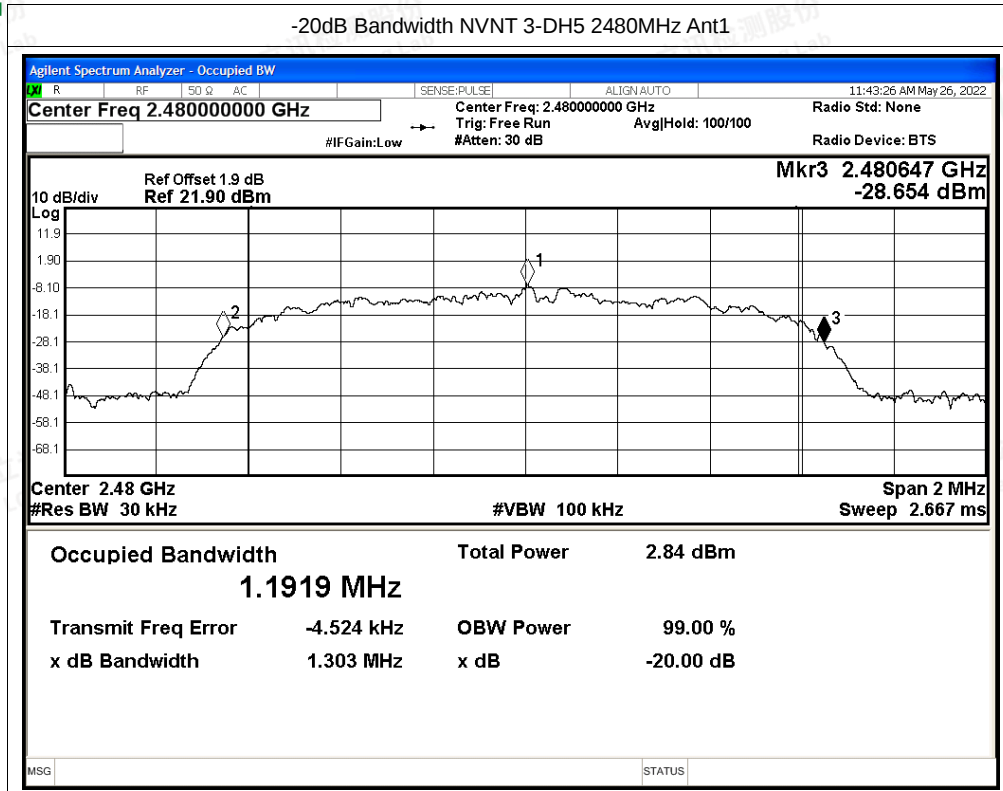



A.2 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	-1.3	21	Pass
NVNT	1-DH5	2441	Ant1	-1.67	21	Pass
NVNT	1-DH5	2480	Ant1	-0.8	21	Pass
NVNT	2-DH5	2402	Ant1	-2.22	21	Pass
NVNT	2-DH5	2441	Ant1	-2.35	21	Pass
NVNT	2-DH5	2480	Ant1	-1.68	21	Pass
NVNT	3-DH5	2402	Ant1	-2	21	Pass
NVNT	3-DH5	2441	Ant1	-2.06	21	Pass
NVNT	3-DH5	2480	Ant1	-1.6	21	Pass






Test Graphs

Power NVNT 1-DH5 2402MHz Ant1

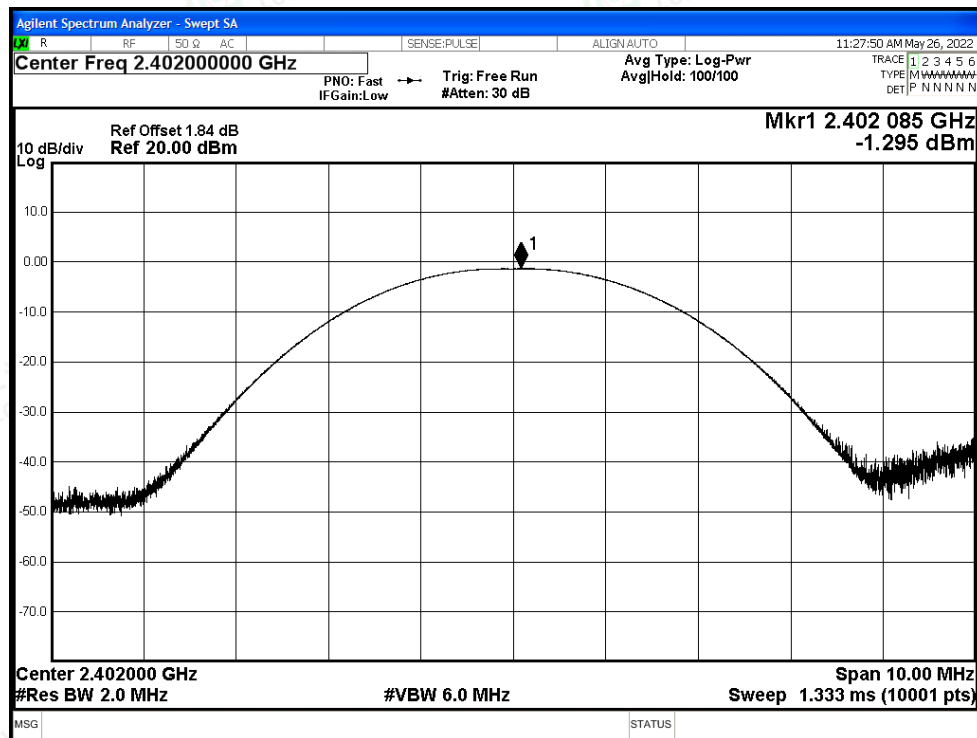


Power NVNT 1-DH5 2441MHz Ant1

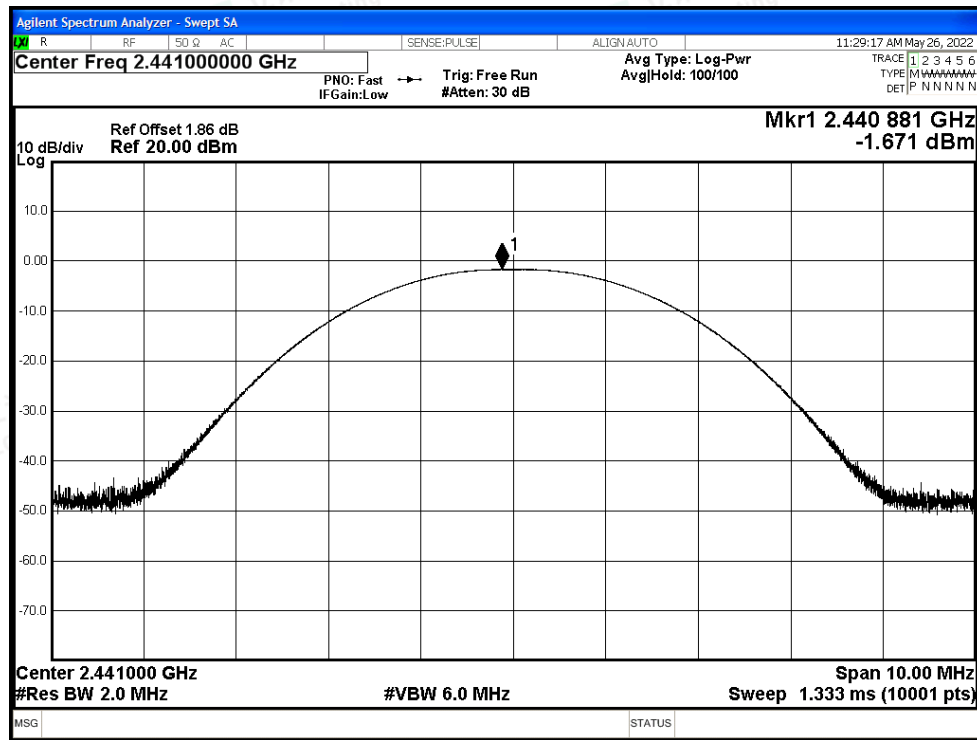




Power NVNT 1-DH5 2480MHz Ant1

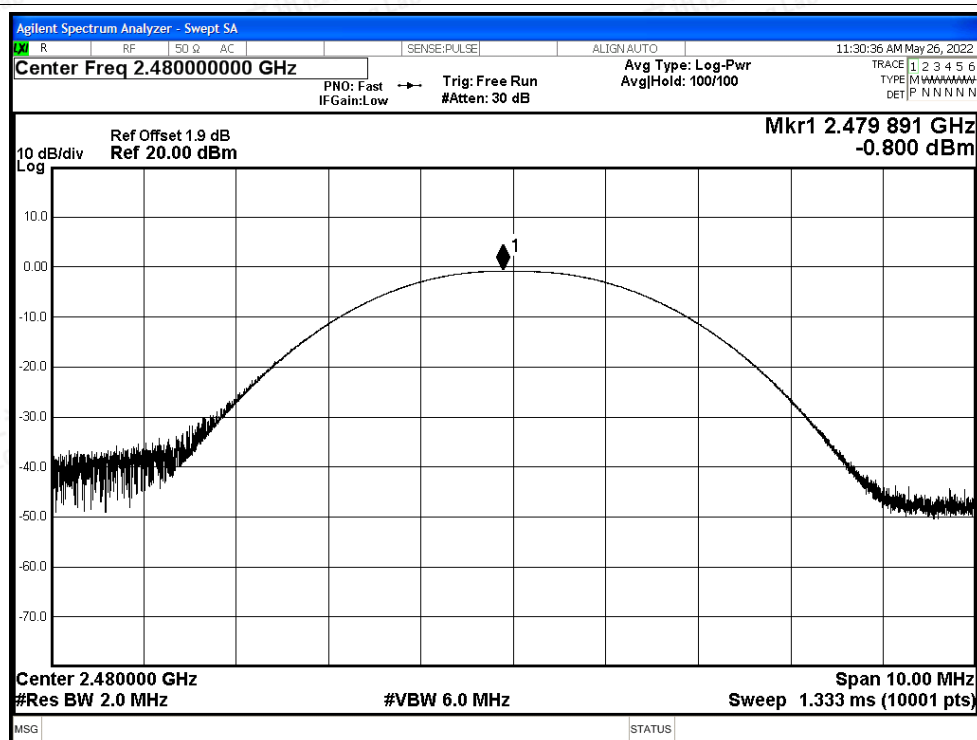


Power NVNT 2-DH5 2402MHz Ant1

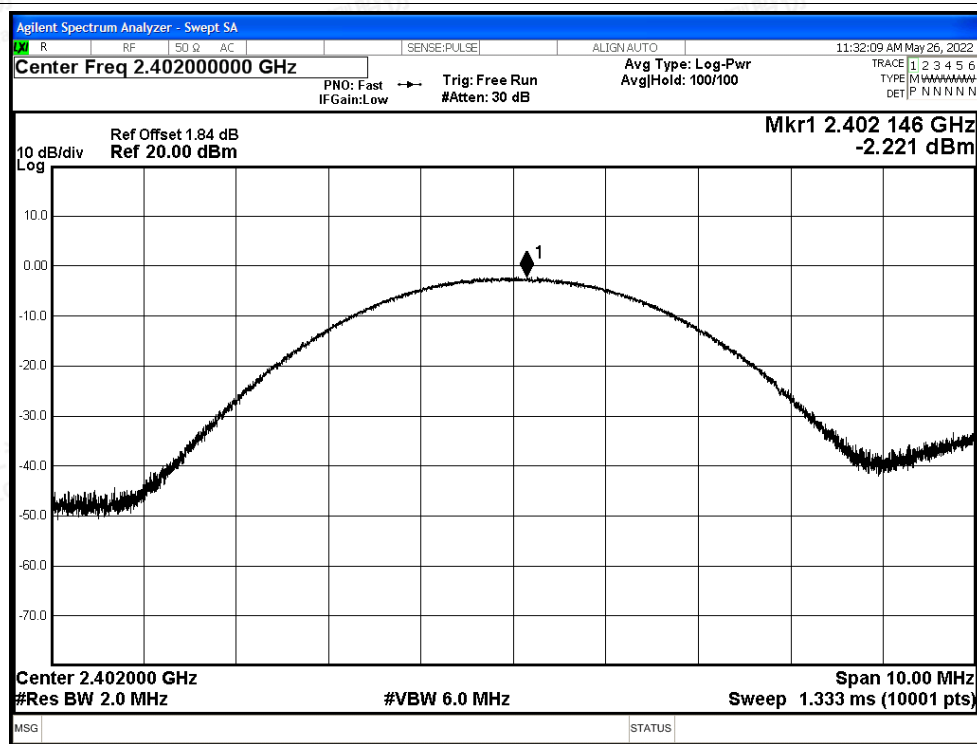




Power NVNT 2-DH5 2441MHz Ant1

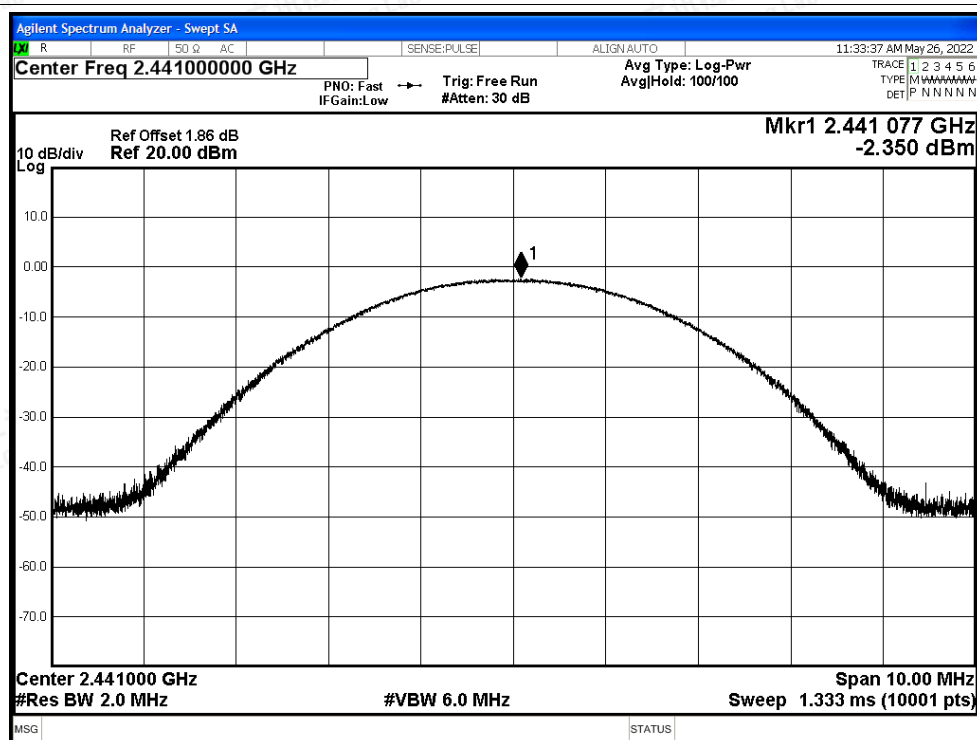


Power NVNT 2-DH5 2480MHz Ant1

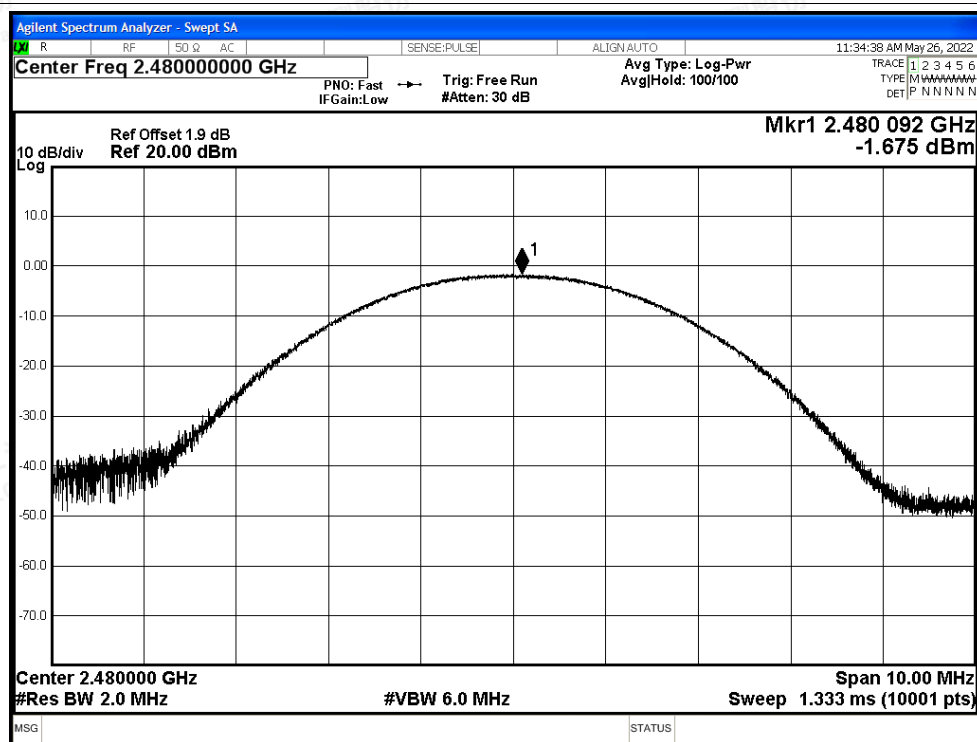





Power NVNT 3-DH5 2402MHz Ant1

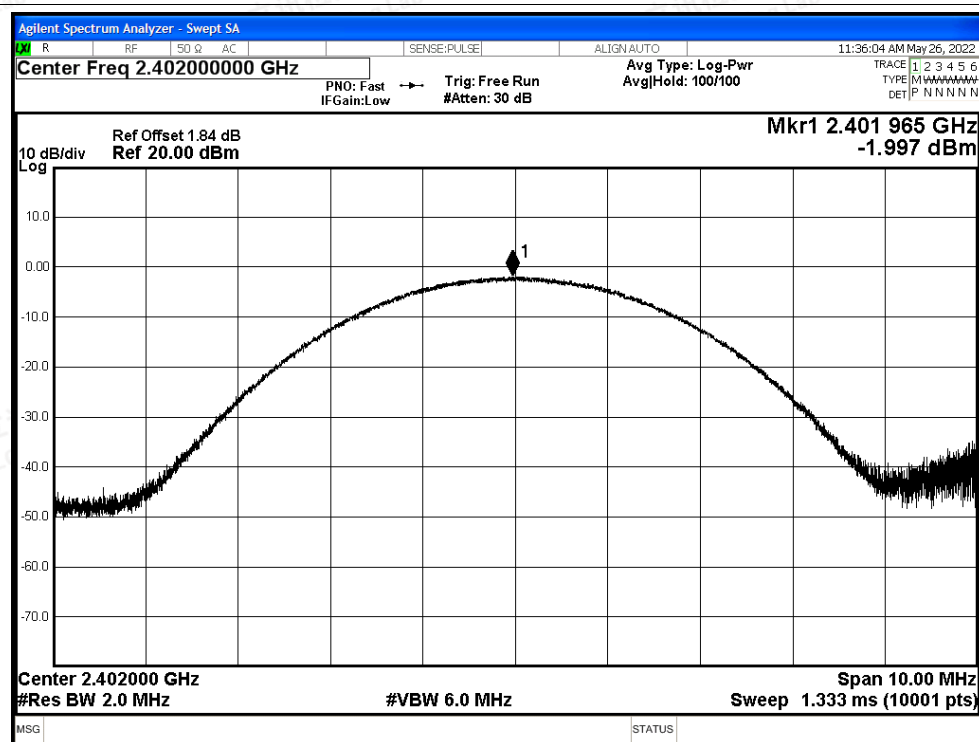

Power NVNT 3-DH5 2441MHz Ant1

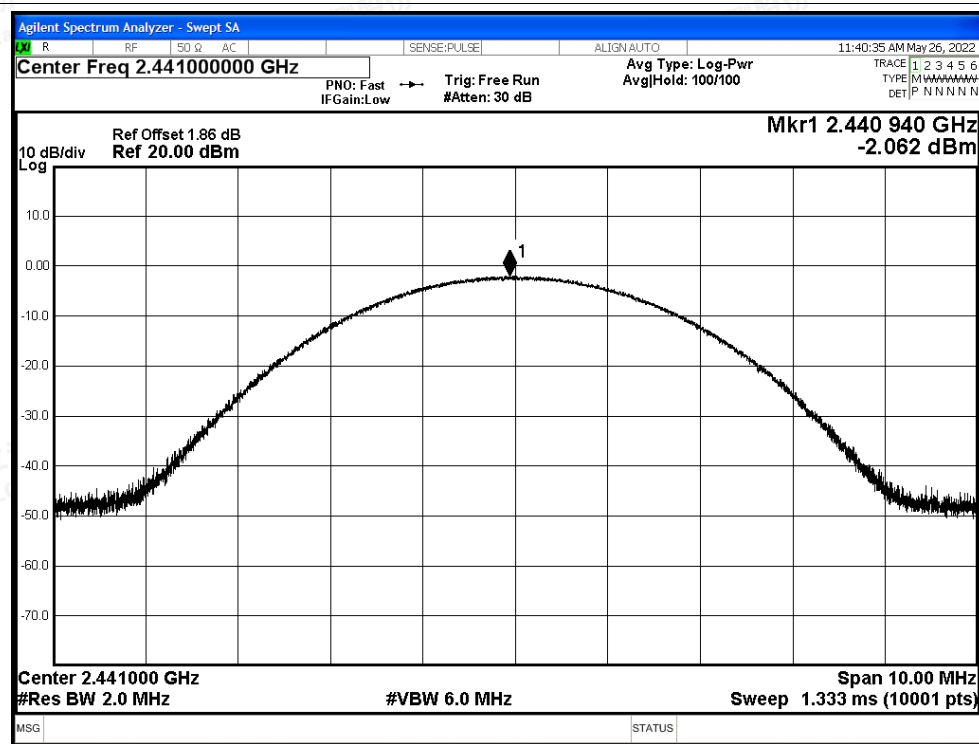

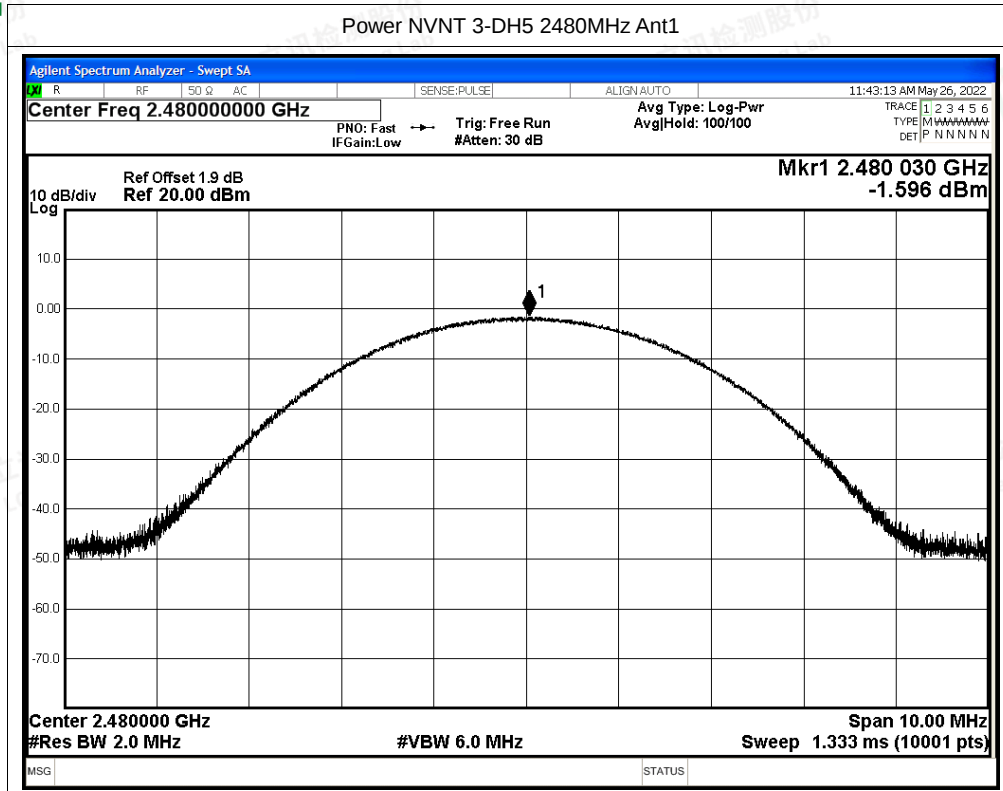



A.3 Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.968	2402.966	0.998	0.631	Pass
NVNT	2-DH5	Ant1	2402.008	2403.158	1.15	0.872	Pass
NVNT	3-DH5	Ant1	2402.162	2403.156	0.994	0.851	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1

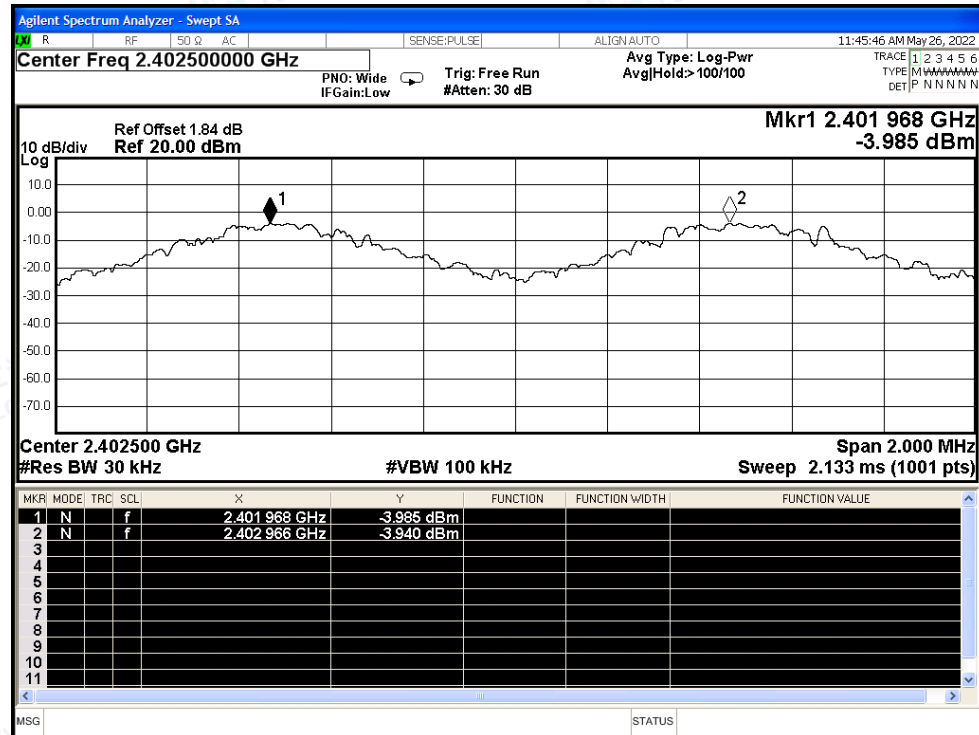


CFS NVNT 2-DH5 2402MHz Ant1

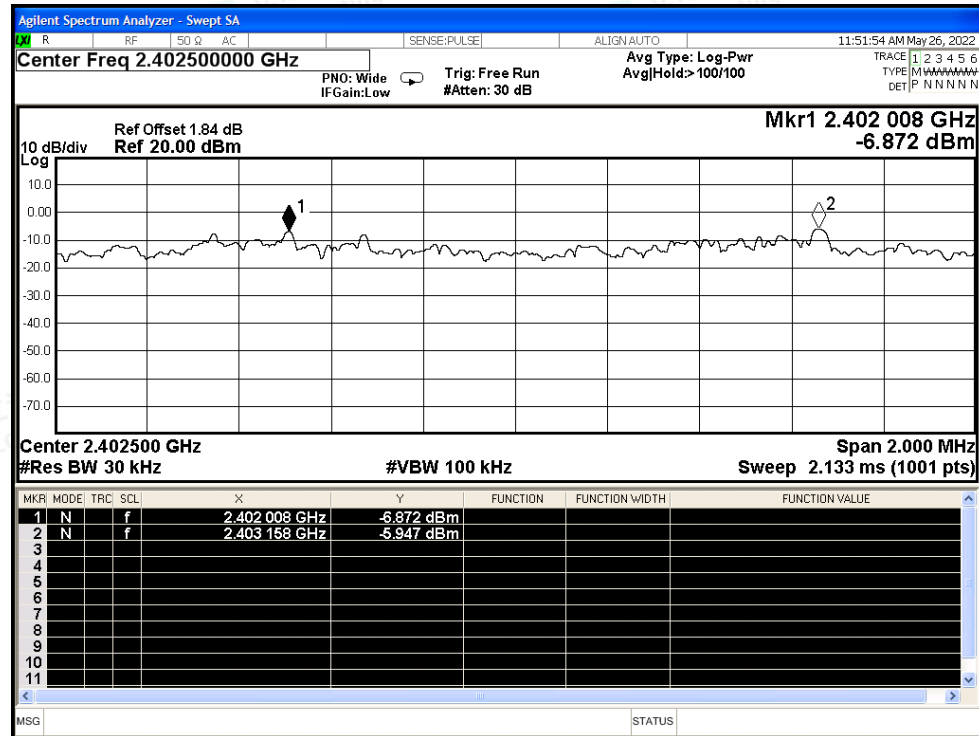



CFS NVNT 3-DH5 2402MHz Ant1

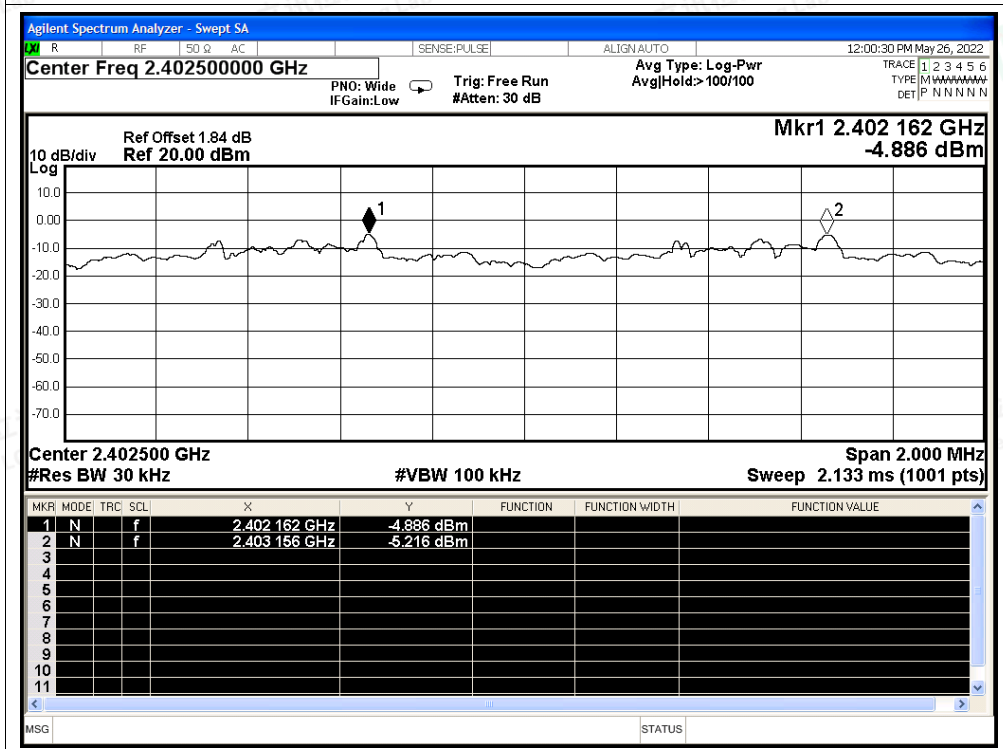

Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



A.4 Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.882	325.666	113	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.882	299.728	104	31600	400	Pass
NVNT	1-DH5	2480	Ant1	2.882	340.076	118	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.88	325.44	113	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.883	299.832	104	31600	400	Pass
NVNT	2-DH5	2480	Ant1	2.882	322.784	112	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.886	277.056	96	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.887	308.909	107	31600	400	Pass
NVNT	3-DH5	2480	Ant1	2.886	294.372	102	31600	400	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

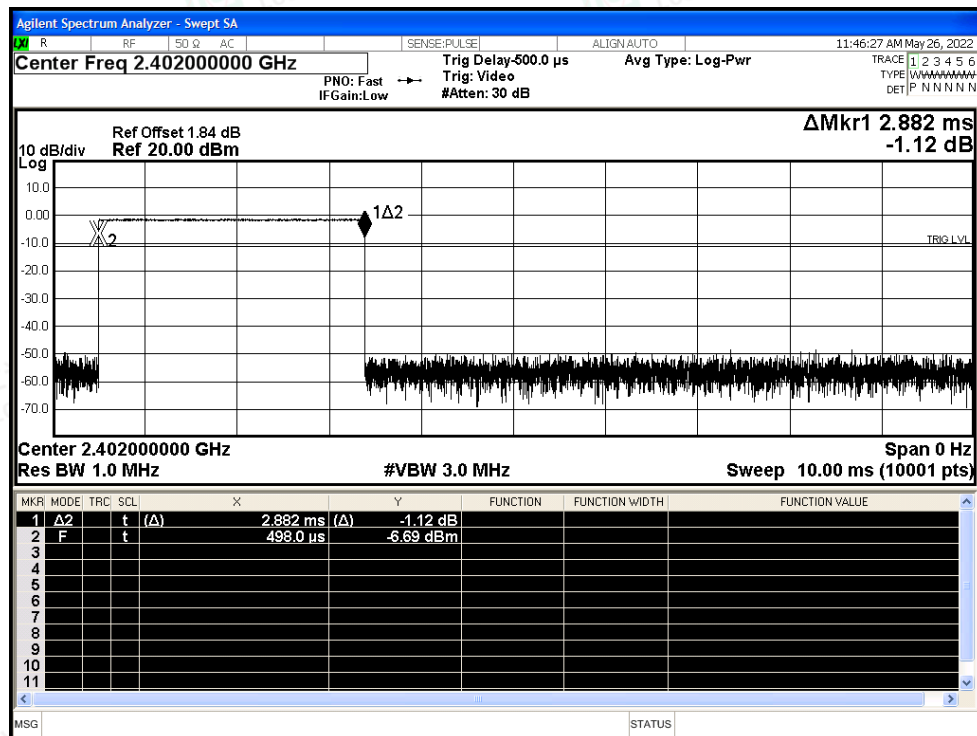


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

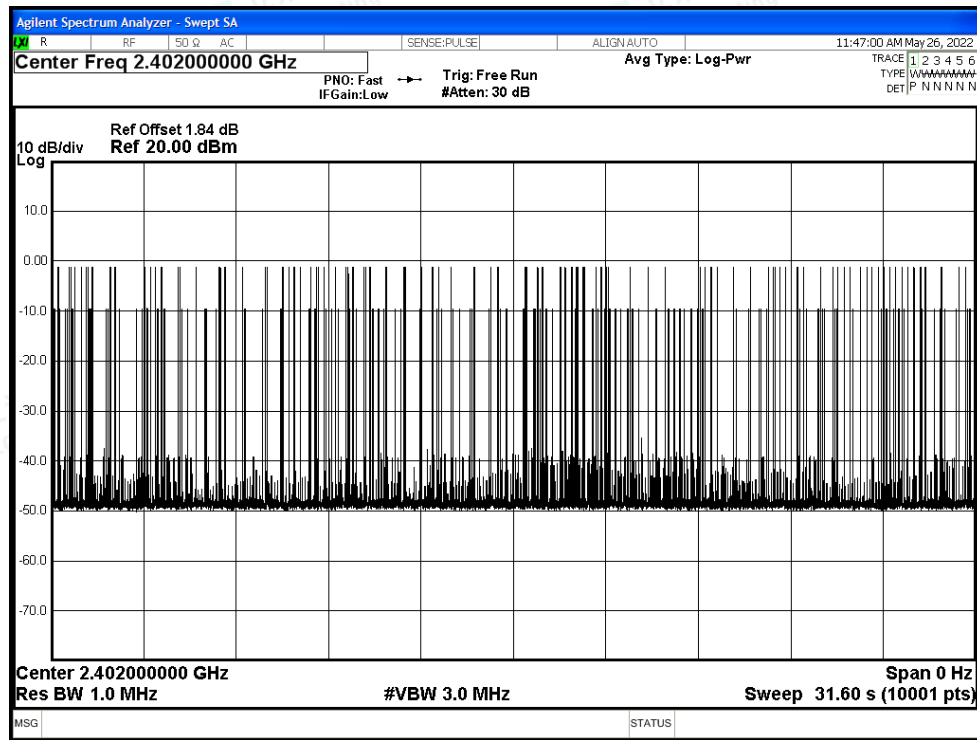




Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

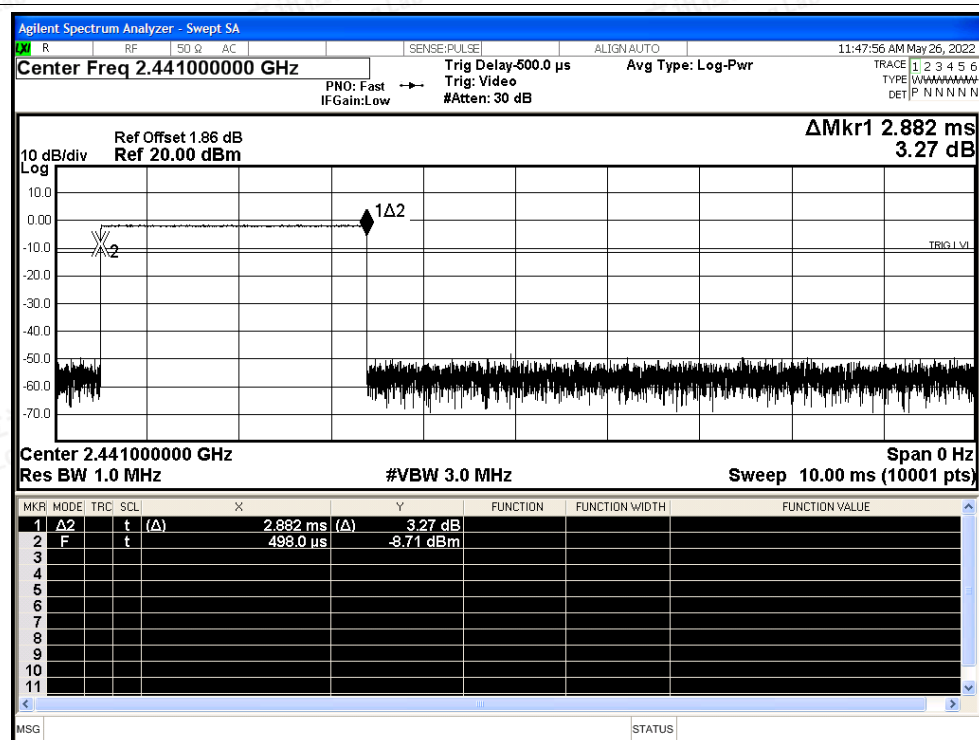


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

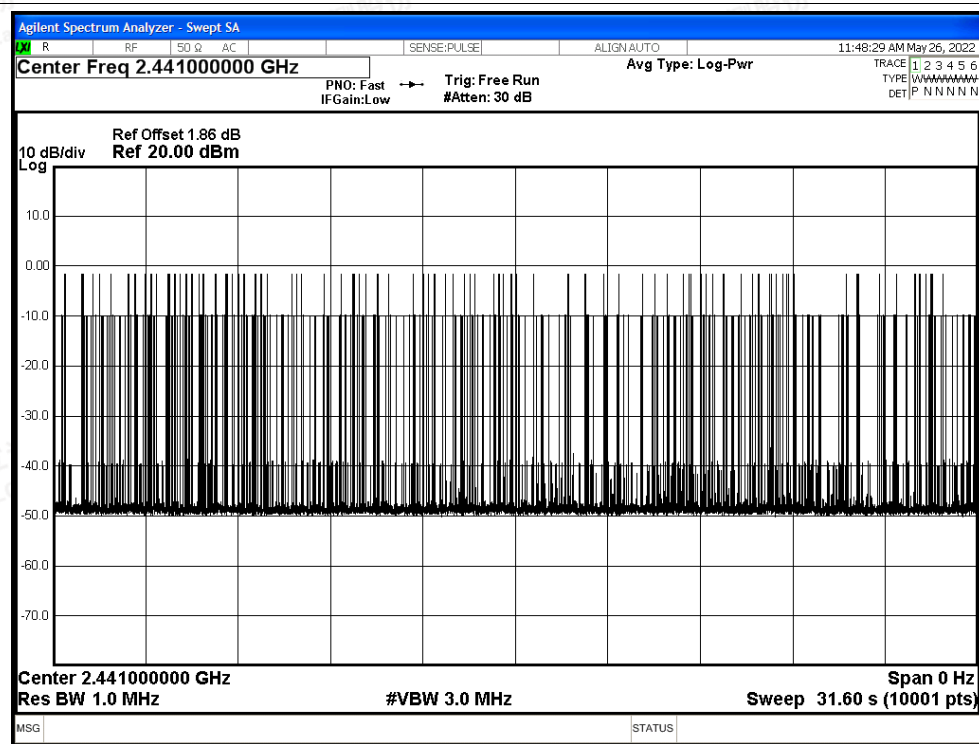




Dwell NVNT 1-DH5 2480MHz Ant1 One Burst

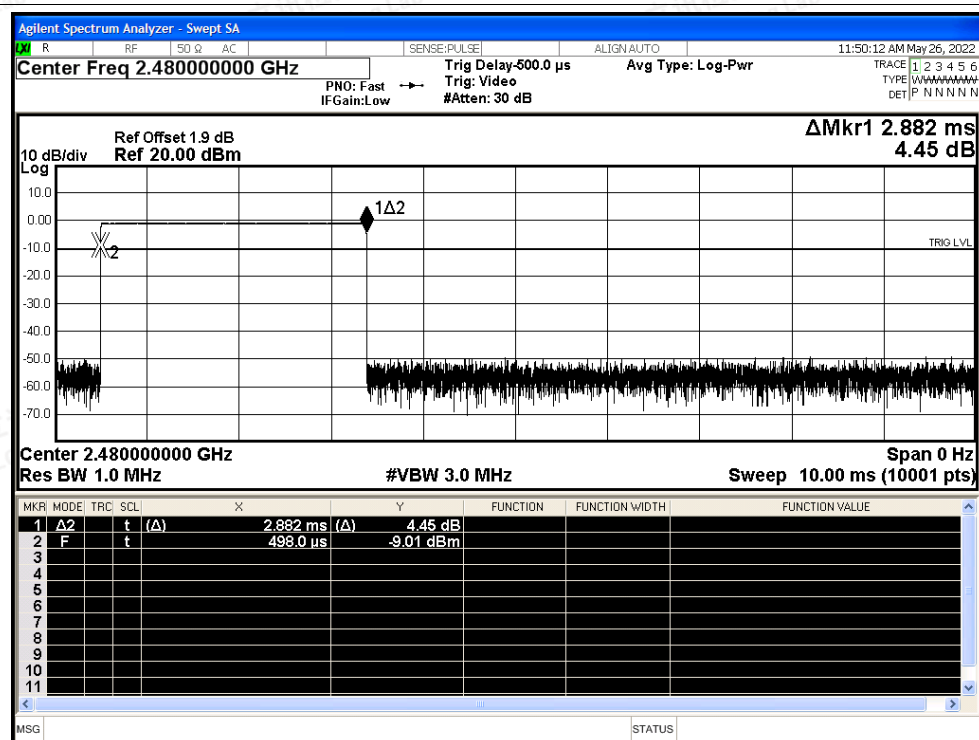


Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated

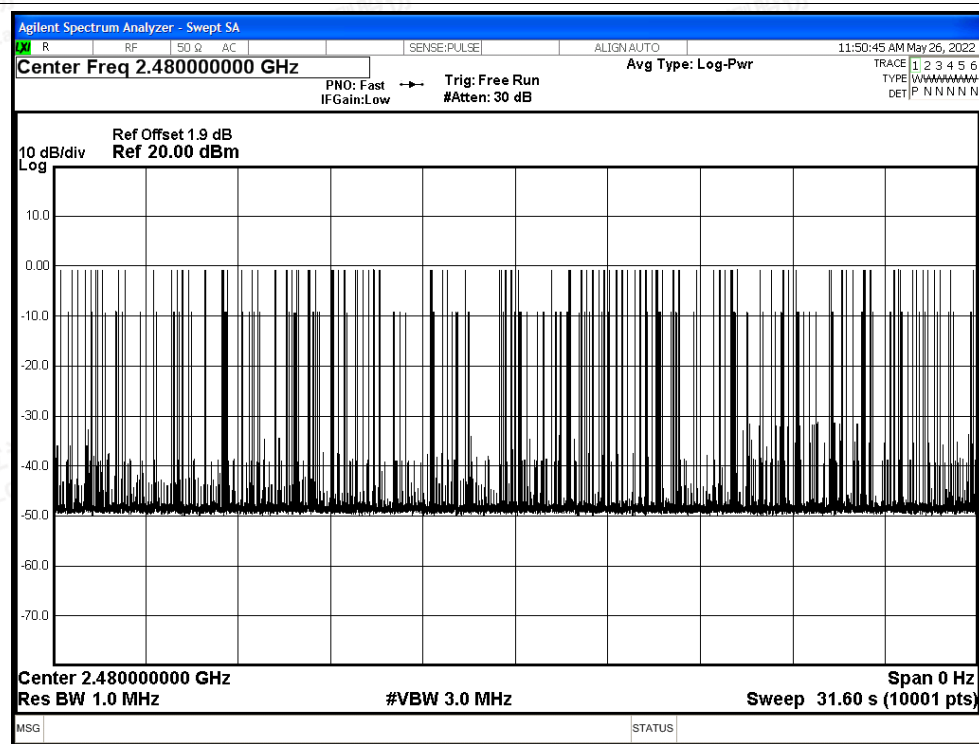




Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

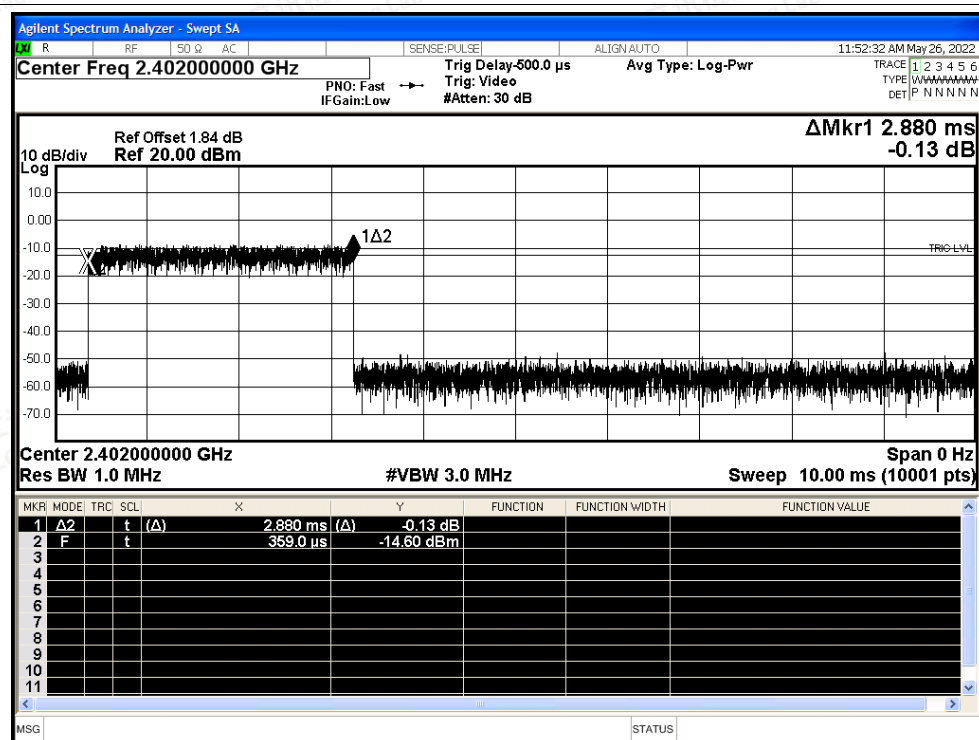


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

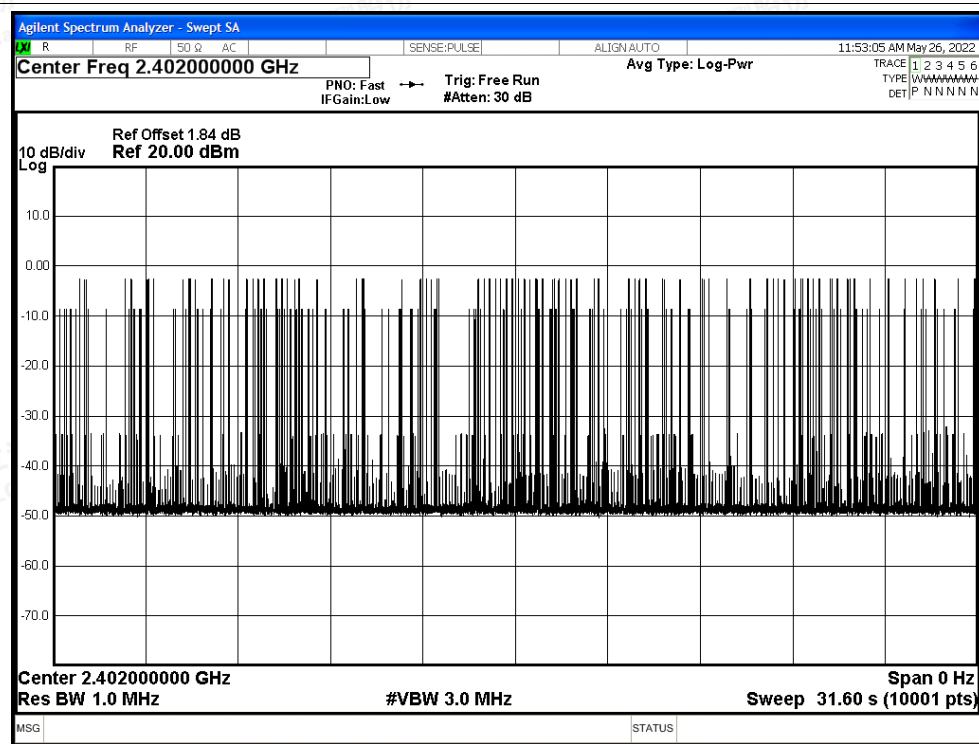




Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

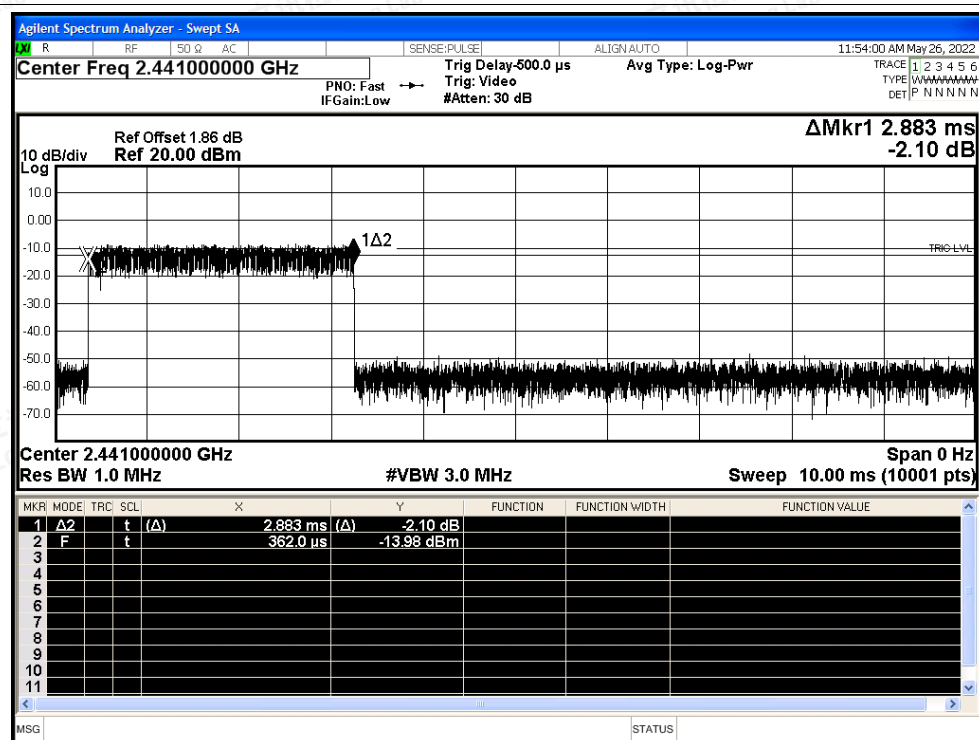


Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

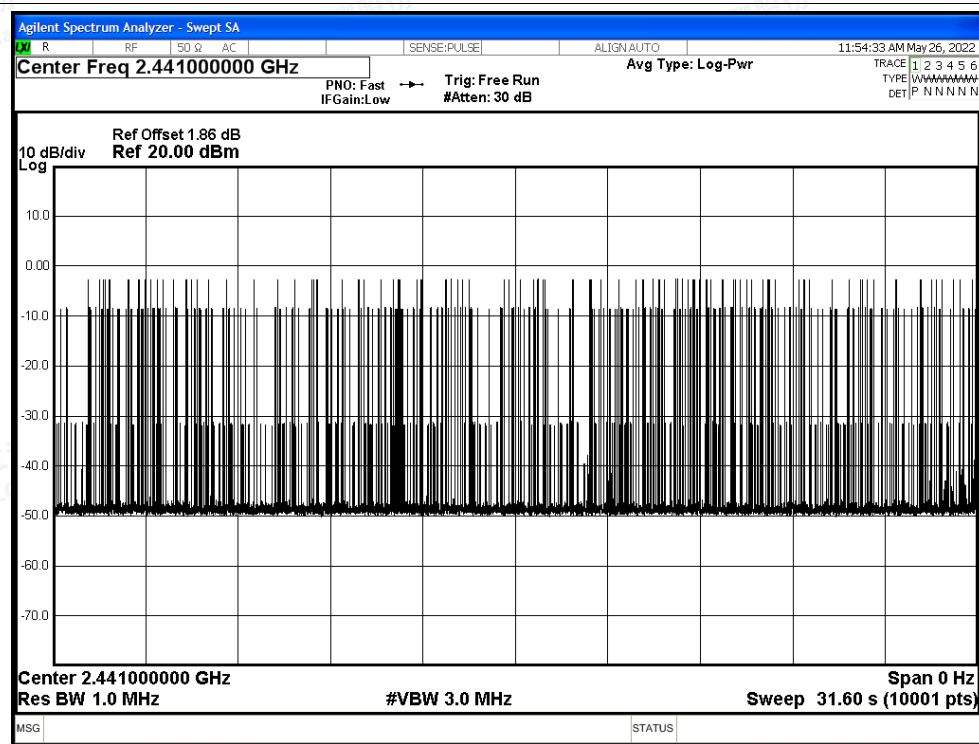




Dwell NVNT 2-DH5 2480MHz Ant1 One Burst

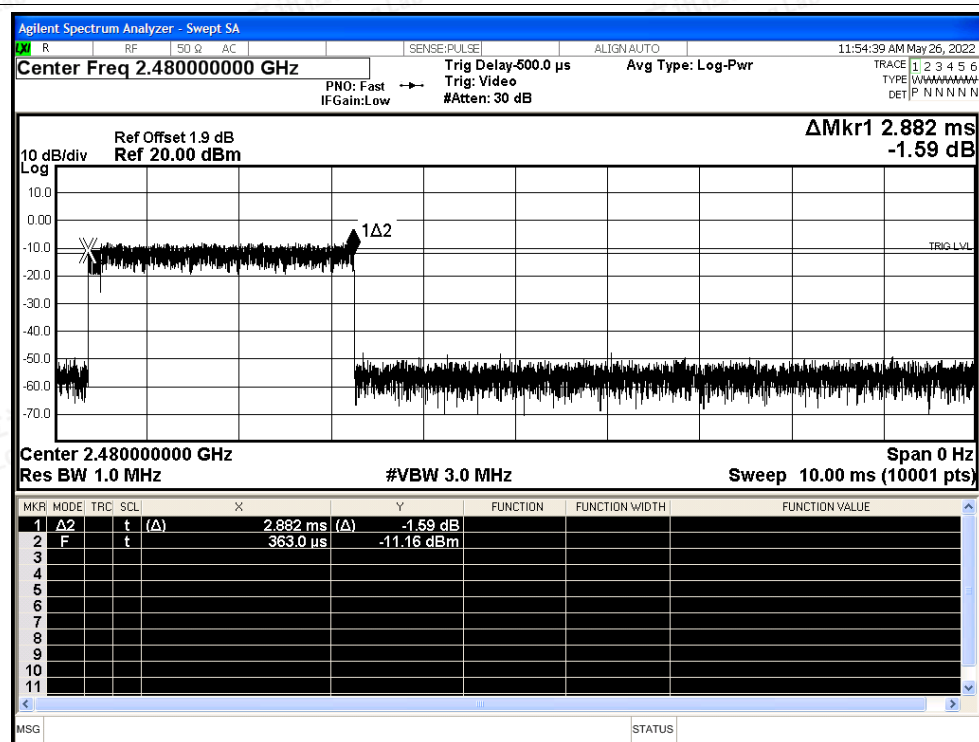


Dwell NVNT 2-DH5 2480MHz Ant1 Accumulated

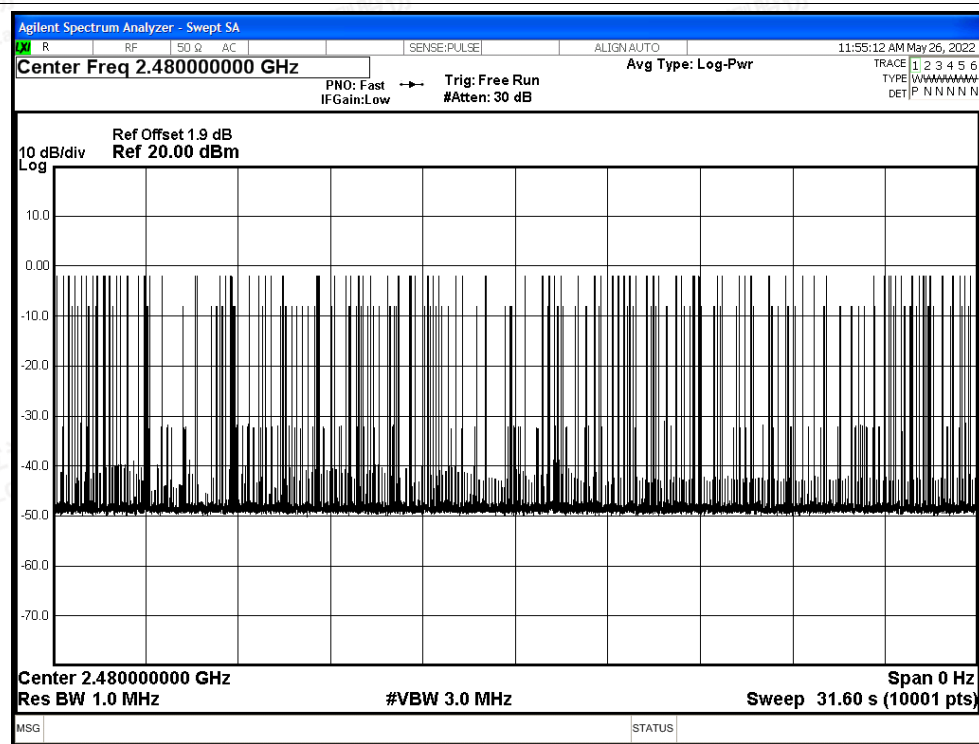




Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

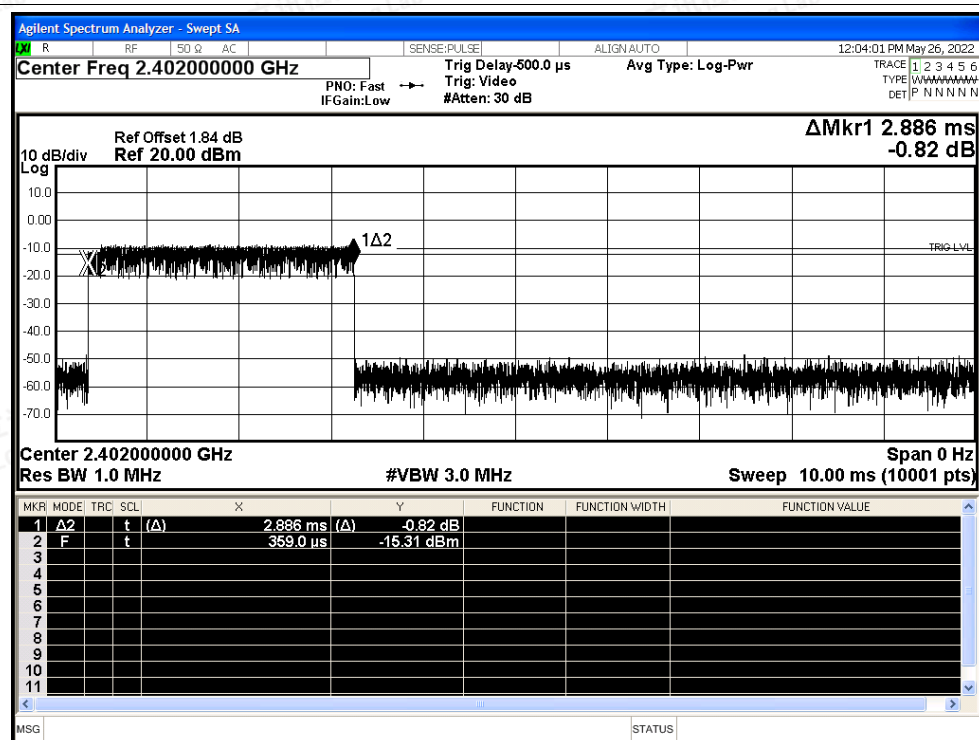


Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

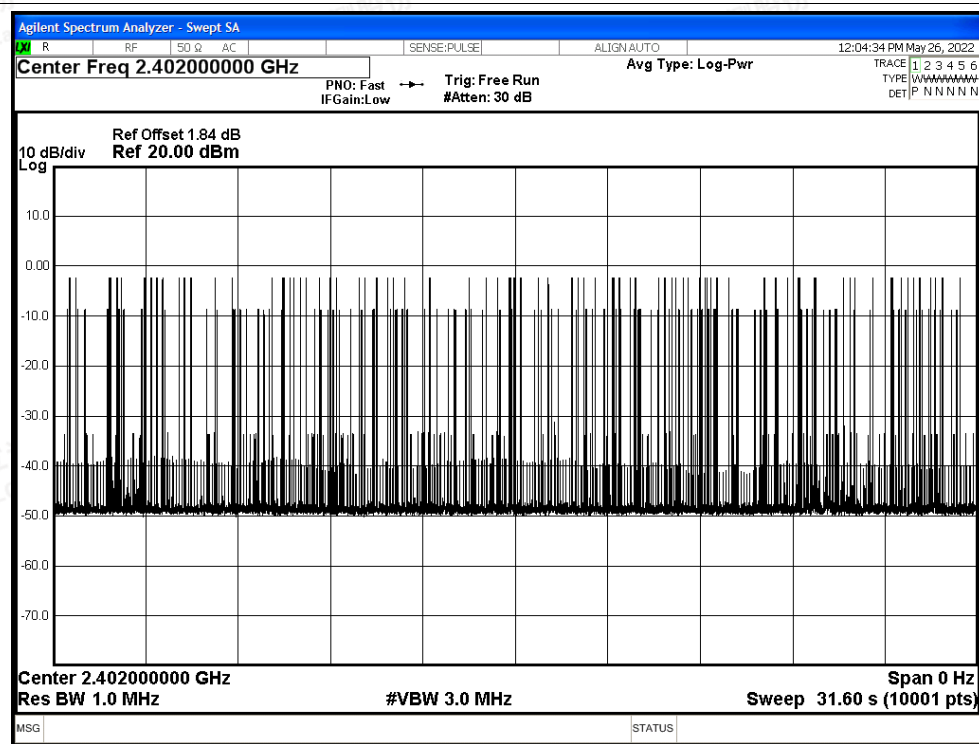




Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

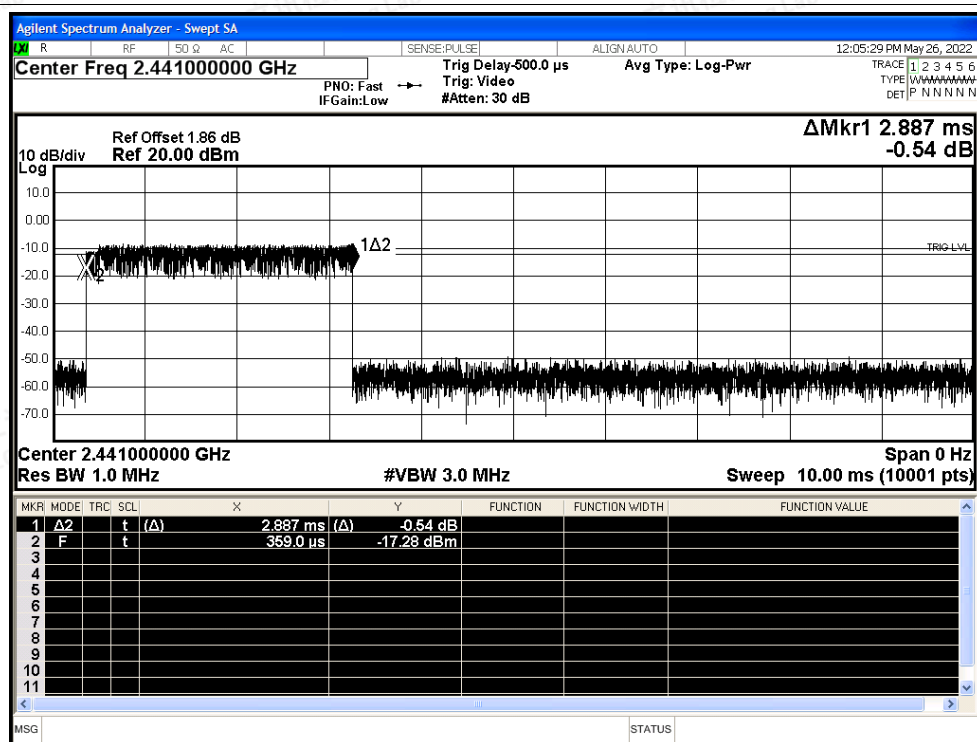


Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

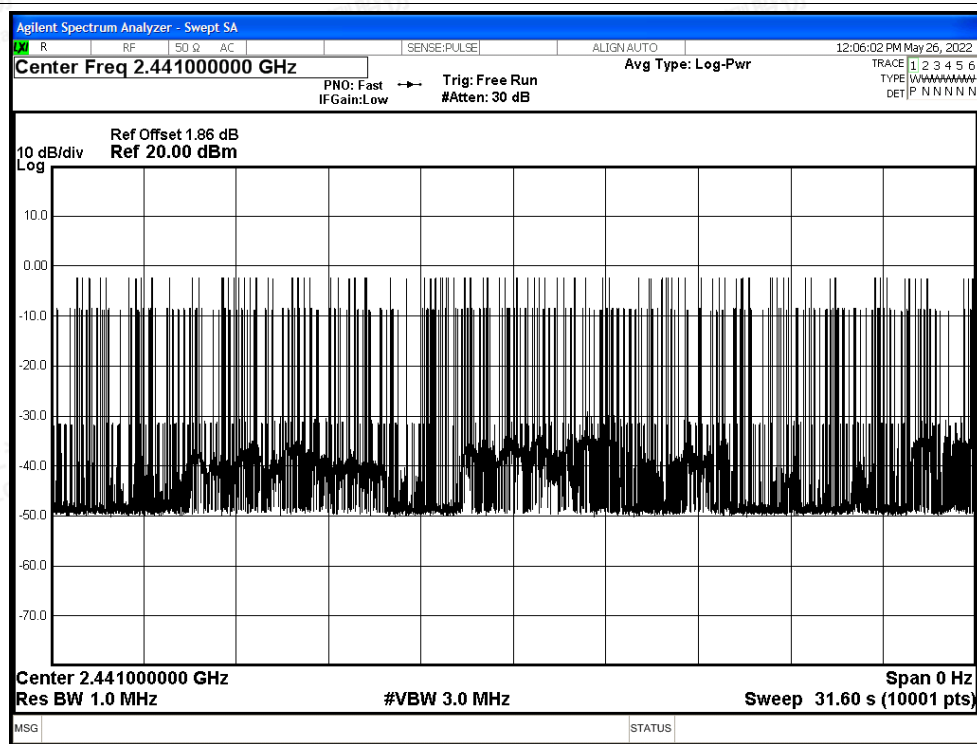




Dwell NVNT 3-DH5 2480MHz Ant1 One Burst

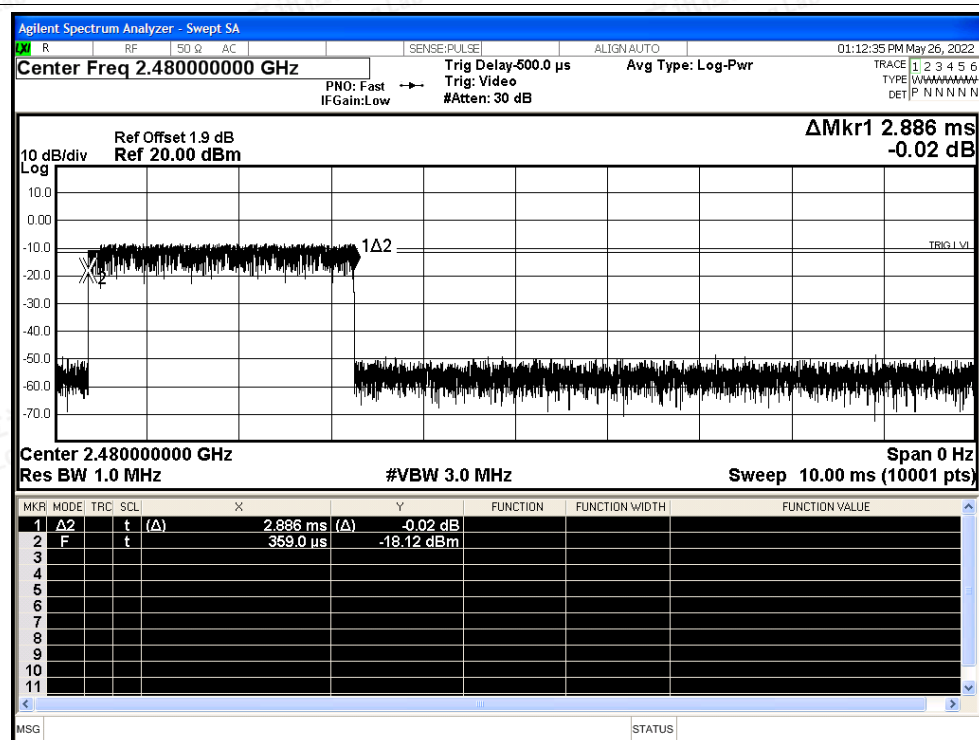

Dwell NVNT 3-DH5 2480MHz Ant1 Accumulated

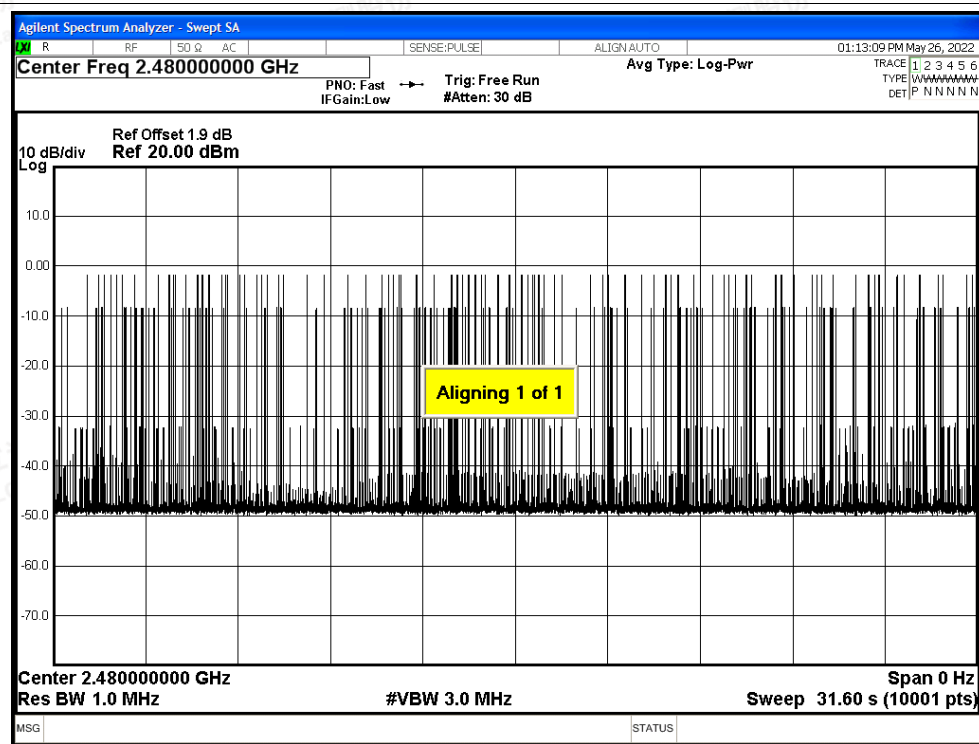



A.5 Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass






Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

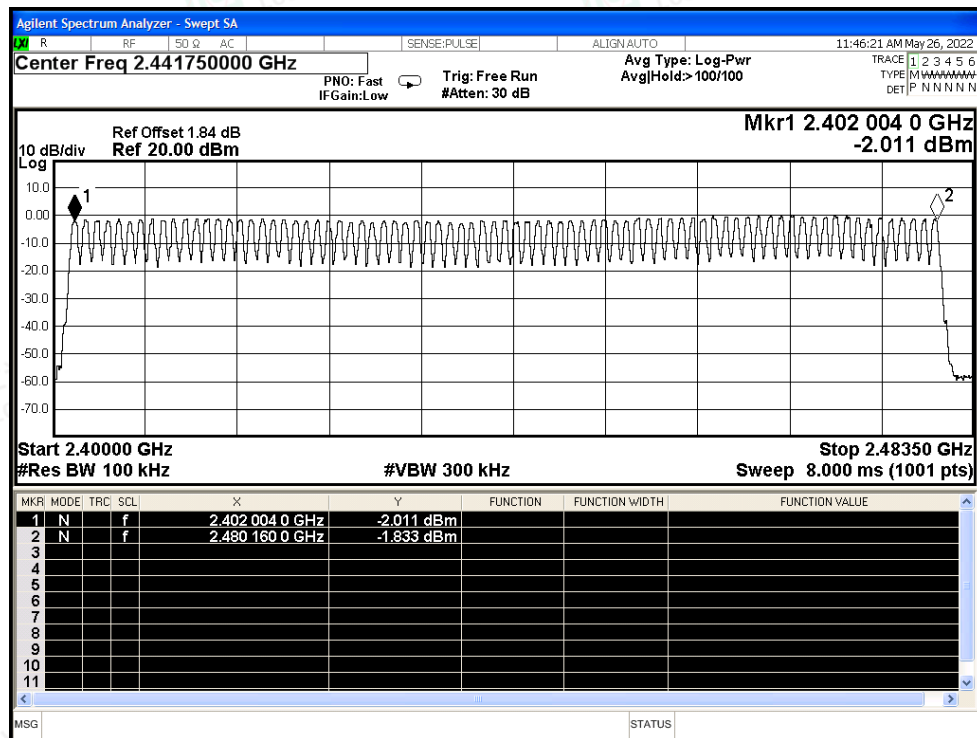


Hopping No. NVNT 2-DH5 2402MHz Ant1

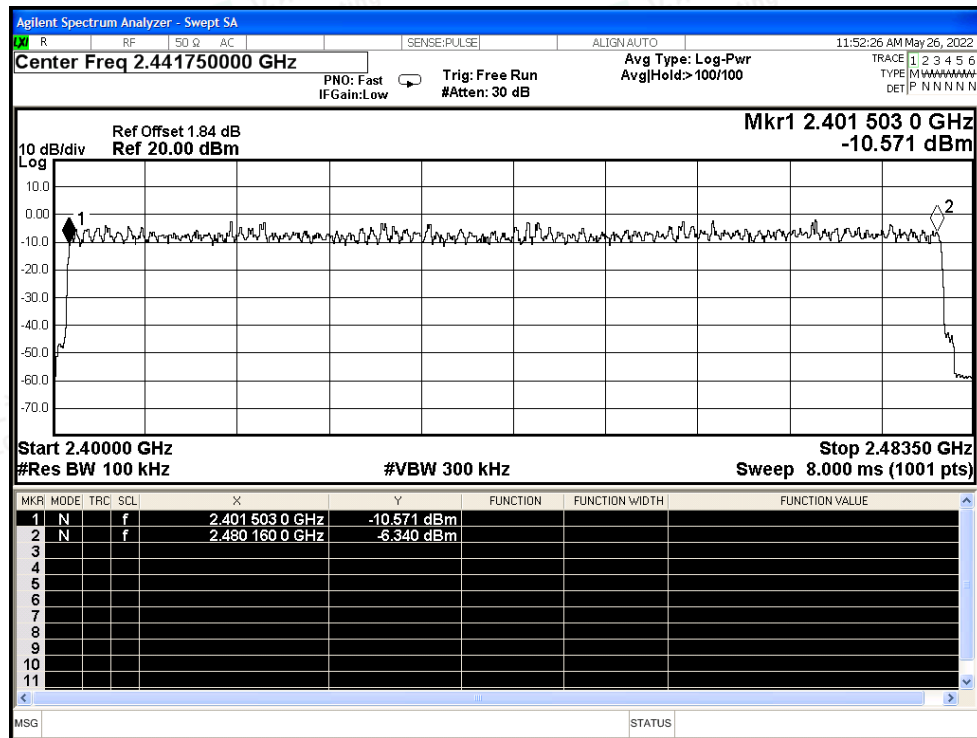



Hopping No. NVNT 3-DH5 2402MHz Ant1

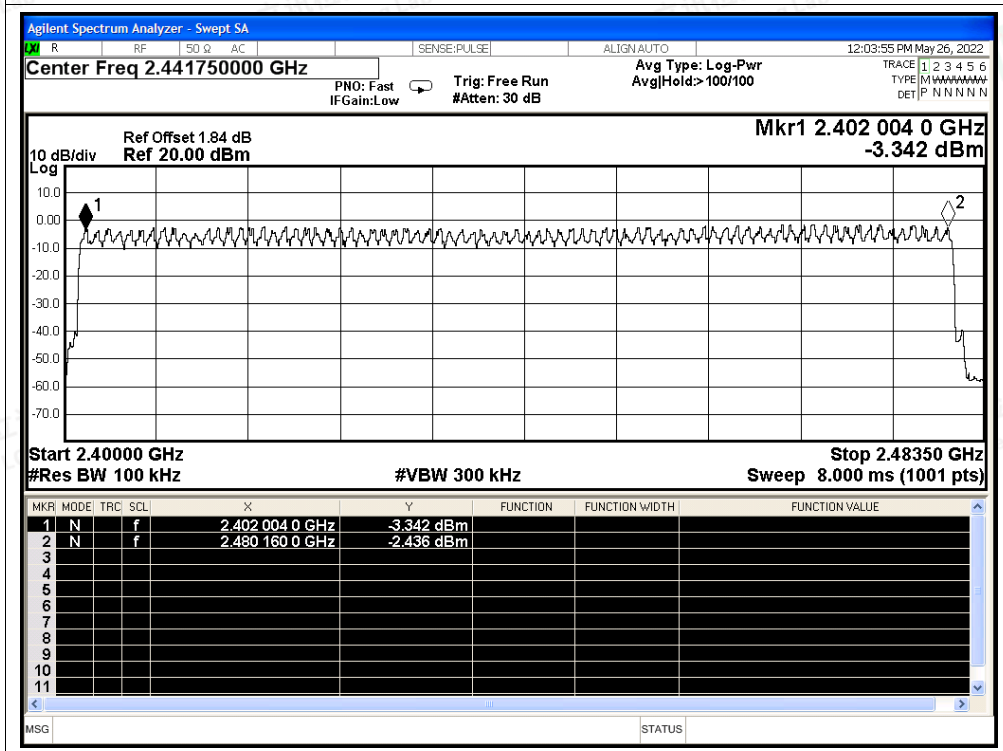



A.6 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-55.37	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-54.97	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-50.27	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-55.57	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-52.26	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-54.95	-20	Pass






Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

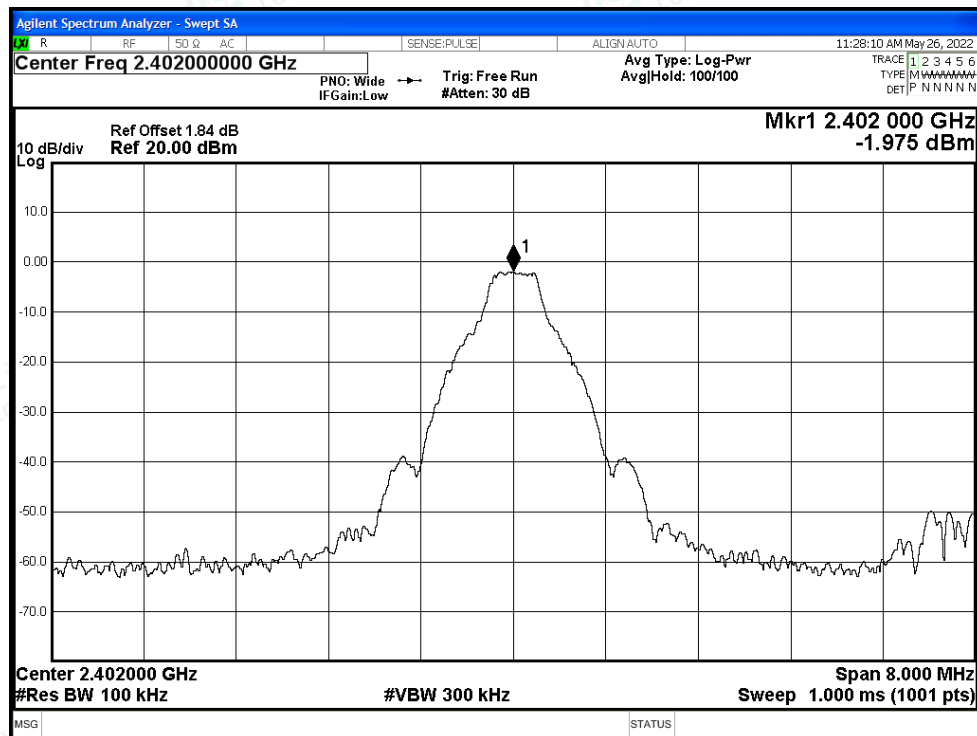

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

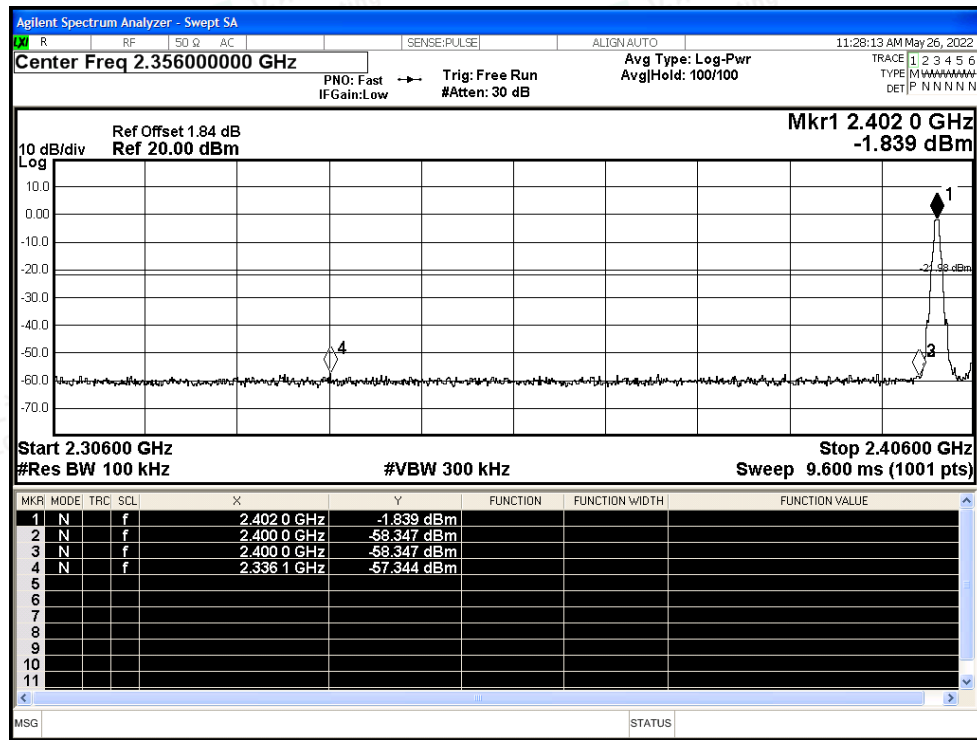

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

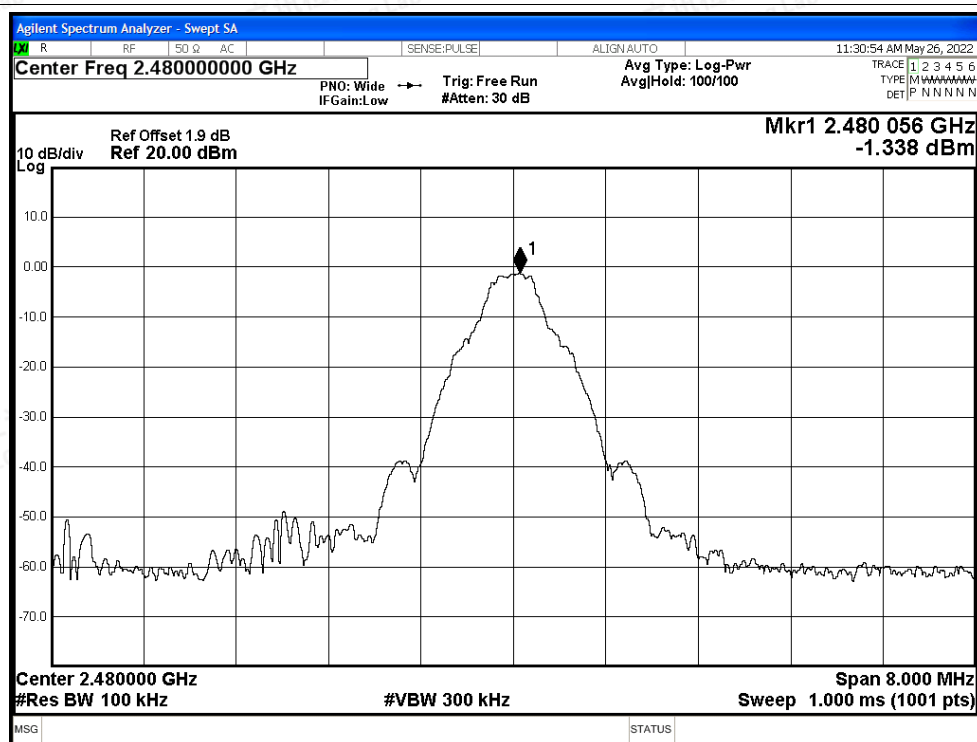


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

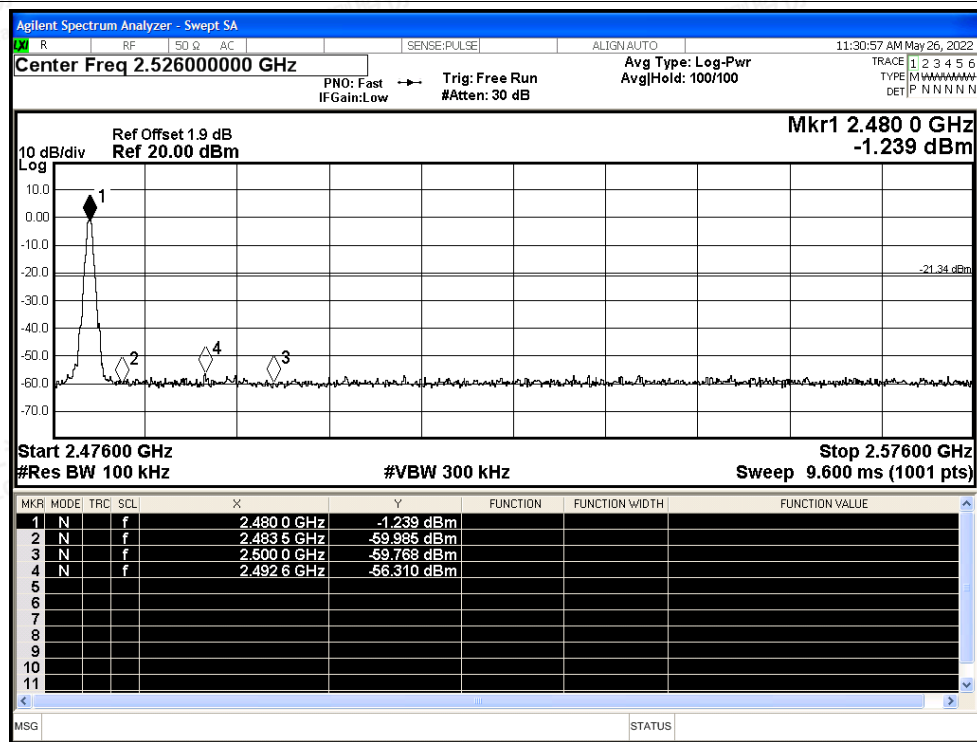




Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

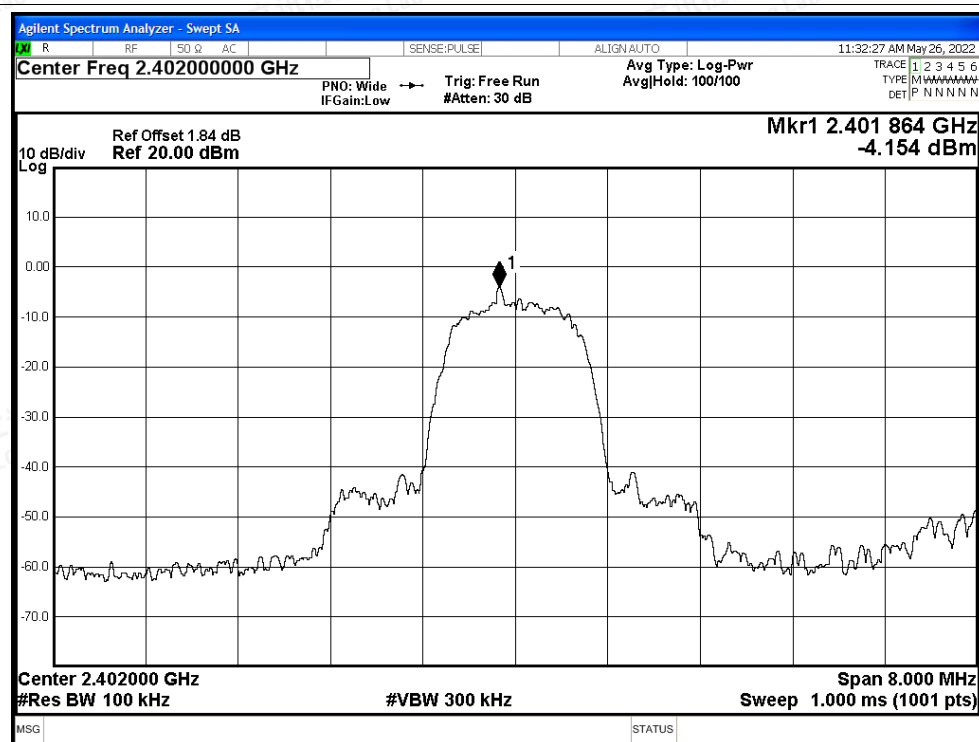


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

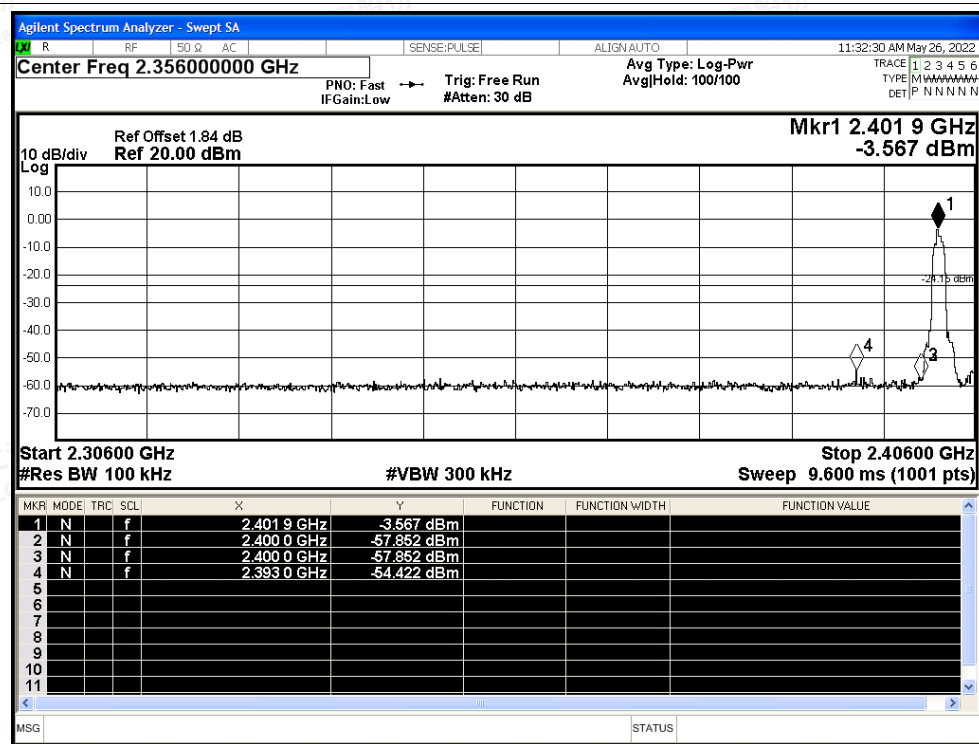




Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

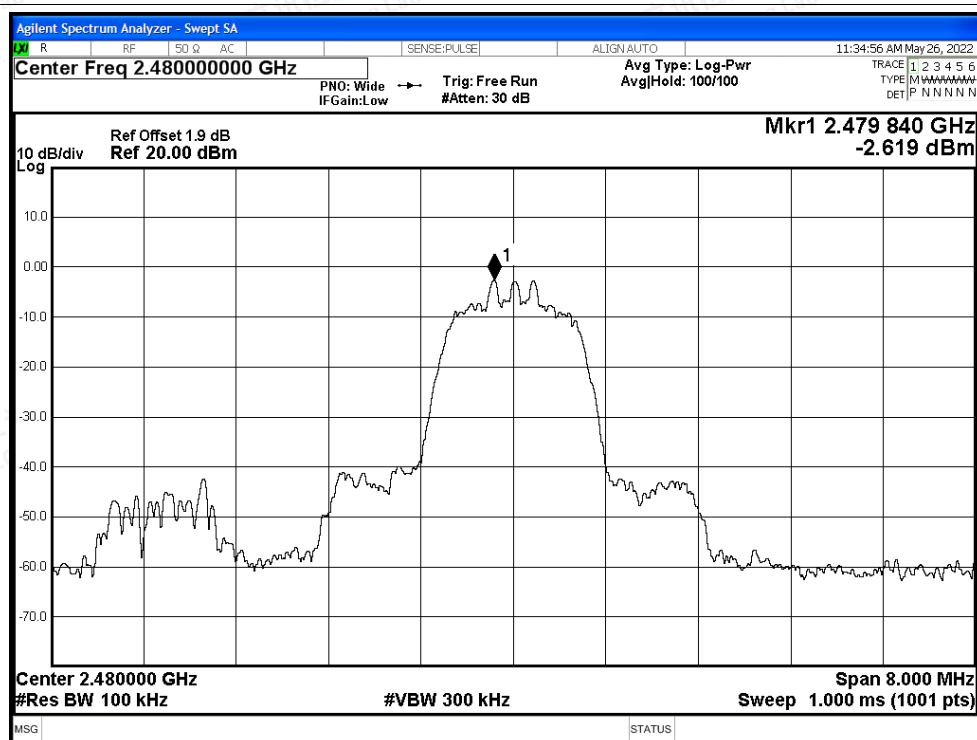

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

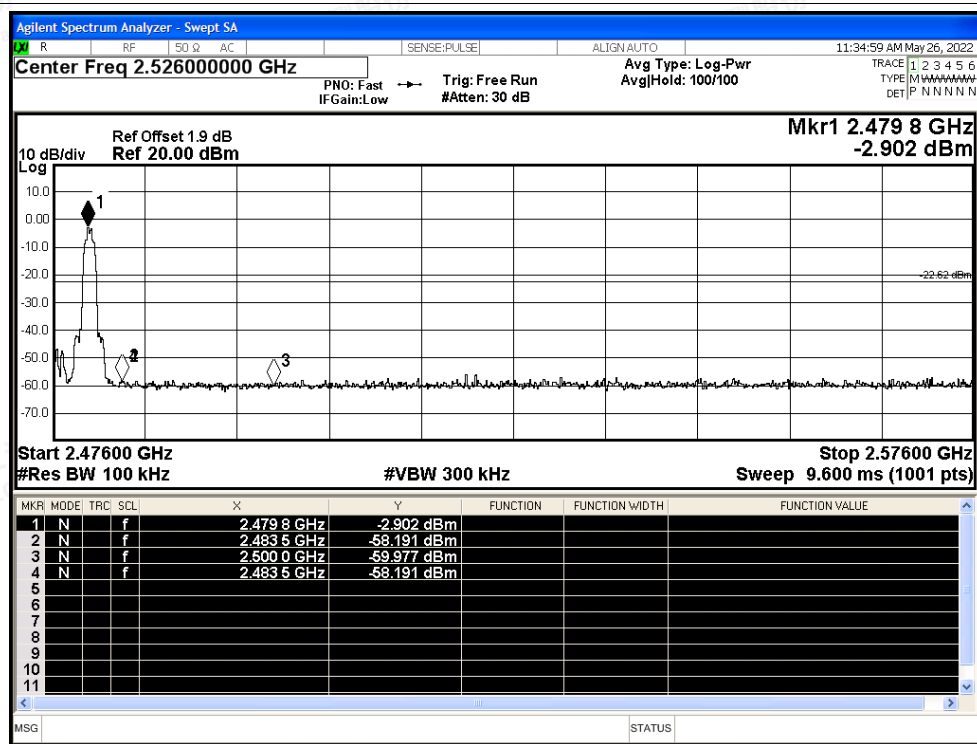

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

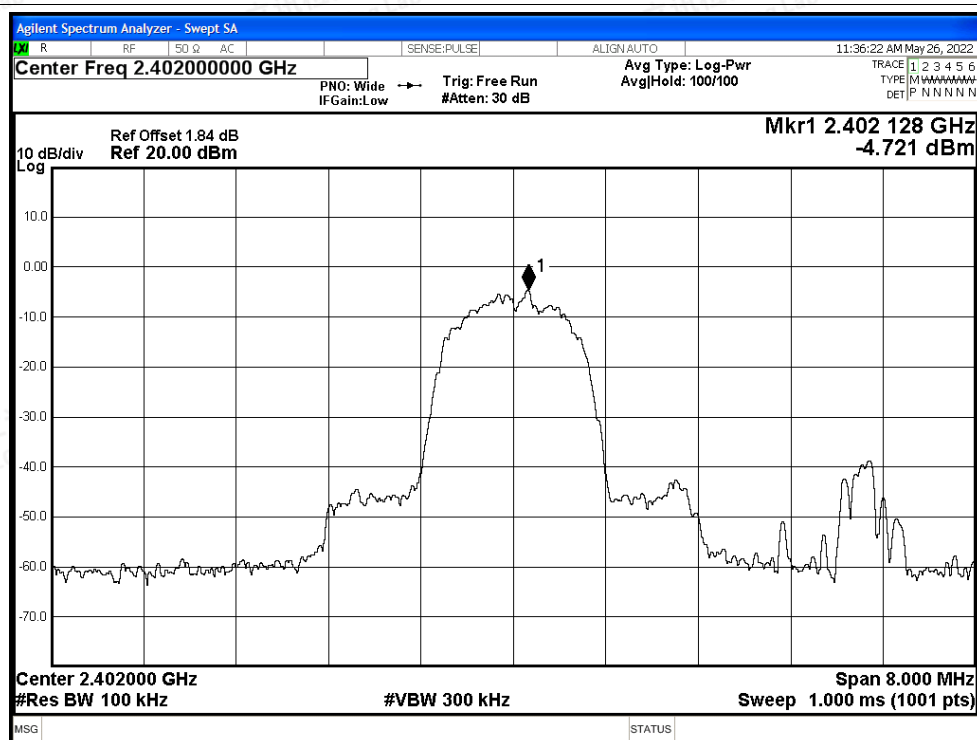


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

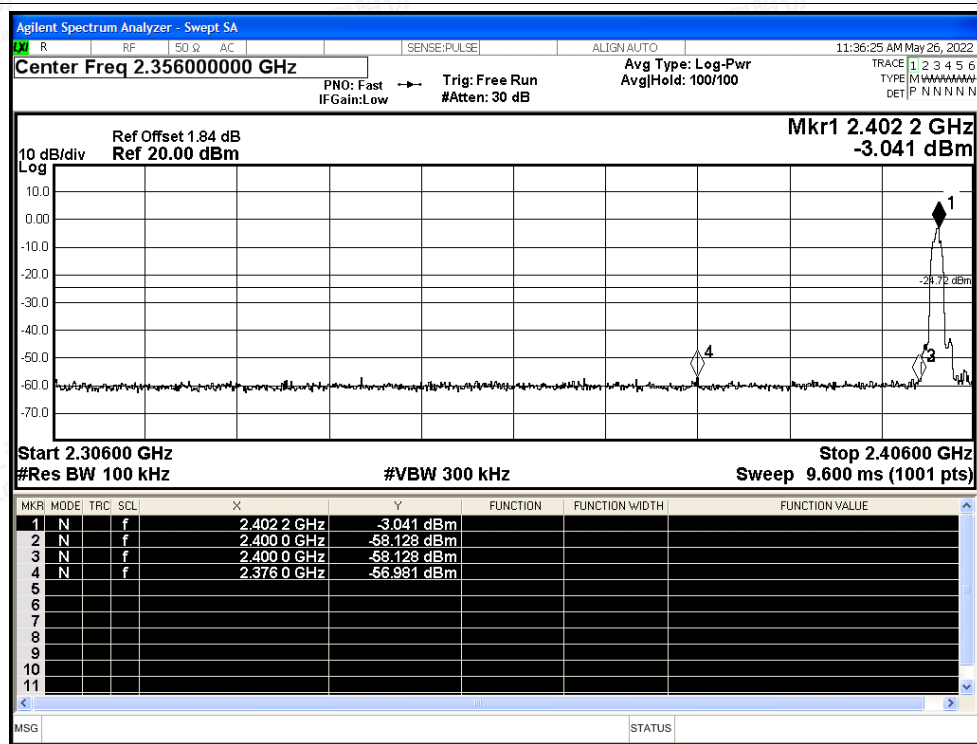




Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

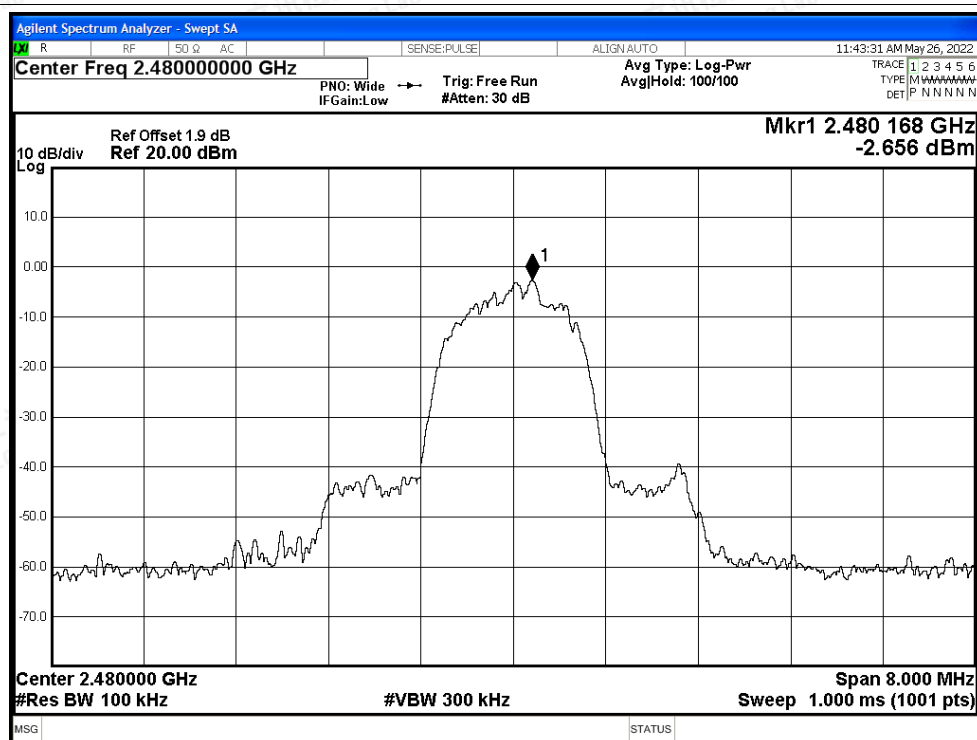

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

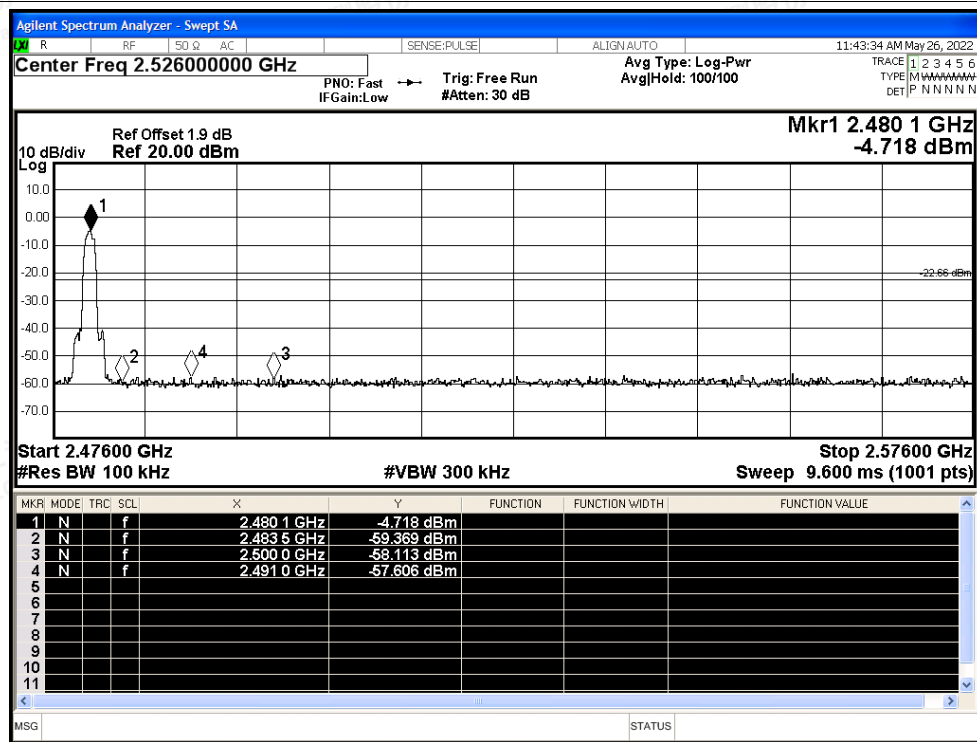

**(Hopping)**


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-54.9	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-55.88	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-52.78	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-53.8	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-52.97	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-54.32	-20	Pass






Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

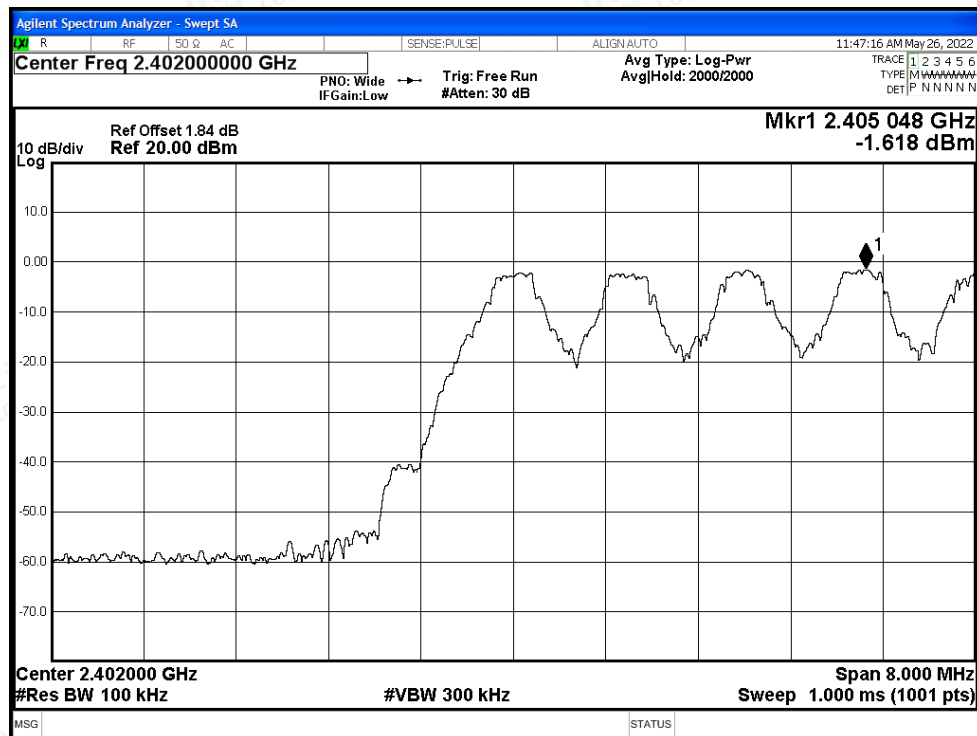


Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

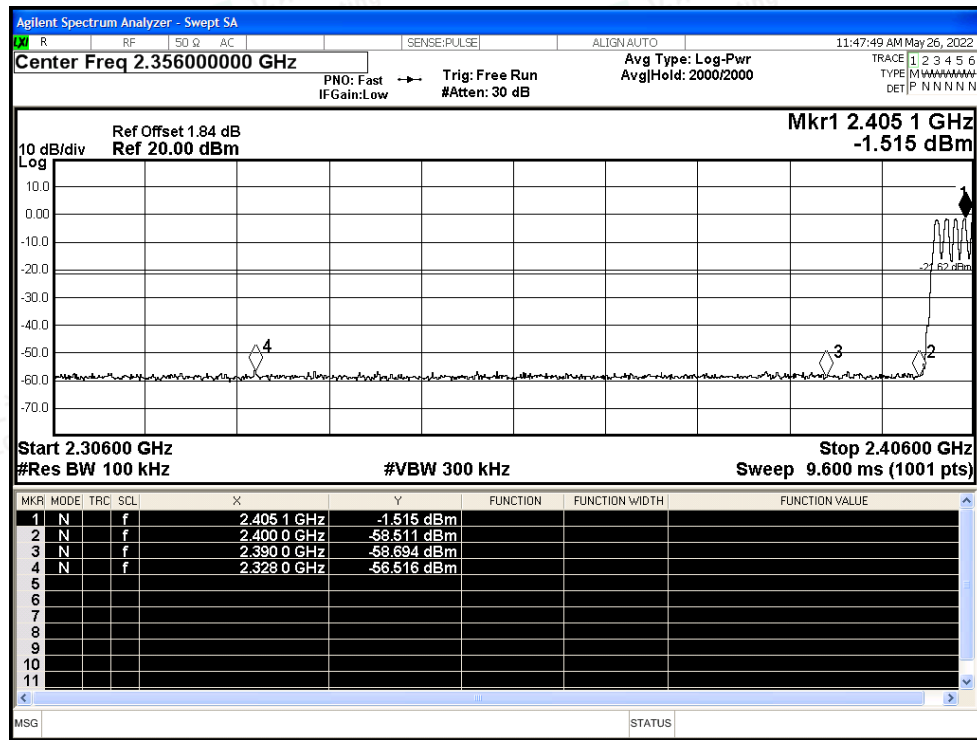




Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

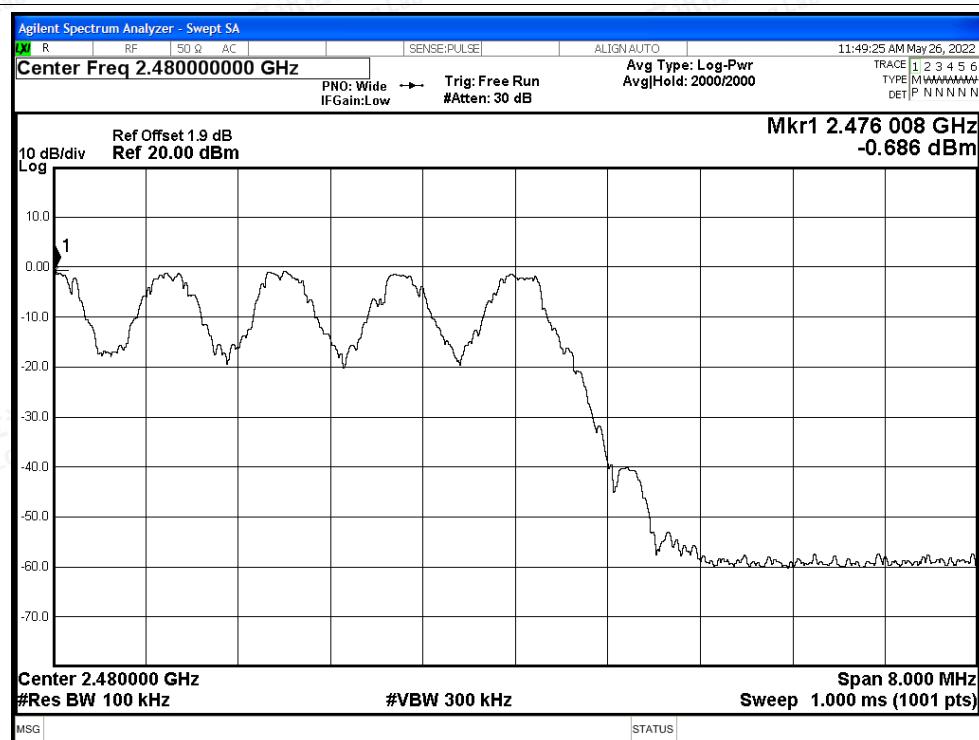

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

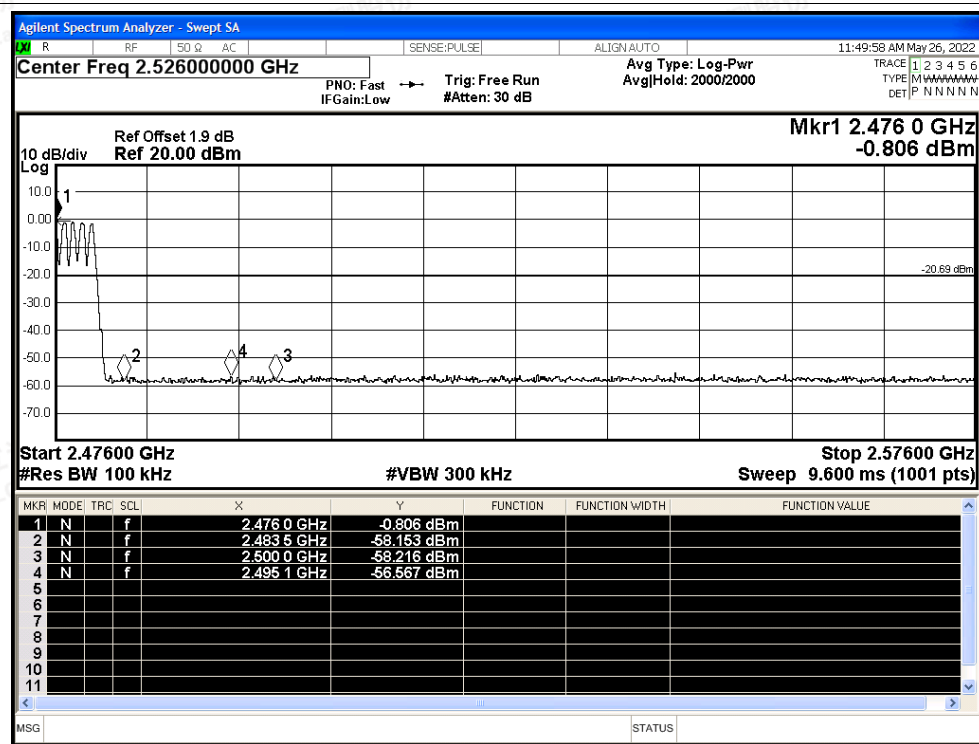




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

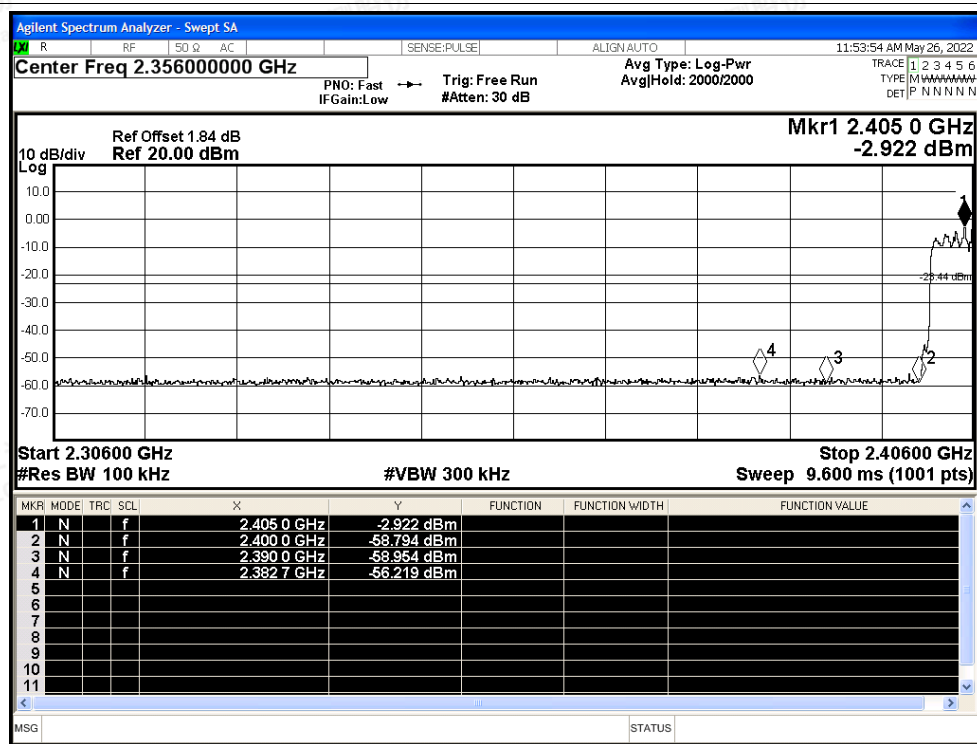




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

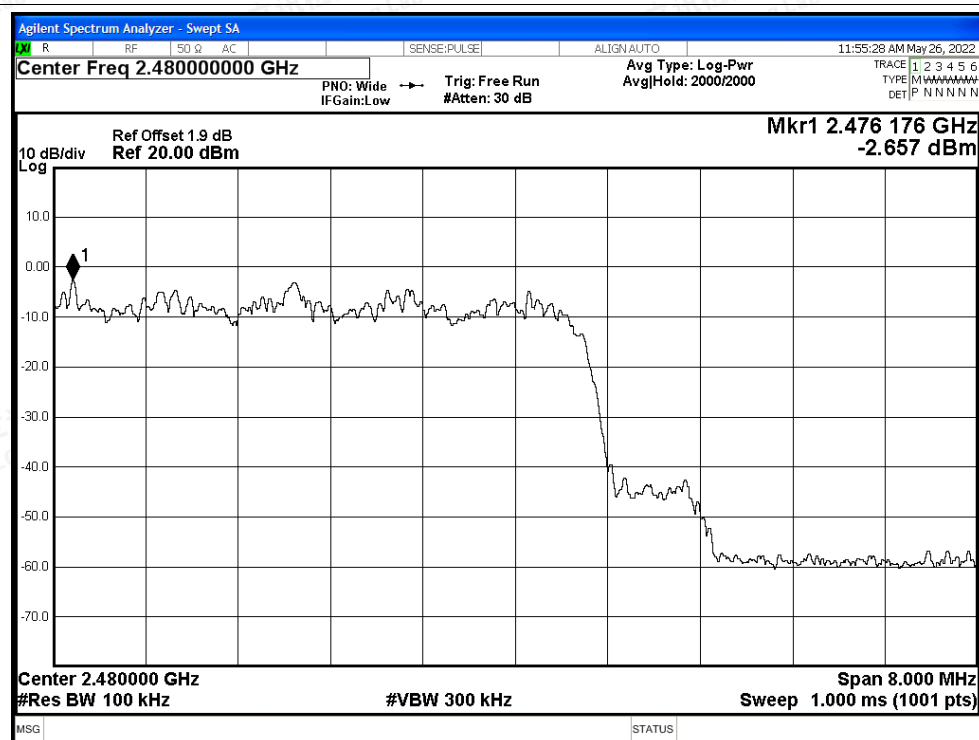

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

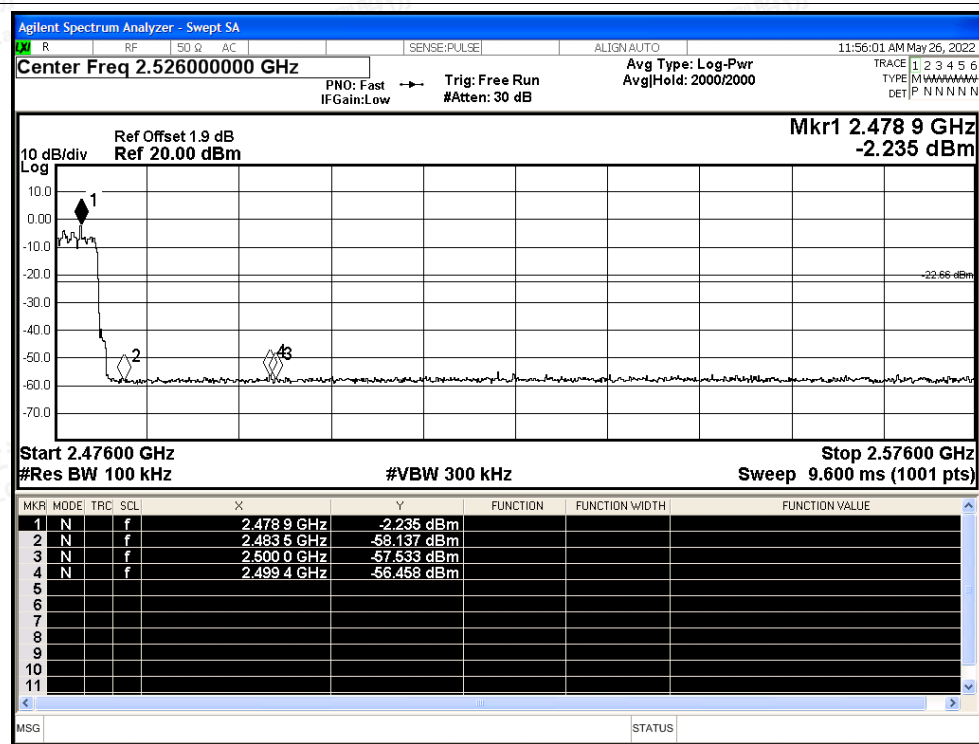




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

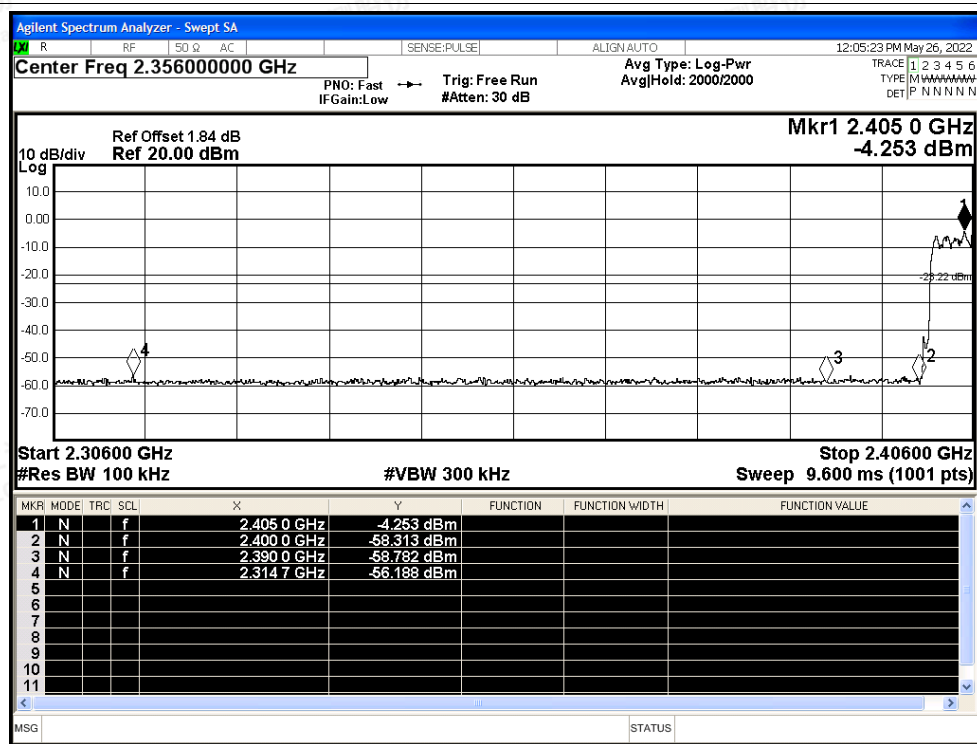




Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

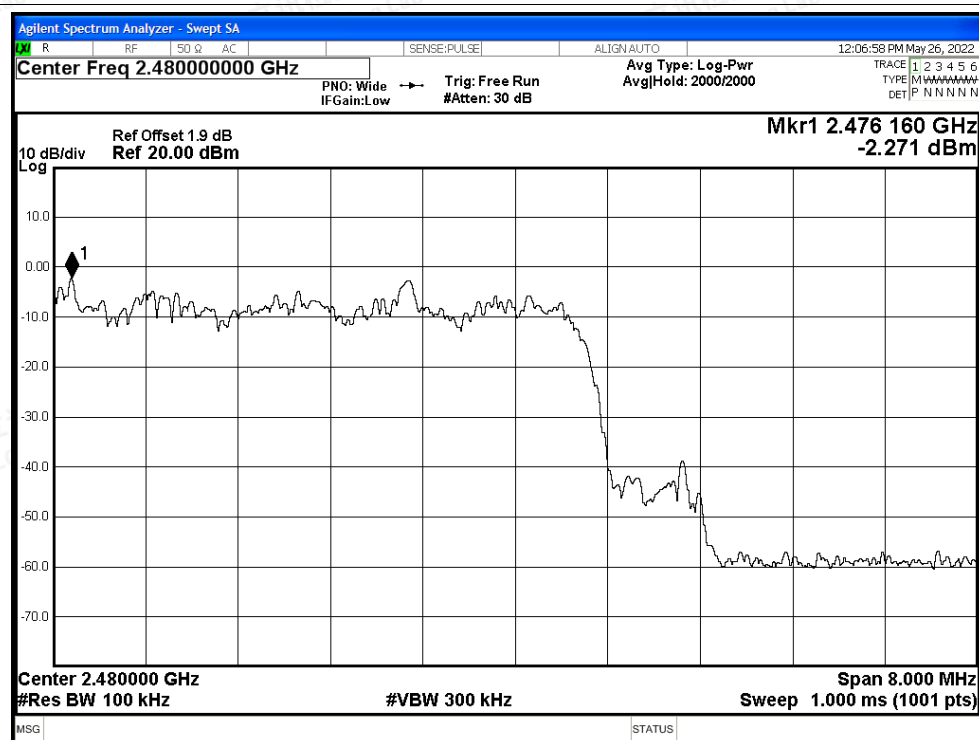

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

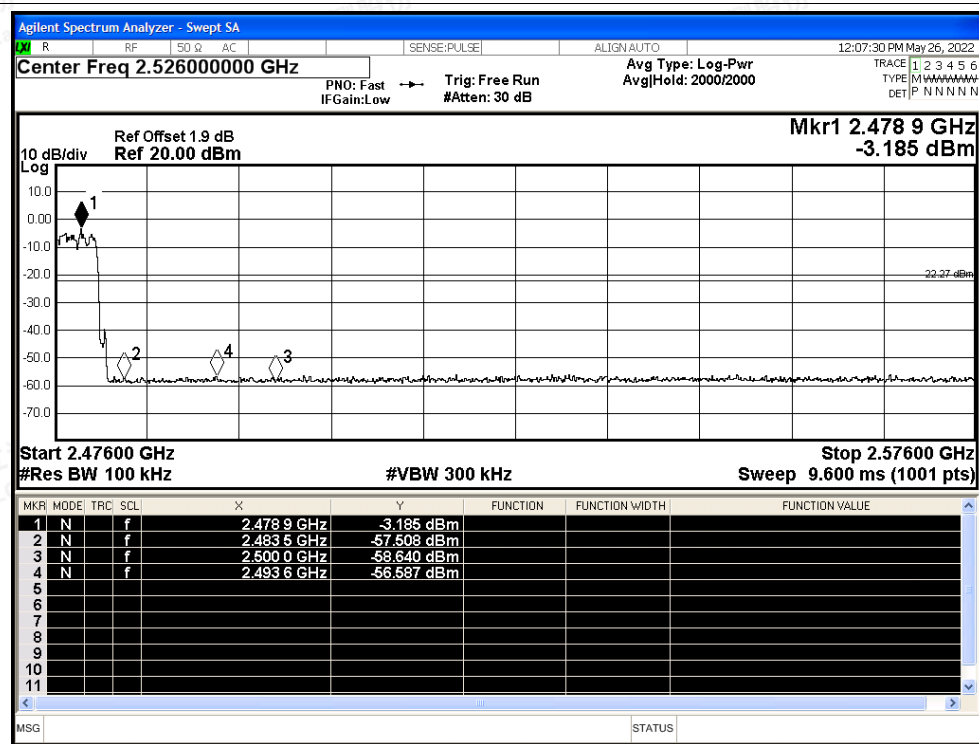



A.7 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-35.42	-20	Pass
NVNT	1-DH5	2441	Ant1	-42.58	-20	Pass
NVNT	1-DH5	2480	Ant1	-50.18	-20	Pass
NVNT	2-DH5	2402	Ant1	-48.25	-20	Pass
NVNT	2-DH5	2441	Ant1	-48.54	-20	Pass
NVNT	2-DH5	2480	Ant1	-45.12	-20	Pass
NVNT	3-DH5	2402	Ant1	-46.61	-20	Pass
NVNT	3-DH5	2441	Ant1	-47.15	-20	Pass
NVNT	3-DH5	2480	Ant1	-49.96	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

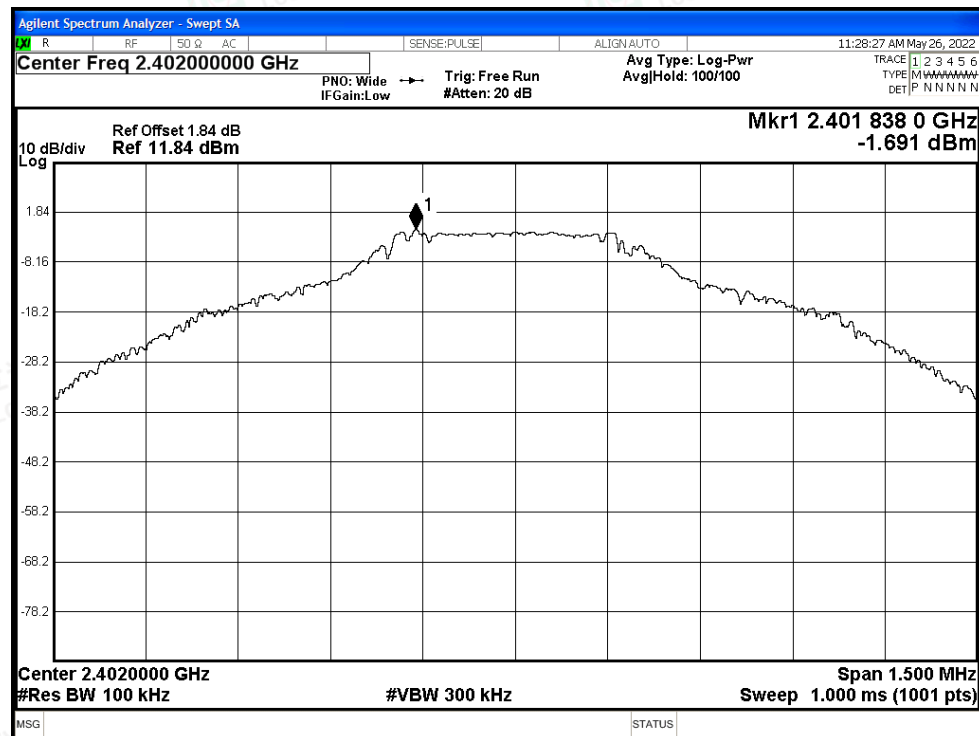


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

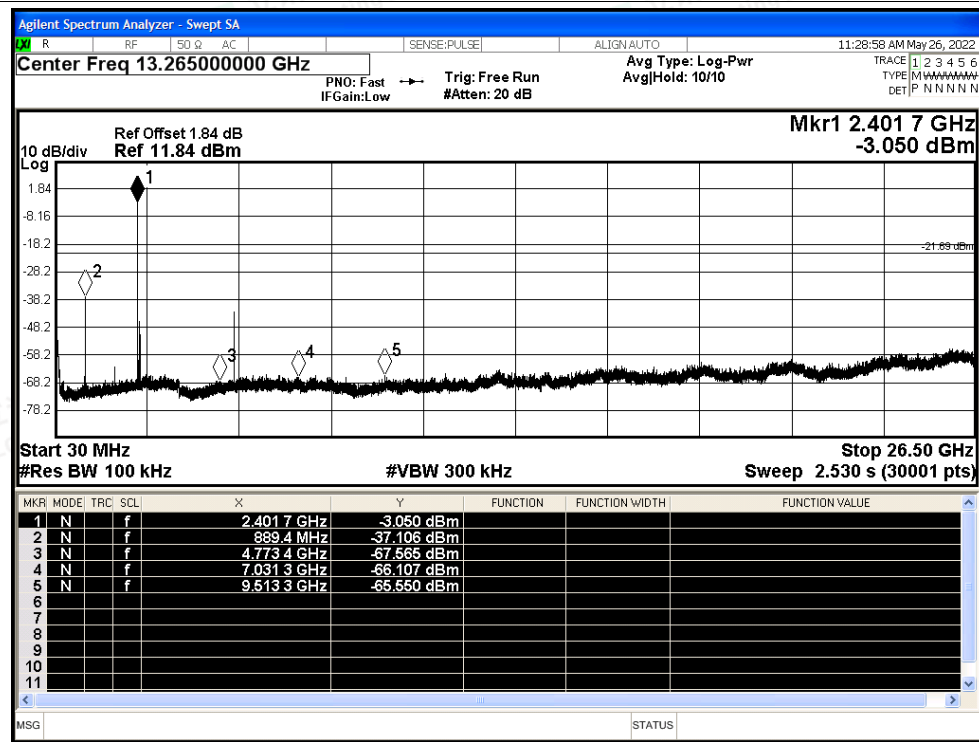




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

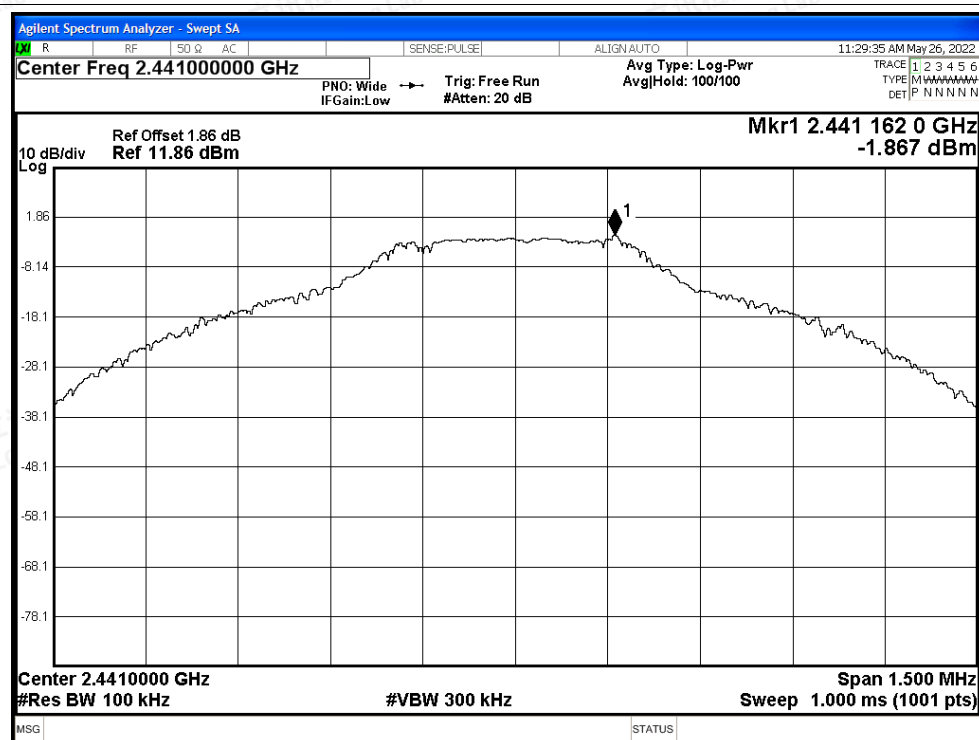


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

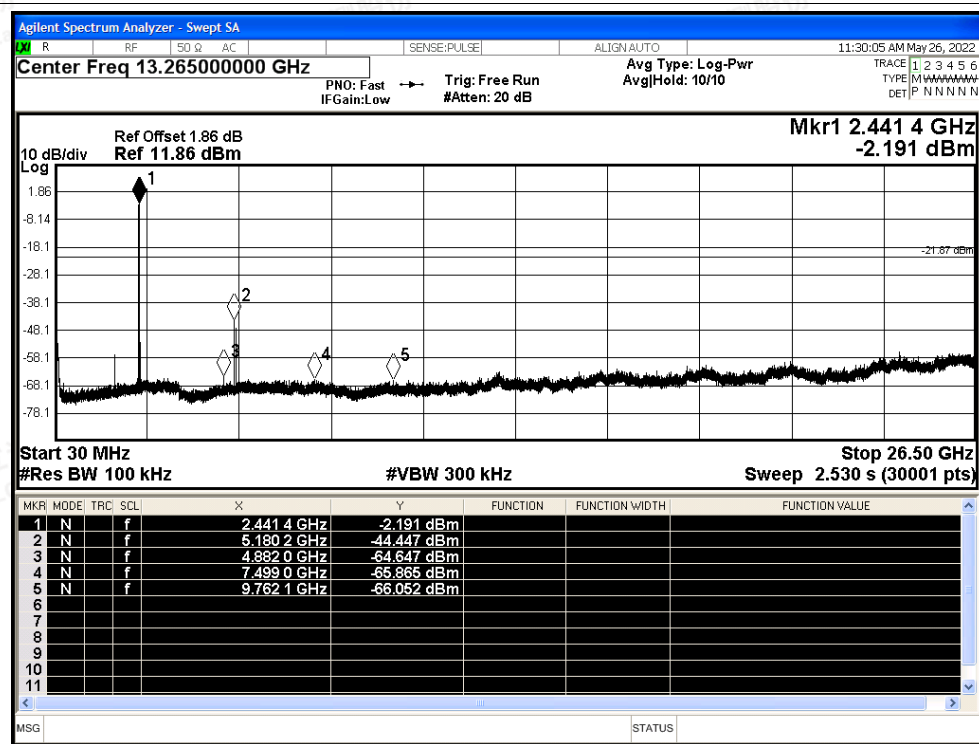




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

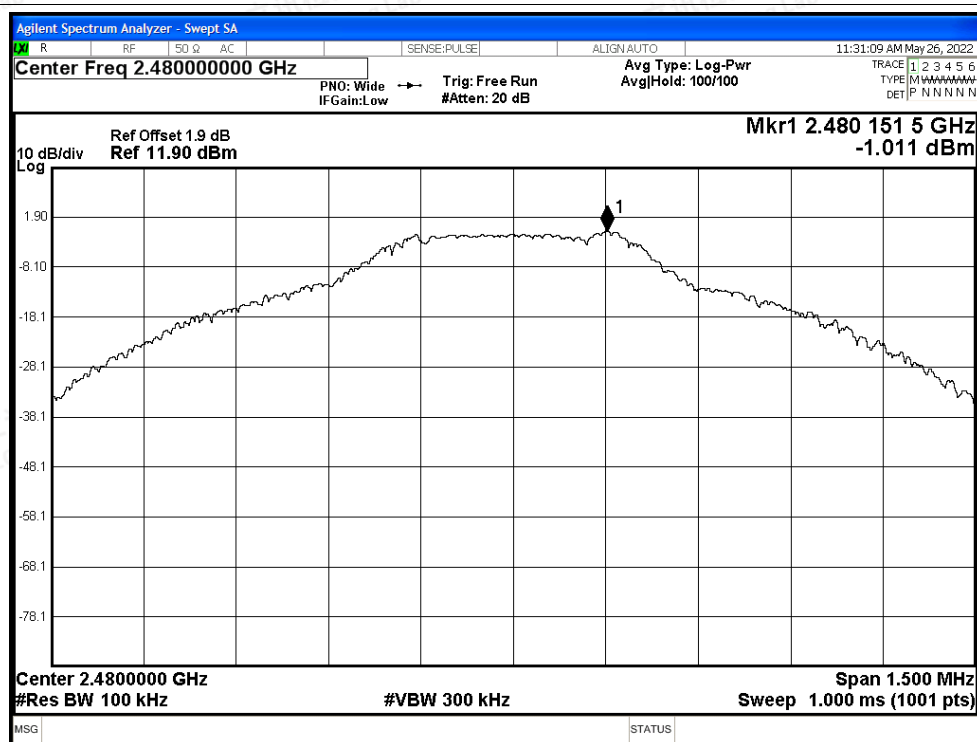

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

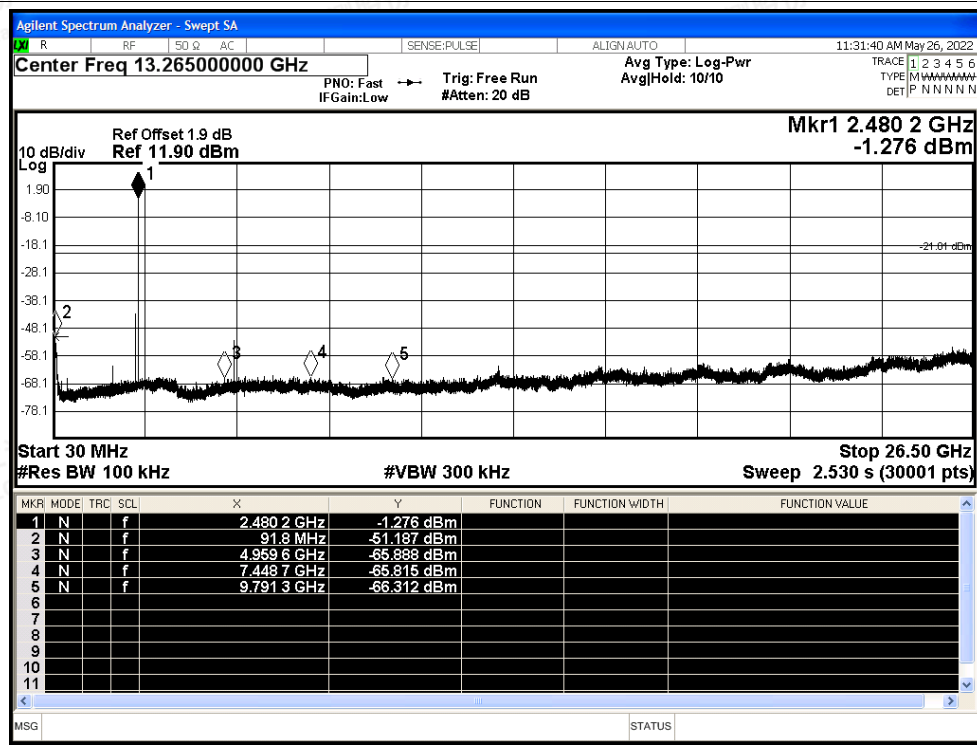

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

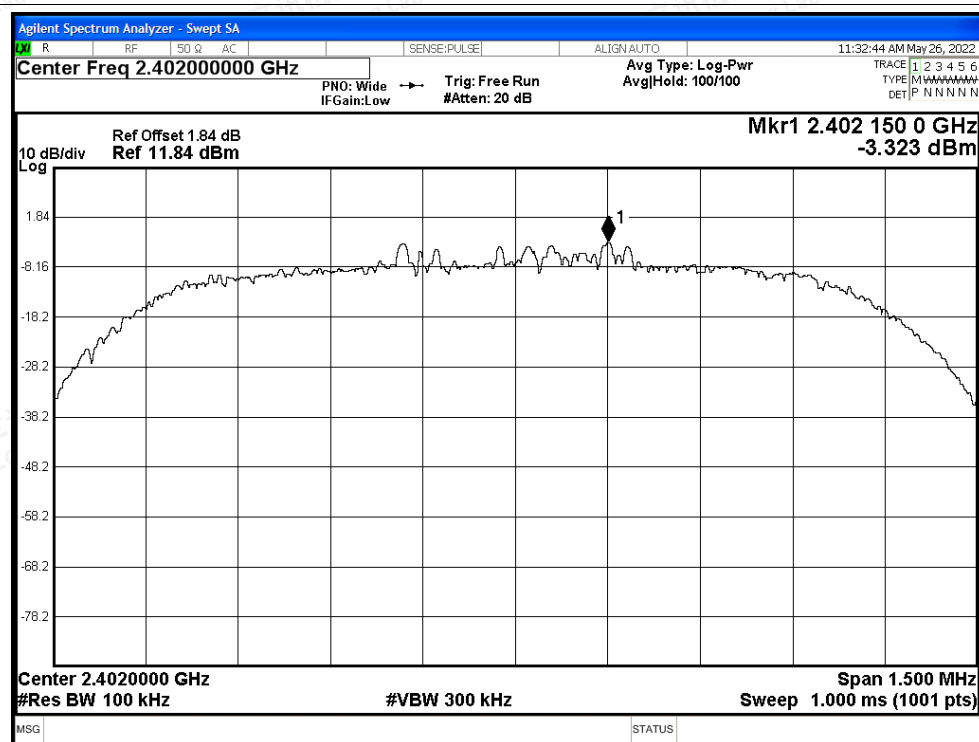

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

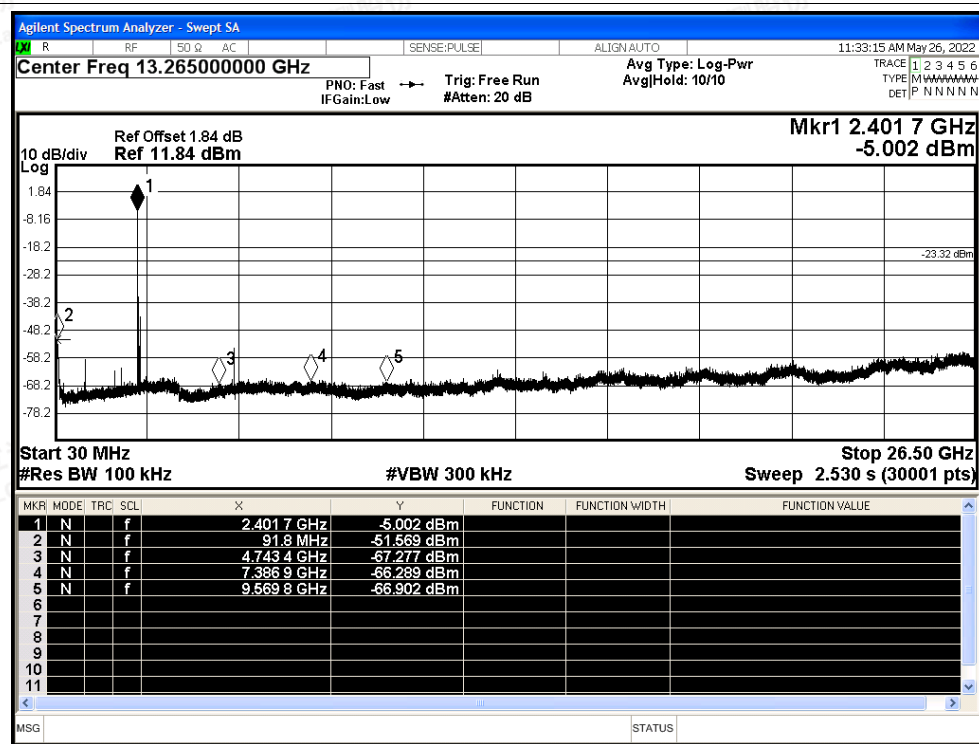

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

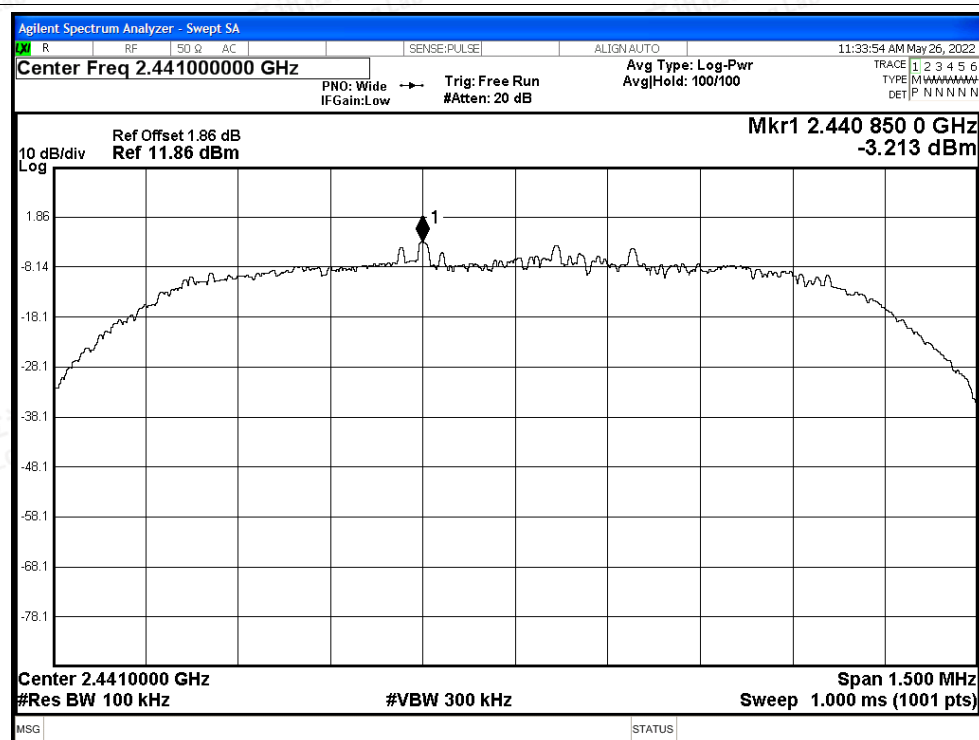


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

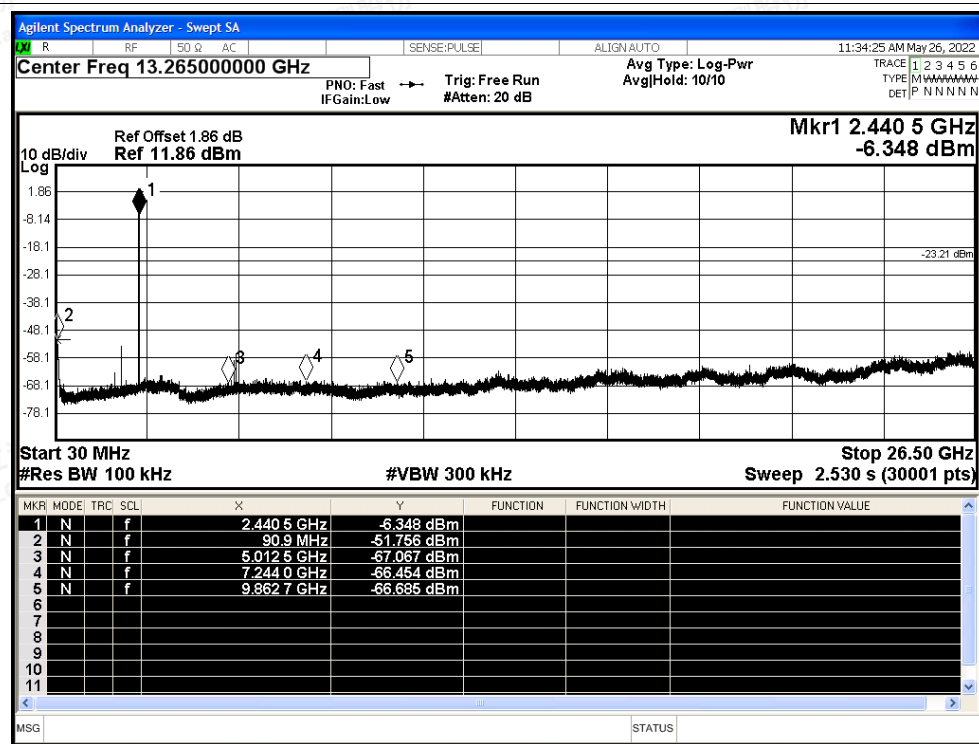




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

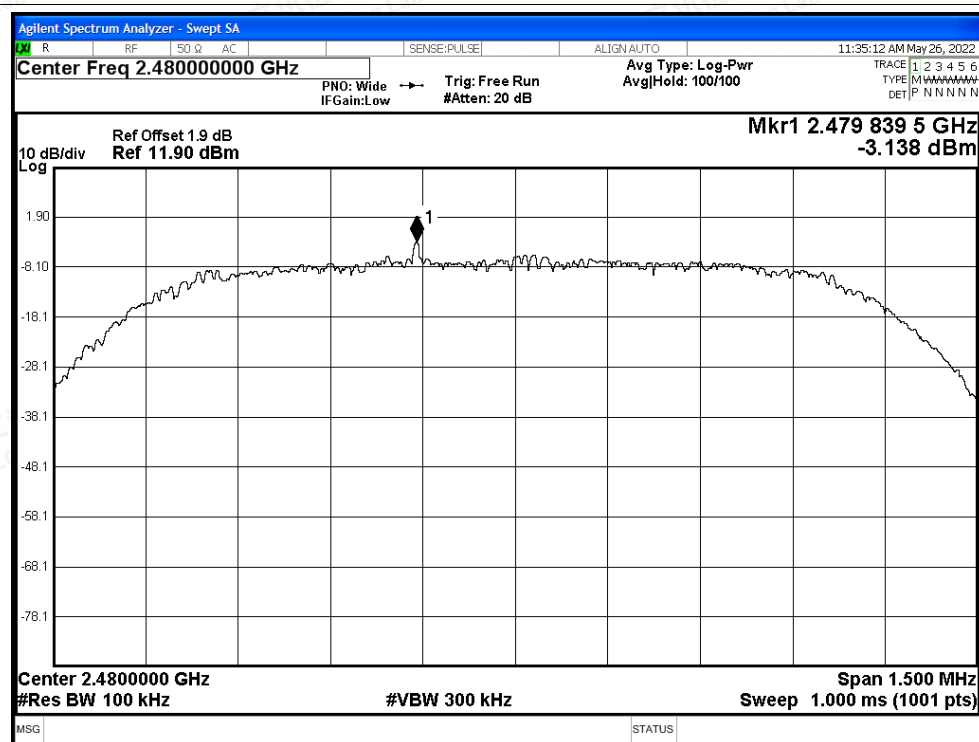

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

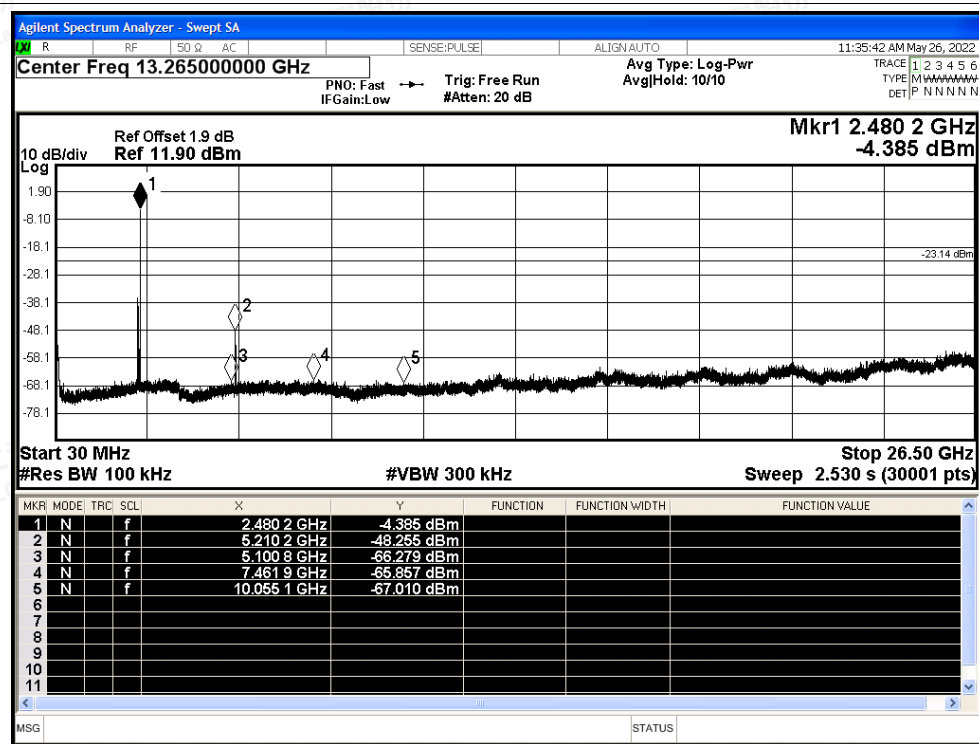

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

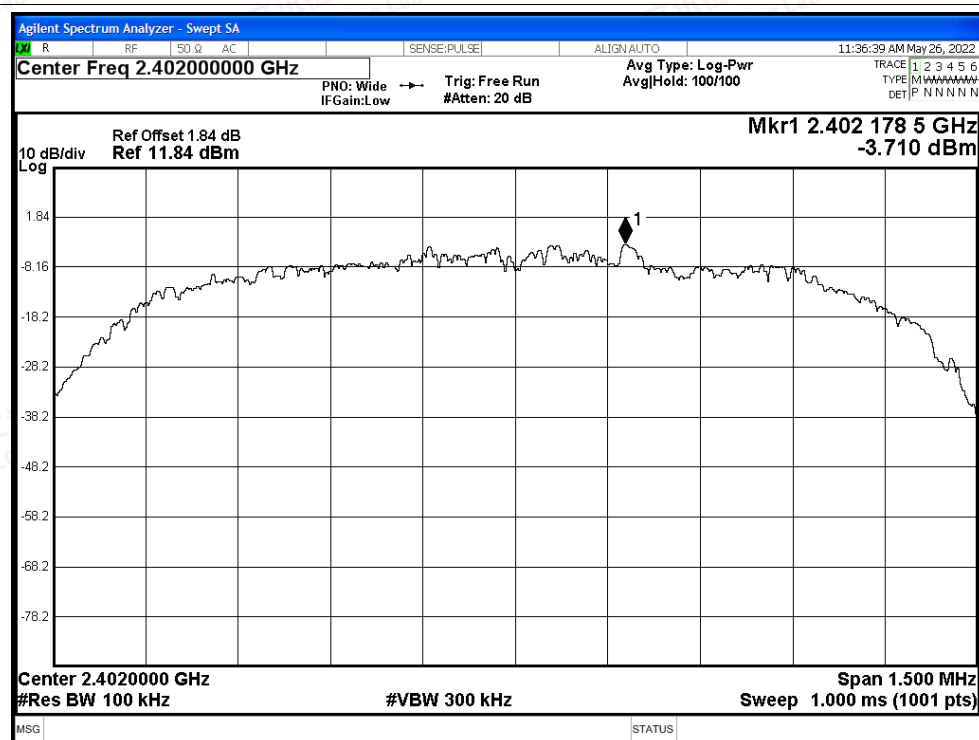


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

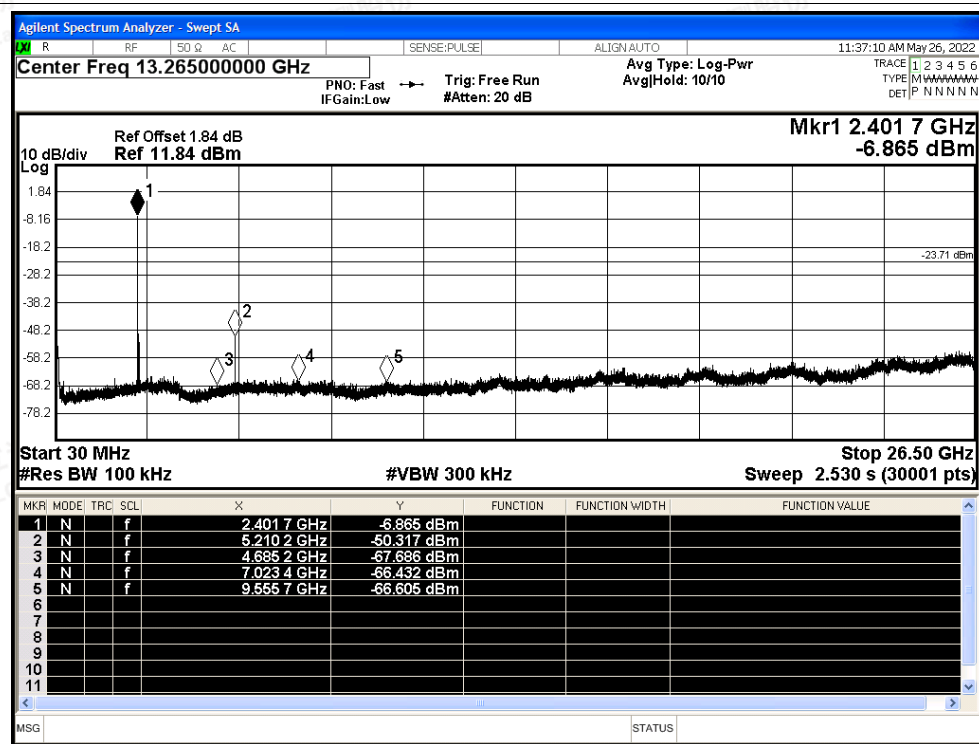




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

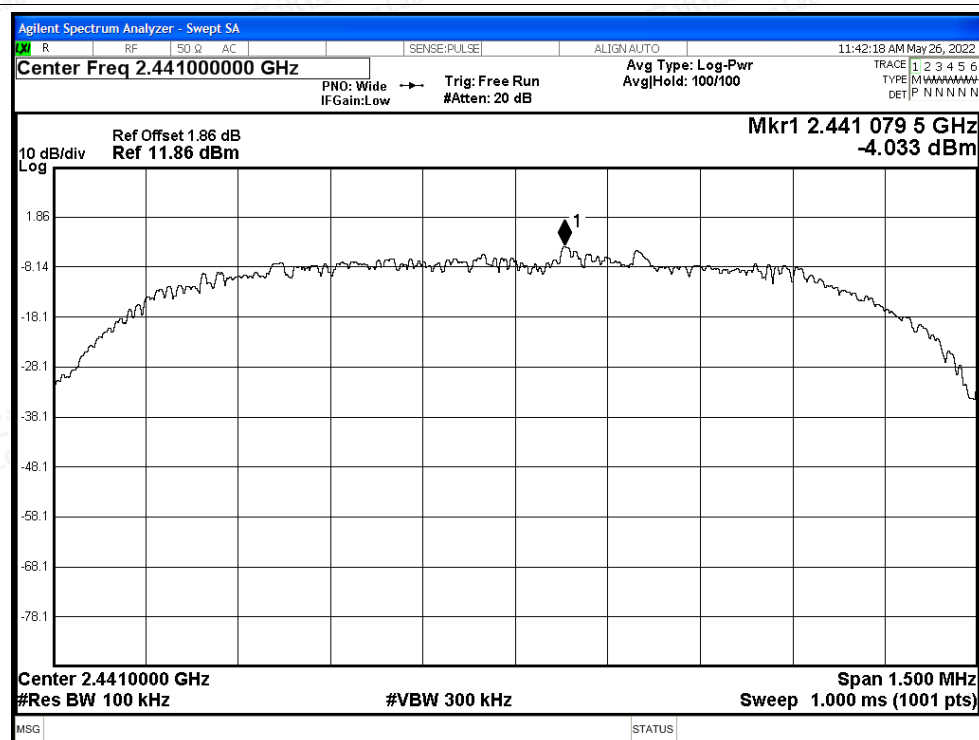


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

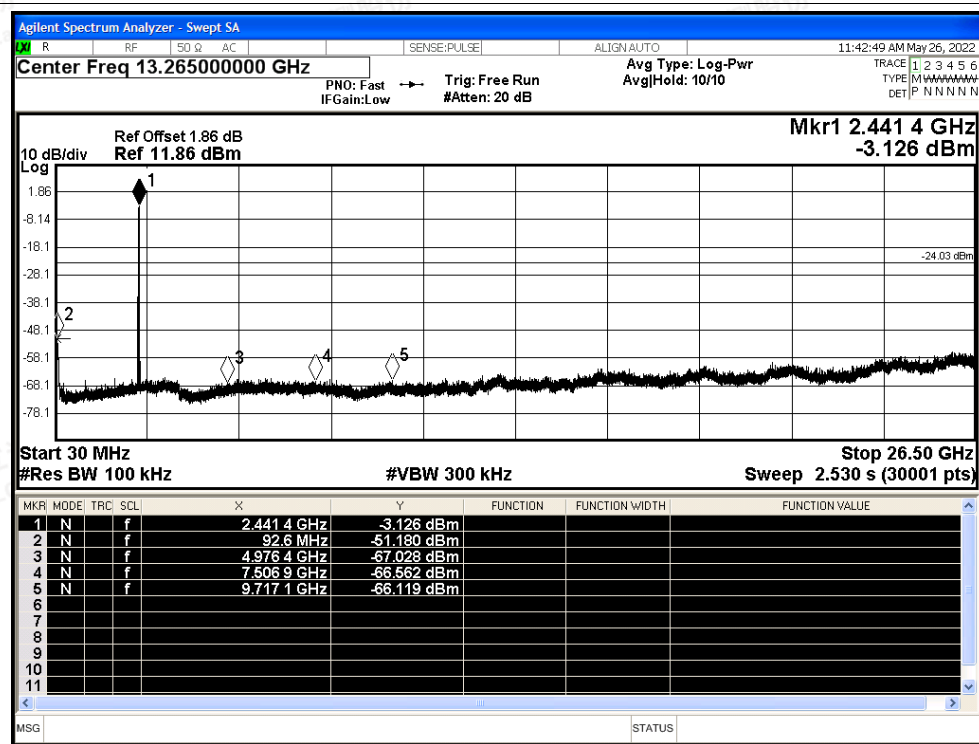




Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

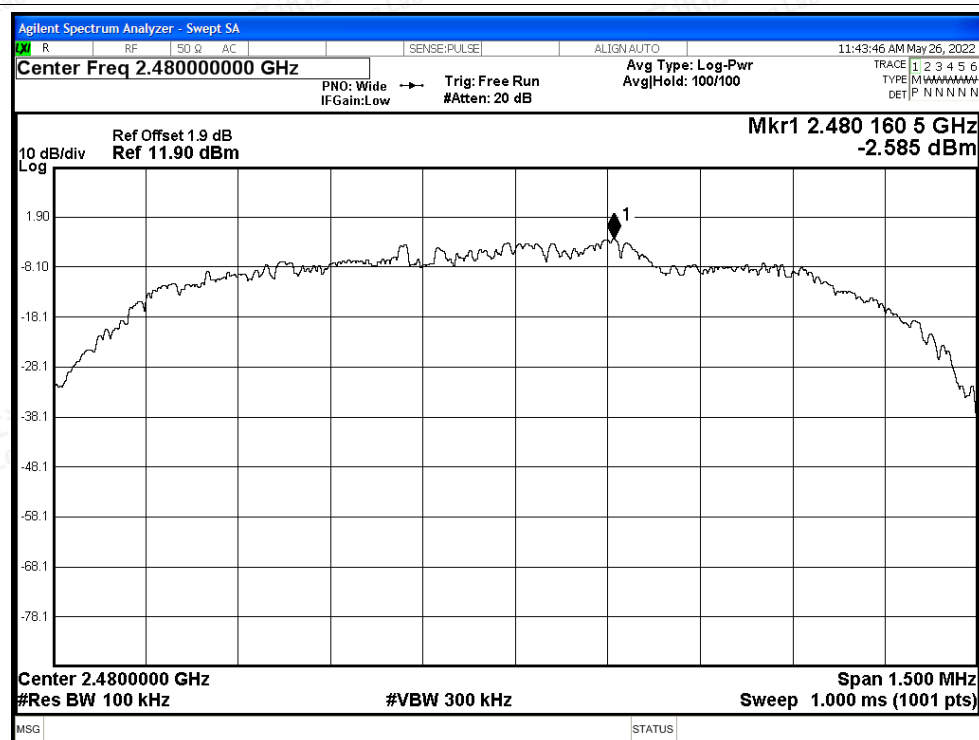

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

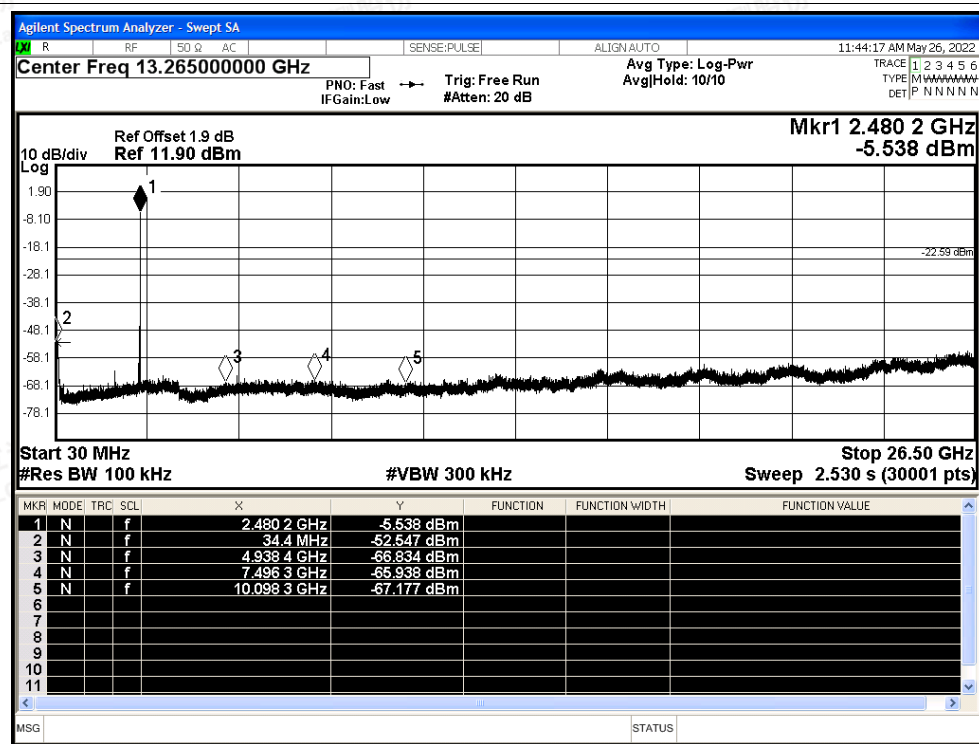



A.8 Restrict Band

Condition	Mode	Frequency (MHz)	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH5	2402	No-Hopping	2310	-50.5	2	46.76	Peak	74	Pass
NVNT	1-DH5	2402	No-Hopping	2310	-60.77	2	36.49	Average	54	Pass
NVNT	1-DH5	2402	No-Hopping	2369.904	-47.58	2	49.68	Peak	74	Pass
NVNT	1-DH5	2402	No-Hopping	2385.36	-60.26	2	37	Average	54	Pass
NVNT	1-DH5	2402	No-Hopping	2390	-50.3	2	46.96	Peak	74	Pass
NVNT	1-DH5	2402	No-Hopping	2390	-60.48	2	36.78	Average	54	Pass
NVNT	1-DH5	2480	No-Hopping	2483.5	-49.35	2	47.91	Peak	74	Pass
NVNT	1-DH5	2480	No-Hopping	2483.5	-59.97	2	37.29	Average	54	Pass
NVNT	1-DH5	2480	No-Hopping	2484.784	-47.18	2	50.08	Peak	74	Pass
NVNT	1-DH5	2480	No-Hopping	2489.584	-59.77	2	37.49	Average	54	Pass
NVNT	1-DH5	2480	No-Hopping	2500	-50.07	2	47.19	Peak	74	Pass
NVNT	1-DH5	2480	No-Hopping	2500	-60.09	2	37.17	Average	54	Pass
NVNT	2-DH5	2402	No-Hopping	2310	-51.88	2	45.38	Peak	74	Pass
NVNT	2-DH5	2402	No-Hopping	2310	-60.77	2	36.49	Average	54	Pass
NVNT	2-DH5	2402	No-Hopping	2328.048	-47.97	2	49.29	Peak	74	Pass
NVNT	2-DH5	2402	No-Hopping	2389.968	-60.31	2	36.95	Average	54	Pass
NVNT	2-DH5	2402	No-Hopping	2390	-50.36	2	46.9	Peak	74	Pass
NVNT	2-DH5	2402	No-Hopping	2390	-60.42	2	36.84	Average	54	Pass
NVNT	2-DH5	2480	No-Hopping	2483.5	-50.47	2	46.79	Peak	74	Pass
NVNT	2-DH5	2480	No-Hopping	2483.5	-59.8	2	37.46	Average	54	Pass
NVNT	2-DH5	2480	No-Hopping	2488	-47.93	2	49.33	Peak	74	Pass
NVNT	2-DH5	2480	No-Hopping	2483.512	-59.8	2	37.46	Average	54	Pass
NVNT	2-DH5	2480	No-Hopping	2500	-52.43	2	44.83	Peak	74	Pass
NVNT	2-DH5	2480	No-Hopping	2500	-60.15	2	37.11	Average	54	Pass
NVNT	3-DH5	2402	No-Hopping	2310	-52.58	2	44.68	Peak	74	Pass
NVNT	3-DH5	2402	No-Hopping	2310	-60.73	2	36.53	Average	54	Pass
NVNT	3-DH5	2402	No-Hopping	2378.16	-46.98	2	50.28	Peak	74	Pass
NVNT	3-DH5	2402	No-Hopping	2384.688	-60.29	2	36.97	Average	54	Pass
NVNT	3-DH5	2402	No-Hopping	2390	-50.94	2	46.32	Peak	74	Pass
NVNT	3-DH5	2402	No-Hopping	2390	-60.54	2	36.72	Average	54	Pass
NVNT	3-DH5	2480	No-Hopping	2483.5	-49.81	2	47.45	Peak	74	Pass
NVNT	3-DH5	2480	No-Hopping	2483.5	-59.93	2	37.33	Average	54	Pass
NVNT	3-DH5	2480	No-Hopping	2495.968	-47.55	2	49.71	Peak	74	Pass
NVNT	3-DH5	2480	No-Hopping	2483.728	-59.82	2	37.44	Average	54	Pass
NVNT	3-DH5	2480	No-Hopping	2500	-48.88	2	48.38	Peak	74	Pass
NVNT	3-DH5	2480	No-Hopping	2500	-60.18	2	37.08	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Test Graphs

Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Peak

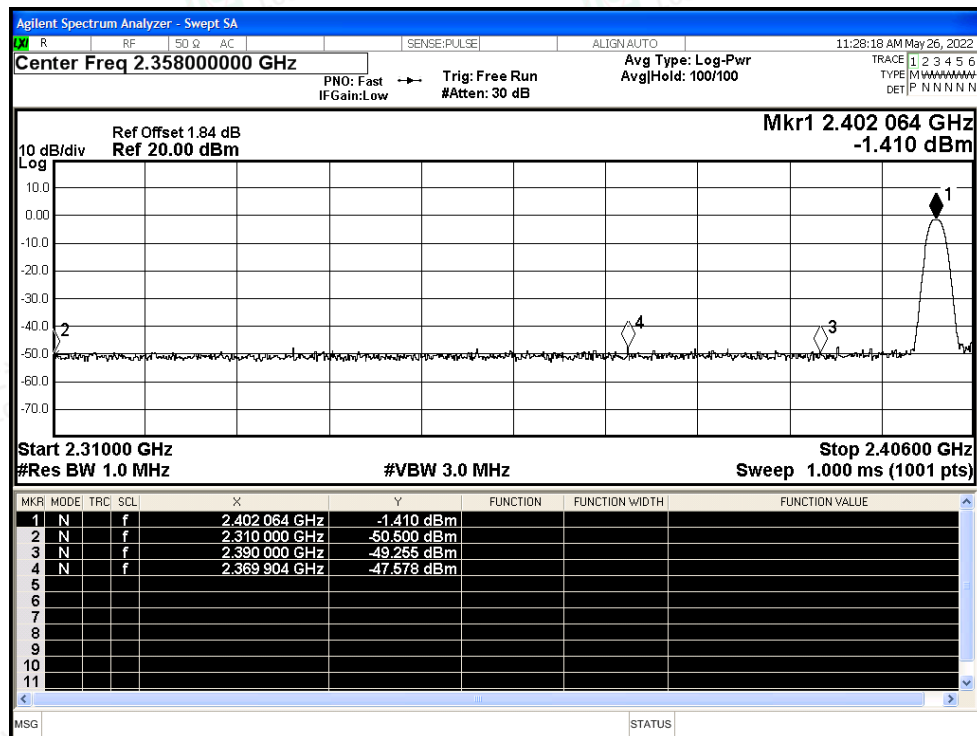


Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Average

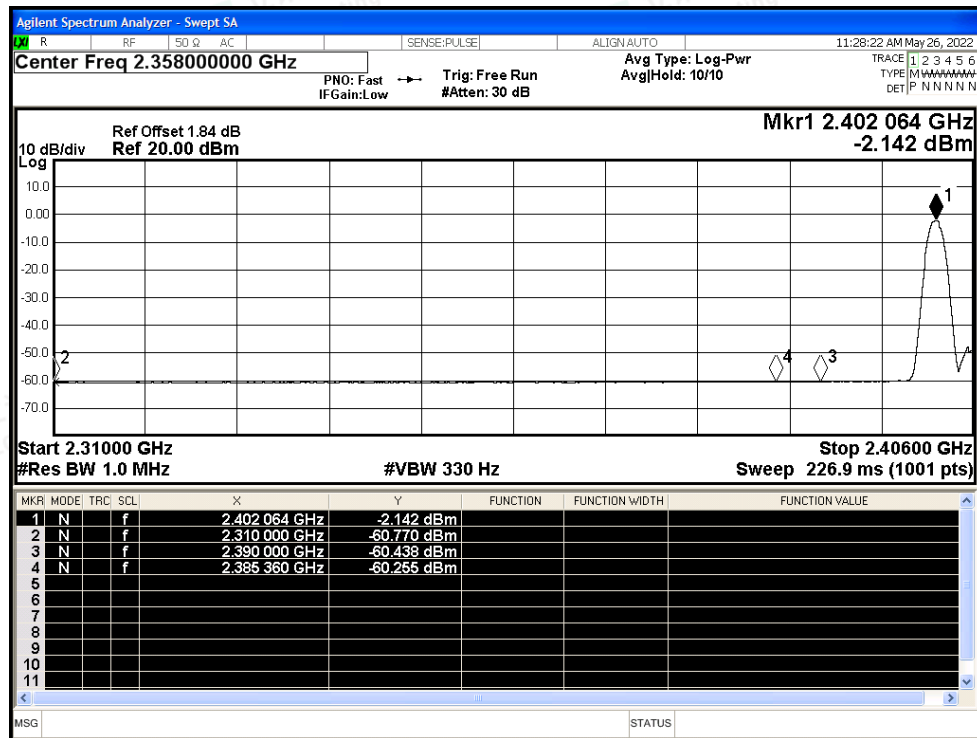




Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Peak

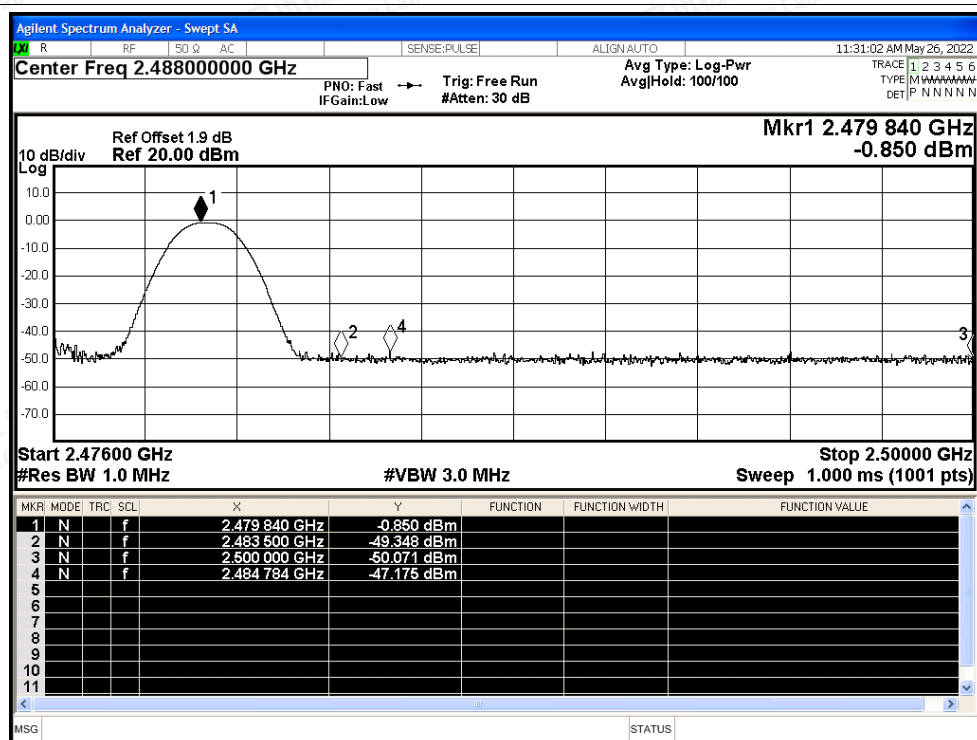


Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Average

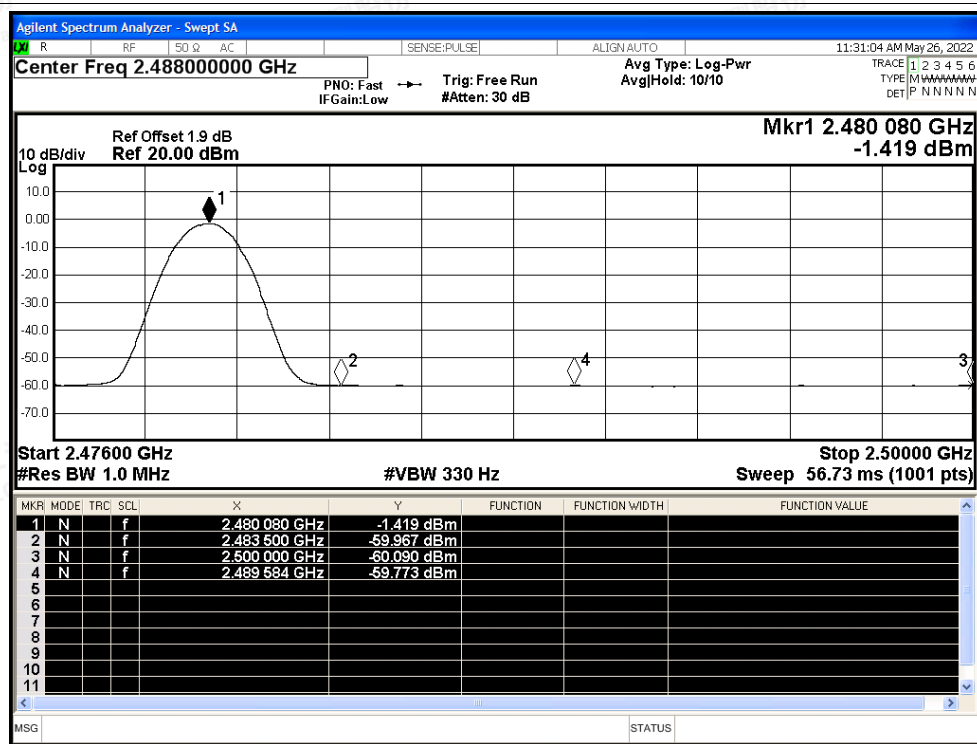




Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Peak

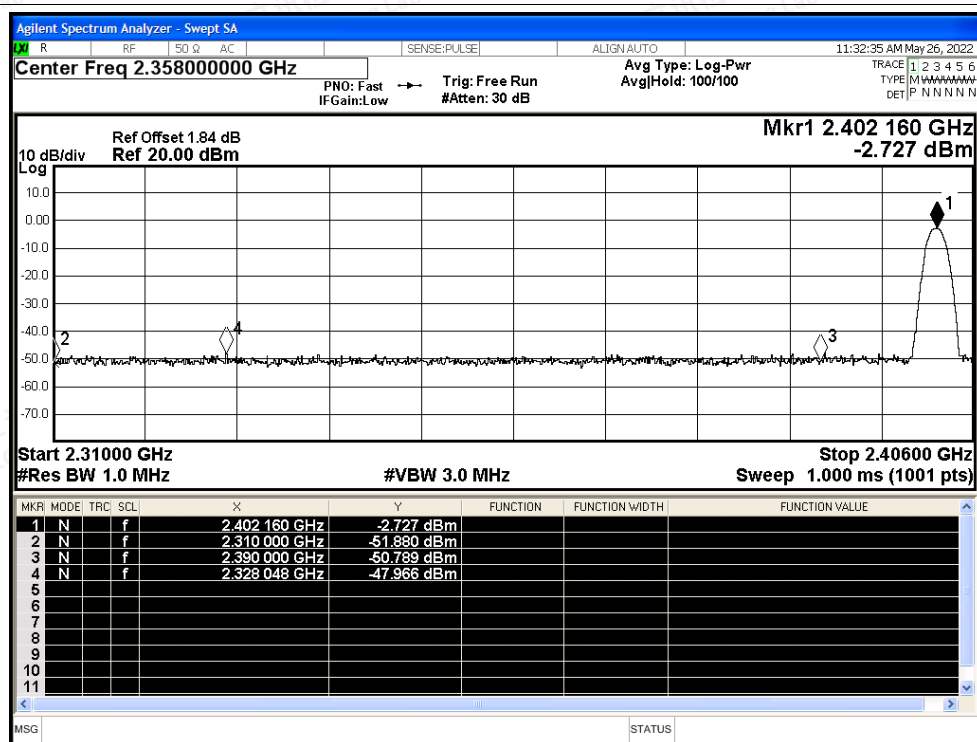


Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Average

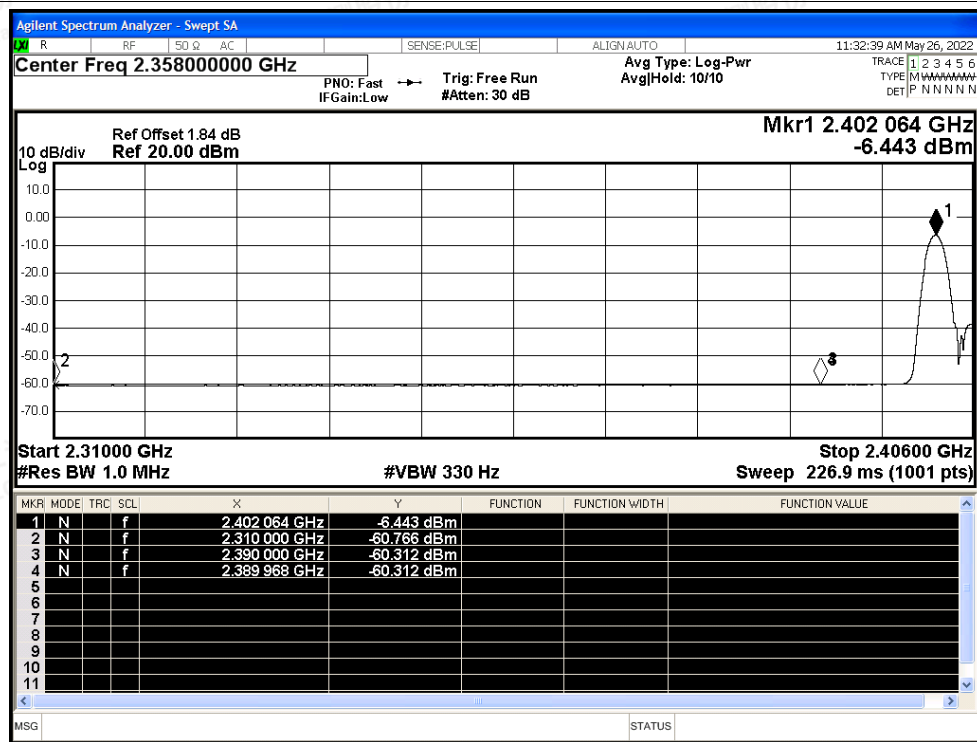




Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Peak

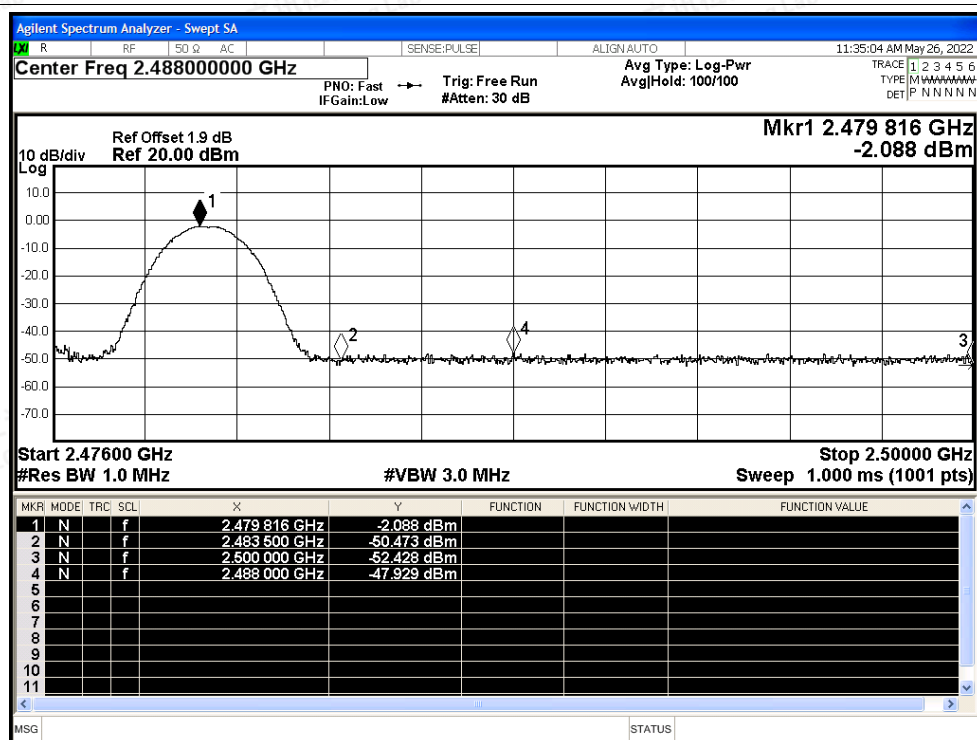


Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Average

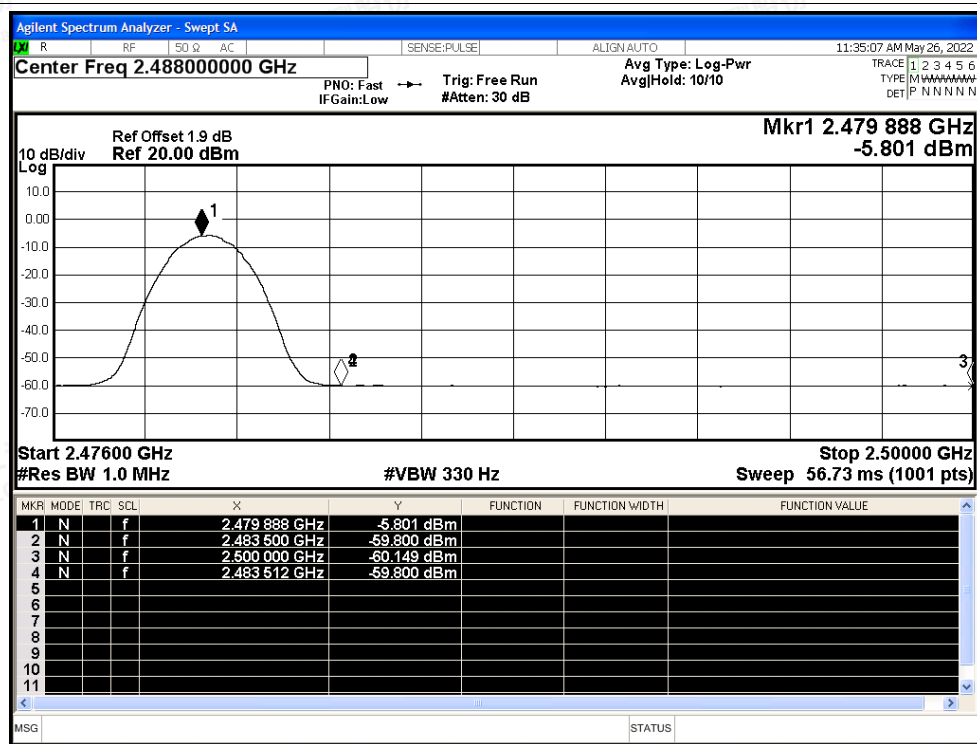




Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Peak

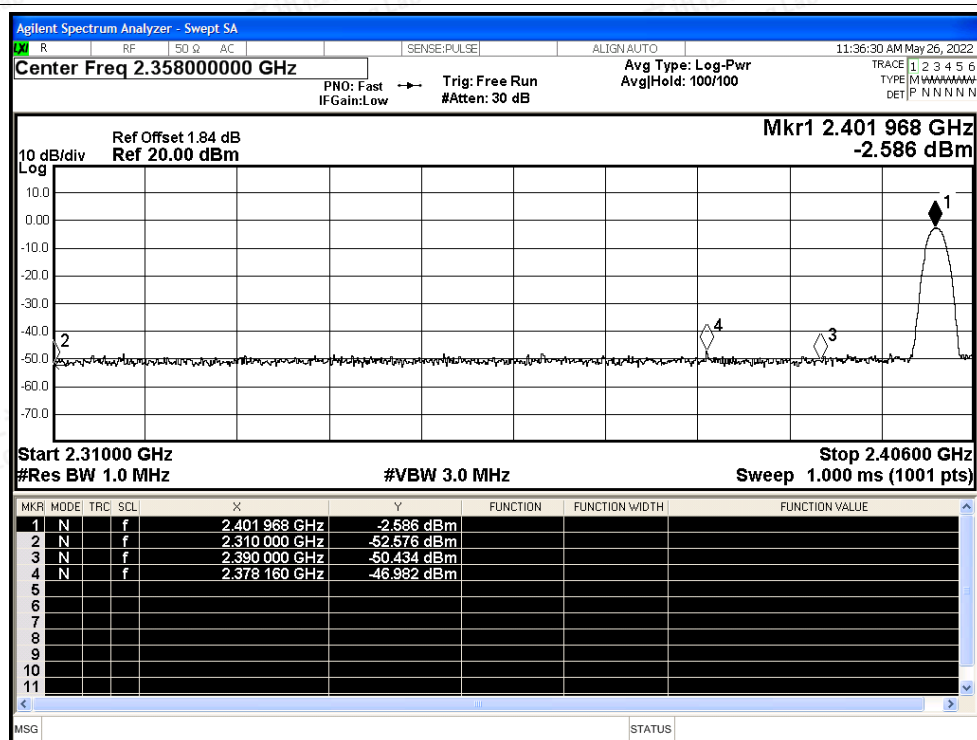


Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Average

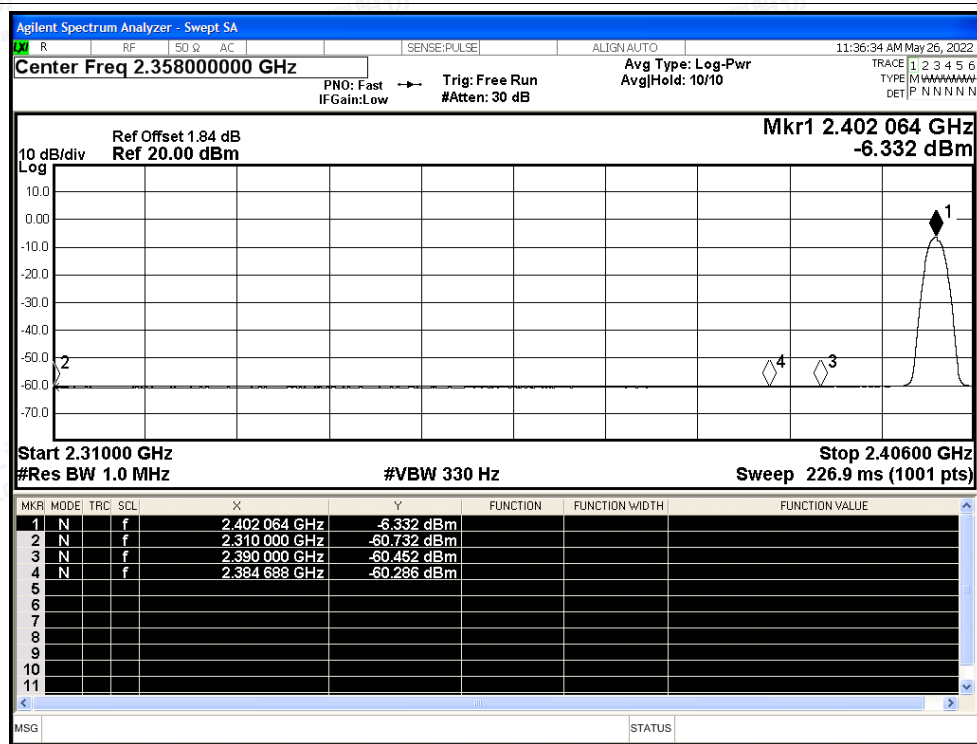



Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Peak

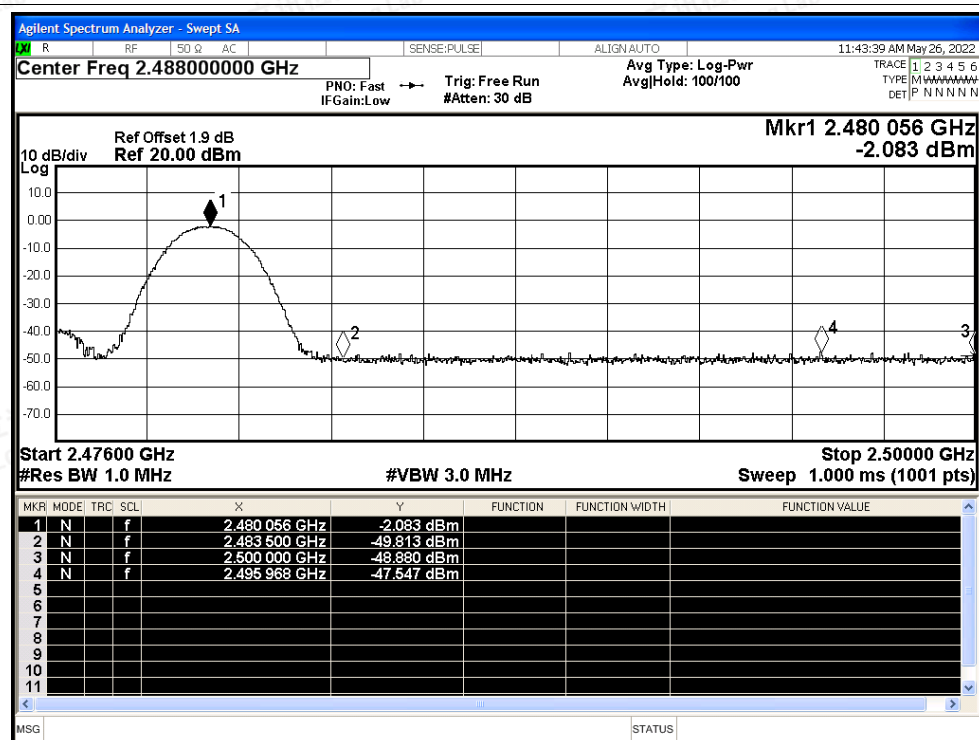

Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Average

