



TEST Report

Applicant: OVC Intelligence Technology Co., Ltd.

Address of Applicant: Room 1812 A, No.501 Qinhaidong road, Hengqin district, Zhuhai city, P.R.C.

Manufacturer : OVC Intelligence Technology Co., Ltd.

Address of Manufacturer : Room 1812 A, No.501 Qinhaidong road, Hengqin district, Zhuhai city, P.R.C.

Equipment Under Test (EUT)

Product Name: True wireless earbuds

Model No.: ZIIM HEART #001

Series model: N/A

Trade Mark: ZIIM

FCC ID: 2A64D-HEART001

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: May 19,2022

Date of Test: May 19,2022- May 31,2022

Date of report issued: May 31,2022

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.



Report No.: HTT202205296F01

1. Version

Version No.	Date	Description
00	May 31,2022	Original

Tested/ Prepared By

Date:

May 31,2022

Project Engineer

Check By:

Date:

May 31,2022

Reviewer

Approved By :

Date:

May 31,2022

Authorized Signature



2. Contents

	Page
1. VERSION.....	2
2. CONTENTS.....	3
3. TEST SUMMARY	4
4. GENERAL INFORMATION.....	5
4.1. GENERAL DESCRIPTION OF EUT	5
4.2. TEST MODE	7
4.3. DESCRIPTION OF SUPPORT UNITS	7
4.4. DEVIATION FROM STANDARDS	7
4.5. ABNORMALITIES FROM STANDARD CONDITIONS	7
4.6. TEST FACILITY	7
4.7. TEST LOCATION	7
4.8. ADDITIONAL INSTRUCTIONS	7
5. TEST INSTRUMENTS LIST.....	8
6. TEST RESULTS AND MEASUREMENT DATA	9
6.1. CONDUCTED EMISSIONS	9
6.2. CONDUCTED PEAK OUTPUT POWER	12
6.3. 20dB EMISSION BANDWIDTH	20
6.4. FREQUENCIES SEPARATION.....	26
6.5. HOPPING CHANNEL NUMBER.....	32
6.6. DWELL TIME	37
6.7. BAND EDGE	44
6.7.1. <i>Conducted Emission Method</i>	44
6.7.2. <i>Radiated Emission Method</i>	51
6.8. SPURIOUS EMISSION.....	58
6.8.1. <i>Conducted Emission Method</i>	58
6.8.2. <i>Radiated Emission Method</i>	63
7. TEST SETUP PHOTO.....	76
8. EUT CONSTRUCTIONAL DETAILS	76



3. Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)(iii)	Pass
Dwell Time	15.247 (a)(1)(iii)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remarks:

1. *Pass: The EUT complies with the essential requirements in the standard.*
2. *Test according to ANSI C63.10:2013*

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9k~30MHz	3.17 dB	(1)
Radiated Emission	30~1000MHz	3.45 dB	(1)
Radiated Emission	1~6GHz	3.54 dB	(1)
Radiated Emission	>6GHz	4.89dB	(1)
Conducted Disturbance	0.15~30MHz	2.66 dB	(1)
RF power, conducted	/	0.16 dB	(1)
Spurious emissions, conducted	/	0.21dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.



Report No.: HTT202205296F01

4. General Information

4.1. General Description of EUT

Product Name:	True wireless earbuds
Model No.:	ZIIM HEART #001
Series model:	N/A
Model Difference	N/A
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8QPSK
Antenna Type:	FPCB Antenna
Antenna gain:	2.42dBi
Power Supply:	DC 3.7V/40mAh Form Battery and DC 5V From External Circuit
Battery	DC 3.7V 40mAh



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz



4.2. Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

4.3. Description of Support Units

None.

4.4. Deviation from Standards

None.

4.5. Abnormalities from Standard Conditions

None.

4.6. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:
FCC-Registration No.: 779513 Designation Number: CN1319 Shenzhen HTT Technology Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.
A2LA-Lab Cert. No.: 6435.01 Shenzhen HTT Technology Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

4.7. Test Location

All tests were performed at:
Shenzhen HTT Technology Co.,Ltd. 1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road, Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China Tel: 0755-23595200 Fax: 0755-23595201

4.8. Additional Instructions

Test Software	Special AT test command provided by manufacturer to Keep the EUT in continuously transmitting mode and hopping mode
Power level setup	Default




5. Test Instruments list

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	Shenzhen C.R.T technology co., LTD	9*6*6	HTT-E028	Aug. 10 2020	Aug. 09 2024
2	Control Room	Shenzhen C.R.T technology co., LTD	4.8*3.5*3.0	HTT-E030	Aug. 10 2020	Aug. 09 2024
3	EMI Test Receiver	Rohde&Schwarz	ESCI7	HTT-E022	May 21 2022	May 20 2023
4	Spectrum Analyzer	Rohde&Schwarz	FSP	HTT-E037	May 21 2022	May 20 2023
5	Coaxial Cable	ZDecl	ZT26-NJ-NJ-0.6M	HTT-E018	May 21 2022	May 20 2023
6	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-2M	HTT-E019	May 21 2022	May 20 2023
7	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-0.6M	HTT-E020	May 21 2022	May 20 2023
8	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-8.5M	HTT-E021	May 21 2022	May 20 2023
9	Composite logarithmic antenna	Schwarzbeck	VULB 9168	HTT-E017	Aug. 22 2021	Aug. 21 2022
10	Horn Antenna	Schwarzbeck	BBHA9120D	HTT-E016	Aug. 22 2021	Aug. 21 2022
11	Loop Antenna	Zhinan	ZN30900C	HTT-E039	Aug. 22 2021	Aug. 21 2022
12	Horn Antenna	Beijing Hangwei Dayang	OBH100400	HTT-E040	Aug. 22 2021	Aug. 21 2022
13	low frequency Amplifier	Sonoma Instrument	310	HTT-E015	May 21 2022	May 20 2023
14	high-frequency Amplifier	HP	8449B	HTT-E014	May 21 2022	May 20 2023
15	Variable frequency power supply	Shenzhen Anbiao Instrument Co., Ltd	ANB-10VA	HTT-082	May 21 2022	May 20 2023
16	EMI Test Receiver	Rohde & Schwarz	ESCS30	HTT-E004	May 21 2022	May 20 2023
17	Artificial Mains	Rohde & Schwarz	ESH3-Z5	HTT-E006	May 21 2022	May 20 2023
18	Artificial Mains	Rohde & Schwarz	ENV-216	HTT-E038	May 21 2022	May 20 2023
19	Cable Line	Robinson	Z302S-NJ-BNCJ-1.5M	HTT-E001	May 21 2022	May 20 2023
20	Attenuator	Robinson	6810.17A	HTT-E007	May 21 2022	May 20 2023
21	Variable frequency power supply	Shenzhen Yanghong Electric Co., Ltd	YF-650 (5KVA)	HTT-E032	May 21 2022	May 20 2023
22	Control Room	Shenzhen C.R.T technology co., LTD	8*4*3.5	HTT-E029	May 21 2022	May 20 2023
23	DC power supply	Agilent	E3632A	HTT-E023	May 21 2022	May 20 2023
24	EMI Test Receiver	Agilent	N9020A	HTT-E024	May 21 2022	May 20 2023
25	Analog signal generator	Agilent	N5181A	HTT-E025	May 21 2022	May 20 2023
26	Vector signal generator	Agilent	N5182A	HTT-E026	May 21 2022	May 20 2023
27	Power sensor	Keysight	U2021XA	HTT-E027	May 21 2022	May 20 2023
28	Temperature and humidity meter	Shenzhen Anbiao Instrument Co., Ltd	TH10R	HTT-074	May 21 2022	May 20 2023

6. Test results and Measurement Data


6.1. Conducted Emissions

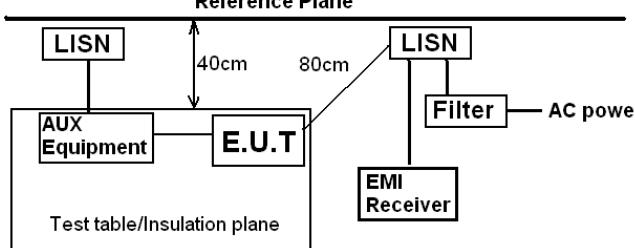Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* Decreases with the logarithm of the frequency.																
Test setup:	<p style="text-align: center;">Reference Plane</p>  <p><i>Remark</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i></p>																
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.2 for details																
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar											
Test voltage:	AC 120V, 60Hz																
Test results:	Pass																


Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

Measurement data:
Line:

100.0 dBuV

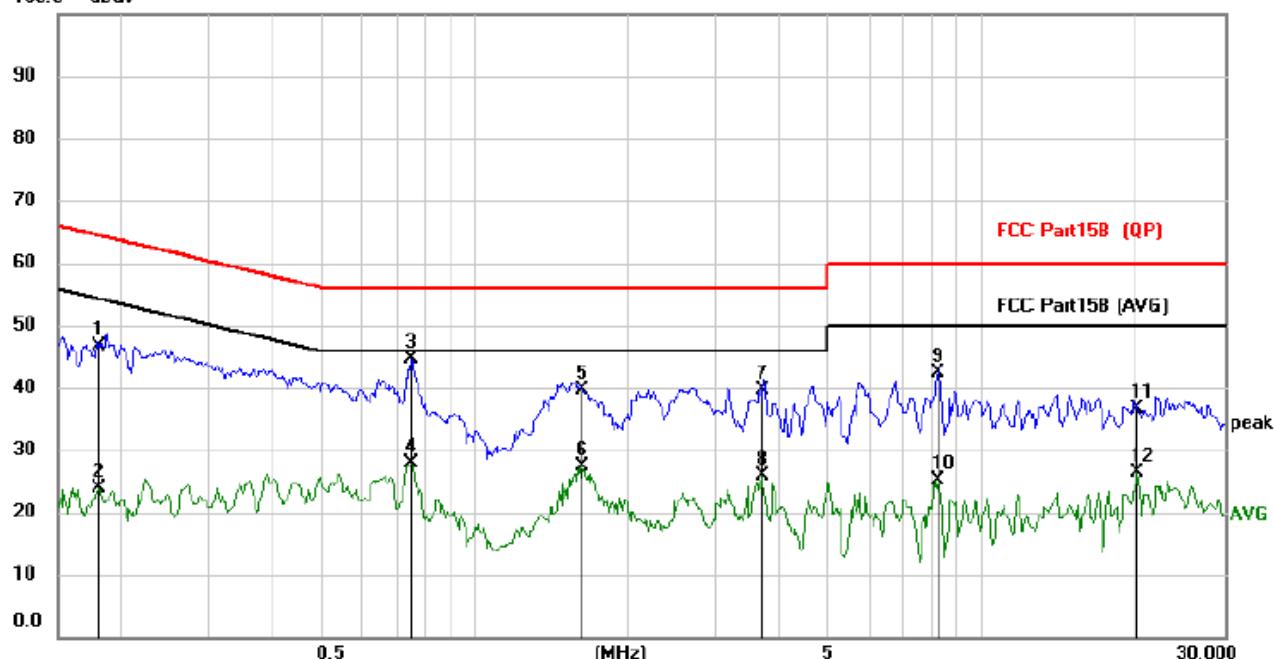

No.	Mk.	Freq.	Reading	Correct Factor	Measure-	Limit	Over
			Level		ment		
		MHz	dBuV	dB	dBuV	dBuV	dB
1		0.1811	36.22	10.39	46.61	64.44	-17.83 QP
2		0.1811	13.38	10.39	23.77	54.44	-30.67 AVG
3 *		0.7506	33.74	10.77	44.51	56.00	-11.49 QP
4		0.7506	17.01	10.77	27.78	46.00	-18.22 AVG
5		1.6270	28.79	10.85	39.64	56.00	-16.36 QP
6		1.6270	16.58	10.85	27.43	46.00	-18.57 AVG
7		3.7000	28.67	10.86	39.53	56.00	-16.47 QP
8		3.7000	14.93	10.86	25.79	46.00	-20.21 AVG
9		8.1913	30.88	11.46	42.34	60.00	-17.66 QP
10		8.1913	13.79	11.46	25.25	50.00	-24.75 AVG
11		20.2179	24.22	12.41	36.63	60.00	-23.37 QP
12		20.2179	13.95	12.41	26.36	50.00	-23.64 AVG

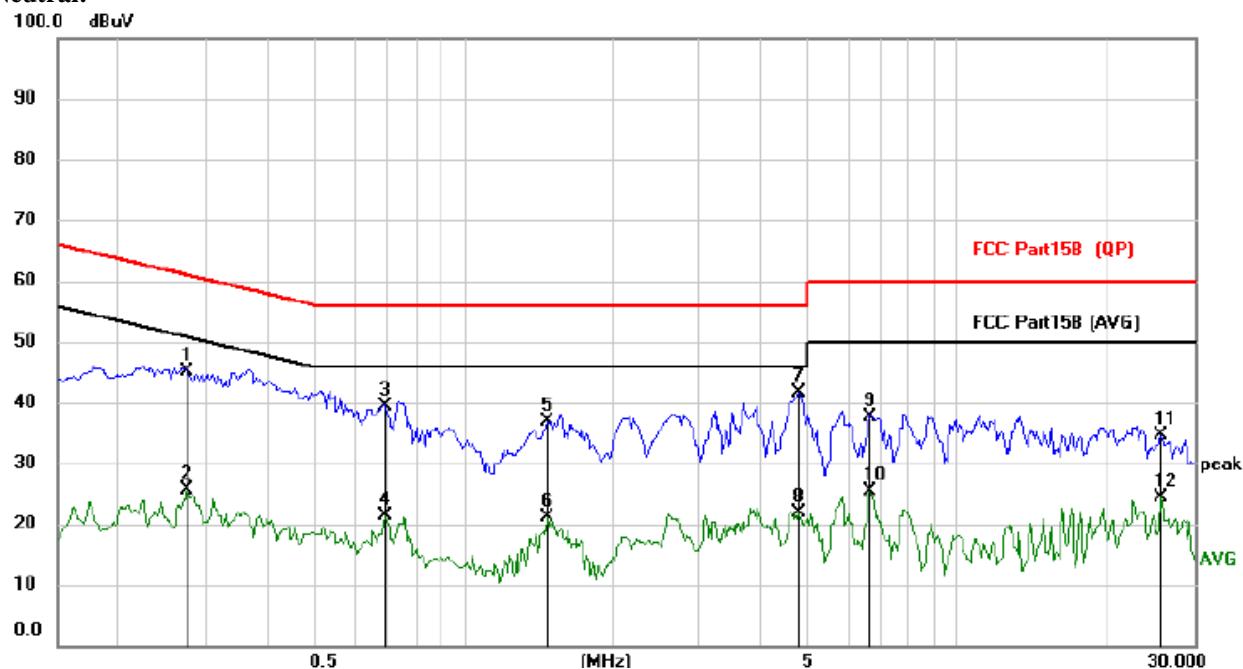
Neutral:


No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over dB	Over Detector
			Level dBuV	Factor dB	ment dBuV			
1		0.2746	34.92	10.23	45.15	60.98	-15.83	QP
2		0.2746	15.36	10.23	25.59	50.98	-25.39	AVG
3		0.6935	28.66	10.64	39.30	56.00	-16.70	QP
4		0.6935	10.68	10.64	21.32	46.00	-24.68	AVG
5		1.4717	26.04	10.81	36.85	56.00	-19.15	QP
6		1.4717	10.22	10.81	21.03	46.00	-24.97	AVG
7	*	4.7716	30.70	10.88	41.58	56.00	-14.42	QP
8		4.7716	10.96	10.88	21.84	46.00	-24.16	AVG
9		6.6387	26.72	10.93	37.65	60.00	-22.35	QP
10		6.6387	14.46	10.93	25.39	50.00	-24.61	AVG
11		25.6473	21.91	12.62	34.53	60.00	-25.47	QP
12		25.6473	11.85	12.62	24.47	50.00	-25.53	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

6.2. Conducted Peak Output Power

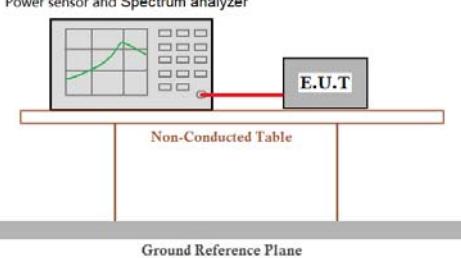Test Requirement:	FCC Part15 C Section 15.247 (b)(3)					
Test Method:	ANSI C63.10:2013					
Limit:	30dBm(for GFSK),20.97dBm(for EDR)					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data


Right Earbuds

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	2.874	30.00	Pass
	Middle	3.199		
	Highest	3.559		
$\pi/4$ -DQPSK	Lowest	2.873	20.97	Pass
	Middle	3.202		
	Highest	3.562		
8QPSK	Lowest	2.873	20.97	Pass
	Middle	3.201		
	Highest	3.566		


Test plot as follows:

Test mode:


GFSK mode

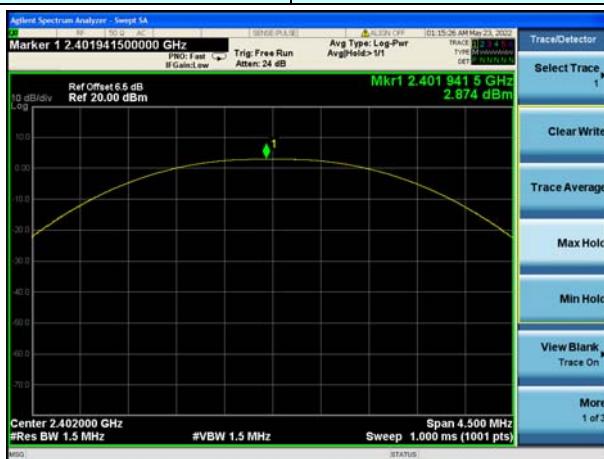

Lowest channel

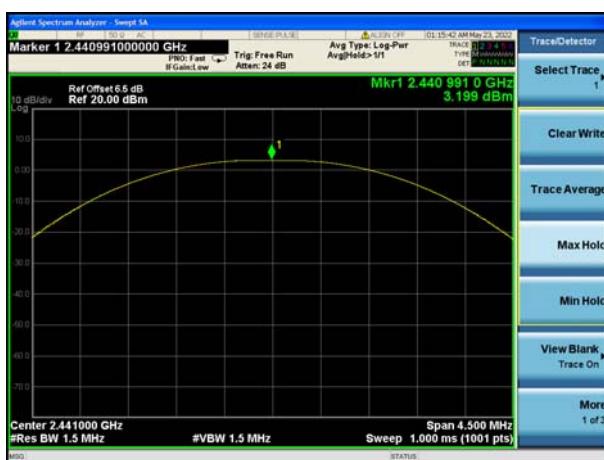

Middle channel

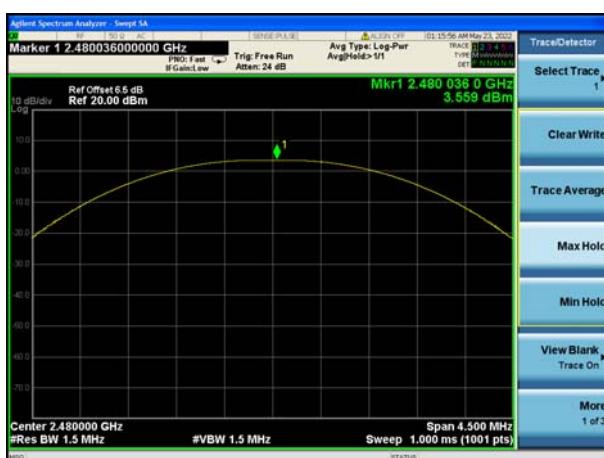

Highest channel

Test mode:

 $\pi/4$ -DQPSK mode


Lowest channel



Middle channel



Highest channel

Test mode:

8QPSK mode



Lowest channel



Middle channel



Highest channel



Report No.: HTT202205296F01

Left Earbuds

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	3.105	30.00	Pass
	Middle	3.420		
	Highest	3.673		
$\pi/4$ -DQPSK	Lowest	3.110	20.97	Pass
	Middle	3.416		
	Highest	3.666		
8QPSK	Lowest	3.117	20.97	Pass
	Middle	3.424		
	Highest	3.671		


Test plot as follows:

Test mode:


GFSK mode



Lowest channel

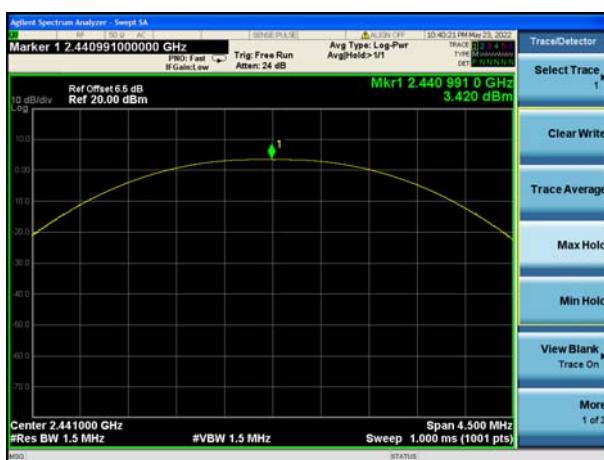

Middle channel

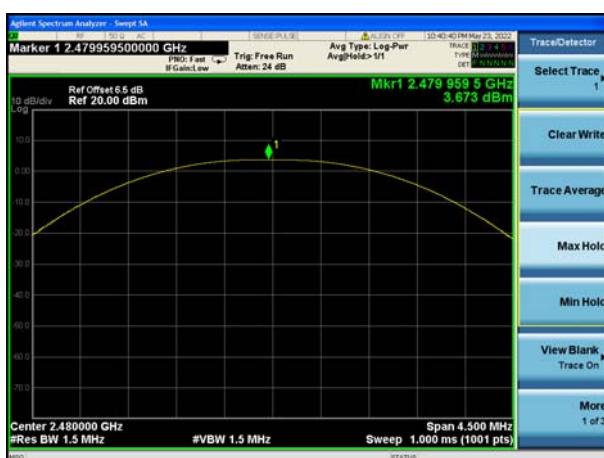

Highest channel

Test mode:

 $\pi/4$ -DQPSK mode


Lowest channel



Middle channel



Highest channel

Test mode:

8QPSK mode



Lowest channel




Middle channel



Highest channel

6.3. 20dB Emission Bandwidth

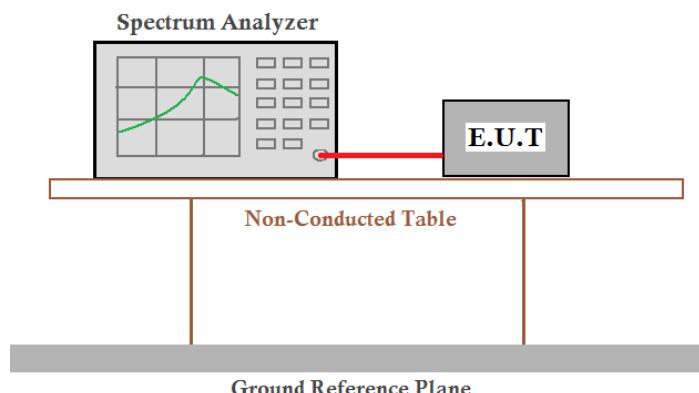Test Requirement:	FCC Part15 C Section 15.247 (a)(2)					
Test Method:	ANSI C63.10:2013					
Limit:	N/A					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data

Right Earbuds

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.929	Pass
	Middle	0.926	
	Highest	0.928	
8QPSK	Lowest	1.221	Pass
	Middle	1.219	
	Highest	1.221	

Test plot as follows:

Test mode:

GFSK mode


Lowest channel

Middle channel


Highest channel

Test mode:

8QPSK mode



Lowest channel

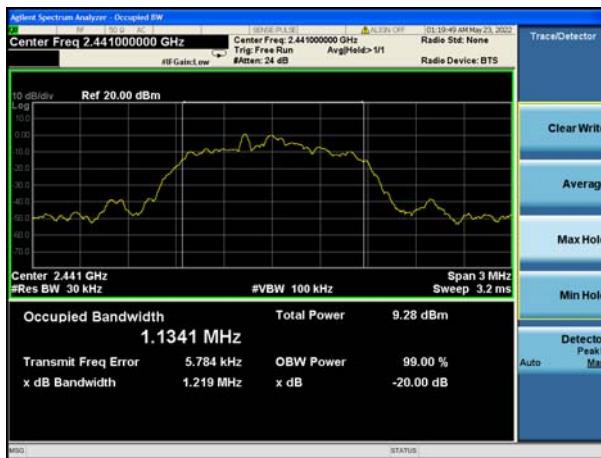

Middle channel



Highest channel



Report No.: HTT202205296F01

Left Earbuds

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.926	Pass
	Middle	0.928	
	Highest	0.928	
8QPSK	Lowest	1.221	Pass
	Middle	1.221	
	Highest	1.219	

Test plot as follows:

Test mode:

GFSK mode


Lowest channel

Middle channel

Highest channel

Test mode:

8QPSK mode



Lowest channel




Middle channel



Highest channel

6.4. Frequencies Separation

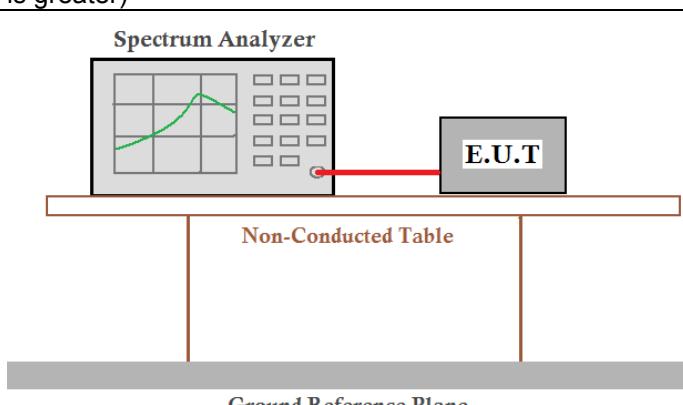Test Requirement:	FCC Part15 C Section 15.247 (a)(1)					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=300KHz, VBW=1MHz, detector=Peak					
Limit:	GFSK: 20dB bandwidth $\pi/4$ -DQPSK/8QPSK : 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data

Right Earbuds

Mode	Test channel	Frequencies Separation (MHz)	Limit (kHz)	Result
GFSK	Low	1.005	20dB bandwidth	Pass
	Middle	0.999		
	High	1.002		
8QPSK	Low	1.002	25KHz or 2/3*20dB bandwidth	Pass
	Middle	1.002		
	High	1.008		

Test plot as follows:

Test mode:	GFSK mode
------------	-----------


Lowest channel

Middle channel

Highest channel

Test mode:

8QPSK mode



Lowest channel



Middle channel



Highest channel



Report No.: HTT202205296F01

Left Earbuds

Mode	Test channel	Frequencies Separation (MHz)	Limit (kHz)	Result
GFSK	Low	0.996	25KHz or 2/3*20dB bandwidth	Pass
	Middle	1.011		
	High	1.011		
8QPSK	Low	1.011	25KHz or 2/3*20dB bandwidth	Pass
	Middle	1.005		
	High	0.996		

Test plot as follows:

Test mode:

GFSK mode


Lowest channel

Middle channel

Highest channel

Test mode:

8QPSK mode



Lowest channel




Middle channel



Highest channel

6.5. Hopping Channel Number

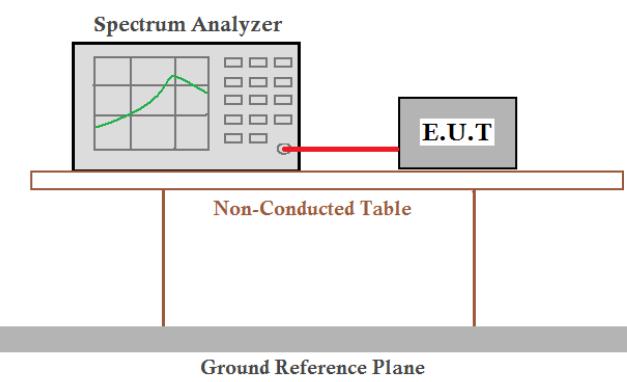Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=300kHz, VBW=1MHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak					
Limit:	15 channels					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data:

Right Earbuds

Mode	Hopping channel numbers	Limit	Result
GFSK	79	≥15	Pass
8QPSK	79		Pass

Left Earbuds



Mode	Hopping channel numbers	Limit	Result
GFSK	79	≥15	Pass
8QPSK	79		Pass

Test plot as follows:

Right Earbuds



Test mode:

GFSK

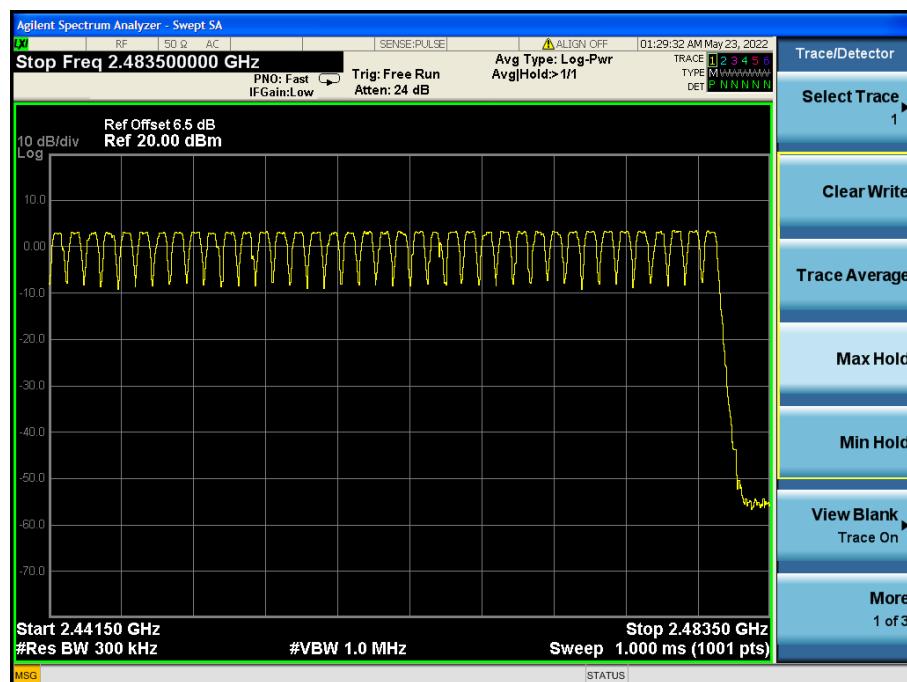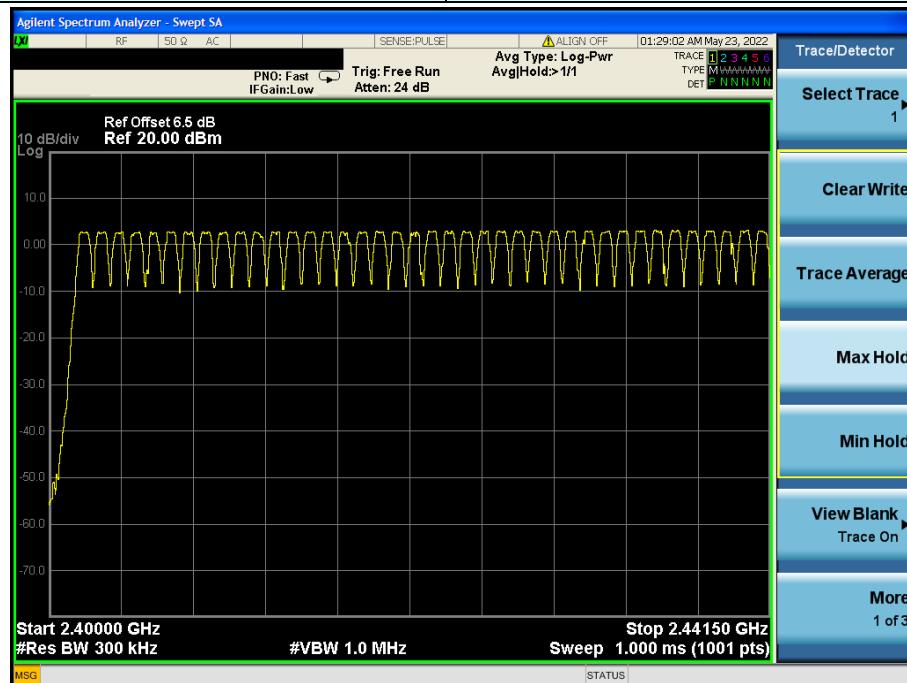

Test mode:

8QPSK

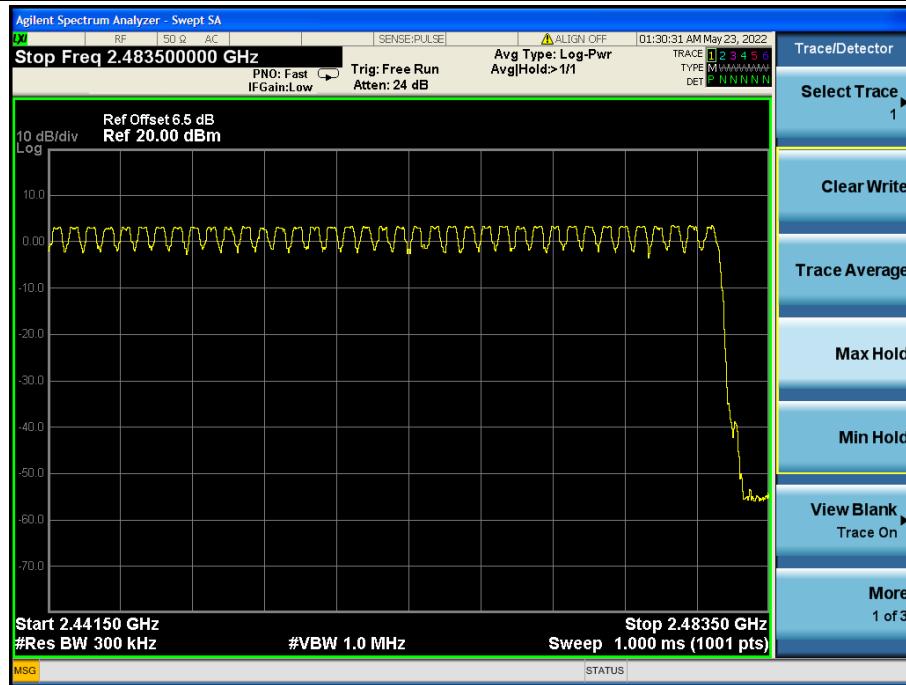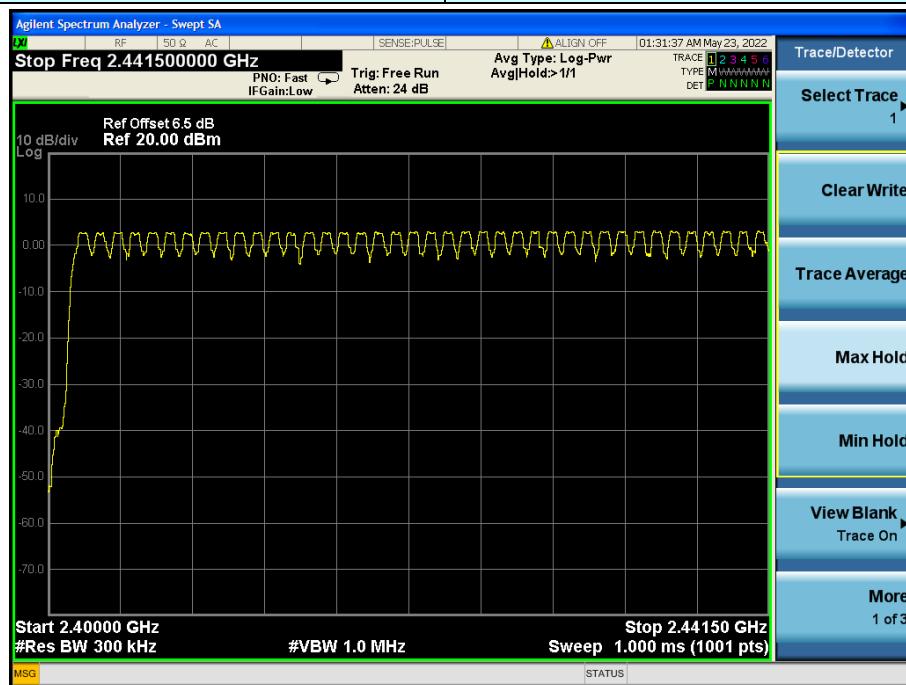





Report No.: HTT202205296F01

Left Earbuds

Test mode:

GFSK

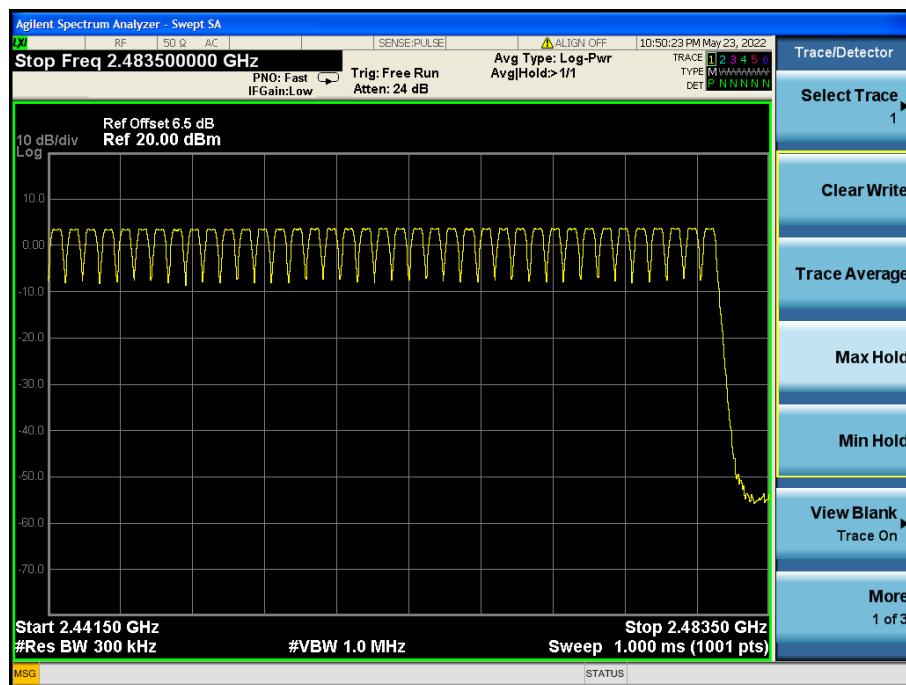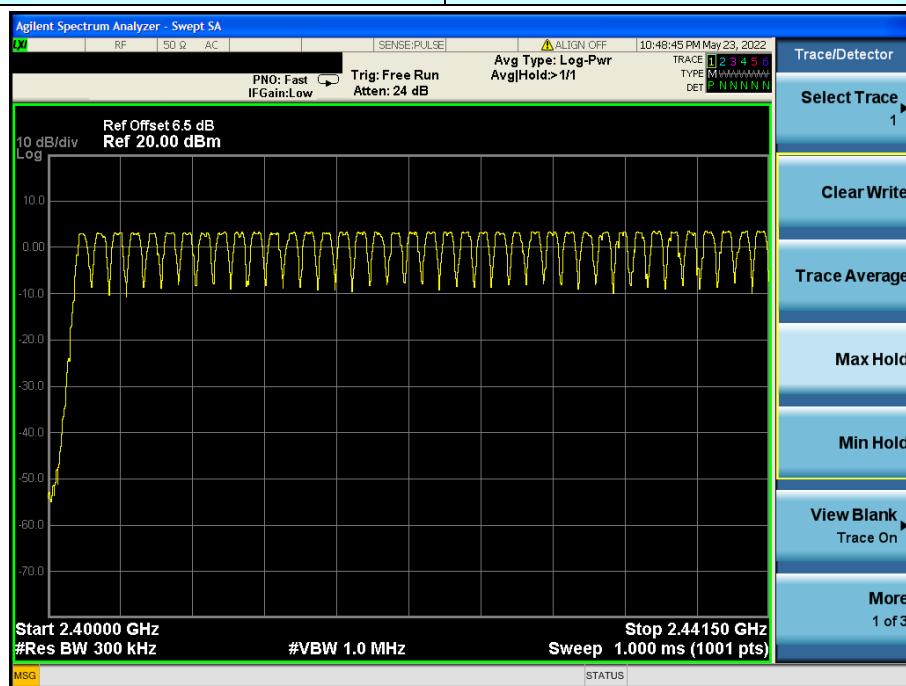



Test mode:

8QPSK


Shenzhen HTT Technology Co.,Ltd.

Tel: 0755-23595200 Fax: 0755-23595201

1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road, Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China

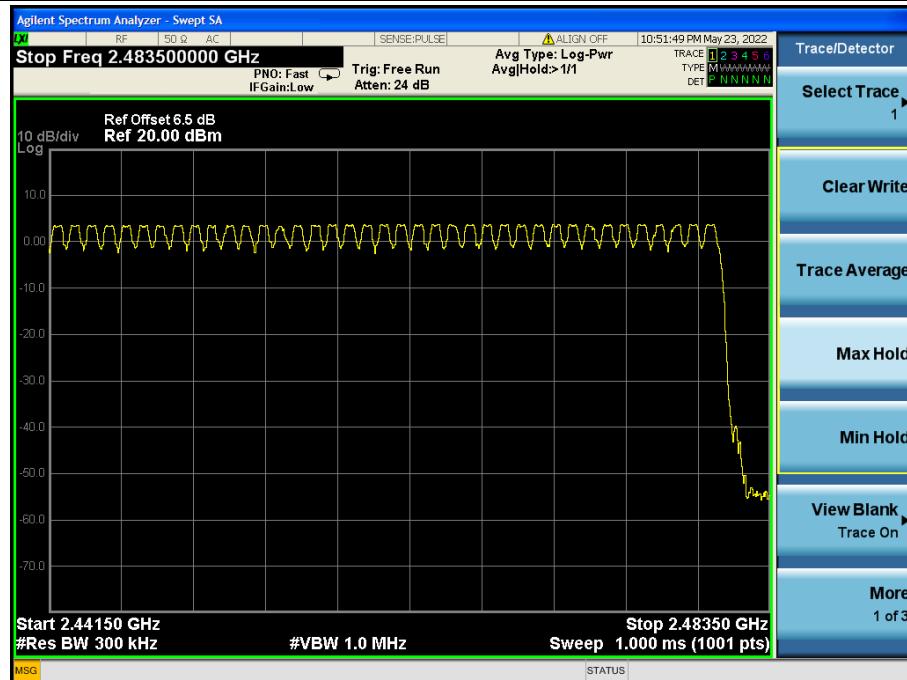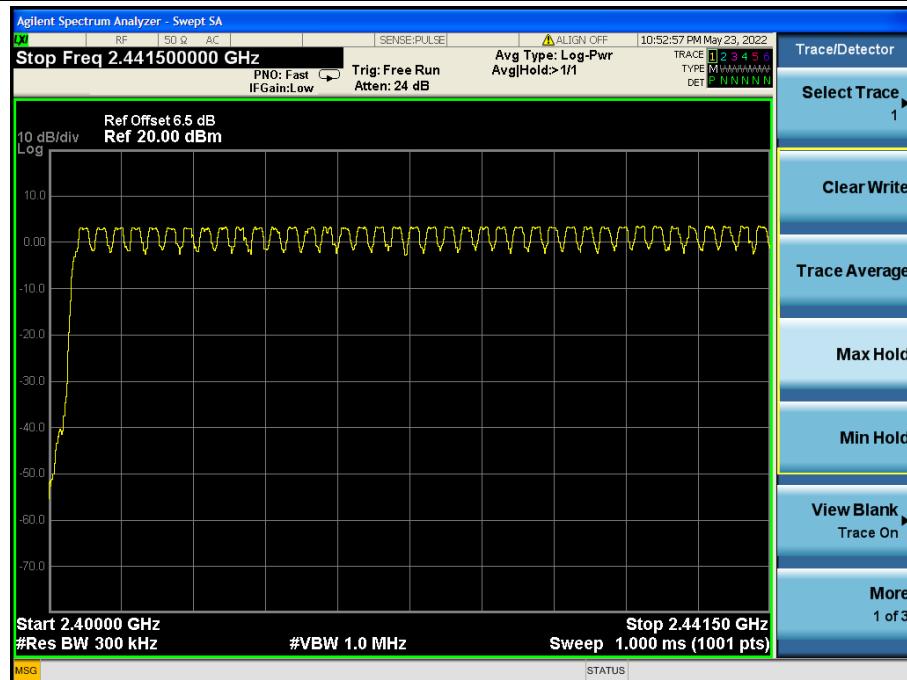

6.6. Dwell Time

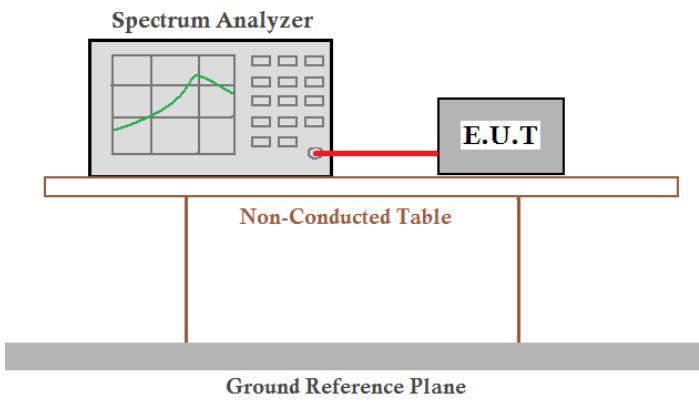Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak					
Limit:	0.4 Second					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

**Measurement Data****Right Earbuds****GFSK mode:**

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	DH1	0.372	119	400	Pass
Hopping	DH3	1.623	260	400	Pass
Hopping	DH5	2.870	306	400	Pass

Note:We have tested all mode at high,middle and low channel, and recorded worst case at Low channel.

Dwell time=Pulse time (ms) \times (1600 \div 2 \div 79) \times 31.6 Second for DH1

Dwell time=Pulse time (ms) \times (1600 \div 4 \div 79) \times 31.6 Second for DH3

Dwell time=Pulse time (ms) \times (1600 \div 6 \div 79) \times 31.6 Second for DH5

8QPSK mode:

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	3DH1	0.377	121	400	Pass
Hopping	3DH3	1.632	261	400	Pass
Hopping	3DH5	2.880	307	400	Pass

Note:We have tested all mode at high,middle and low channel, and recorded worst case at Low channel.


Dwell time=Pulse time (ms) \times (1600 \div 2 \div 79) \times 31.6 Second for 3-DH1

Dwell time=Pulse time (ms) \times (1600 \div 4 \div 79) \times 31.6 Second for 3-DH3


Dwell time=Pulse time (ms) \times (1600 \div 6 \div 79) \times 31.6 Second for 3-DH5

Test plot as follows:


GFSK mode

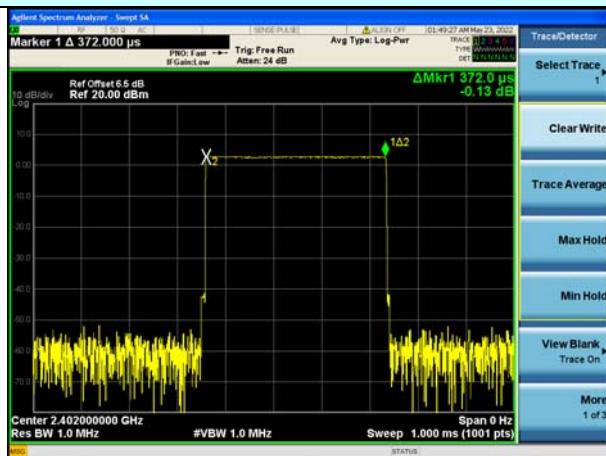




DH1

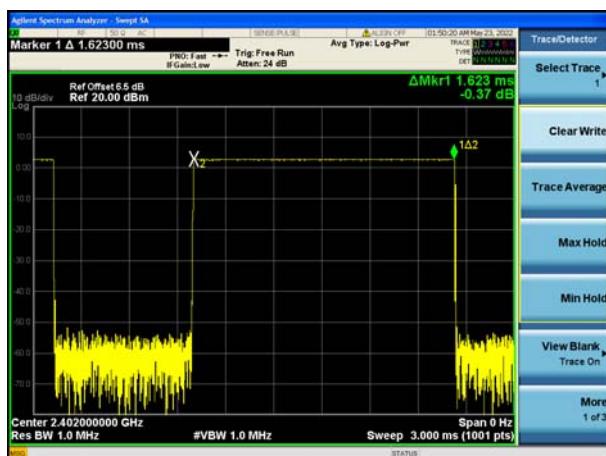

DH3

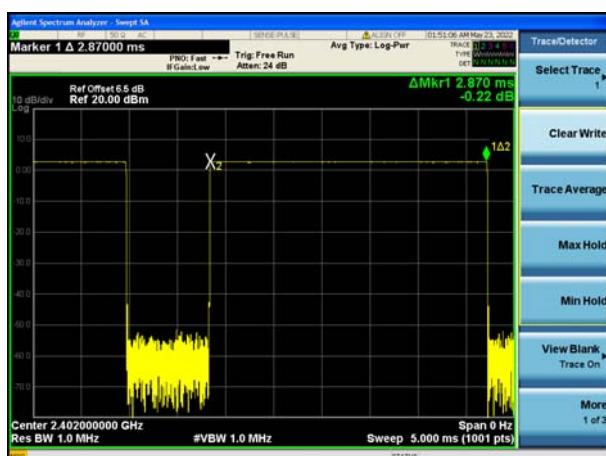

DH5

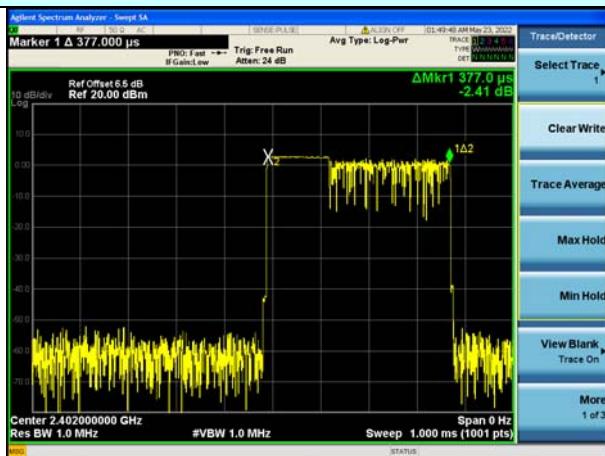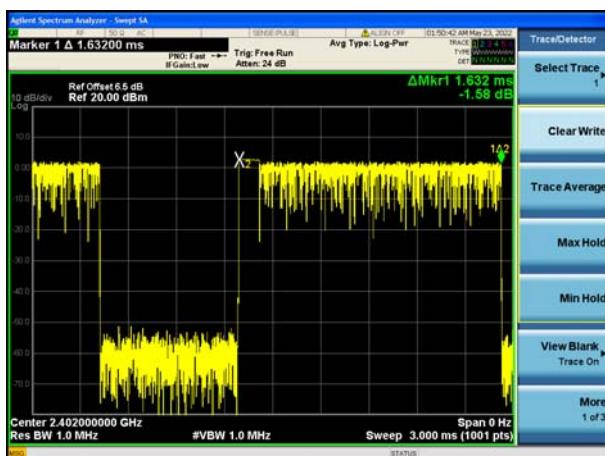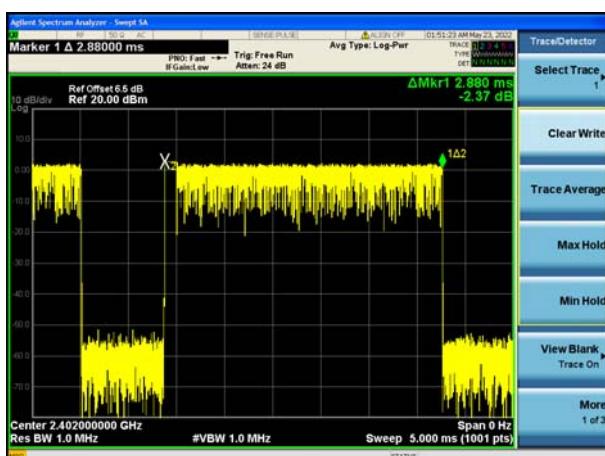8QPSK mode

3DH1

3DH3

3DH5

**Left Earbuds****GFSK mode:**

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	DH1	0.369	118	400	Pass
Hopping	DH3	1.620	259	400	Pass
Hopping	DH5	2.870	306	400	Pass

Note:We have tested all mode at high,middle and low channel, and recorded worst case at Low channel.

Dwell time=Pulse time (ms) \times (1600 \div 2 \div 79) \times 31.6 Second for DH1

Dwell time=Pulse time (ms) \times (1600 \div 4 \div 79) \times 31.6 Second for DH3

Dwell time=Pulse time (ms) \times (1600 \div 6 \div 79) \times 31.6 Second for DH5

8QPSK mode:

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	3DH1	0.374	120	400	Pass
Hopping	3DH3	1.626	260	400	Pass
Hopping	3DH5	2.880	307	400	Pass

Note:We have tested all mode at high,middle and low channel, and recorded worst case at Low channel.


Dwell time=Pulse time (ms) \times (1600 \div 2 \div 79) \times 31.6 Second for 3-DH1

Dwell time=Pulse time (ms) \times (1600 \div 4 \div 79) \times 31.6 Second for 3-DH3


Dwell time=Pulse time (ms) \times (1600 \div 6 \div 79) \times 31.6 Second for 3-DH5

Test plot as follows:


GFSK mode

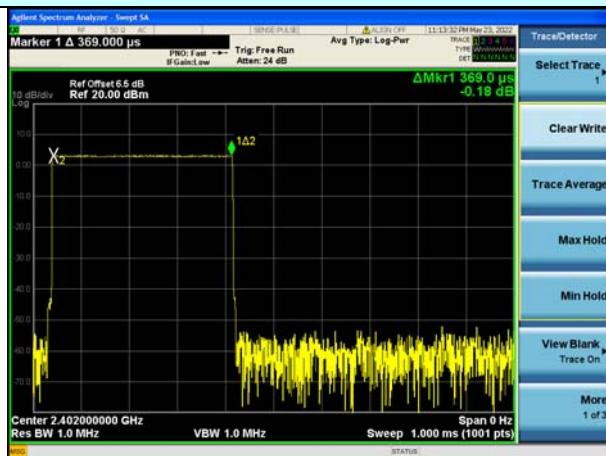

DH1

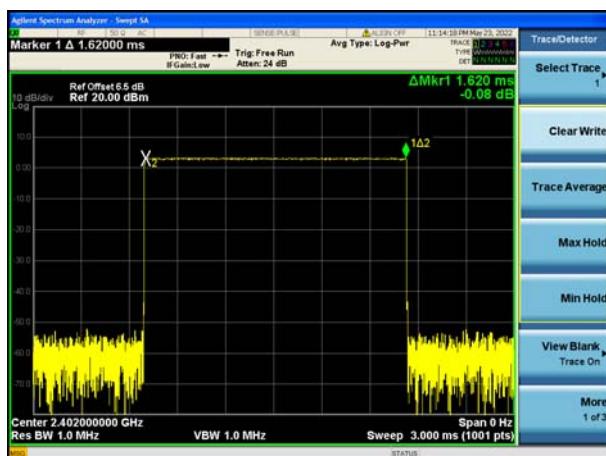


DH3

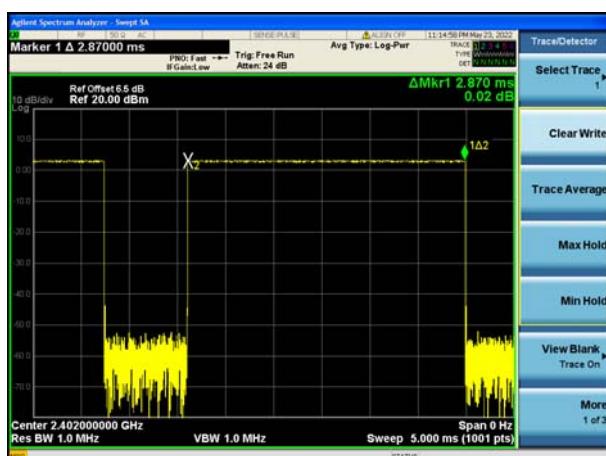


DH5


8QPSK mode

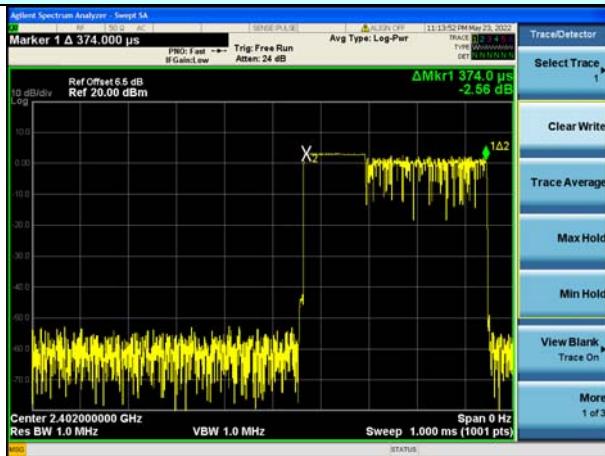

3DH1

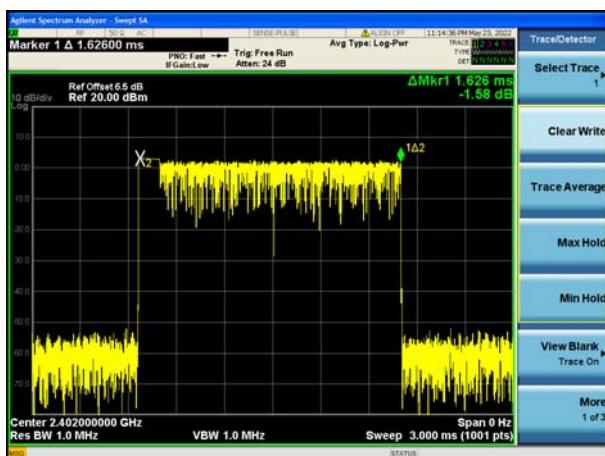


3DH3

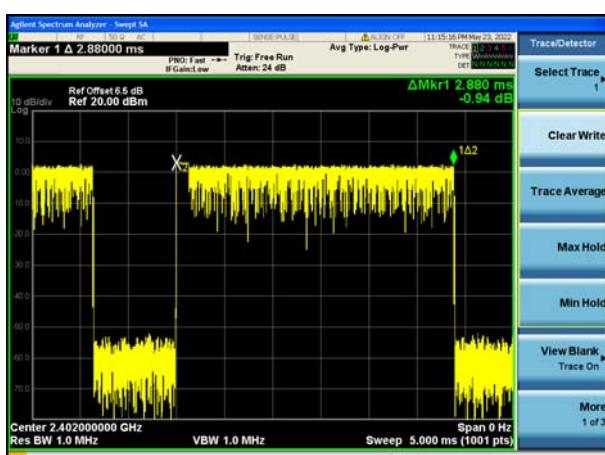

3DH5

6.7. Band Edge

6.7.1. Conducted Emission Method

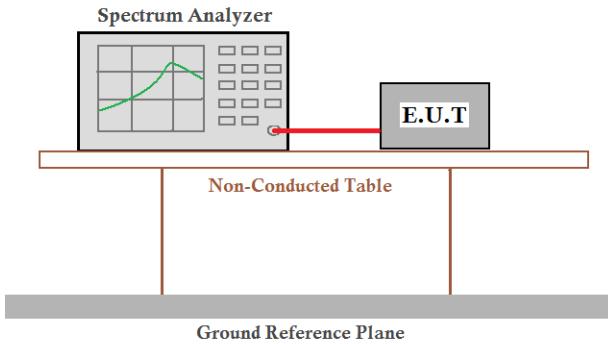Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar




**Right Earbuds**




Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
GFSK Non-hopping			
2400	60.21	20	Pass
2483.5	62.35	20	Pass

Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
GFSK hopping			
2400	61.82	20	Pass
2483.5	63.26	20	Pass

Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
8DPSK Non-hopping			
2400	60.78	20	Pass
2483.5	63.75	20	Pass

Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
8DPSK hopping			
2400	62.78	20	Pass
2483.5	62.53	20	Pass

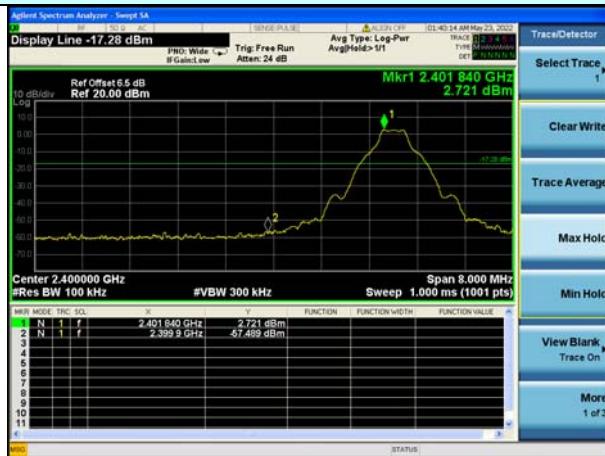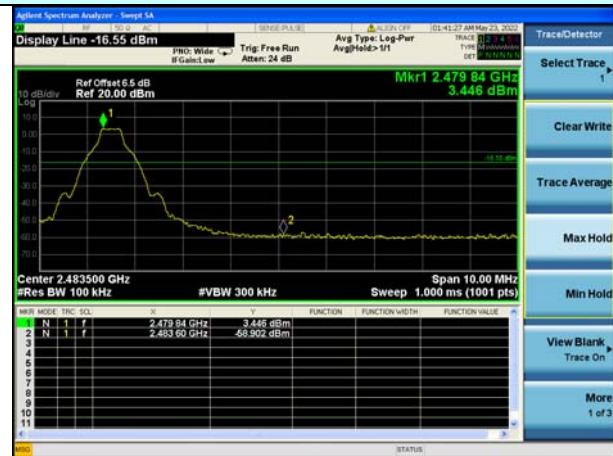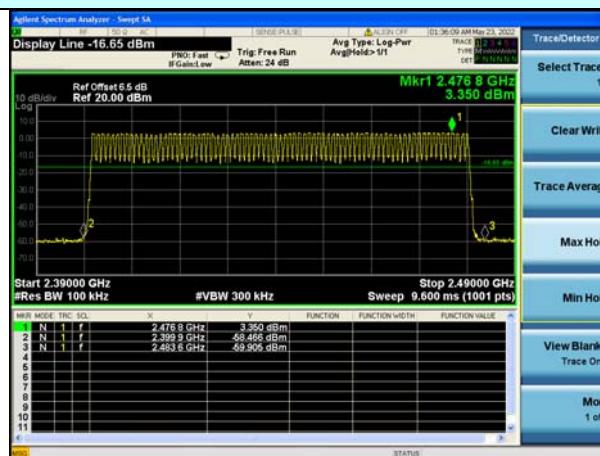Test plot as follows:
GFSK Mode:
Lowest channel

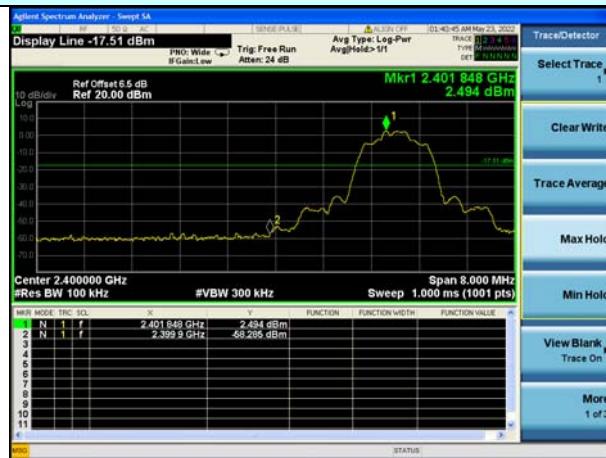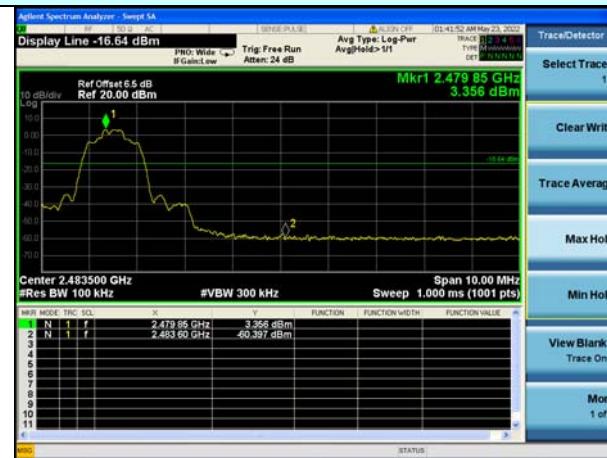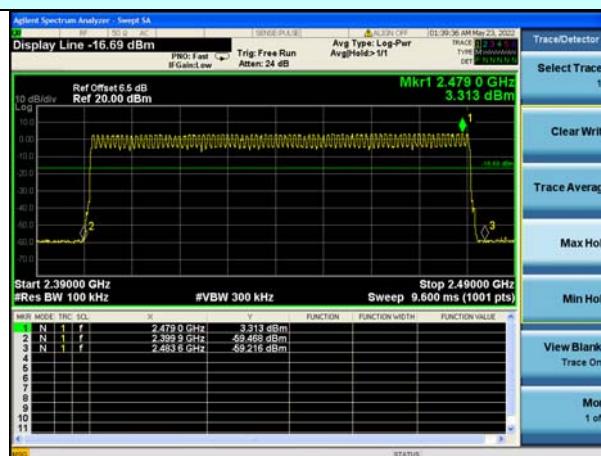No-hopping mode
Highest channel

No-hopping mode

Hopping mode

8QPSK Mode:
Lowest channel

No-hopping mode
Highest channel

No-hopping mode

Hopping mode

**Left Earbuds**

Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
GFSK Non-hopping			
2400	60.71	20	Pass
2483.5	62.76	20	Pass



Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
GFSK hopping			
2400	61.10	20	Pass
2483.5	63.14	20	Pass




Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
8DPSK Non-hopping			
2400	62.24	20	Pass
2483.5	62.69	20	Pass

Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
8DPSK hopping			
2400	62.13	20	Pass
2483.5	62.75	20	Pass


Test plot as follows:

GFSK Mode:

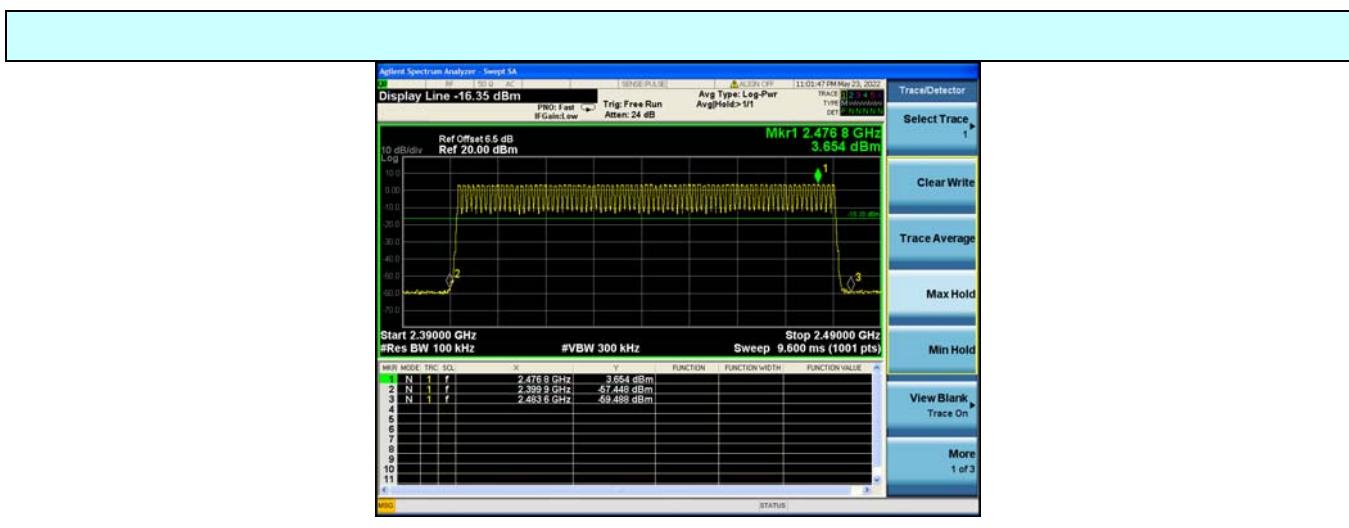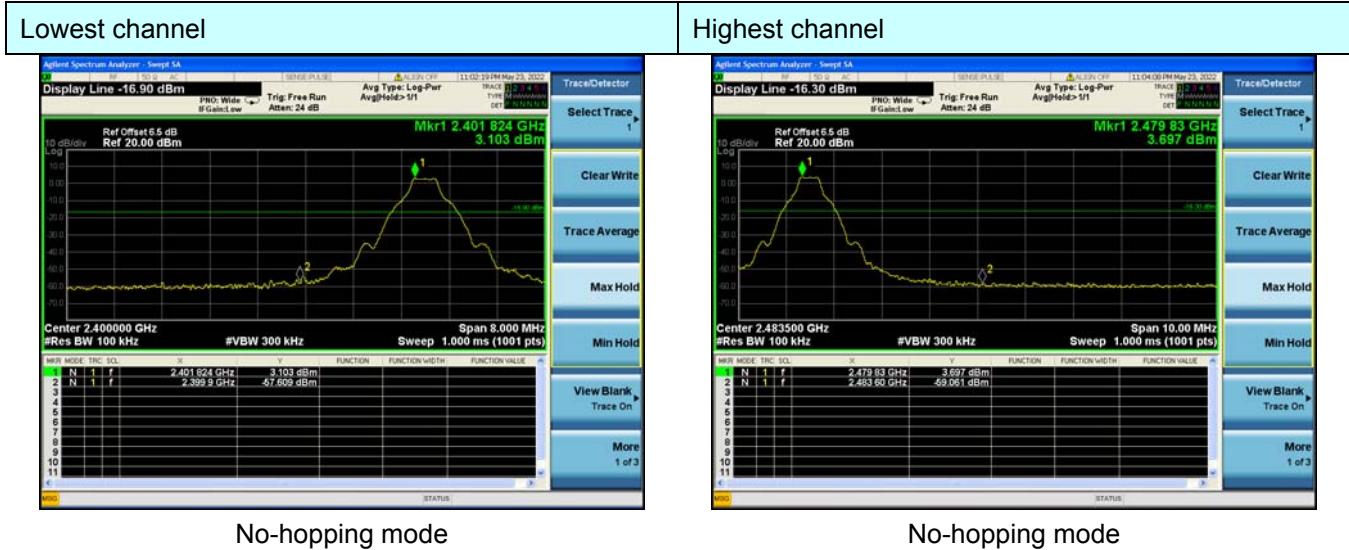

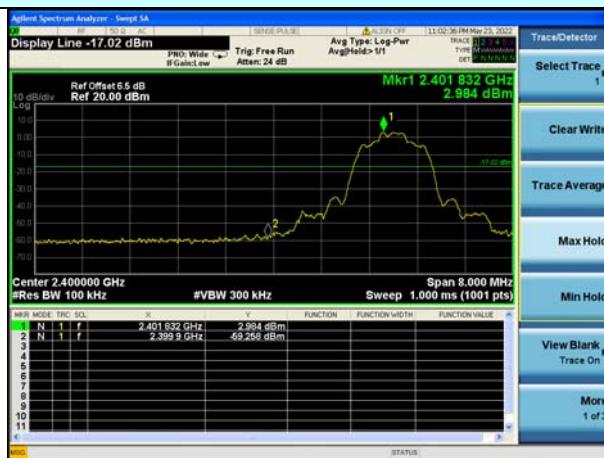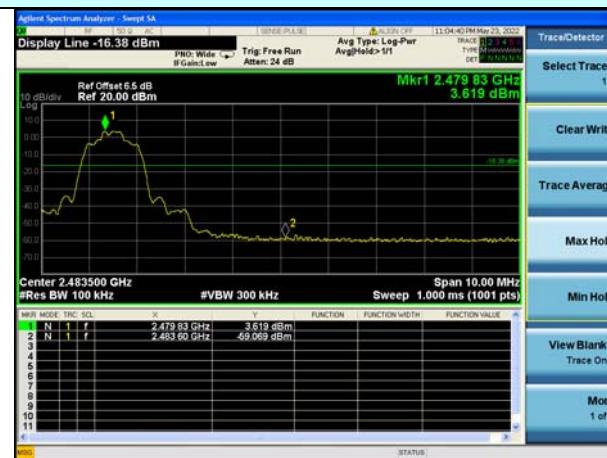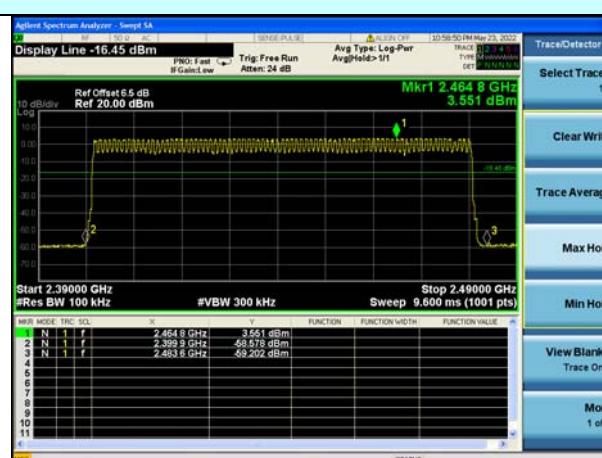8QPSK Mode:
Lowest channel

No-hopping mode
Highest channel

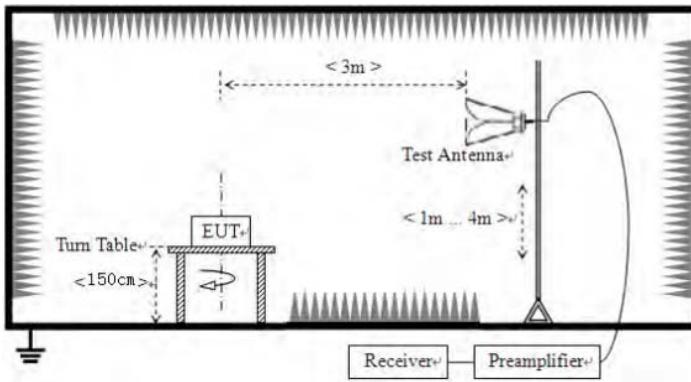No-hopping mode

Hopping mode

6.7.2. Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test Method:	ANSI C63.10:2013								
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark					
	Above 1GHz	54.00		Average Value					
Test setup:									
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 								
Test Instruments:	Refer to section 6.0 for details								
Test mode:	Refer to section 5.2 for details								
Test results:	Pass								
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar			



Report No.: HTT202205296F01

Measurement Data



Right Earbuds



Remark: GFSK, Pi/4 DQPSK, 8QPSK all have been tested, only worse case 8QPSK is reported.

Operation Mode: 8QPSK TX Low channel

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.00	H	49.68	--	-5.79	43.89	--	74.00	54.00	CH00
2390.00	V	48.66	--	-5.79	42.87	--	74.00	54.00	CH00
2483.50	H	48.6	--	-4.98	43.62	--	74.00	54.00	CH78
2483.50	V	48.15	--	-4.98	43.17	--	74.00	54.00	CH78

Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

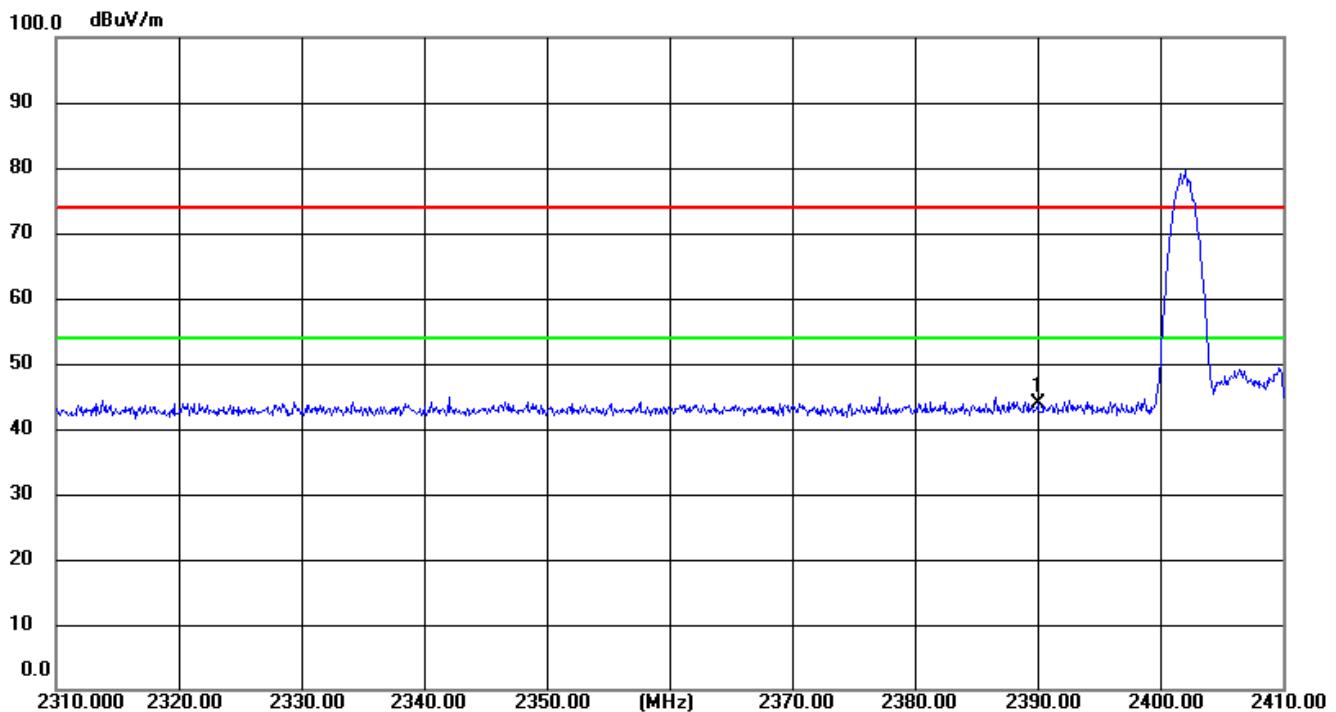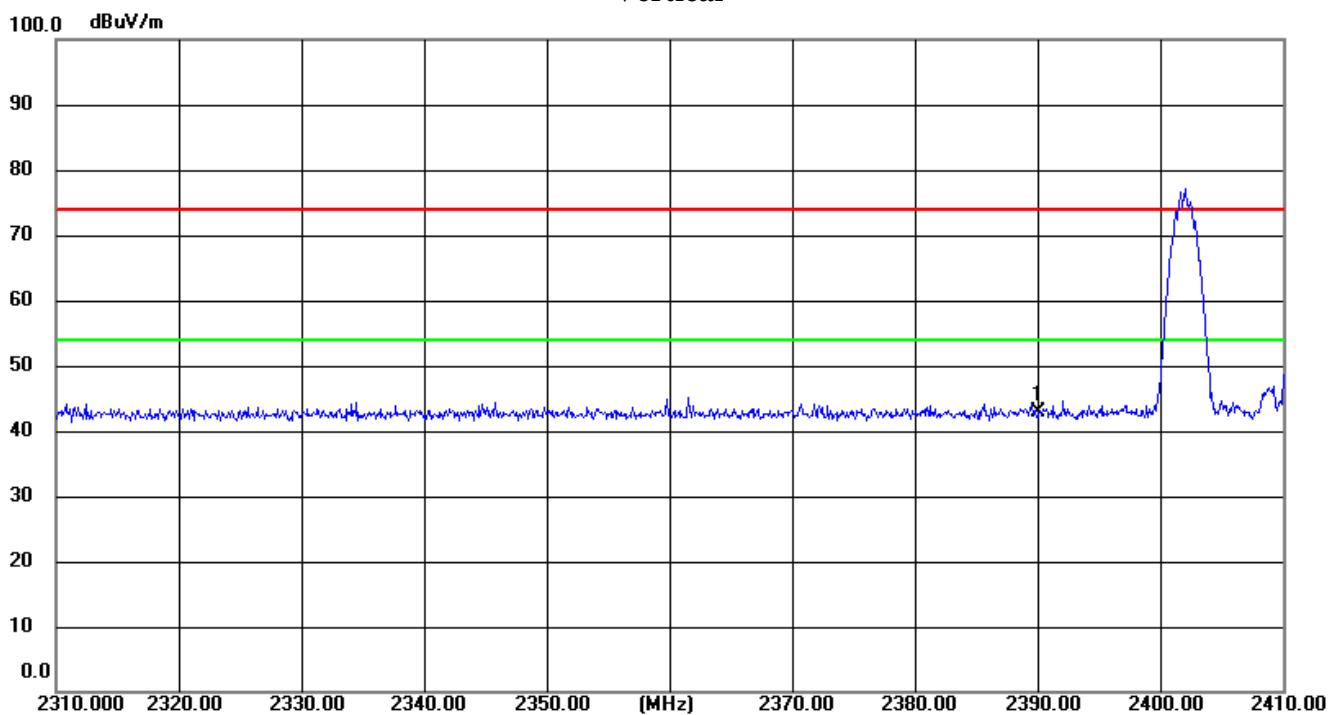Horizontal**Vertical**

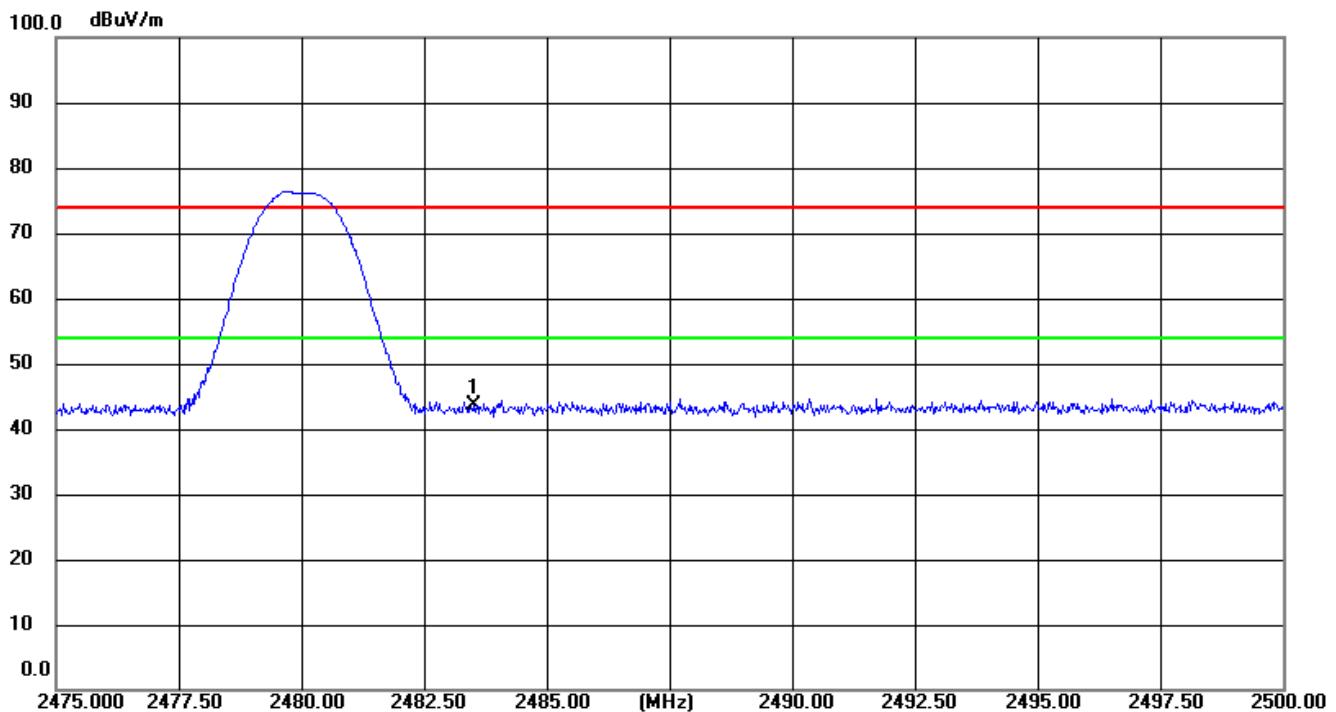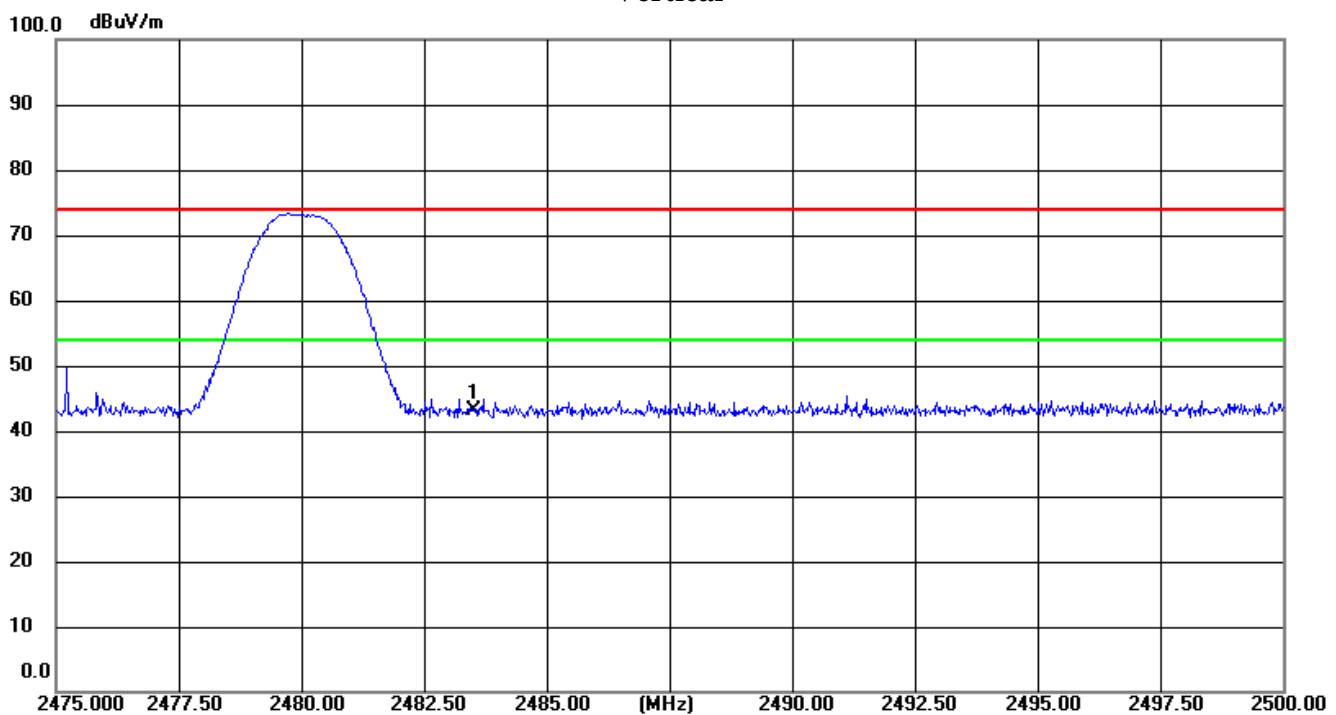Horizontal**Vertical**



Report No.: HTT202205296F01



Left Earbuds



Remark: GFSK, Pi/4 DQPSK, 8QPSK all have been tested, only worse case 8QPSK is reported.

Operation Mode: 8QPSK TX Low channel

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.00	H	49.08	--	-5.79	43.29	--	74.00	54.00	CH00
2390.00	V	48.44	--	-5.79	42.65	--	74.00	54.00	CH00
2483.50	H	48.00	--	-4.98	43.02	--	74.00	54.00	CH78
2483.50	V	48.59	--	-4.98	43.61	--	74.00	54.00	CH78


Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

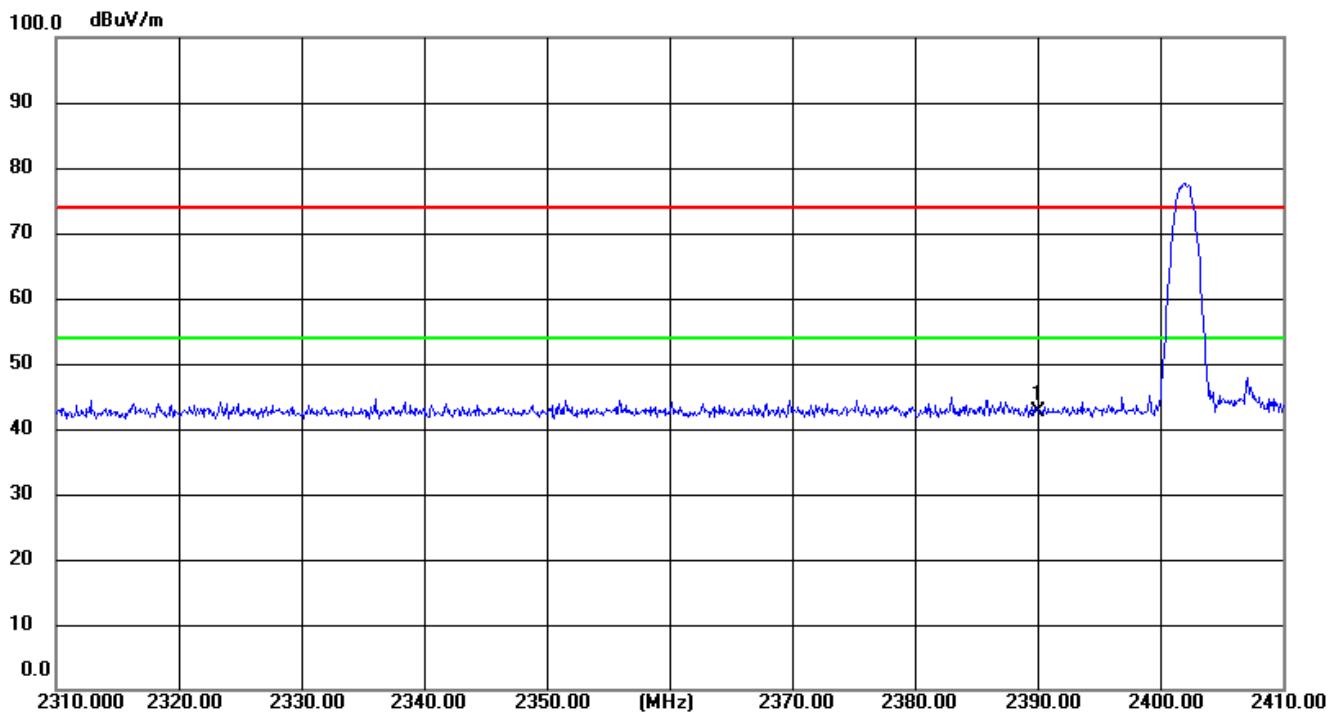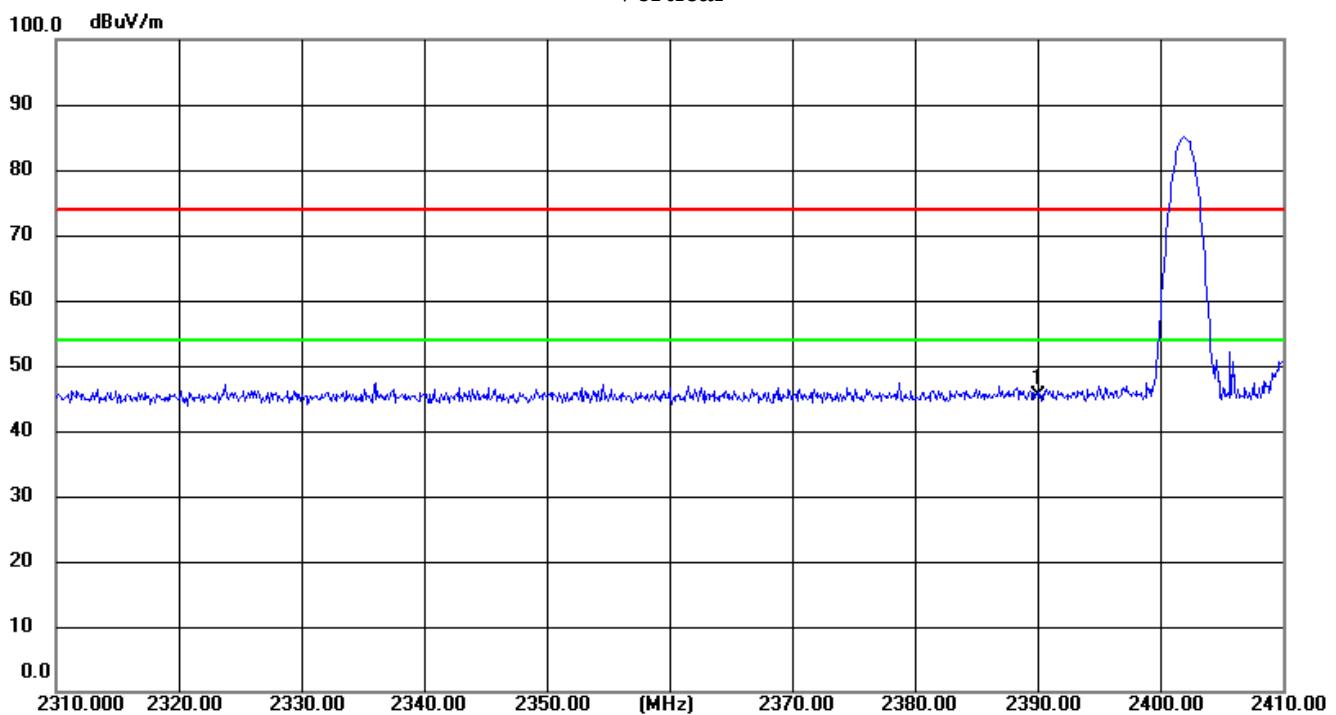Horizontal**Vertical**

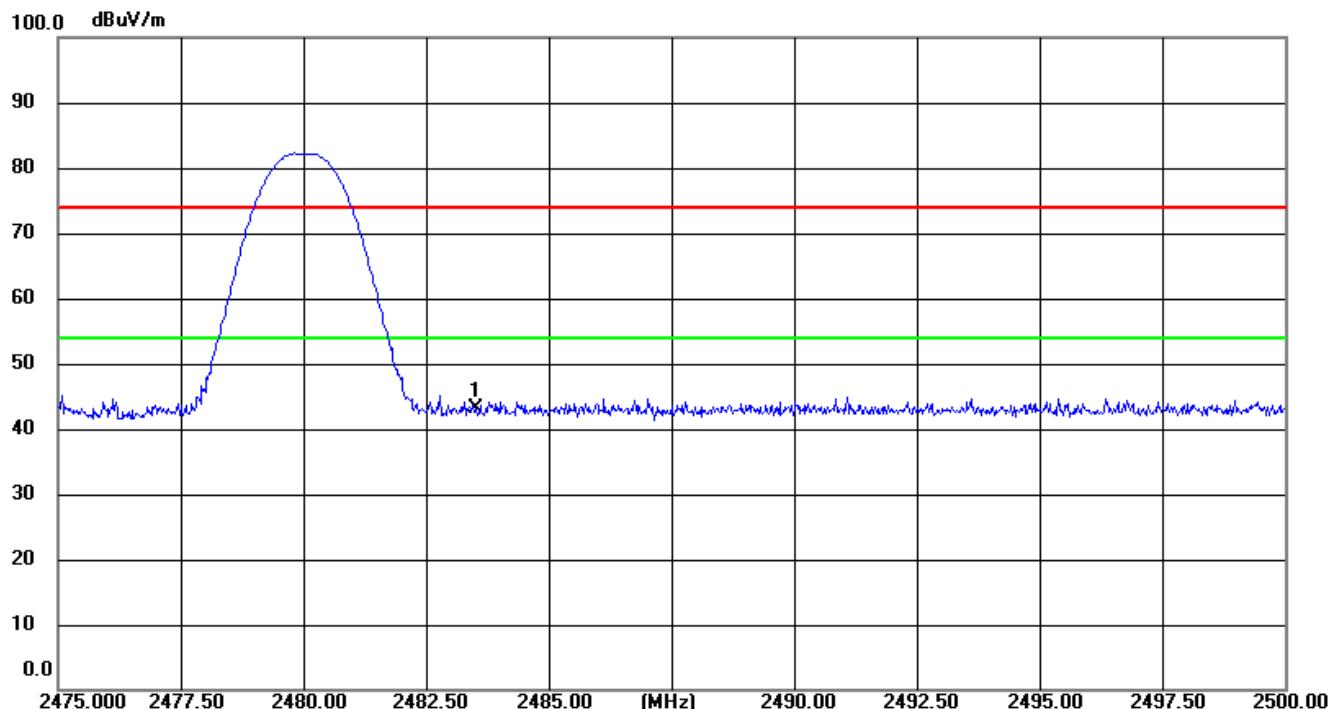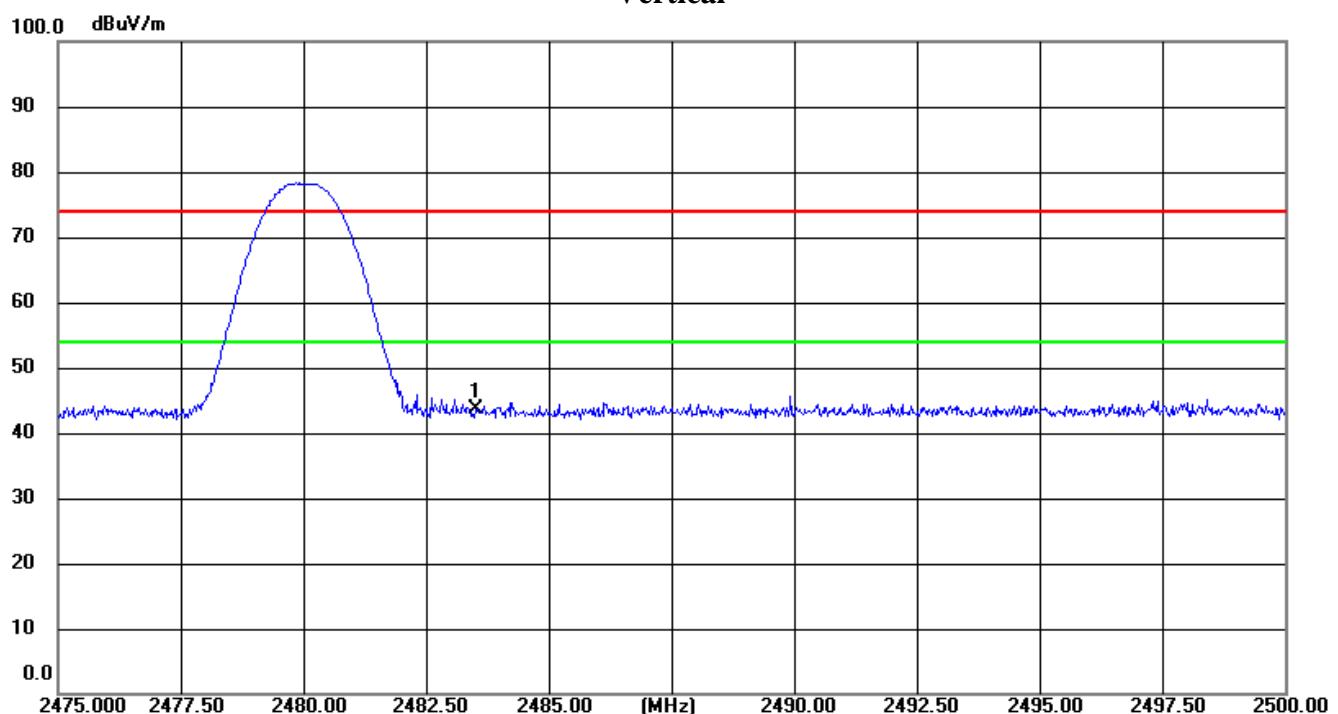Horizontal**Vertical**


6.8. Spurious Emission

6.8.1. Conducted Emission Method

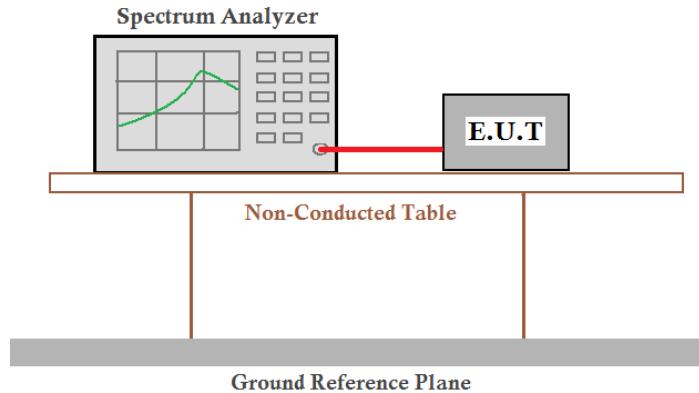
Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.10:2013					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Right Earbuds


GFSK

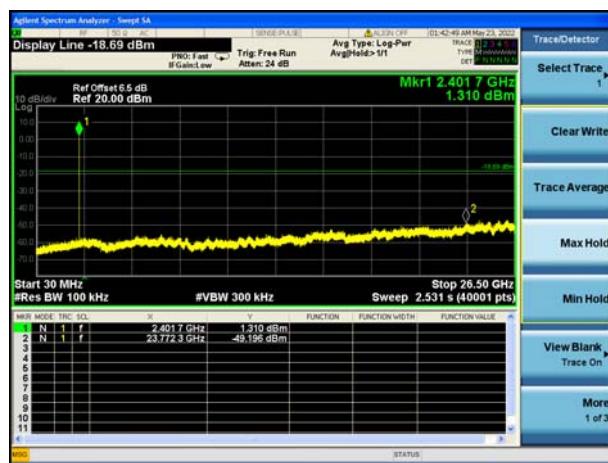

CH00

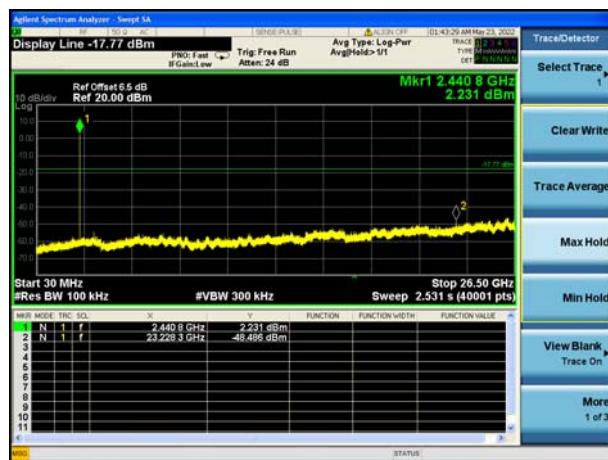


CH39

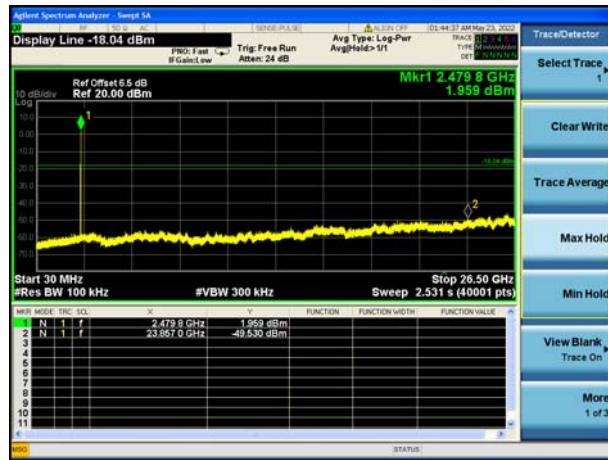


CH78


8QPSK

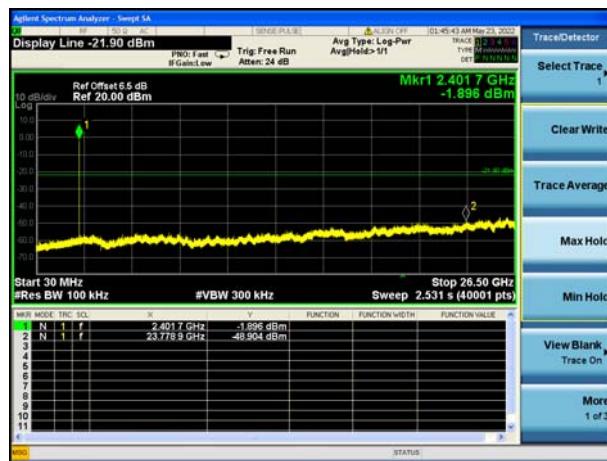

CH00

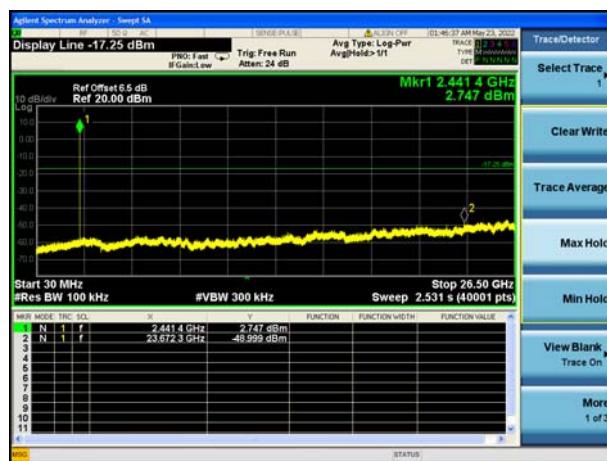


CH39

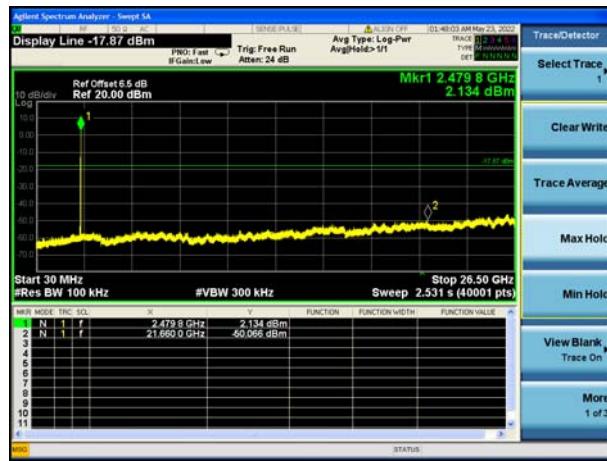


CH78

Left Earbuds


GFSK

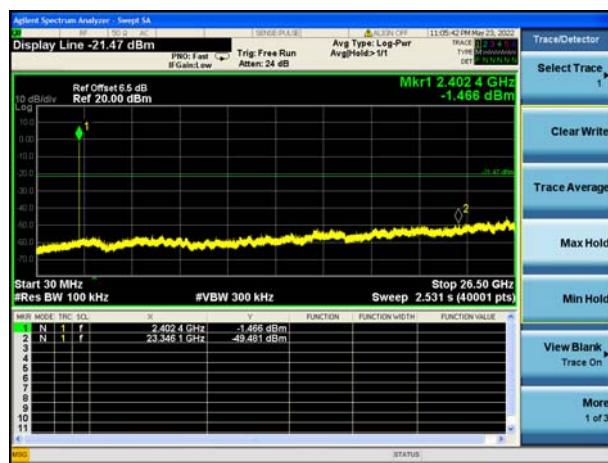

CH00

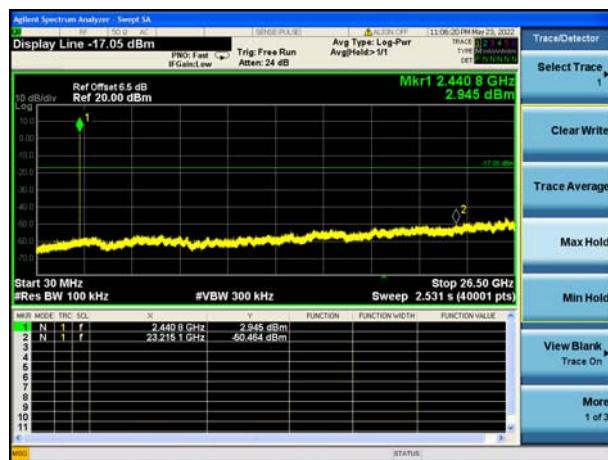


CH39

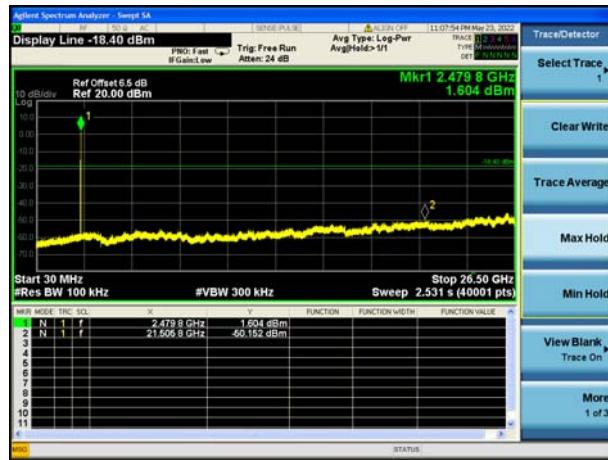


CH78


8QPSK

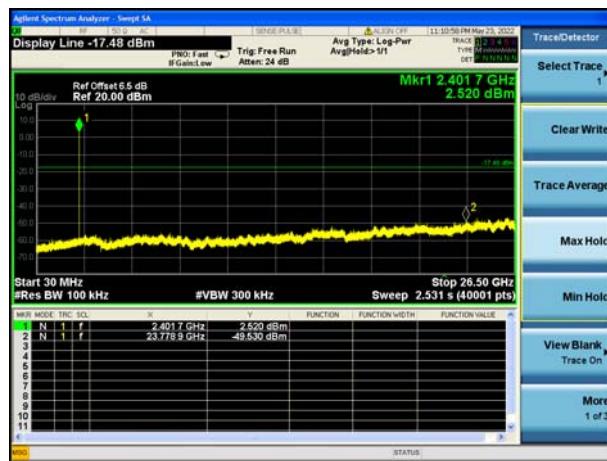

CH00

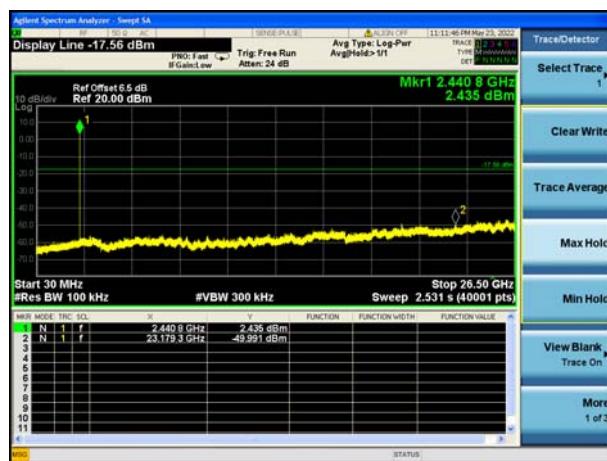


CH39

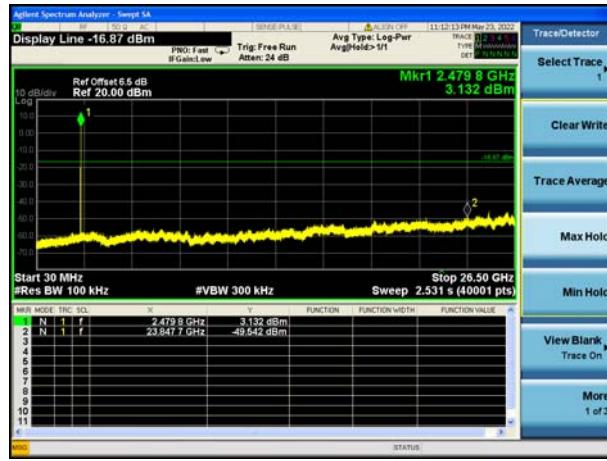


CH78


6.8.2. Radiated Emission Method

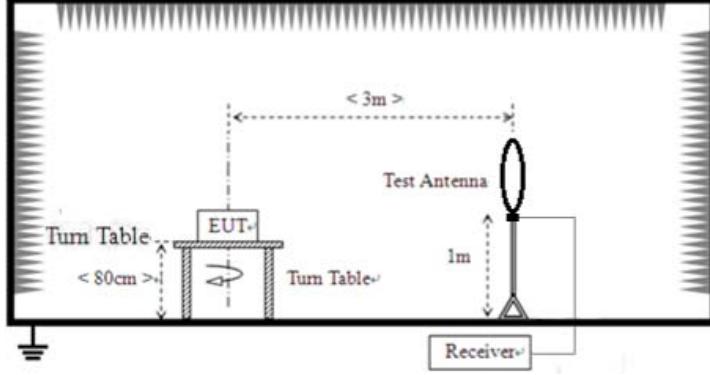Test Requirement:	FCC Part15 C Section 15.209						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	9kHz to 25GHz						
Test site:	Measurement Distance: 3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Value		
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak		
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak		
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak		
	Above 1GHz	Peak	1MHz	3MHz	Peak		
	Above 1GHz	Peak	1MHz	10Hz	Average		
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance			
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m			
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m			
	1.705MHz-30MHz	30	QP	30m			
	30MHz-88MHz	100	QP	3m			
	88MHz-216MHz	150	QP				
	216MHz-960MHz	200	QP				
	960MHz-1GHz	500	QP				
	Above 1GHz	500	Average				
	Above 1GHz	5000	Peak				
Test setup:	For radiated emissions from 9kHz to 30MHz						
							

For radiated emissions from 30MHz to1GHz

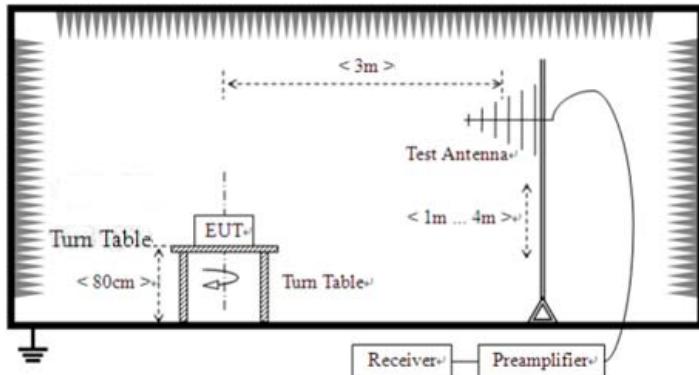

For radiated emissions above 1GHz

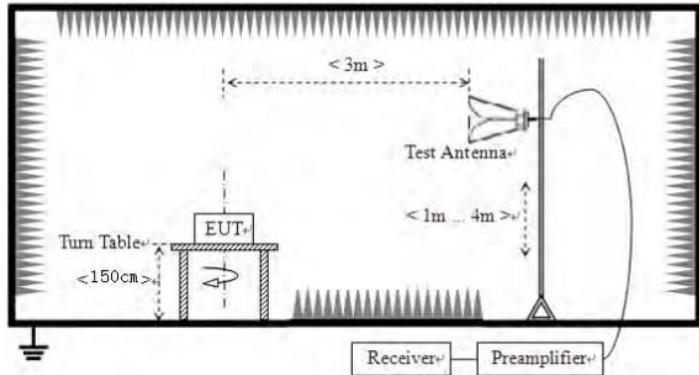

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:

Refer to section 6.0 for details

Test mode:

Refer to section 5.2 for details

Test environment:

Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
--------	-------	---------	-----	---------	----------



Report No.: HTT202205296F01

Test voltage:	AC 120V, 60Hz
Test results:	Pass

Measurement data:

Remarks:

1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8QPSK modulation, and found the 8QPSK modulation which it is worse case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.


■ **9kHz~30MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Right Earbuds

For 30MHz-1GHz


Horizontal

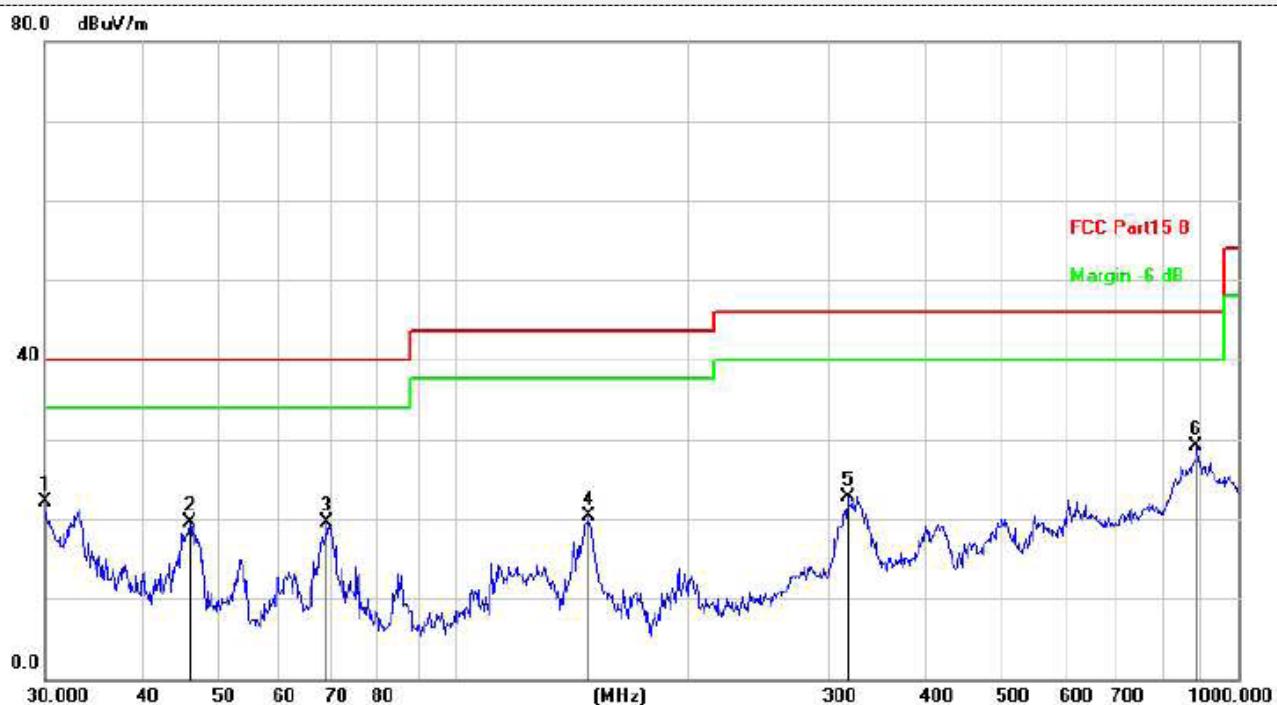

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Over Detector
1	30.0000	40.72	-18.59	22.13	40.00	-17.87	QP	
2	46.0162	36.64	-17.21	19.43	40.00	-20.57	QP	
3	68.8721	39.19	-19.76	19.43	40.00	-20.57	QP	
4	148.4410	38.17	-17.80	20.37	43.50	-23.13	QP	
5	316.5889	39.87	-17.19	22.68	46.00	-23.32	QP	
6 *	884.5027	34.28	-5.10	29.18	46.00	-16.82	QP	

Final Level = Receiver Read level + Correct Factor

Vertical

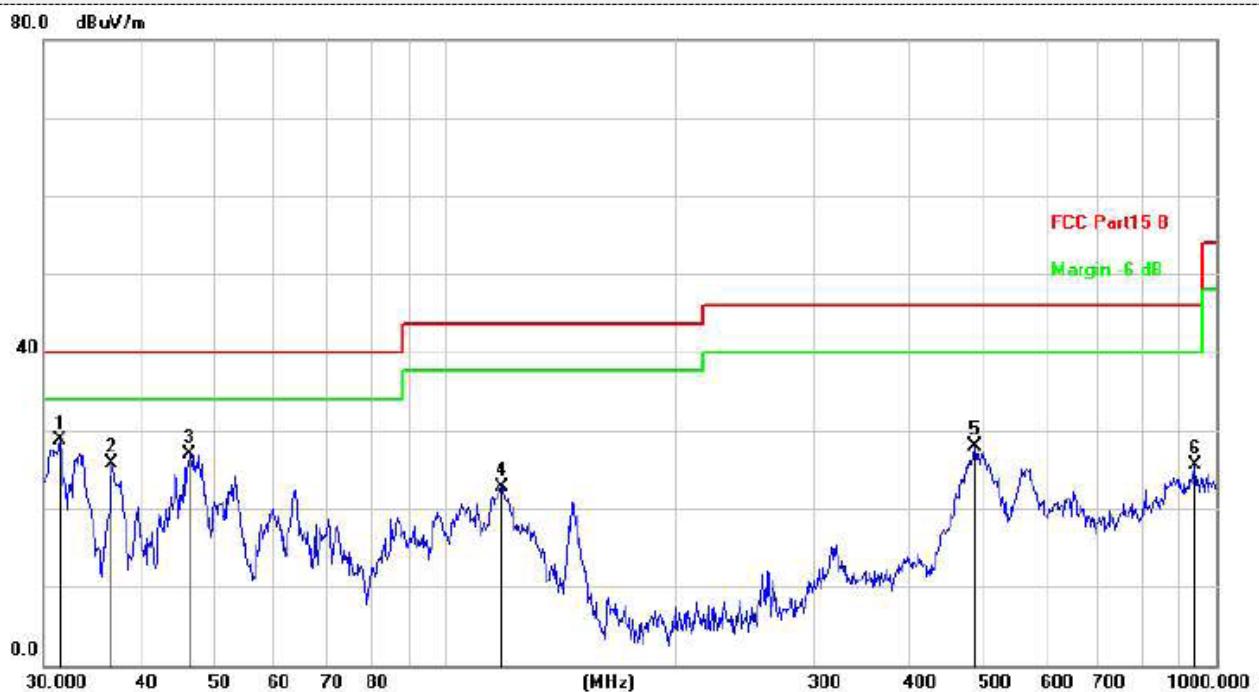

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1	*	31.5091	47.21	-18.43	28.78	40.00	-11.22	QP
2		36.7661	43.48	-17.84	25.64	40.00	-14.36	QP
3		46.3402	44.29	-17.35	26.94	40.00	-13.06	QP
4		118.1860	42.15	-19.40	22.75	43.50	-20.75	QP
5		485.6093	41.81	-13.96	27.85	46.00	-18.15	QP
6		938.8324	30.48	-5.00	25.48	46.00	-20.52	QP

Final Level = Receiver Read level + Correct Factor

Left Earbuds

For 30MHz-1GHz

Horizontal



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1	*	30.0000	39.72	-18.59	21.13	40.00	-18.87	QP
2		46.0162	36.64	-17.21	19.43	40.00	-20.57	QP
3		68.1512	39.38	-19.63	19.75	40.00	-20.25	QP
4		146.8874	36.19	-17.81	18.38	43.50	-25.12	QP
5		413.2706	33.33	-14.10	19.23	46.00	-26.77	QP
6		836.2441	32.66	-6.18	26.48	46.00	-19.52	QP

Final Level = Receiver Read level + Correct Factor

Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		33.7986	44.83	-18.19	26.64	40.00	-13.36	QP
2	*	46.5030	44.82	-17.34	27.48	40.00	-12.52	QP
3		118.1860	42.15	-19.40	22.75	43.50	-20.75	QP
4		475.4990	38.32	-14.54	23.78	46.00	-22.22	QP
5		560.6928	36.55	-10.24	26.31	46.00	-19.69	QP
6		932.2712	31.62	-4.94	26.68	46.00	-19.32	QP

Final Level = Receiver Read level + Correct Factor

**For 1GHz to 25GHz****Right Earbuds**

Remark: For test above 1GHz GFSK, Pi/4 DQPSK and 8QPSK were test at Low, Middle, and High channel; only the worst result of 8QPSK was reported as below:

CH Low (2402MHz)**Horizontal:**

Frequency (MHz)	Meter Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	48.27	31.40	8.18	31.50	56.35	74.00	-17.65	peak
4804	35.02	31.40	8.18	31.50	43.10	54.00	-10.90	AVG
7206	39.06	35.80	10.83	31.40	54.29	74.00	-19.71	peak
7206	24.22	35.80	10.83	31.40	39.45	54.00	-14.55	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	48.74	31.40	8.18	31.50	56.82	74.00	-17.18	peak
4804	32.05	31.40	8.18	31.50	40.13	54.00	-13.87	AVG
7206	39.89	35.80	10.83	31.40	55.12	74.00	-18.88	peak
7206	25.02	35.80	10.83	31.40	40.25	54.00	-13.75	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH Middle (2441MHz)

Horizontal:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882	48.36	31.40	9.17	32.10	56.83	74.00	-17.17	peak
4882	33.11	31.40	9.17	32.10	41.58	54.00	-12.42	AVG
7323	38.02	35.80	10.83	31.40	53.25	74.00	-20.75	peak
7323	24.74	35.80	10.83	31.40	39.97	54.00	-14.03	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882	47.11	31.40	9.17	32.10	55.58	74.00	-18.42	peak
4882	33.02	31.40	9.17	32.10	41.49	54.00	-12.51	AVG
7323	37.52	35.80	10.83	31.40	52.75	74.00	-21.25	peak
7323	23.09	35.80	10.83	31.40	38.32	54.00	-15.68	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: HTT202205296F01

CH High (2480MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960	50.13	31.40	9.17	32.10	58.6	74	-15.4	
4960	31.52	31.40	9.17	32.10	39.99	54	-14.01	AVG
7440	40.16	35.80	10.83	31.40	55.39	74	-18.61	peak
7440	23.58	35.80	10.83	31.40	38.81	54	-15.19	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960	49.69	31.40	9.17	32.10	58.16	74	-15.84	
4960	33.02	31.40	9.17	32.10	41.49	54	-12.51	AVG
7440	38.52	35.80	10.83	31.40	53.75	74	-20.25	peak
7440	24.25	35.80	10.83	31.40	39.48	54	-14.52	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

(1) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(2) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed.

**Left Earbuds**

Remark: For test above 1GHz GFSK, Pi/4 DQPSK and 8QPSK were test at Low, Middle, and High channel; only the worst result of 8QPSK was reported as below:

CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	49.56	31.40	8.18	31.50	57.64	74.00	-16.36	peak
4804	32.05	31.40	8.18	31.50	40.13	54.00	-13.87	AVG
7206	38.74	35.80	10.83	31.40	53.97	74.00	-20.03	peak
7206	22.17	35.80	10.83	31.40	37.40	54.00	-16.60	AVG
---	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	48.16	31.40	8.18	31.50	56.24	74.00	-17.76	peak
4804	33.25	31.40	8.18	31.50	41.33	54.00	-12.67	AVG
7206	38.74	35.80	10.83	31.40	53.97	74.00	-20.03	peak
7206	21.15	35.80	10.83	31.40	36.38	54.00	-17.62	AVG
---	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH Middle (2441MHz)

Horizontal:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882	49.95	31.40	9.17	32.10	58.42	74.00	-15.58	peak
4882	33.51	31.40	9.17	32.10	41.98	54.00	-12.02	AVG
7323	39.52	35.80	10.83	31.40	54.75	74.00	-19.25	peak
7323	24.15	35.80	10.83	31.40	39.38	54.00	-14.62	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882	47.77	31.40	9.17	32.10	56.24	74.00	-17.76	peak
4882	33.02	31.40	9.17	32.10	41.49	54.00	-12.51	AVG
7323	37.14	35.80	10.83	31.40	52.37	74.00	-21.63	peak
7323	21.05	35.80	10.83	31.40	36.28	54.00	-17.72	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: HTT202205296F01

CH High (2480MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960	49.89	31.40	9.17	32.10	58.36	74	-15.64	
4960	35.03	31.40	9.17	32.10	43.5	54	-10.5	AVG
7440	33.78	35.80	10.83	31.40	49.01	74	-24.99	peak
7440	24.12	35.80	10.83	31.40	39.35	54	-14.65	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960	49.36	31.40	9.17	32.10	57.83	74	-16.17	
4960	34.21	31.40	9.17	32.10	42.68	54	-11.32	AVG
7440	38.11	35.80	10.83	31.40	53.34	74	-20.66	peak
7440	22.01	35.80	10.83	31.40	37.24	54	-16.76	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

(1) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(2) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed.



Report No.: HTT202205296F01

7. Test Setup Photo

Reference to the **appendix I** for details.

8. EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----