



FCC TEST REPORT

FCC ID: 2A6CJ-BDX4UB

On Behalf of

BirdDog Australia Pty Ltd

X4 Ultra

Model No.: BDX4UB, BDX4UW

Prepared for : BirdDog Australia Pty Ltd
Address : Lvl 4, 1-9 Sackville St Collingwood, VIC, 3066, Australia

Prepared By : Shenzhen PSI Testing Co., Ltd.
1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West
Address : Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong,
China

Report Number : psi2411066-C02-R02
Date of Receipt : November 15, 2024
Date of Test : November 15- December 29, 2024
Date of Report : December 29, 2024
Version Number : V0

TABLE OF CONTENTS

Description	Page
1 TEST SUMMARY	5
1.1 MEASUREMENT UNCERTAINTY	5
2 GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 TEST MODE.....	7
2.3 TEST FACILITY	7
2.4 DESCRIPTION OF SUPPORT UNITS.....	7
2.5 DEVIATION FROM STANDARDS	8
2.6 ABNORMALITIES FROM STANDARD CONDITIONS	8
2.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
2.8 ADDITIONAL INSTRUCTIONS	8
2.9 TEST CONDITIONS.....	8
3 TEST INSTRUMENTS LIST	9
4 TEST RESULTS AND MEASUREMENT DATA	10
4.1 ANTENNA REQUIREMENT:	10
4.2 CONDUCTED EMISSIONS	11
4.3 EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	14
4.4 MAXIMUM CONDUCTED OUTPUT POWER	218
4.5 POWER SPECTRAL DENSITY	228
4.6 BAND EDGE	363
4.7 RADIATED EMISSION	410
4.8 FREQUENCY STABILITY	417

TEST REPORT DECLARATION

Applicant : BirdDog Australia Pty Ltd
Address : Lvl 4, 1-9 Sackville St Collingwood, VIC, 3066, Australia
Manufacturer : BirdDog Australia Pty Ltd
Address : Lvl 4, 1-9 Sackville St Collingwood, VIC, 3066, Australia
EUT Description : X4 Ultra
(A) Model No. : BDX4UB, BDX4UW
(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E

RSS-247 Issue 2, ANSI C63.4:2014, ANSI C63.10:2013

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart E&RSS-247 limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Jensen Wang
Test Engineer

Jensen Wang

Approved by (name + signature).....:

Simple Guan
Project Manager

Simple Guan

Date of issue.....:

December 29, 2024

Revision History

Revision	Issue Date	Revisions	Revised By
V0	December 29, 2024	Initial released Issue	Jensen Wang



1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	Section 15.203 Section 7.1.4 RSS-Gen Issue 5	PASS
AC Power Line Conducted Emission	Section 15.207 Section 7.2.4 RSS-GEN(8.8), ANSI C63.10	PASS
occupied bandwidth	Section 15.407 (e)	PASS
Peak Transmit Power	Section 15.407(a), RSS-247 5.4(2)	PASS
Power Spectral Density	Section 15.407(a), RSS-247 5.2(2)	PASS
Undesirable Emission	Section 15.407(b), RSS-247 5.5	PASS
Radiated Emission	Section 15.407(b)&15.209 Section 5.5 RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10	PASS
Band Edge	15.205, RSS-247 Issue 2, ANSI C63.10	PASS
Frequency Stability	15.407(f), RSS-GEN(6.11)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.
4. Measurement-method usage KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

1.1 Measurement Uncertainty

Item	Uncertainty
Uncertainty for Power Line Conducted Emissions Test	2.17dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	2.74dB(Polarize: V)
	2.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB(Polarize: V)
	4.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31dB(Polarize: V)
	4.30dB(Polarize: H)
Uncertainty for radio frequency	48.24KHz
Uncertainty for conducted RF Power	0.41dB
Uncertainty for Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Conducted-Spurious Emission	1.26dB

2 General Information

2.1 General Description of EUT

EUT Name : X4 Ultra
 Model : BDX4UB, BDX4UW
 Diff : There is no difference between the models except the appearance color. So all the test were performed on the model BDX4UB.
 Test Voltage : DC 12V from adapter, DC 7.4V from battery

Radio Technology	: 5G WIFI
Operation frequency	: 802.11a/802.11ac20/802.11n(HT20)/802.11ax20: 5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz 802.11ac40/802.11n(HT40)/802.11ax40: 5190-5230MHz, 5270-5310MHz, 5510-5670MHz, 5755-5795MHz 802.11ac80/802.11ax80: 5210MHz, 5290MHz, 5530MHz, 5775MHz 802.11ac160/802.11ax160: 5250MHz, 5570MHz
Channel separation	: 20MHz for 802.11a/802.11ac20/802.11n(HT20)/802.11ax20 40MHz for 802.11ac40/ 802.11n(HT40)/802.11ax40 80MHz for 802.11ac80/802.11ax80 160MHz for 802.11ac160/802.11ax160
Modulation technology:	: IEEE 802.11n: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE 802.11a: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE 802.11ac: OFDM (64QAM,16QAM, 256QAM,QPSK,BPSK) IEEE 802.11ax: OFDMA (64QAM,16QAM,QPSK,BPSK,256QAM,1024QAM)
Antenna Type	: External antenna, Maximum Gain is 3.23dBi.
Software version	: V1.0
Hardware version	: V1.0
FVIN	
Note	: Antenna information is provided by applicant. Testing lab is not responsible for the accuracy of the information.

2.2 Test mode

Transmitting mode Keep the EUT in transmitting with modulation.
EUT was test with 99% duty cycle at its maximum power control level.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission
Registration Number: 916281

September 21, 2023 Certificated by IC
Registration Number: 31123
CAB identifier: CN0158

2.4 Description of Support Units

Accessories : AC ADAPTER
Manufacturer : Mass Power Electronic Limited
Model : S065-A1120500B3
Rating : Input: 100-240V~50/60Hz 1.5A
 : Output: DC 12.0V/5.0A

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

2.7 Other Information Requested by the Customer

None.

2.8 Additional instructions

Software (Used for test) from client

Channel	Power level
Lowest	Default
Middle	Default
Highest	Default

2.9 Test Conditions


Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	98kPa

3 Test Instruments list


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2024.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2024.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2024.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2024.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G18G-45dB	SK2022032901	/	2024.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118G-45	SK2020010801	/	2024.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02-1111533-Fz	/	2024.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P008	/	2024.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2024.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2024.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10A	202211251638		2024.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer			Version		
RE	EZ EMC	Farad			PSI-3A1		
CE	EZ EMC	Farad			PSI-3A1		
RF	RTS	TACHOY			V1.0.0		

4 Test results and Measurement Data

4.1 Antenna requirement:

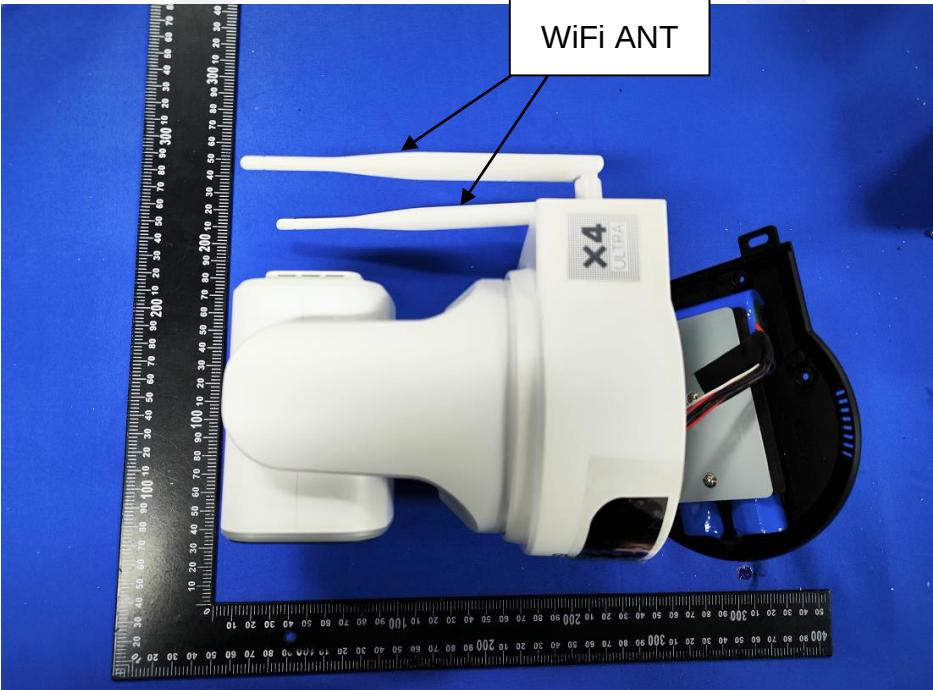Standard requirement:	FCC Part15 C Section 15.203, RSS-GEN(6.8)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
Internal antenna, Maximum Gain is 3.23dBi, for 5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5845MHz	
	


4.2 Conducted Emissions

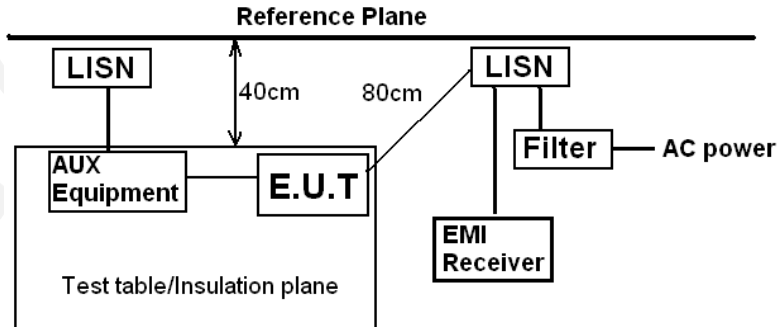Test Requirement:	FCC Part15 C Section 15.207, RSS-Gen §8.8		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class Severity:	Class B		
Class B			
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.		
Test setup:	 Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 3.0 for details		
Test mode:	Refer to section 2.2 for details		
Test results:	Pass		

Measurement Data


An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Line:

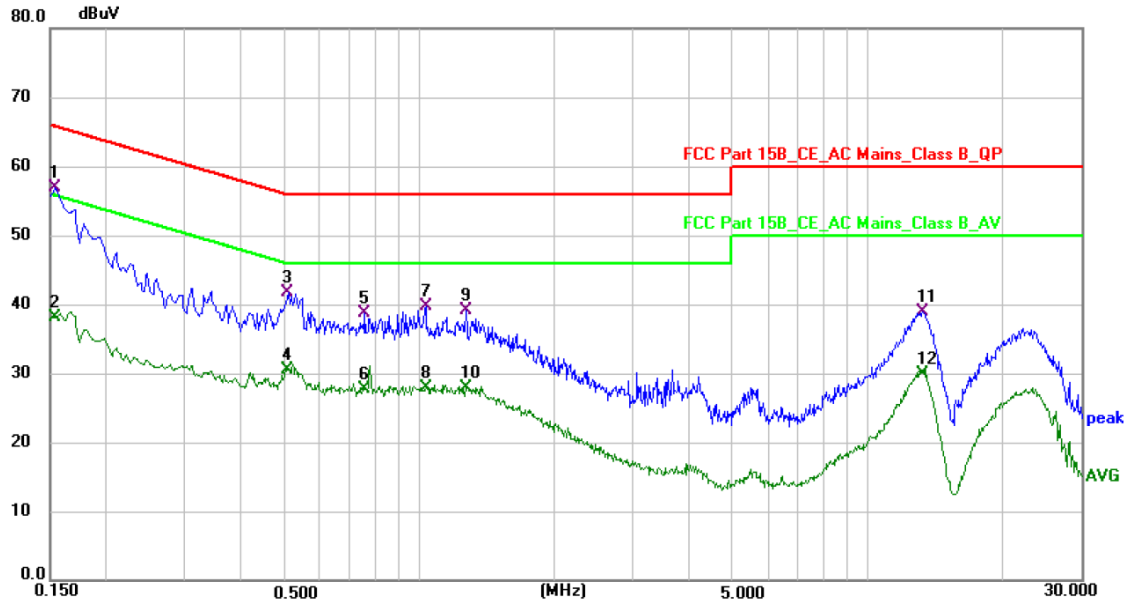

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.1539	47.03	9.94	56.97	65.79	-8.82	QP
2	0.1539	28.21	9.94	38.15	55.79	-17.64	AVG
3	0.5100	31.90	9.89	41.79	56.00	-14.21	QP
4	0.5100	20.70	9.89	30.59	46.00	-15.41	AVG
5	0.7580	29.20	9.43	38.63	56.00	-17.37	QP
6	0.7580	18.27	9.43	27.70	46.00	-18.30	AVG
7	1.0339	30.22	9.41	39.63	56.00	-16.37	QP
8	1.0339	18.43	9.41	27.84	46.00	-18.16	AVG
9	1.2740	29.64	9.40	39.04	56.00	-16.96	QP
10	1.2740	18.47	9.40	27.87	46.00	-18.13	AVG
11	13.2780	29.27	9.55	38.82	60.00	-21.18	QP
12	13.2780	20.45	9.55	30.00	50.00	-20.00	AVG

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

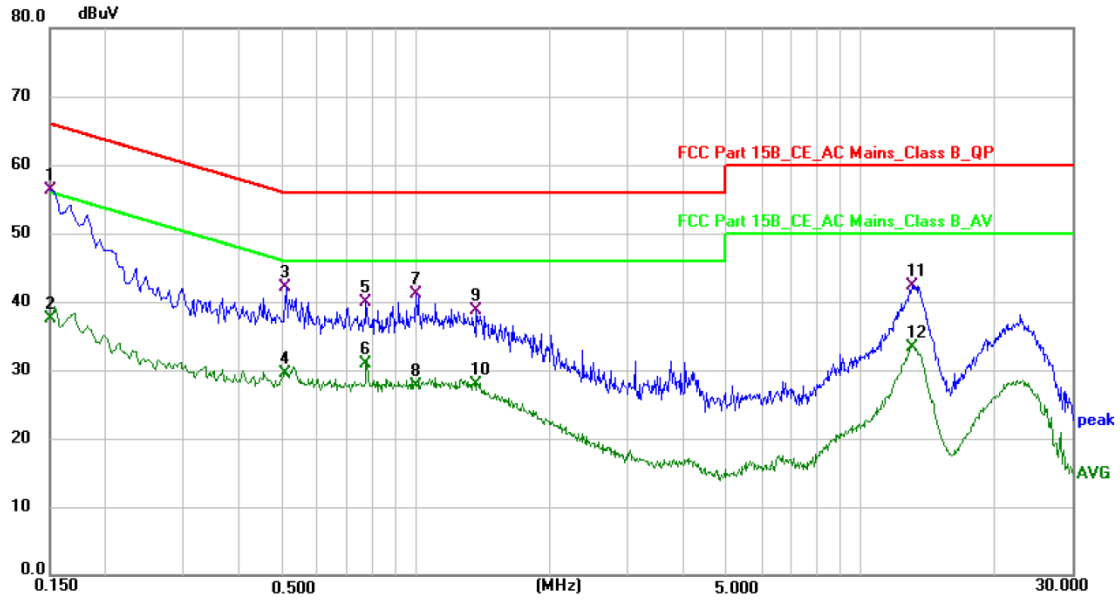
Neutral:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.1500	46.60	9.77	56.37	66.00	-9.63	QP
2	0.1500	27.68	9.77	37.45	56.00	-18.55	AVG
3	0.5100	32.27	9.78	42.05	56.00	-13.95	QP
4	0.5100	19.77	9.78	29.55	46.00	-16.45	AVG
5	0.7740	30.25	9.71	39.96	56.00	-16.04	QP
6	0.7740	21.25	9.71	30.96	46.00	-15.04	AVG
7	1.0020	31.52	9.51	41.03	56.00	-14.97	QP
8	1.0020	18.21	9.51	27.72	46.00	-18.28	AVG
9	1.3700	29.29	9.42	38.71	56.00	-17.29	QP
10	1.3700	18.45	9.42	27.87	46.00	-18.13	AVG
11	13.0940	32.65	9.71	42.36	60.00	-17.64	QP
12	13.0940	23.69	9.71	33.40	50.00	-16.60	AVG

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

All modes and channels have been tested and only the A 5180MHz mode with the worst data is listed.


4.3 Emission Bandwidth and 99% Occupied Bandwidth

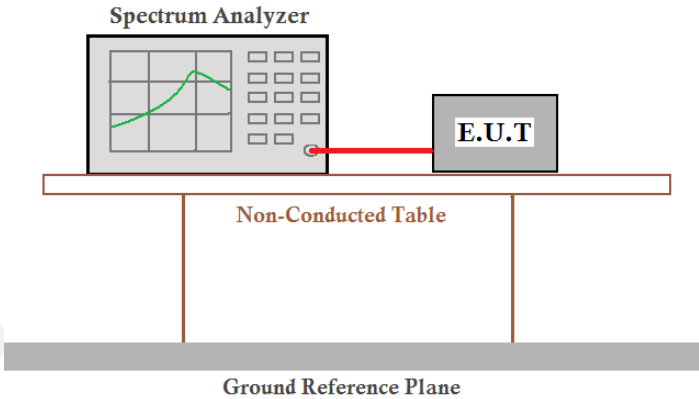Test Requirement:	FCC Part15 E Section 15.407, RSS-Gen §6.7; RSS-247 §6.2
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	>500kHz for 6 dB bandwidth
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green curve, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a 'Non-Conducted Table'. This table is supported by two vertical legs that rest on a 'Ground Reference Plane', which is represented by a thick grey horizontal bar at the bottom of the setup.
Test procedure:	According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass


Measurement Data:**Band 1 (5150-5250 MHz):**

Condition	Antenna	Modulation	Frequency(MHz)	26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5180.00	20.25	16.51
NVNT	ANT2	802.11a	5180.00	20.18	16.50
NVNT	ANT1	802.11a	5200.00	20.52	16.48
NVNT	ANT2	802.11a	5200.00	20.54	16.48
NVNT	ANT1	802.11a	5240.00	21.23	16.54
NVNT	ANT2	802.11a	5240.00	20.63	16.56
NVNT	ANT1	802.11n(HT20)	5180.00	20.28	16.49
NVNT	ANT2	802.11n(HT20)	5180.00	21.12	16.50
NVNT	ANT1	802.11n(HT20)	5200.00	20.29	16.49
NVNT	ANT2	802.11n(HT20)	5200.00	20.18	16.49
NVNT	ANT1	802.11n(HT20)	5240.00	23.72	16.53
NVNT	ANT2	802.11n(HT20)	5240.00	21.12	16.54
NVNT	ANT1	802.11ac(VHT20)	5180.00	20.37	16.50
NVNT	ANT2	802.11ac(VHT20)	5180.00	20.37	16.47
NVNT	ANT1	802.11ac(VHT20)	5200.00	20.44	16.50
NVNT	ANT2	802.11ac(VHT20)	5200.00	20.65	16.53
NVNT	ANT1	802.11ac(VHT20)	5240.00	24.77	16.53
NVNT	ANT2	802.11ac(VHT20)	5240.00	20.71	16.56
NVNT	ANT1	802.11ax(HE20)	5180.00	20.50	16.50
NVNT	ANT2	802.11ax(HE20)	5180.00	20.20	16.51
NVNT	ANT1	802.11ax(HE20)	5200.00	20.53	16.49
NVNT	ANT2	802.11ax(HE20)	5200.00	20.69	16.52
NVNT	ANT1	802.11ax(HE20)	5240.00	23.72	16.59
NVNT	ANT2	802.11ax(HE20)	5240.00	20.92	16.53
NVNT	ANT1	802.11n(HT40)	5190.00	50.03	36.23
NVNT	ANT2	802.11n(HT40)	5190.00	65.19	36.21
NVNT	ANT1	802.11n(HT40)	5230.00	40.07	36.27
NVNT	ANT2	802.11n(HT40)	5230.00	40.52	36.23
NVNT	ANT1	802.11ac(VHT40)	5190.00	40.33	36.21
NVNT	ANT2	802.11ac(VHT40)	5190.00	40.57	36.19
NVNT	ANT1	802.11ac(VHT40)	5230.00	40.15	36.24
NVNT	ANT2	802.11ac(VHT40)	5230.00	40.52	36.26
NVNT	ANT1	802.11ax(HE40)	5190.00	40.51	36.18
NVNT	ANT2	802.11ax(HE40)	5190.00	40.01	36.27
NVNT	ANT1	802.11ax(HE40)	5230.00	41.87	36.25
NVNT	ANT2	802.11ax(HE40)	5230.00	40.12	36.22
NVNT	ANT1	802.11ac(VHT80)	5210.00	82.88	75.84
NVNT	ANT2	802.11ac(VHT80)	5210.00	81.72	75.74
NVNT	ANT1	802.11ax(HE80)	5210.00	82.12	75.85
NVNT	ANT2	802.11ax(HE80)	5210.00	82.10	75.79


99%_OCB_NVNT_ANT1_802_11a_5180

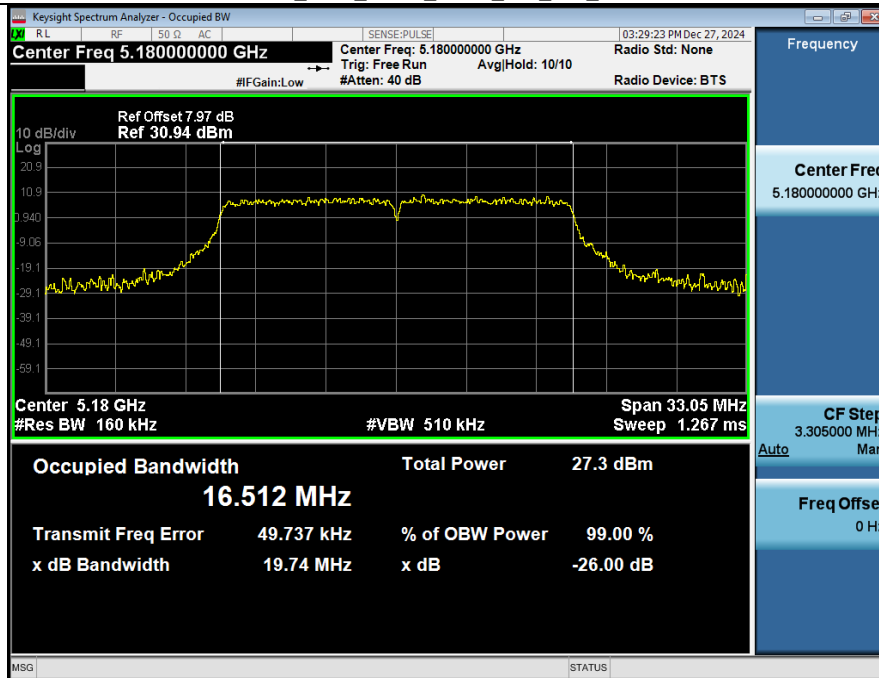


-26BW_NVNT_ANT1_802_11a_5180

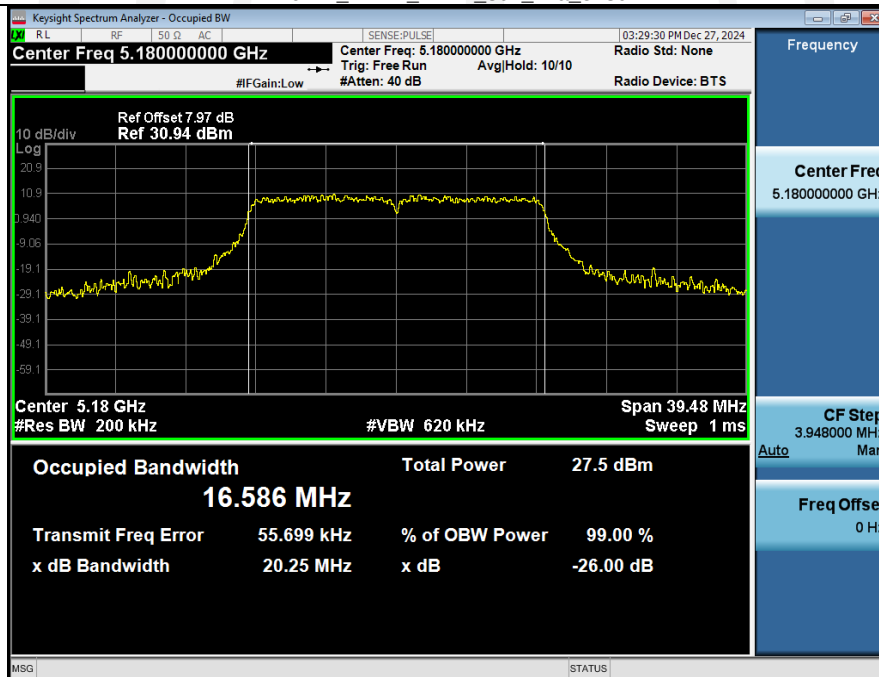


99%_OCB_NVNT_ANT2_802_11a_5180

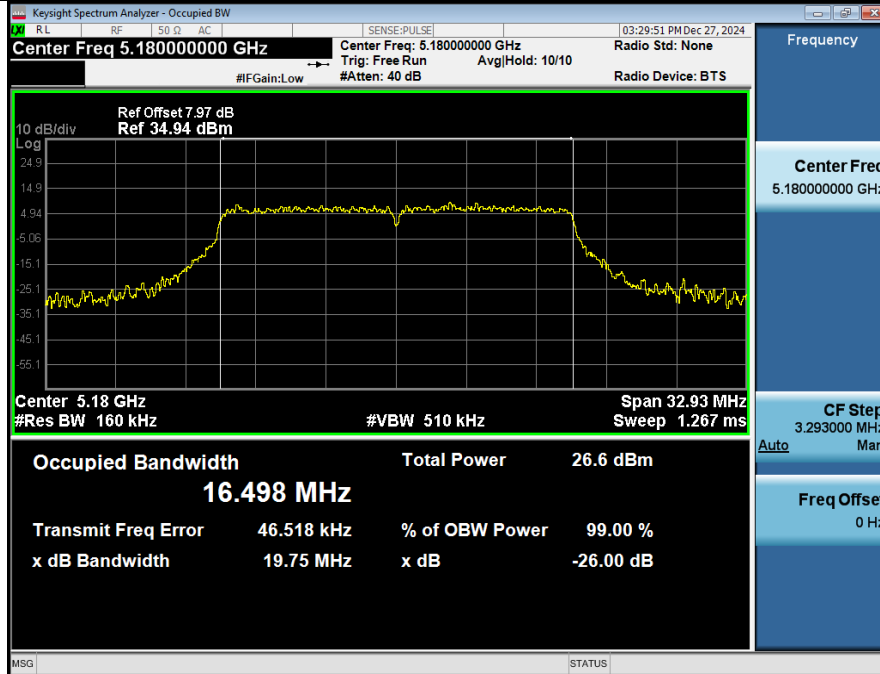


-26BW_NVNT_ANT2_802_11a_5180

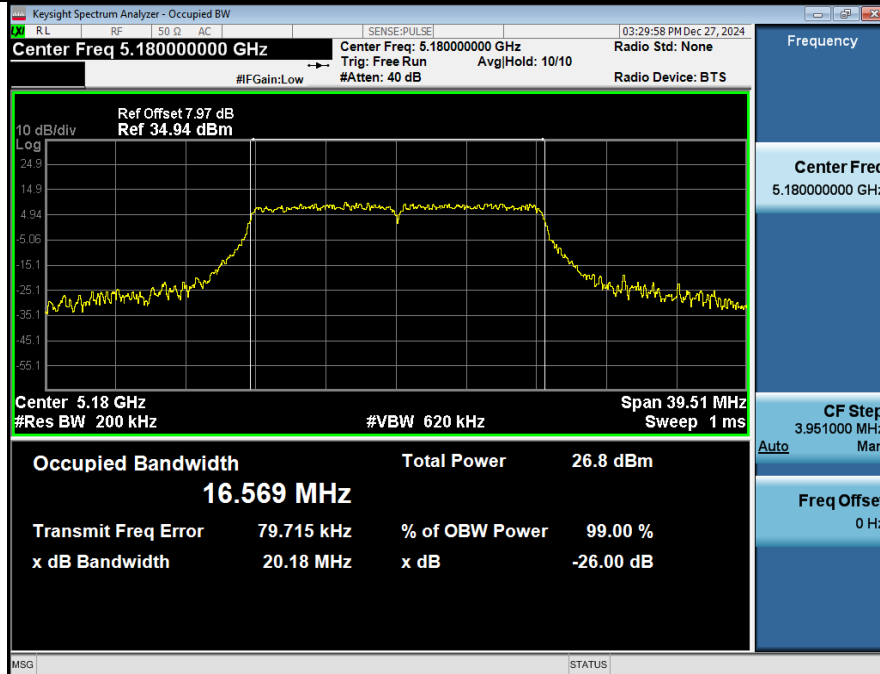


99%_OCB_NVNT_ANT1_802_11a_5200

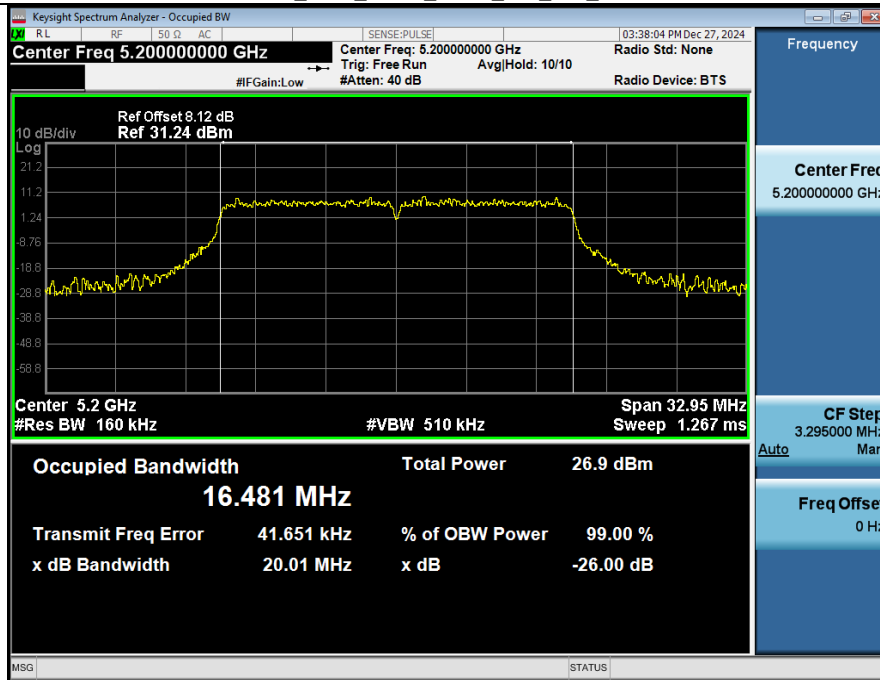


-26BW_NVNT_ANT1_802_11a_5200

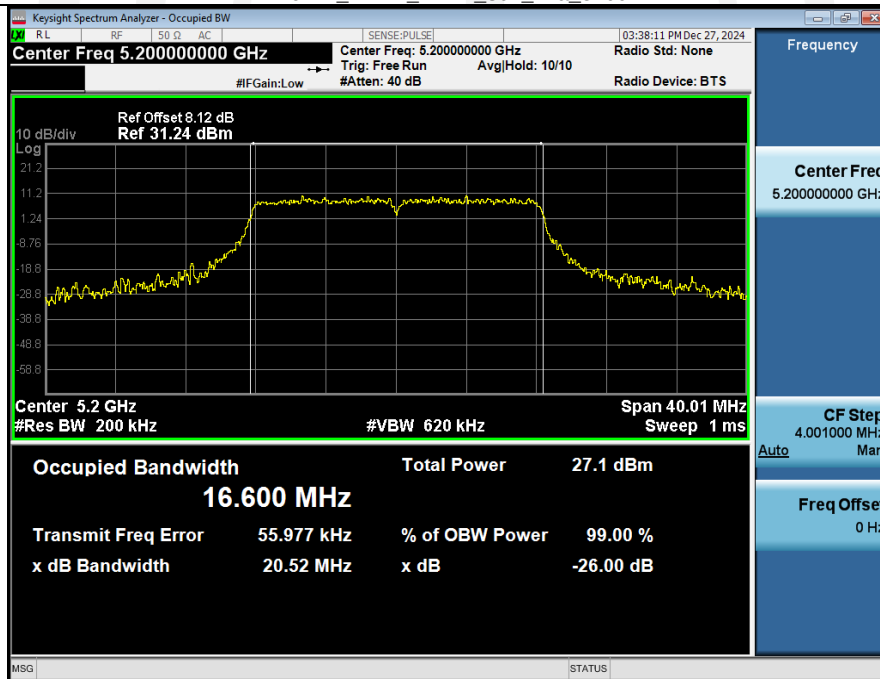


99%_OCB_NVNT_ANT2_802_11a_5200

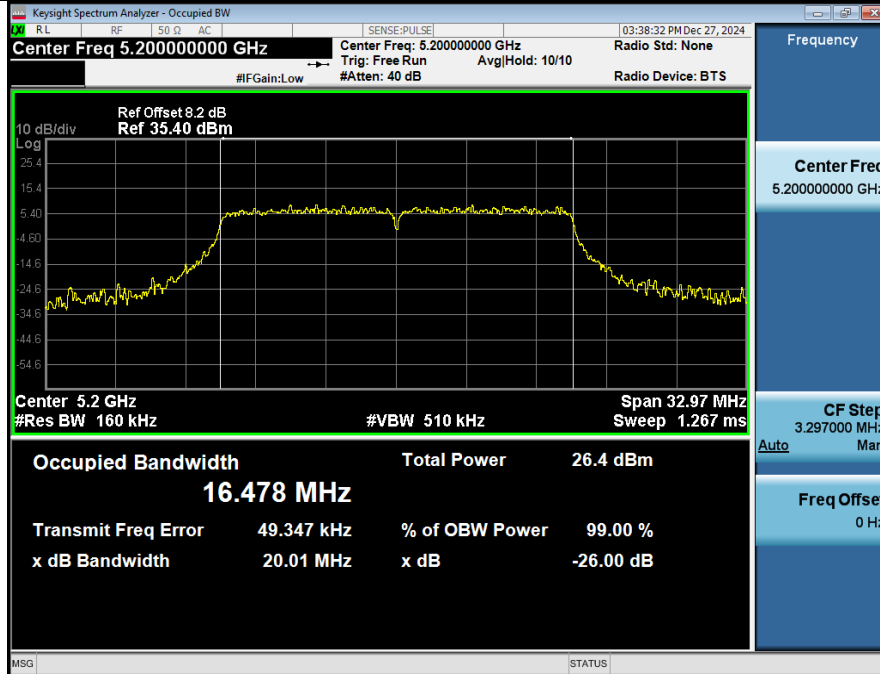


-26BW_NVNT_ANT2_802_11a_5200

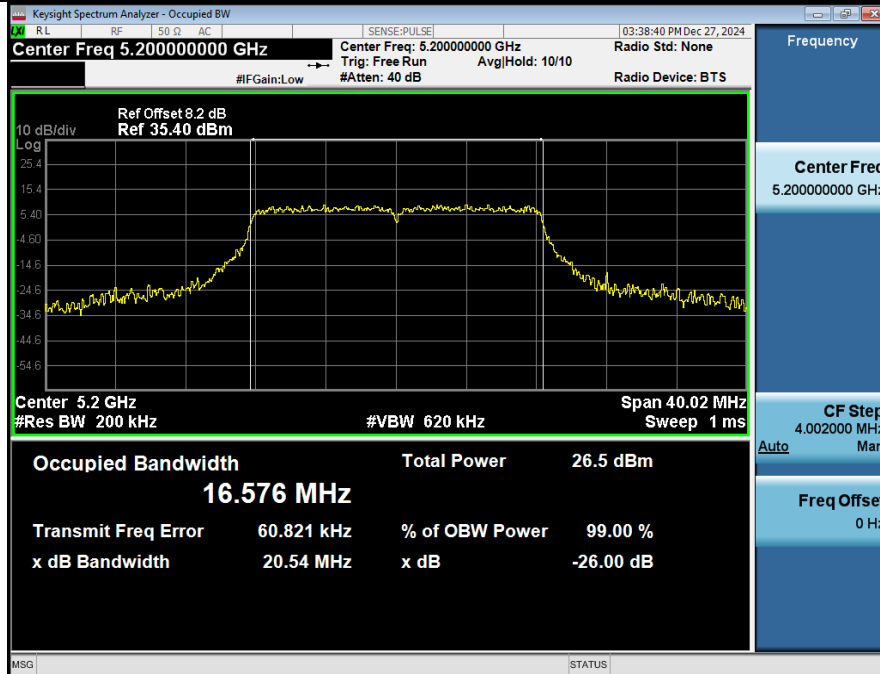

99%_OCB_NVNT_ANT1_802_11a_5240

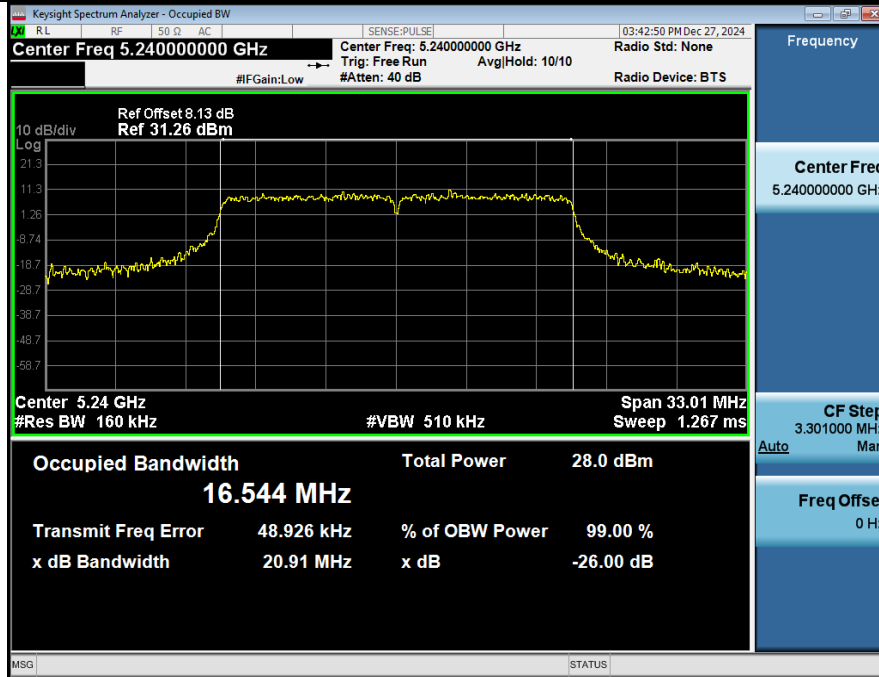


-26BW_NVNT_ANT1_802_11a_5240

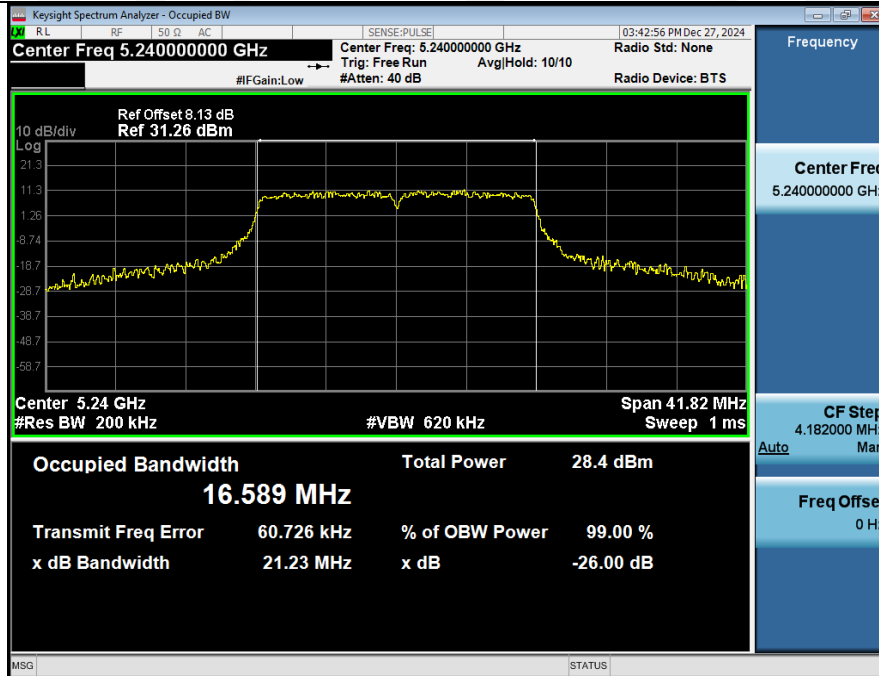


99%_OCB_NVNT_ANT2_802_11a_5240




-26BW_NVNT_ANT2_802_11a_5240

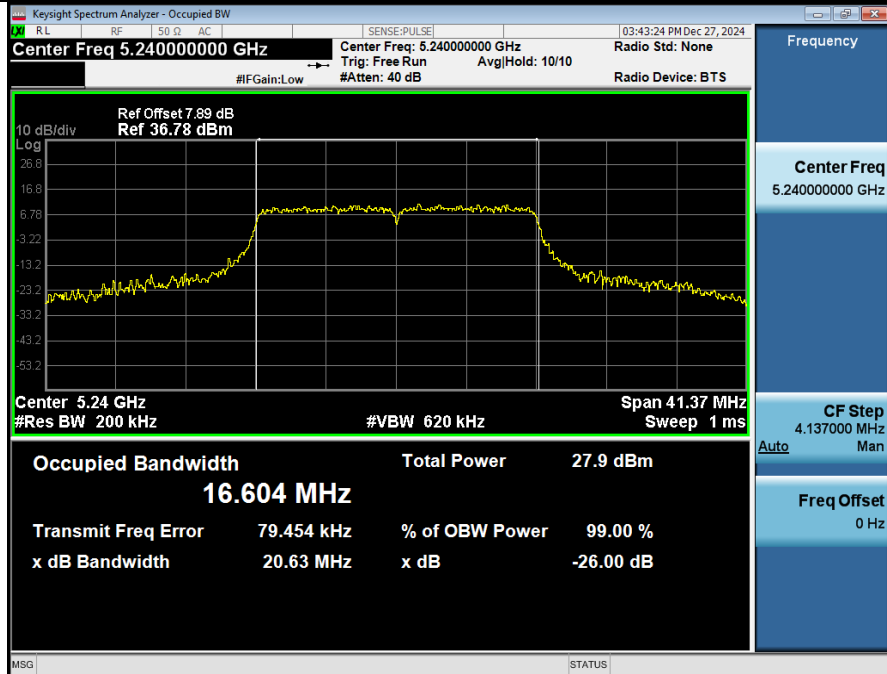


99%_OCB_NVNT_ANT1_802_11n(HT20)_5180

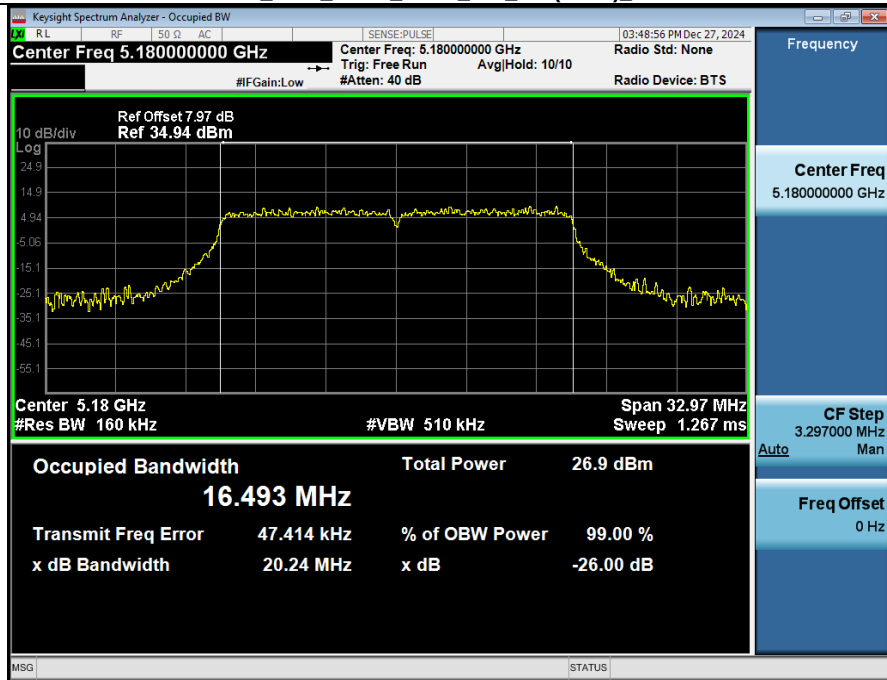


-26BW_NVNT_ANT1_802_11n(HT20)_5180

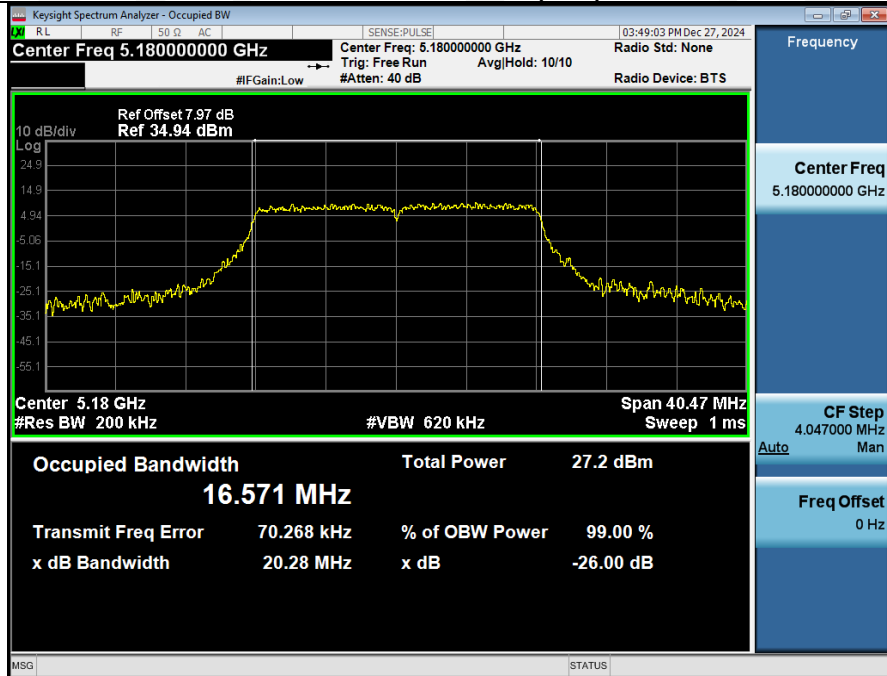


99%_OCB_NVNT_ANT2_802_11n(HT20)_5180

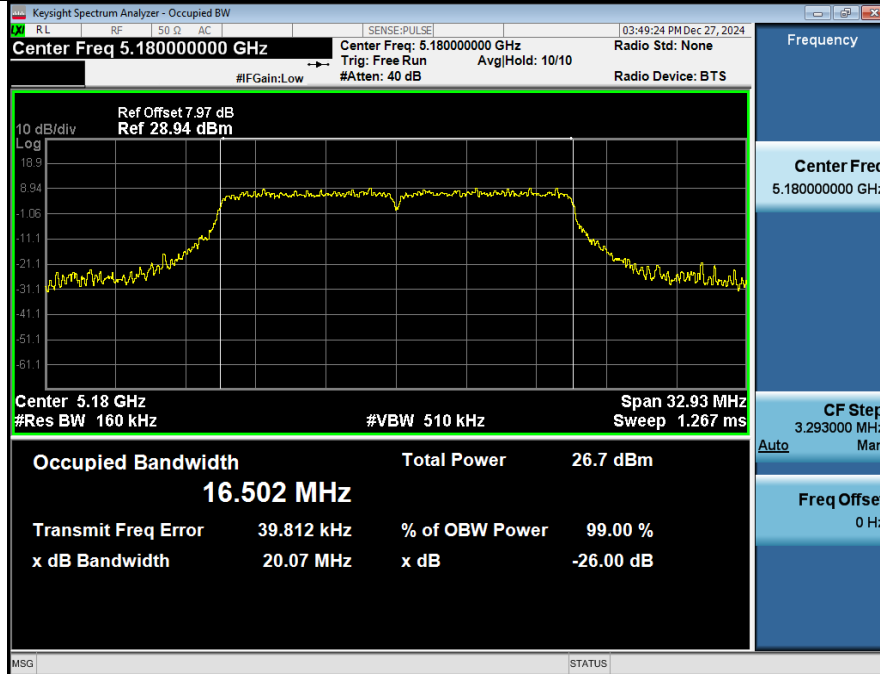


-26BW_NVNT_ANT2_802_11n(HT20)_5180

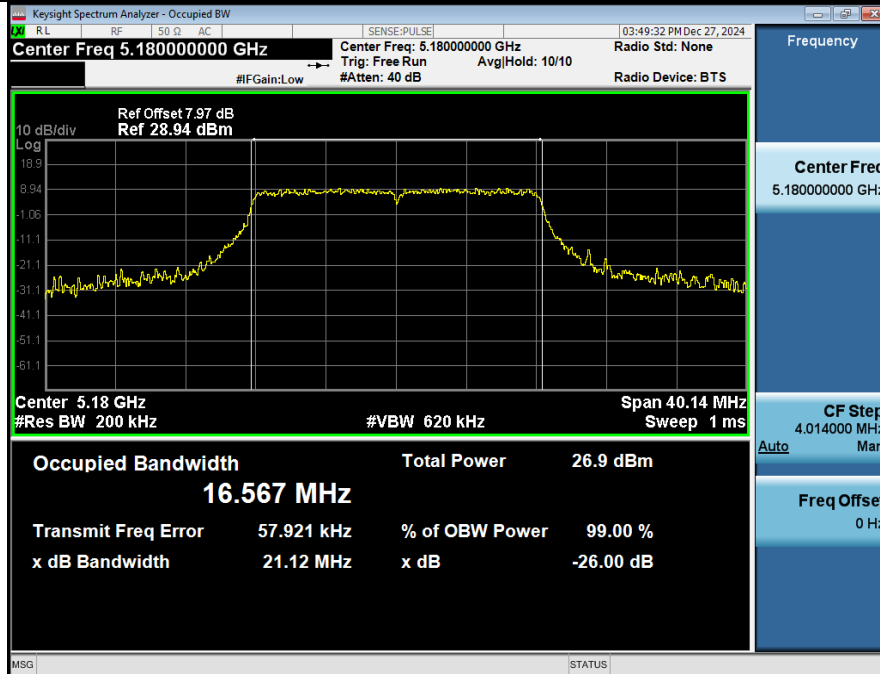


99%_OCB_NVNT_ANT1_802_11n(HT20)_5200

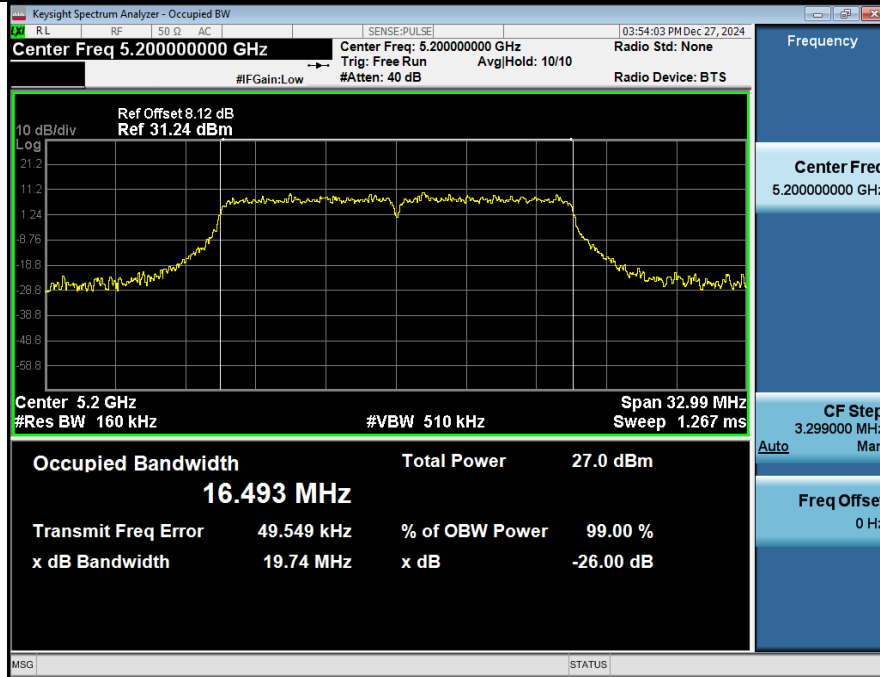


-26BW_NVNT_ANT1_802_11n(HT20)_5200

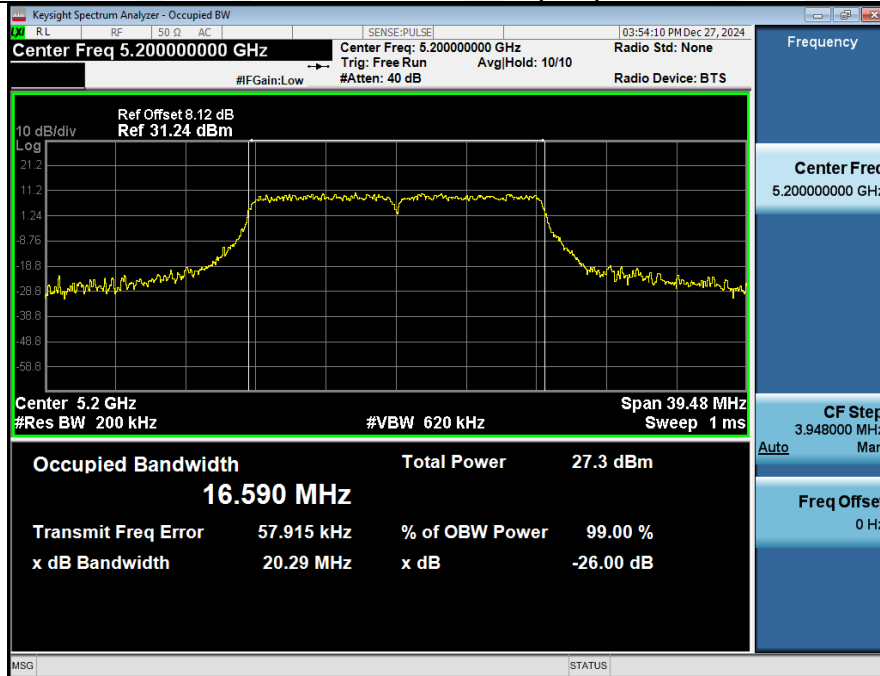


99%_OCB_NVNT_ANT2_802_11n(HT20)_5200

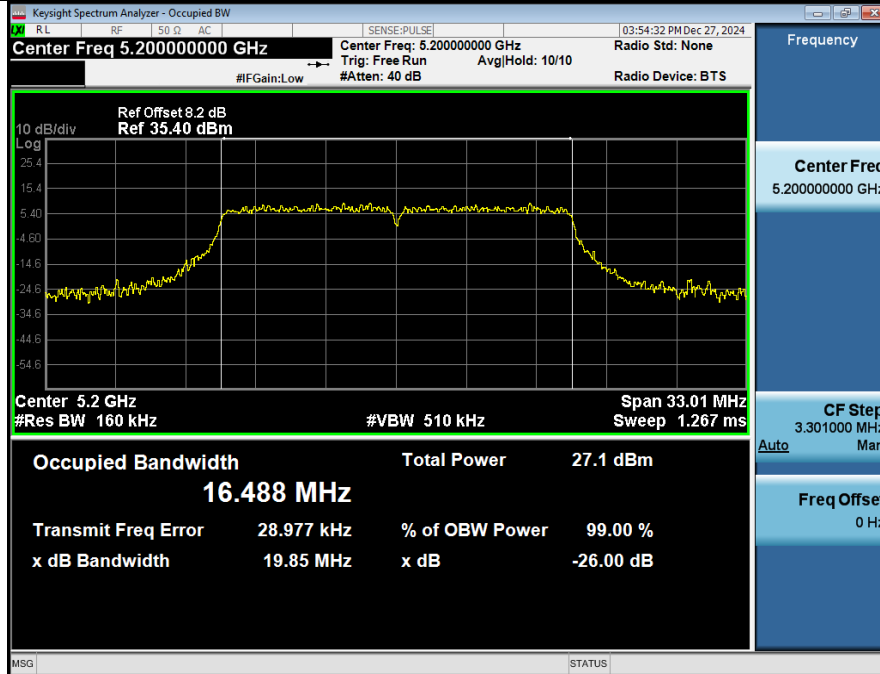


-26BW_NVNT_ANT2_802_11n(HT20)_5200

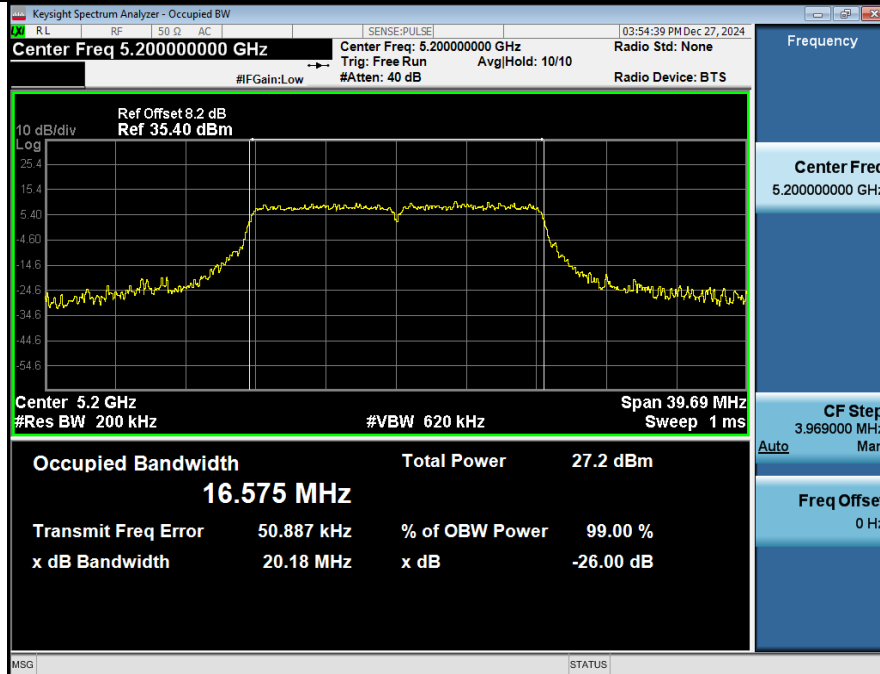


99%_OCB_NVNT_ANT1_802_11n(HT20)_5240

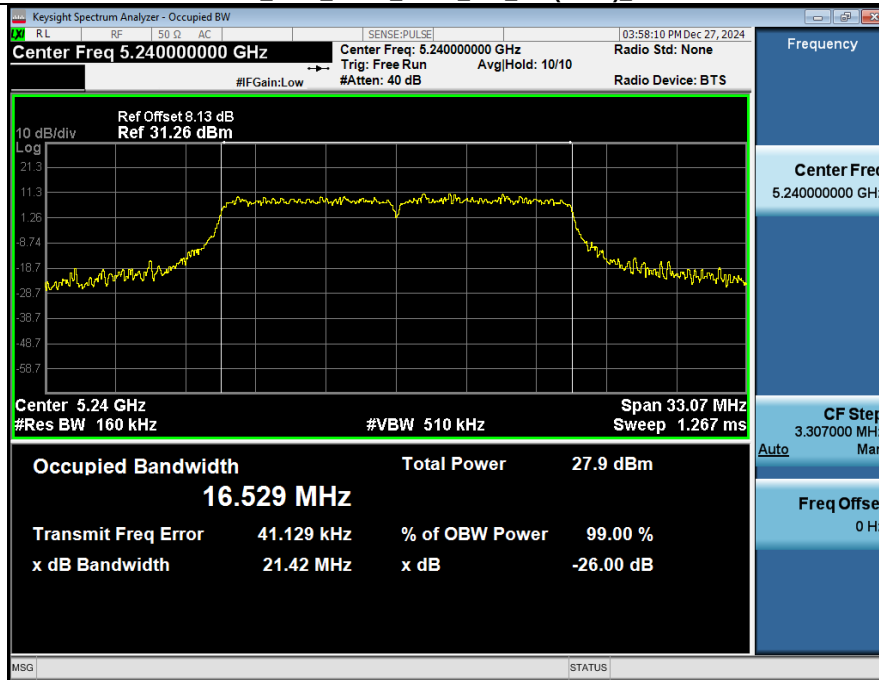


-26BW_NVNT_ANT1_802_11n(HT20)_5240

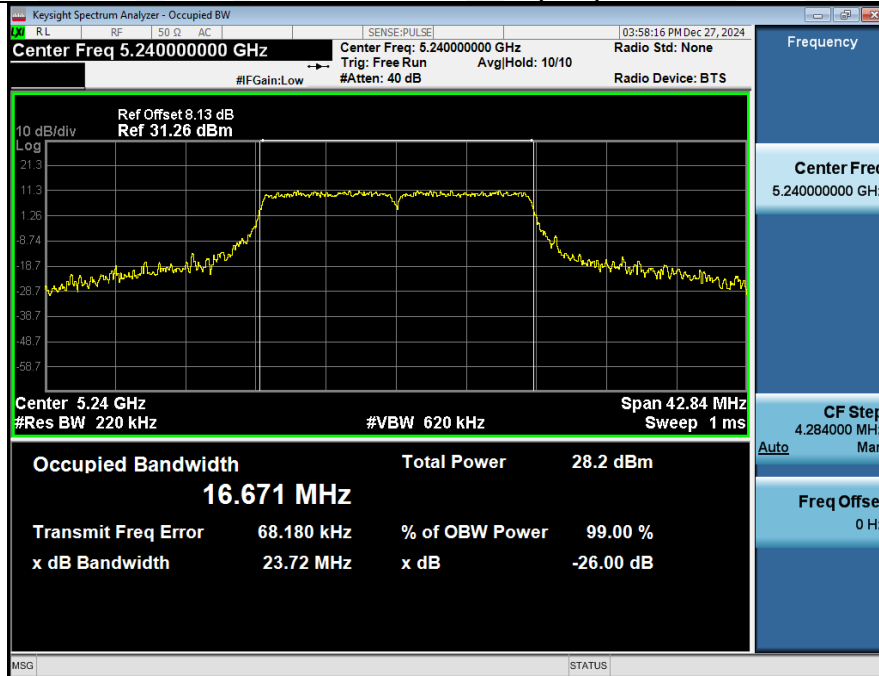


99%_OCB_NVNT_ANT2_802_11n(HT20)_5240

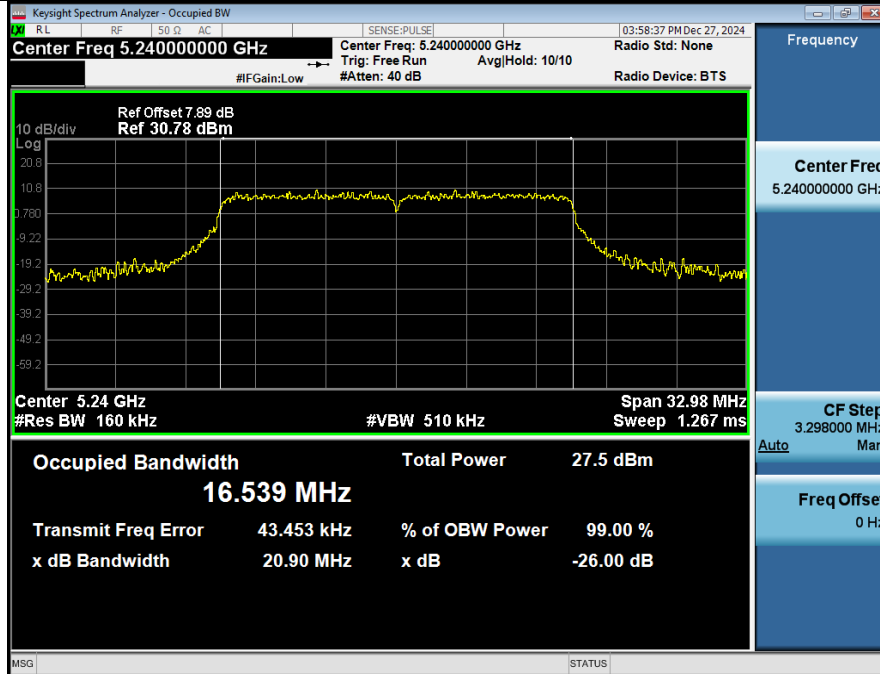


-26BW_NVNT_ANT2_802_11n(HT20)_5240

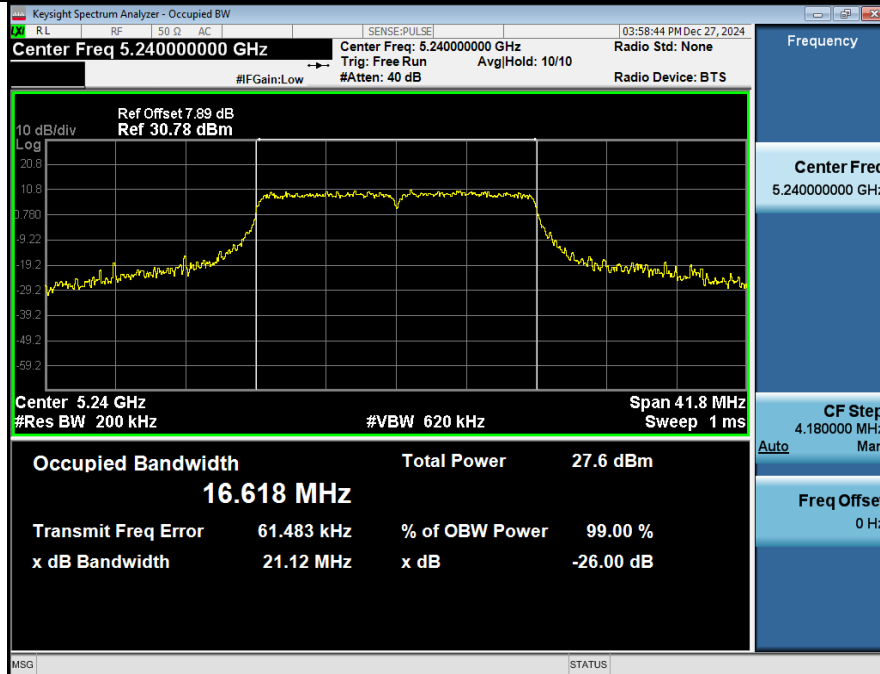


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5180

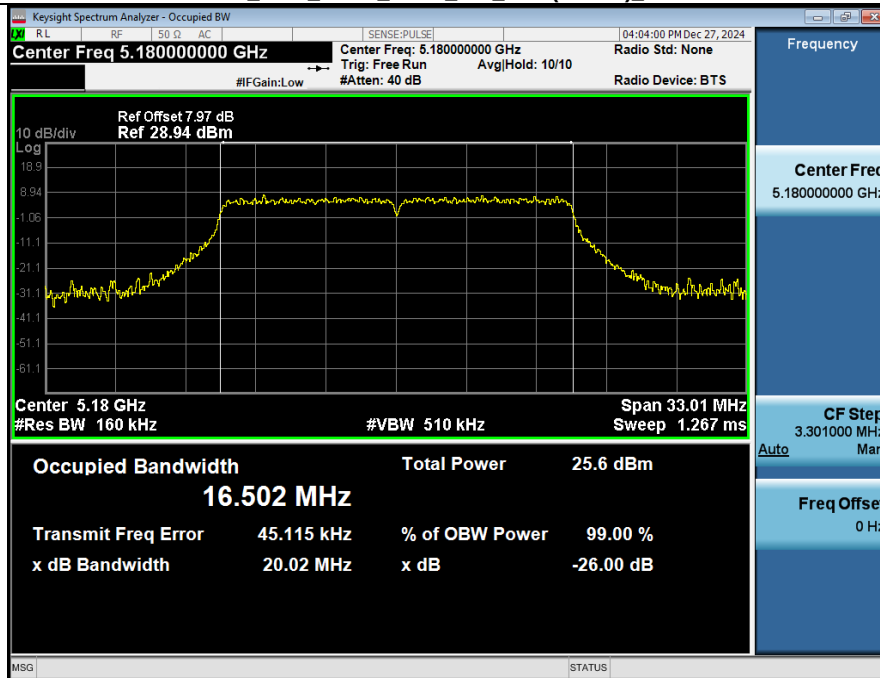


-26BW_NVNT_ANT1_802_11ac(VHT20)_5180

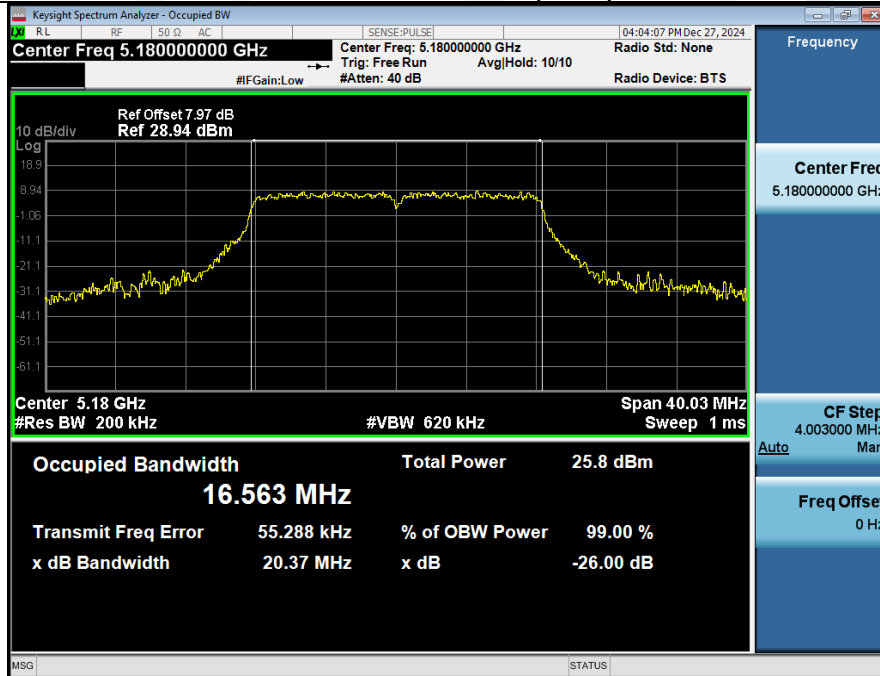


99%_OCB_NVNT_ANT2_802_11ac(VHT20)_5180

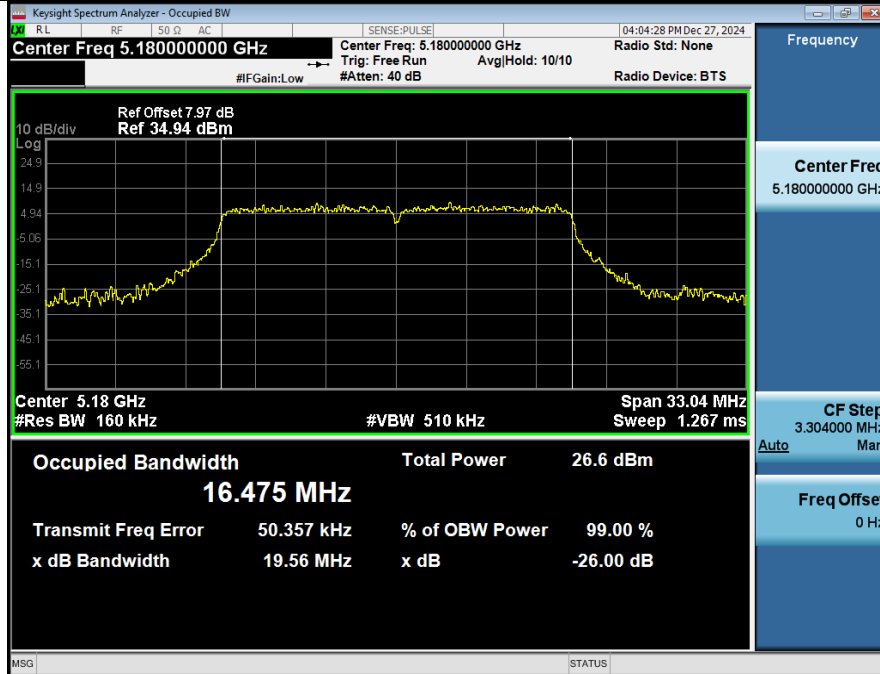


-26BW_NVNT_ANT2_802_11ac(VHT20)_5180

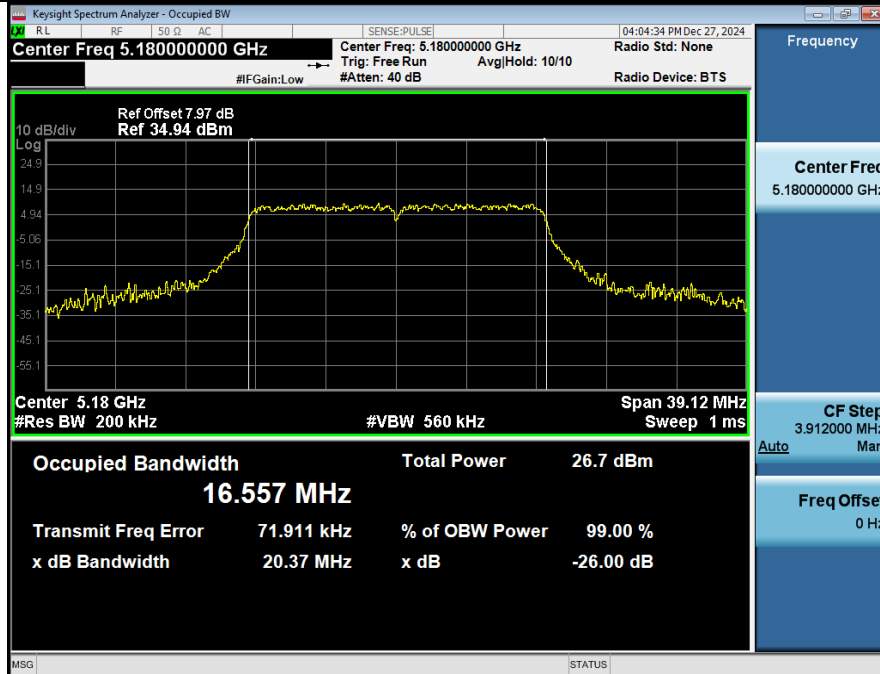


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5200

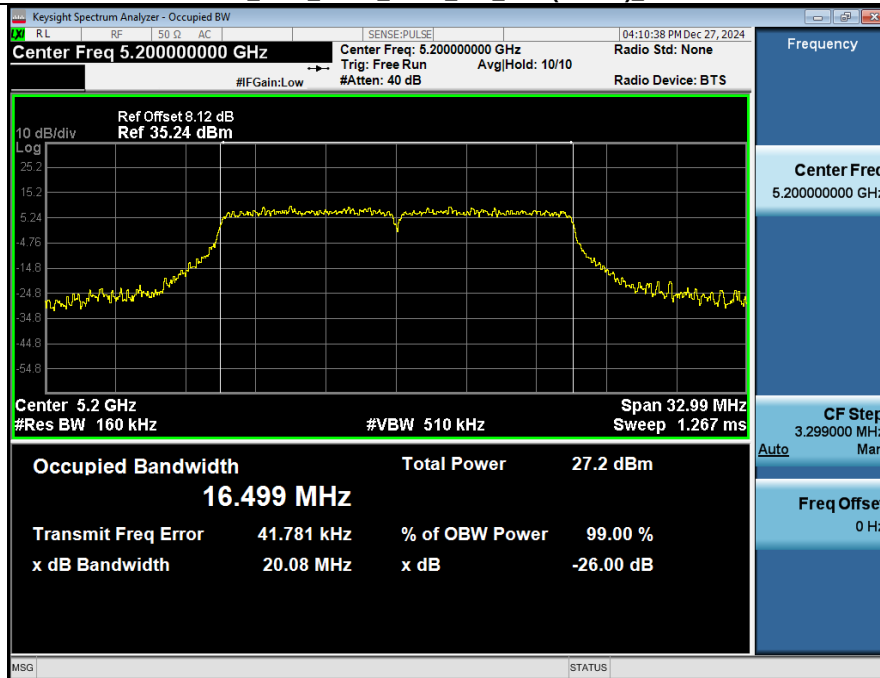


-26BW_NVNT_ANT1_802_11ac(VHT20)_5200

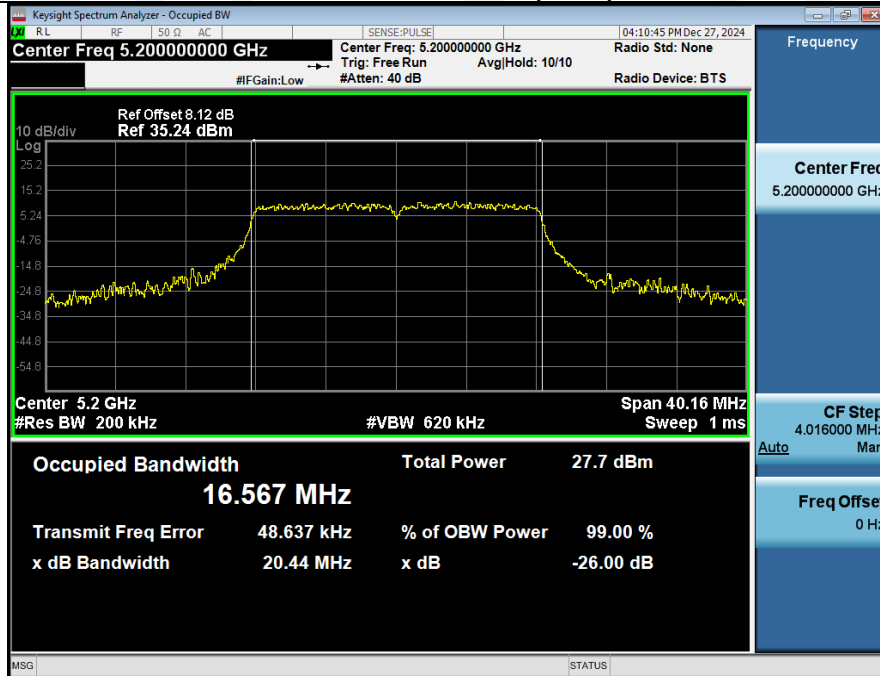


99%_OCB_NVNT_ANT2_802_11ac(VHT20)_5200

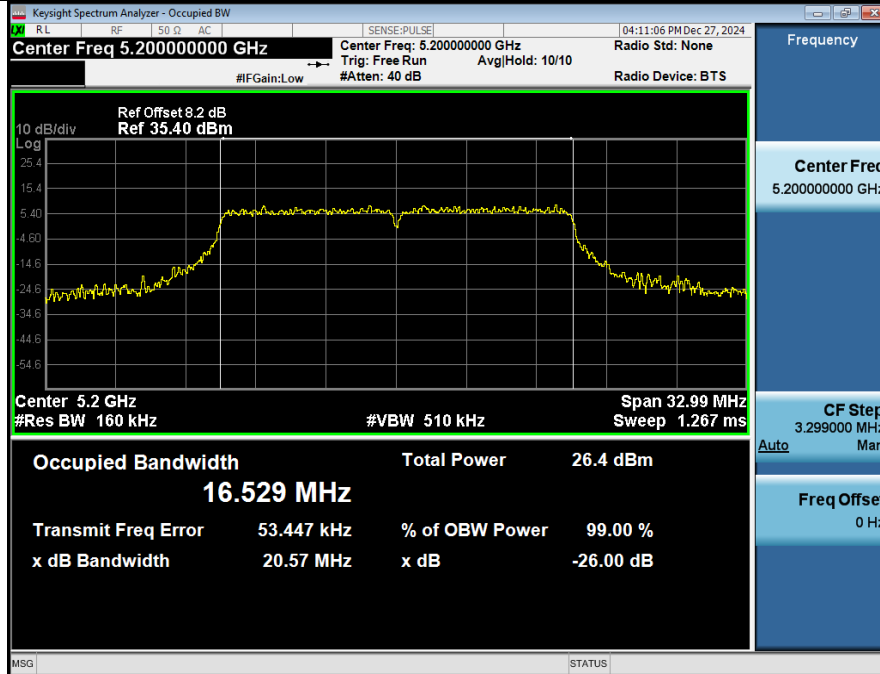


-26BW_NVNT_ANT2_802_11ac(VHT20)_5200

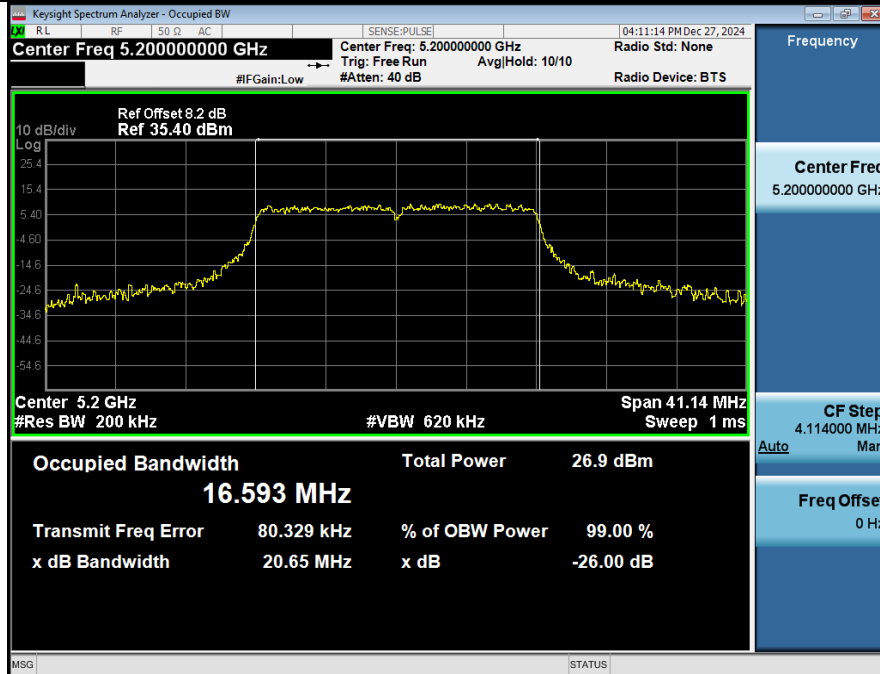


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5240

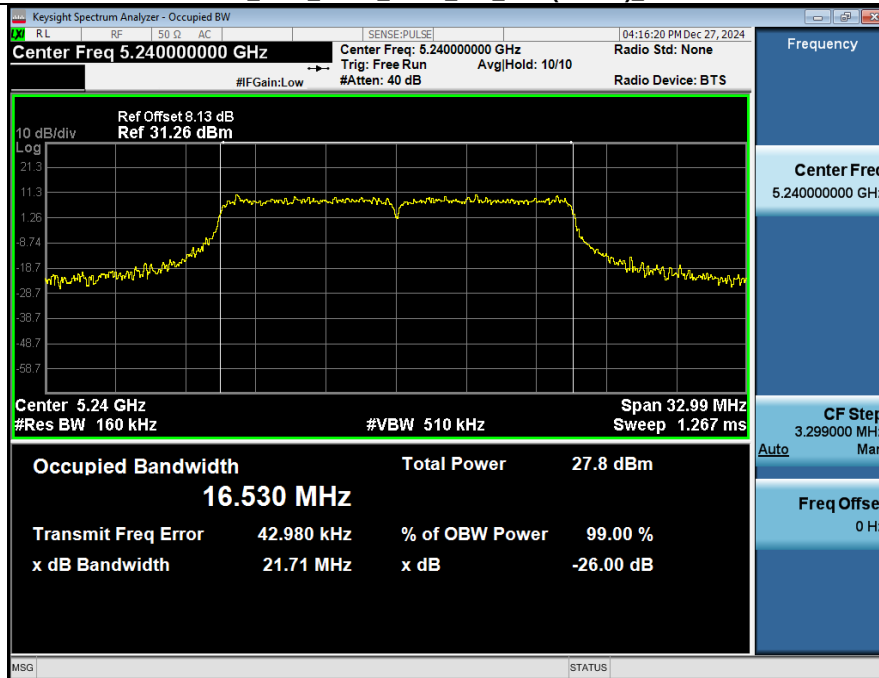


-26BW_NVNT_ANT1_802_11ac(VHT20)_5240

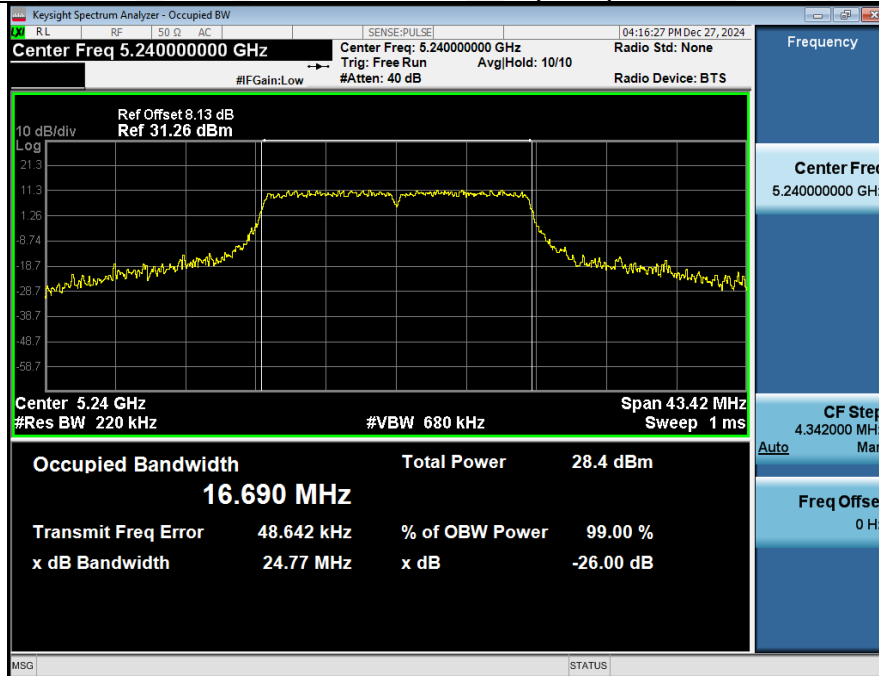


99%_OCB_NVNT_ANT2_802_11ac(VHT20)_5240

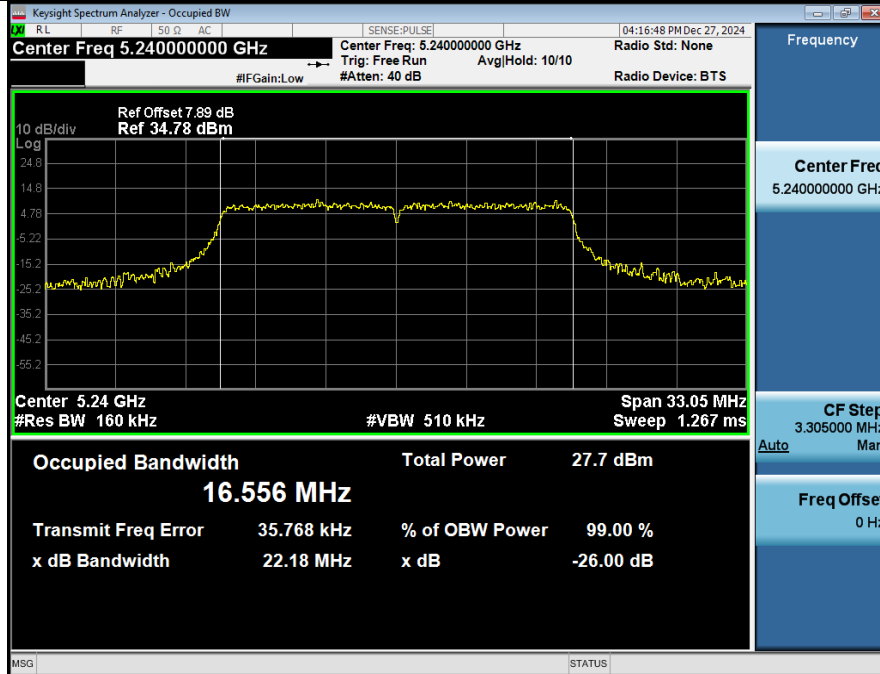


-26BW_NVNT_ANT2_802_11ac(VHT20)_5240

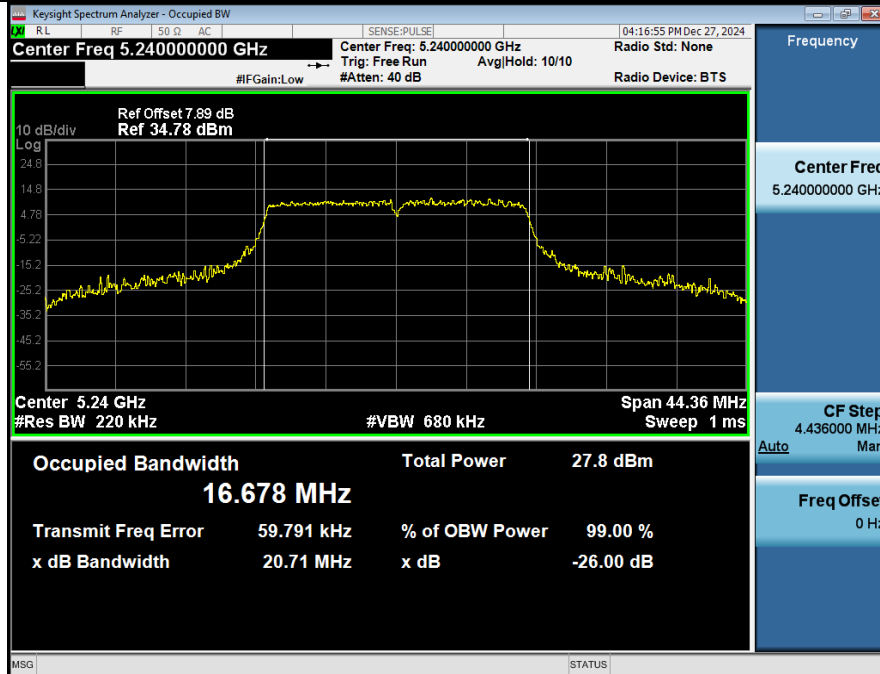


99%_OCB_NVNT_ANT1_802_11ax(HE20)_5180

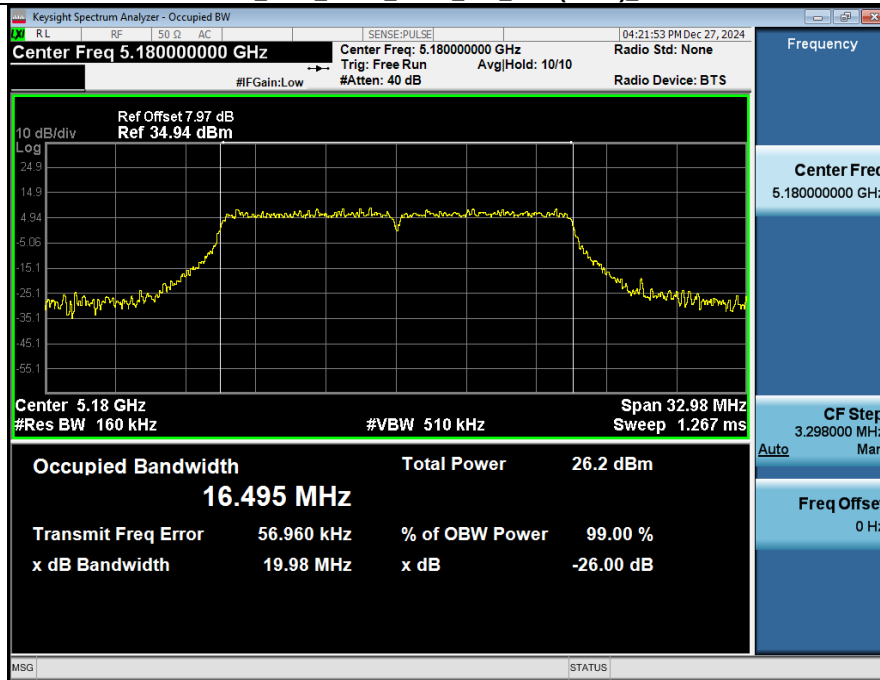


-26BW_NVNT_ANT1_802_11ax(HE20)_5180

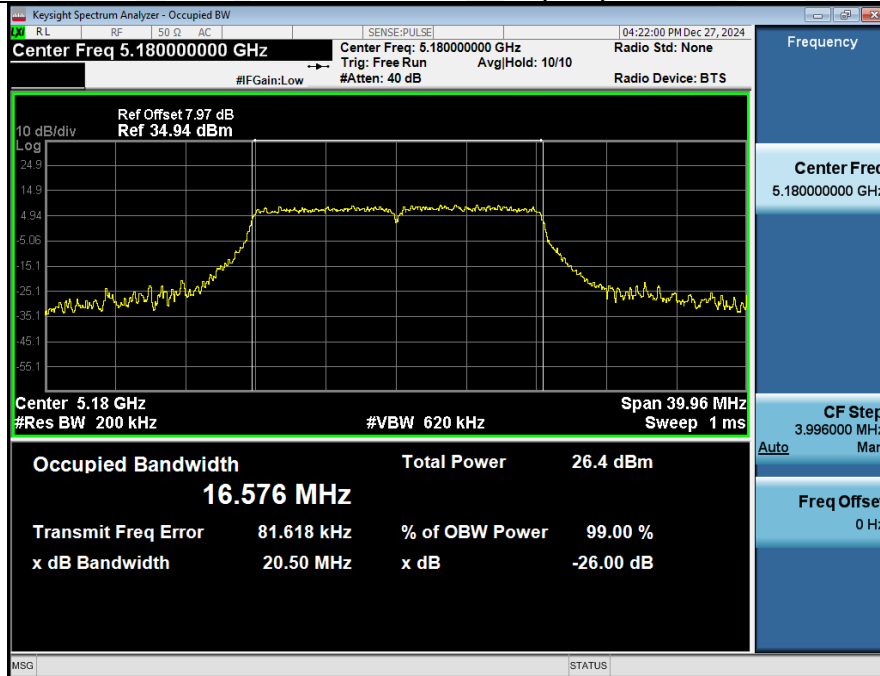

99%_OCB_NVNT_ANT2_802_11ax(HE20)_5180

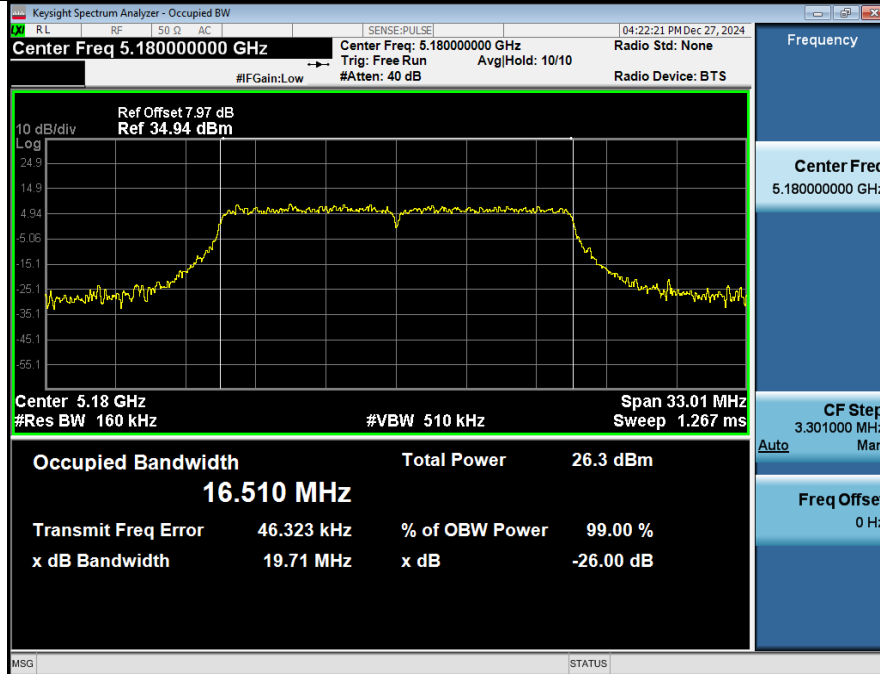


-26BW_NVNT_ANT2_802_11ax(HE20)_5180

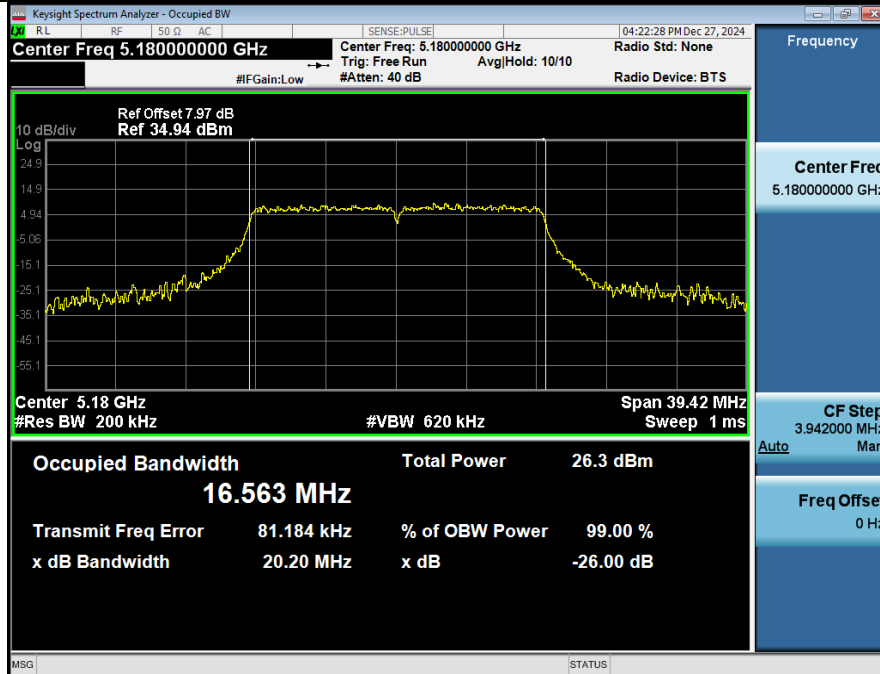


99%_OCB_NVNT_ANT1_802_11ax(HE20)_5200




-26BW_NVNT_ANT1_802_11ax(HE20)_5200

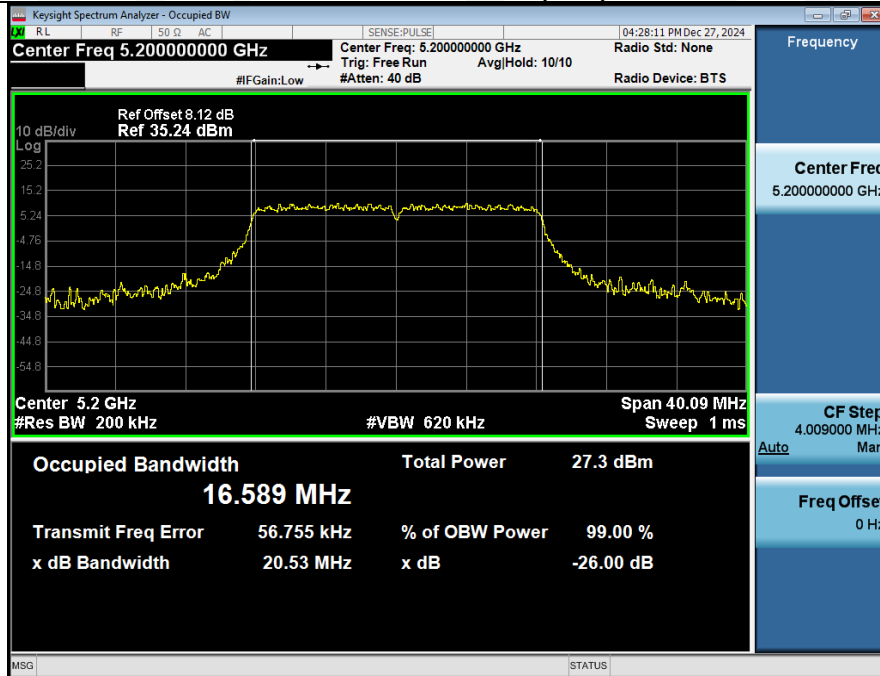


99%_OCB_NVNT_ANT2_802_11ax(HE20)_5200

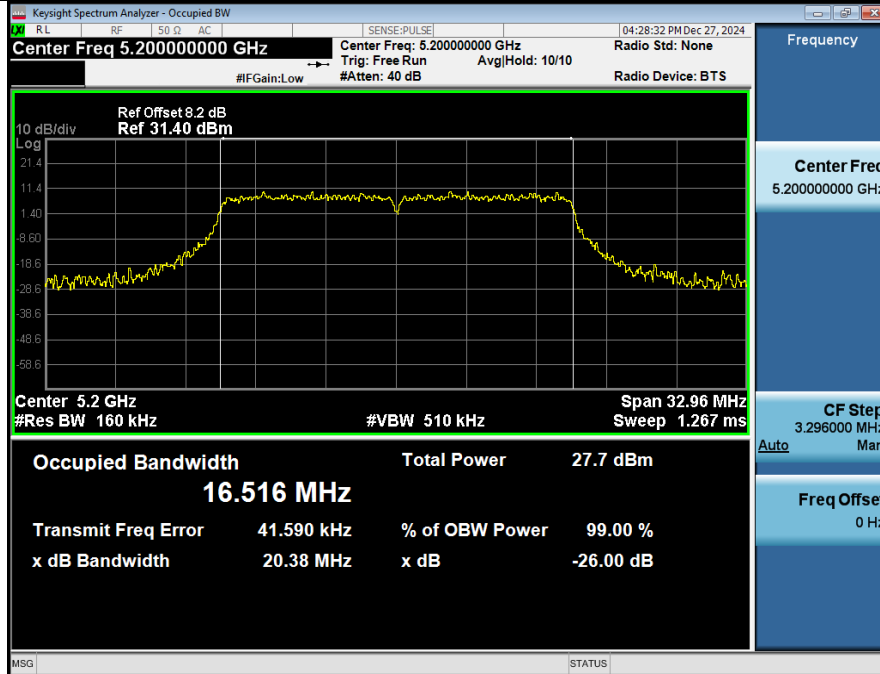


-26BW_NVNT_ANT2_802_11ax(HE20)_5200

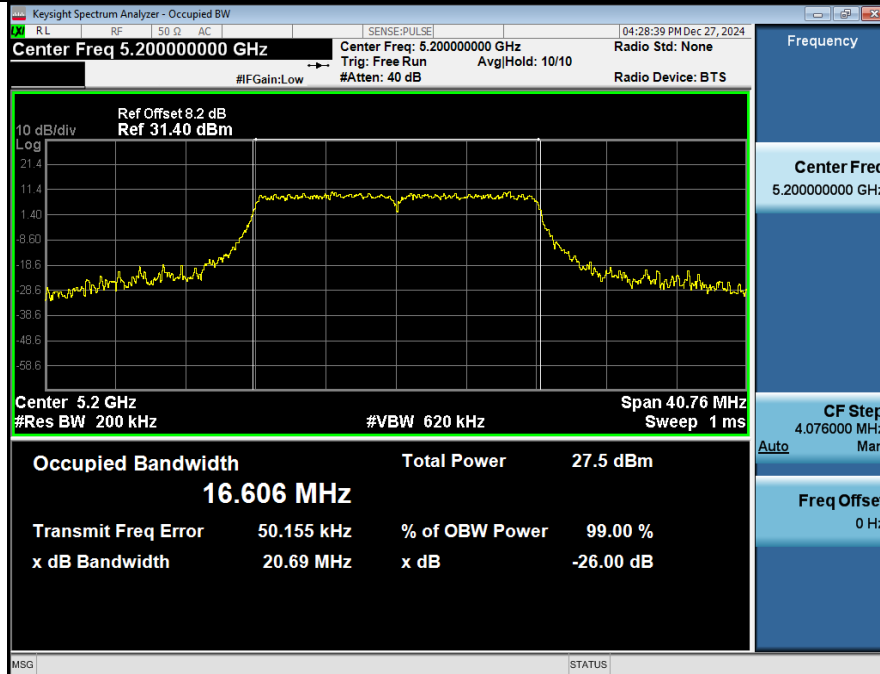


99%_OCB_NVNT_ANT1_802_11ax(HE20)_5240

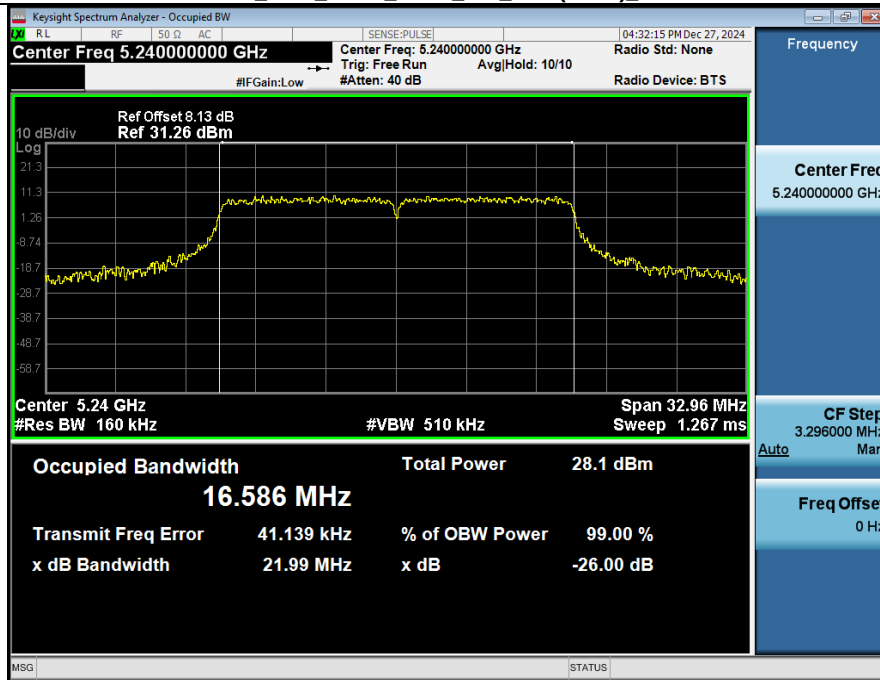


-26BW_NVNT_ANT1_802_11ax(HE20)_5240

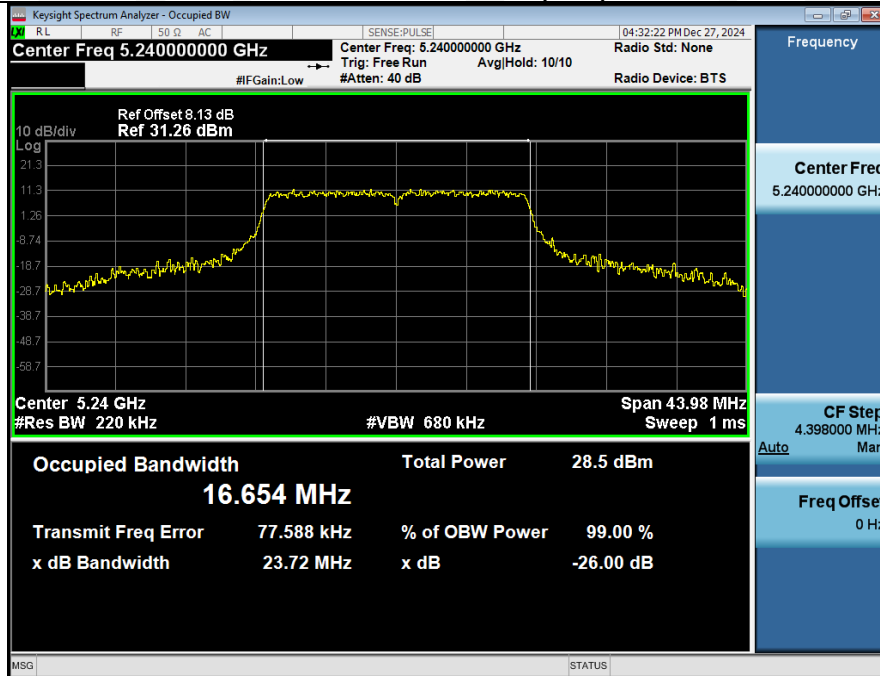


99%_OCB_NVNT_ANT2_802_11ax(HE20)_5240

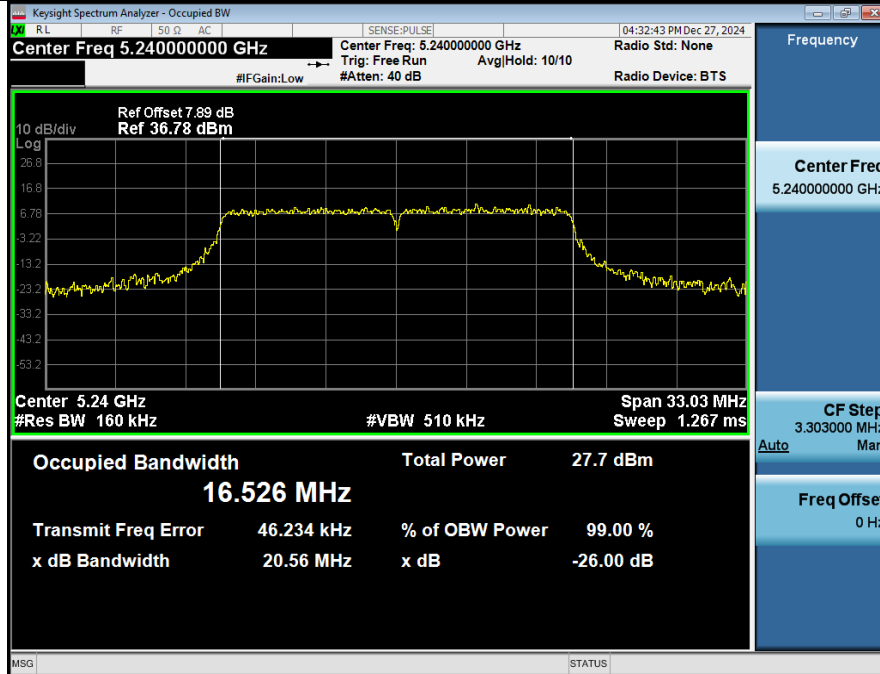


-26BW_NVNT_ANT2_802_11ax(HE20)_5240

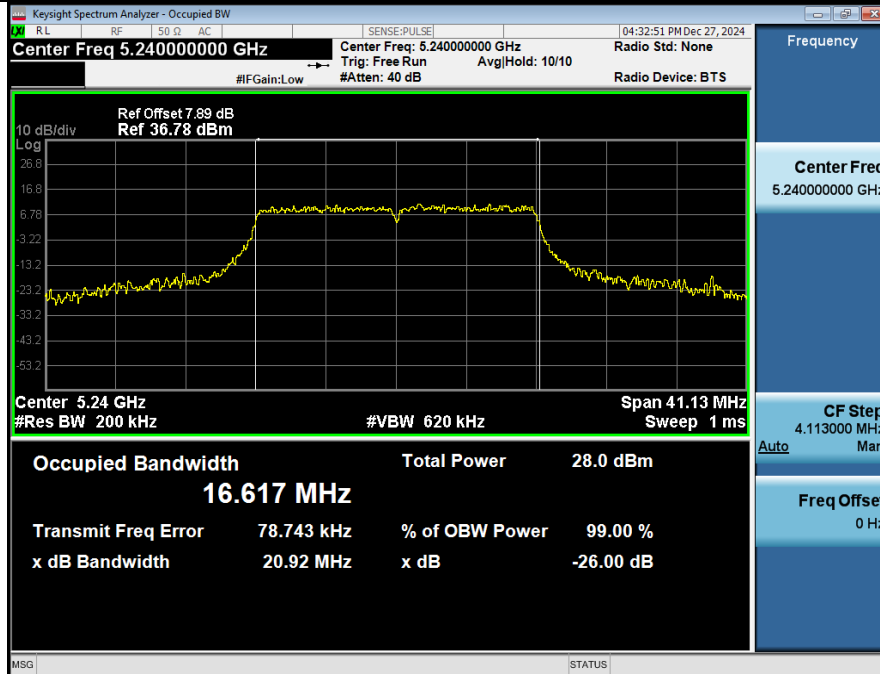


99%_OCB_NVNT_ANT1_802_11n(HT40)_5190

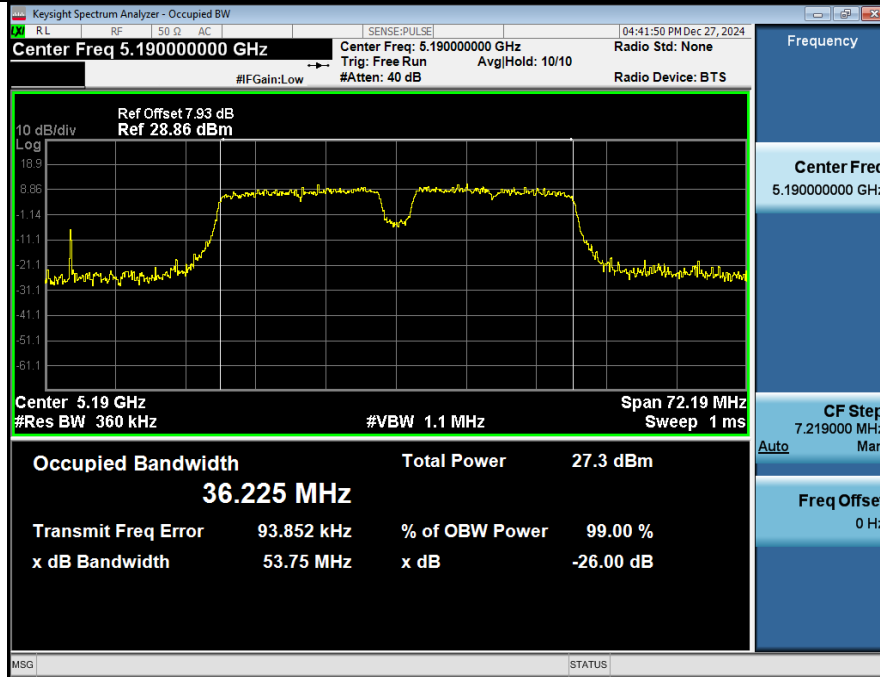


-26BW_NVNT_ANT1_802_11n(HT40)_5190

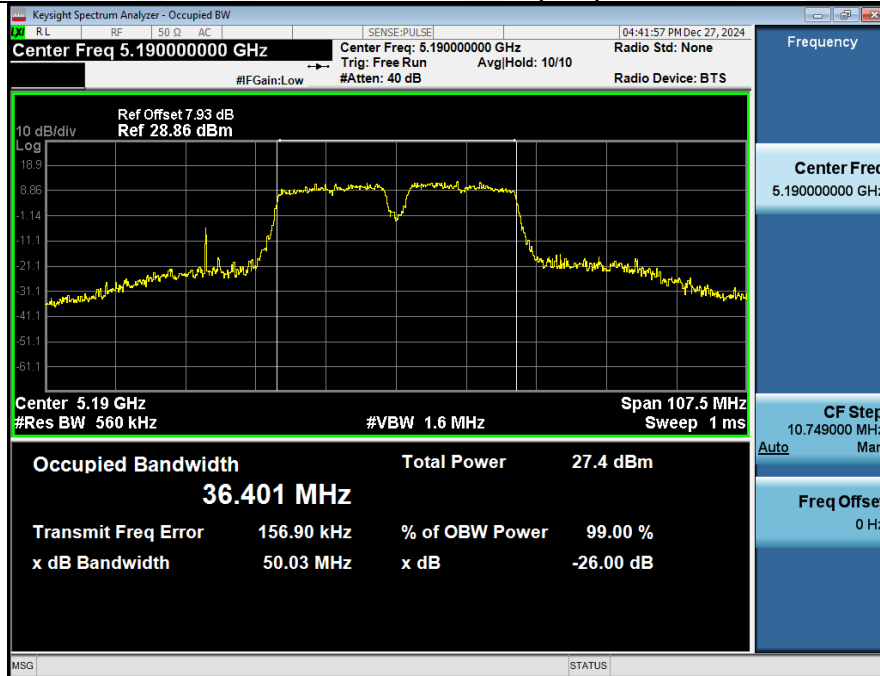


99%_OCB_NVNT_ANT2_802_11n(HT40)_5190

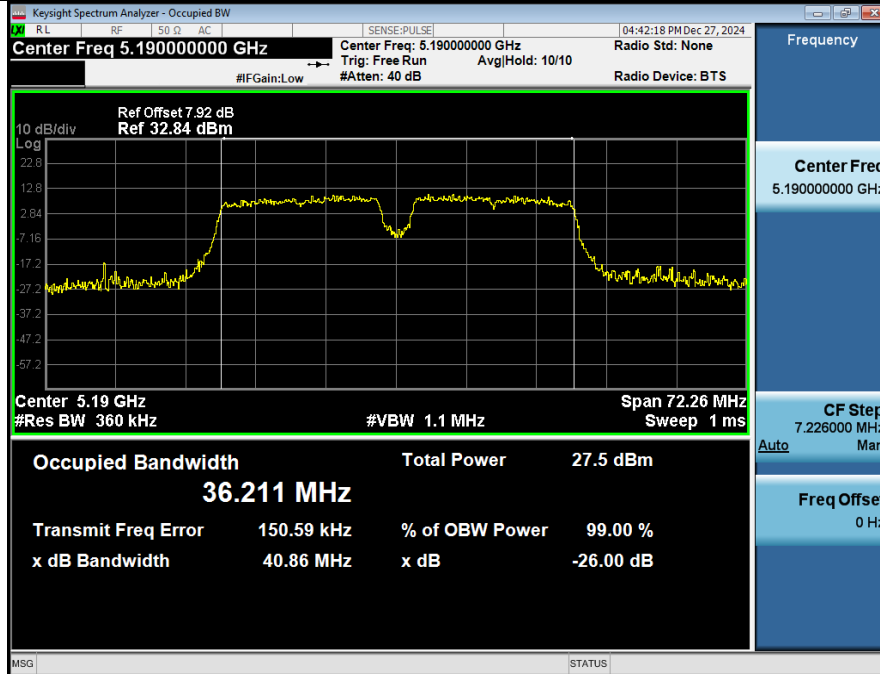


-26BW_NVNT_ANT2_802_11n(HT40)_5190

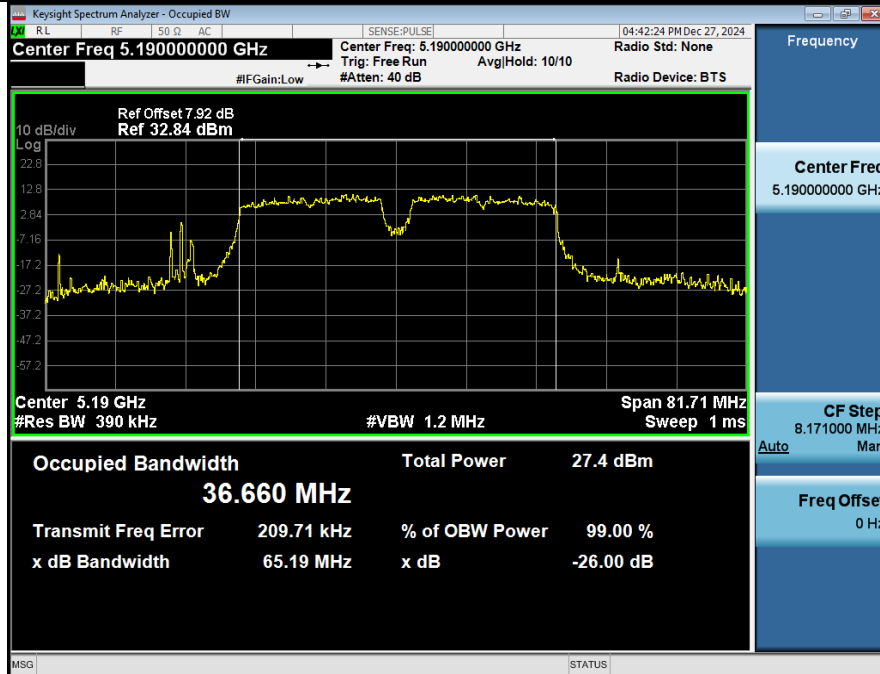


99% OCB NVNT ANT1_802_11n(HT40)_5230

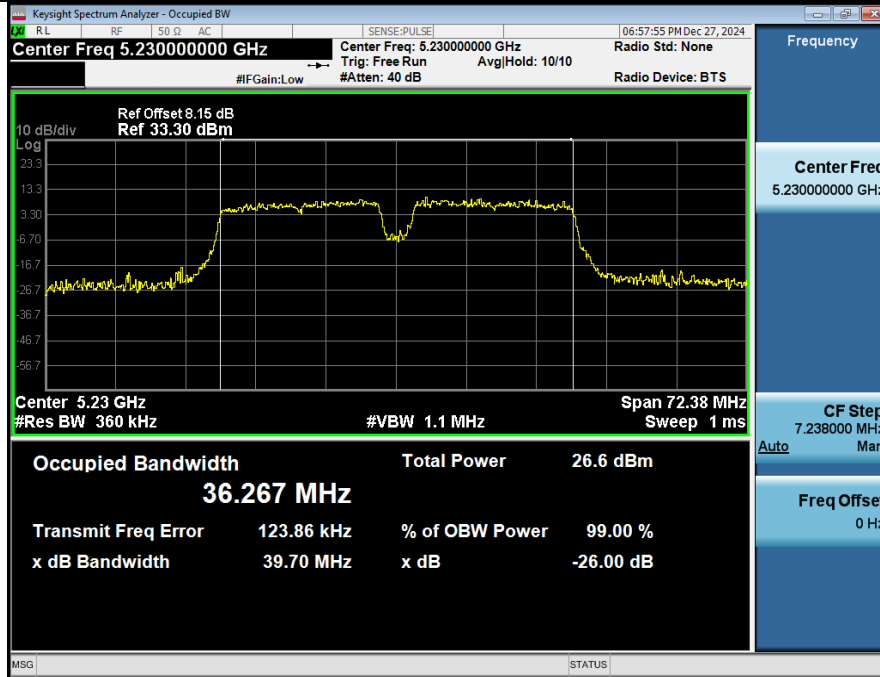


-26BW NVNT ANT1_802_11n(HT40)_5230

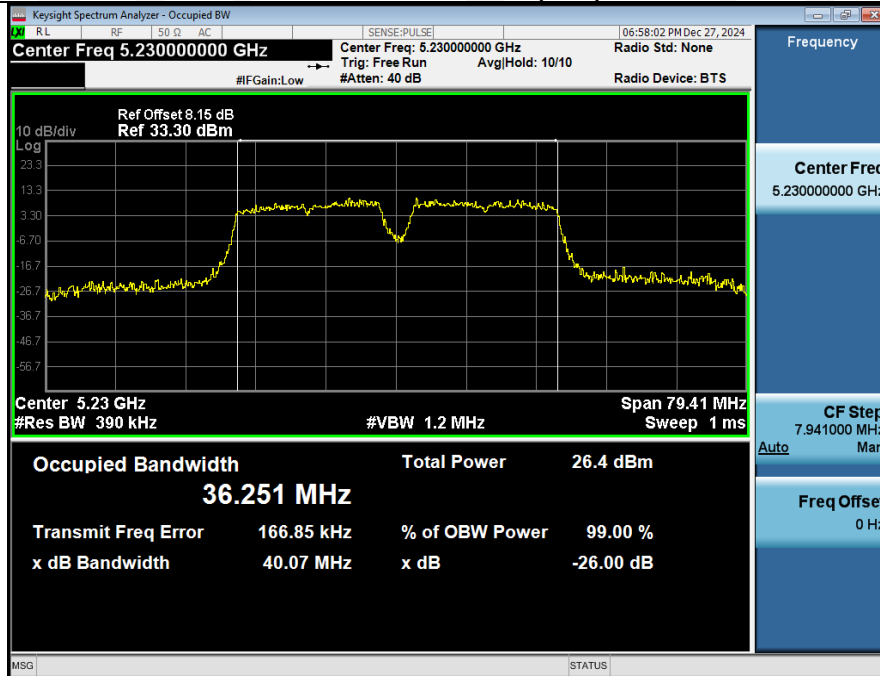


99%_OCB_NVNT_ANT2_802_11n(HT40)_5230

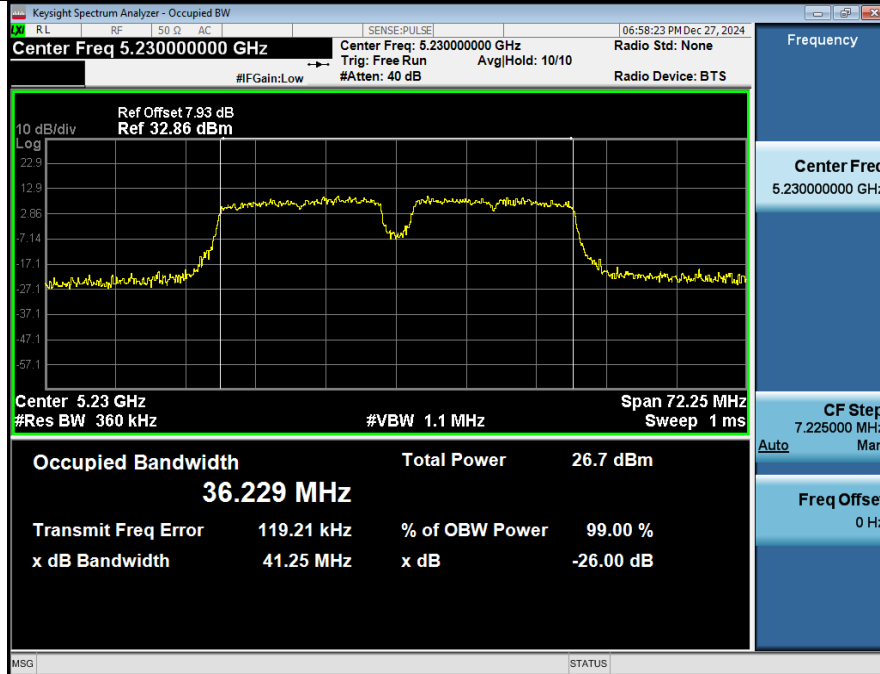


-26BW_NVNT_ANT2_802_11n(HT40)_5230

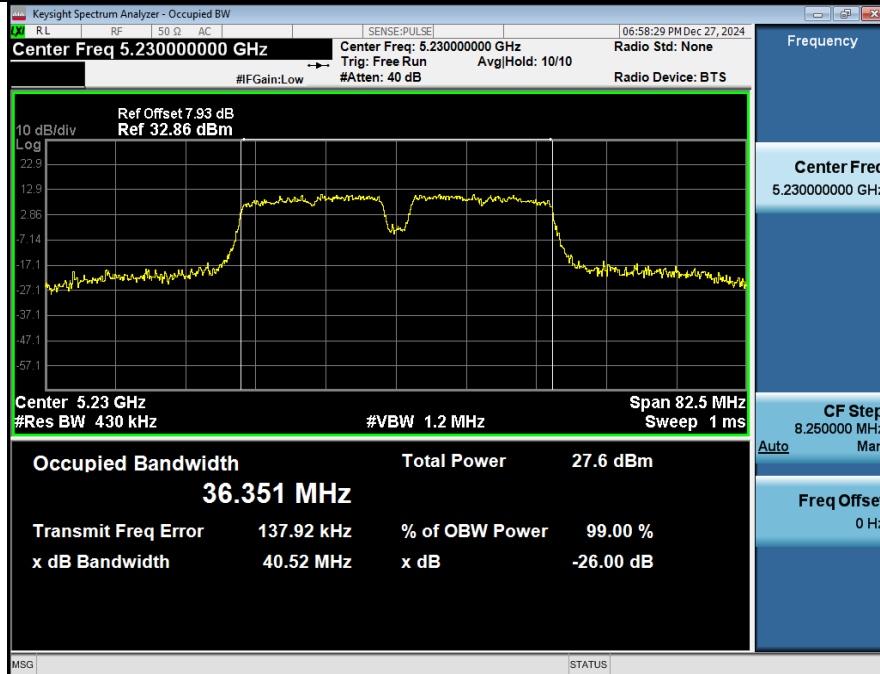


99% OCB NVNT ANT1 802 11ac(VHT40) 5190

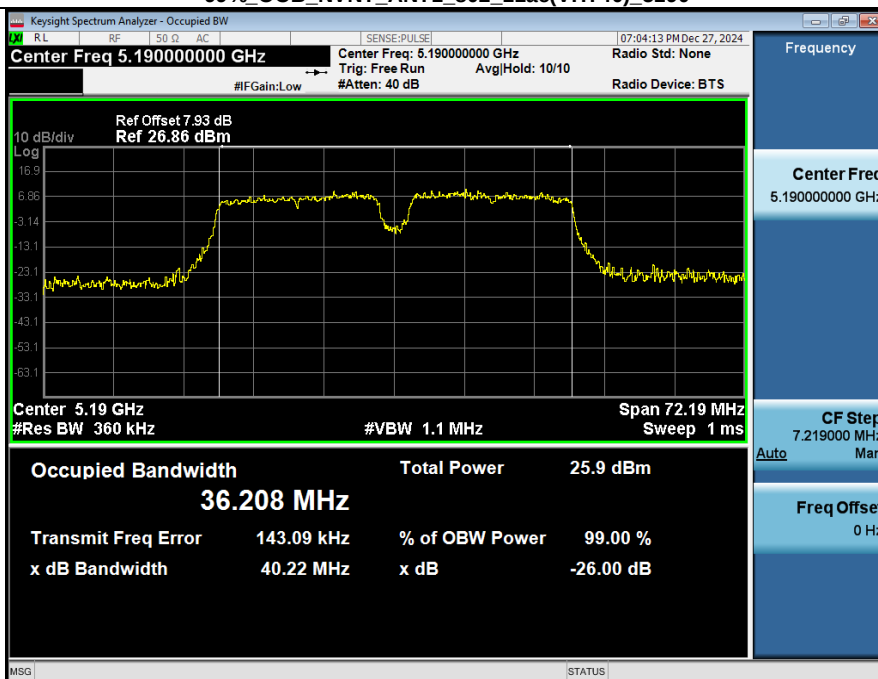


-26BW_NVNT_ANT1_802_11ac(VHT40)_5190

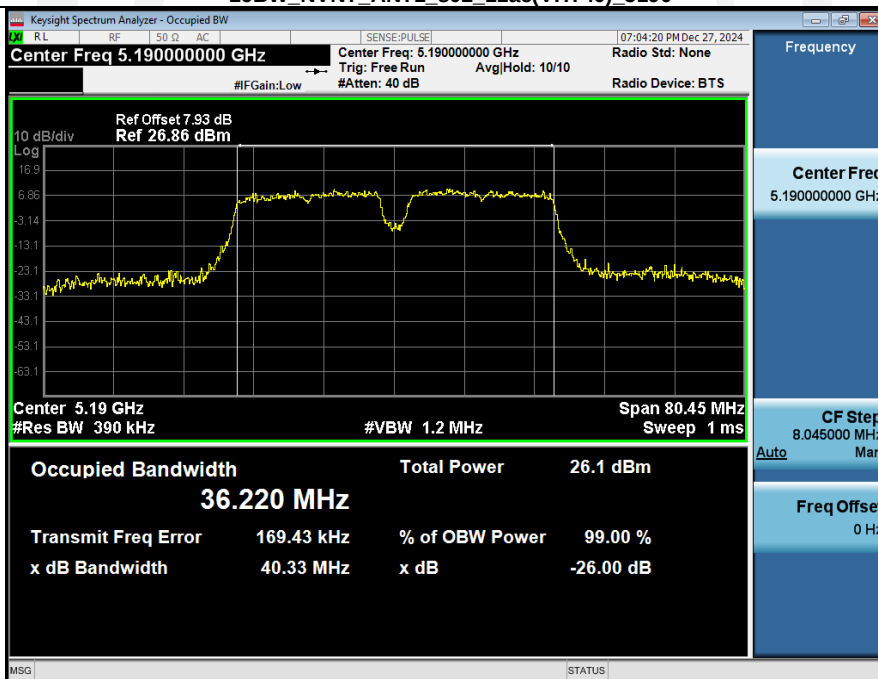


99%_OCB_NVNT_ANT2_802_11ac(VHT40)_5190

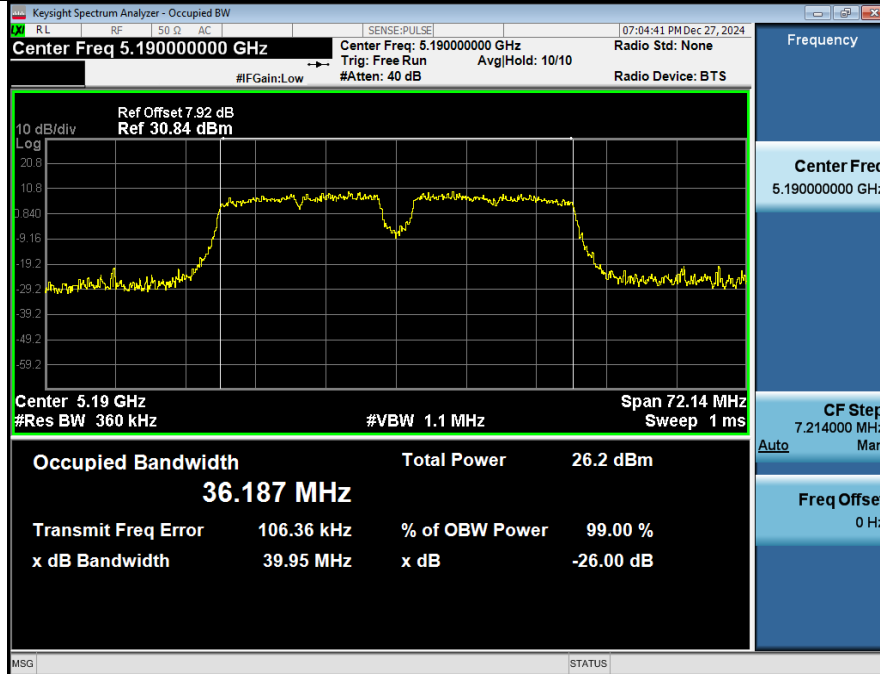


-26BW_NVNT_ANT2_802_11ac(VHT40)_5190

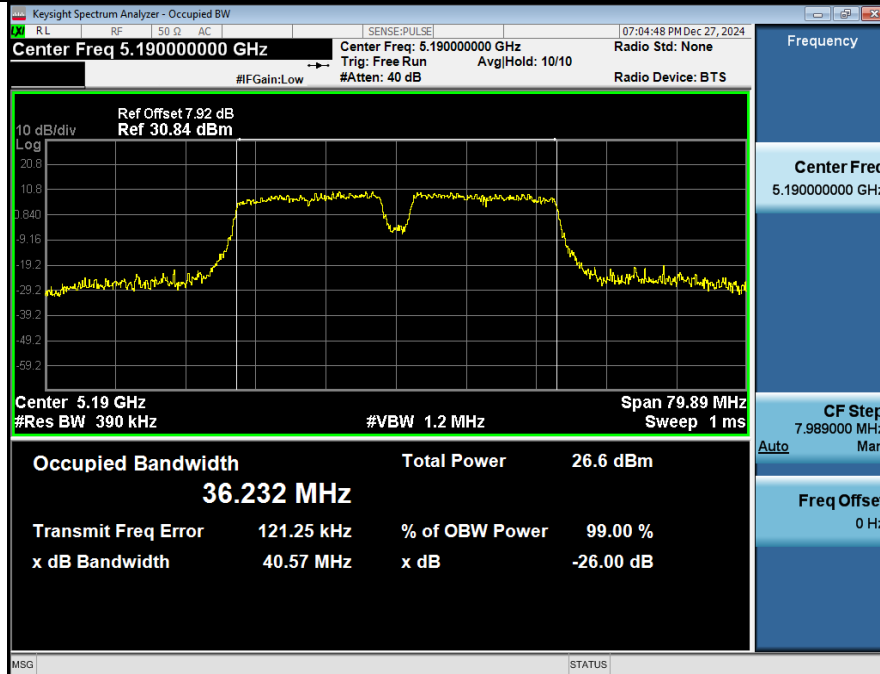


99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5230

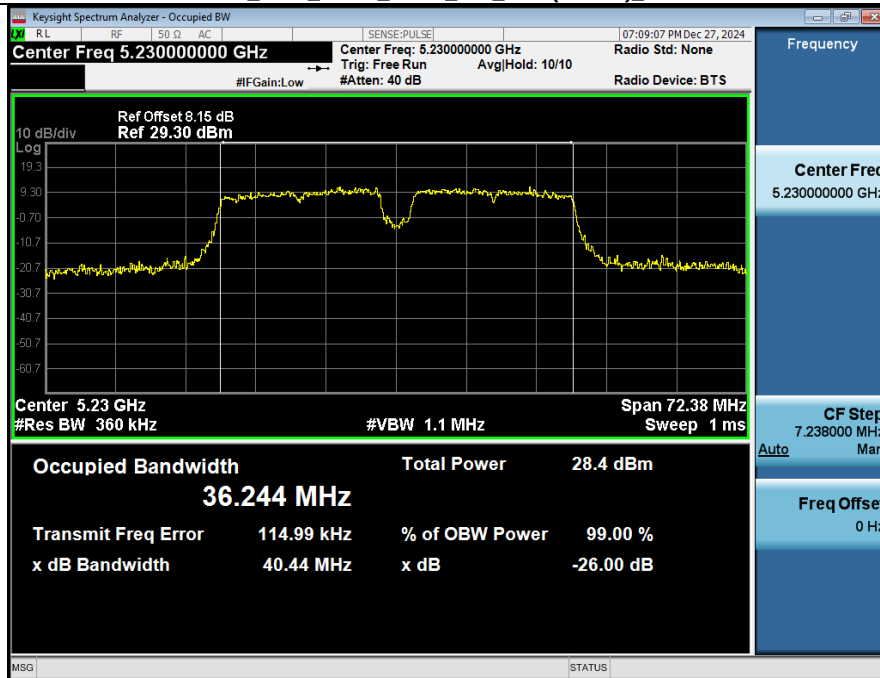


-26BW_NVNT_ANT1_802_11ac(VHT40)_5230

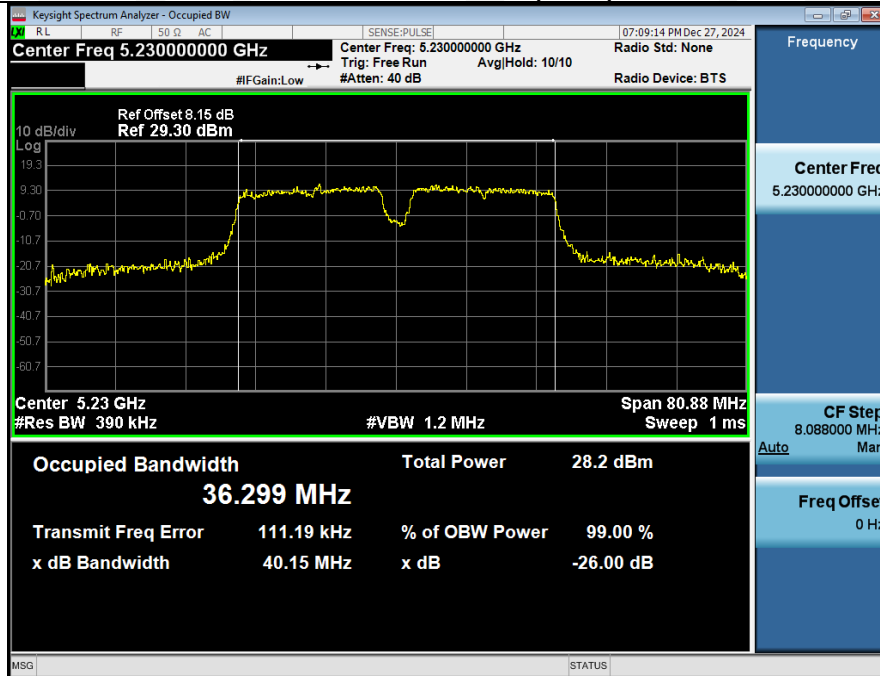


99%_OCB_NVNT_ANT2_802_11ac(VHT40)_5230

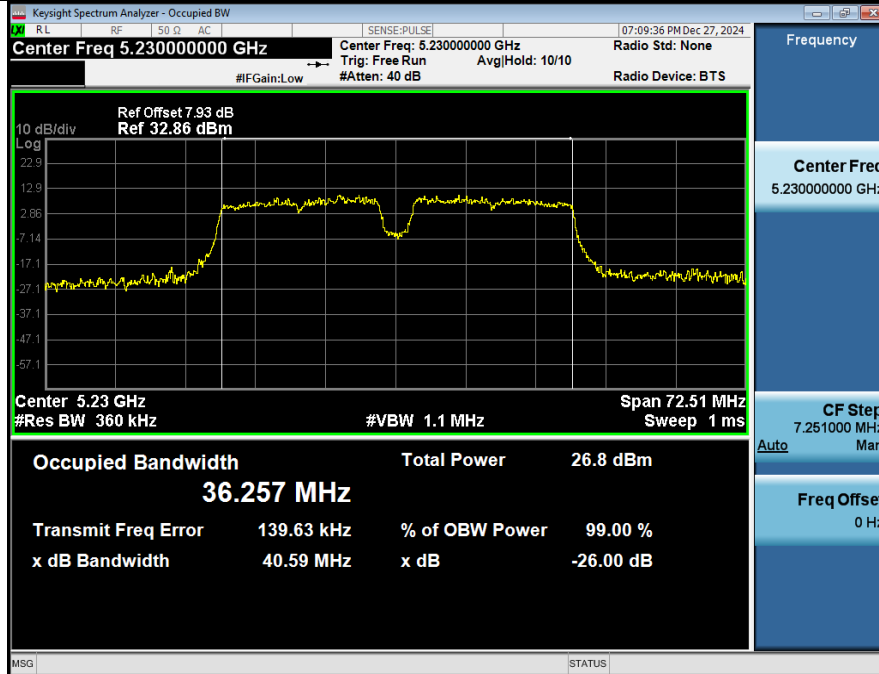


-26BW_NVNT_ANT2_802_11ac(VHT40)_5230

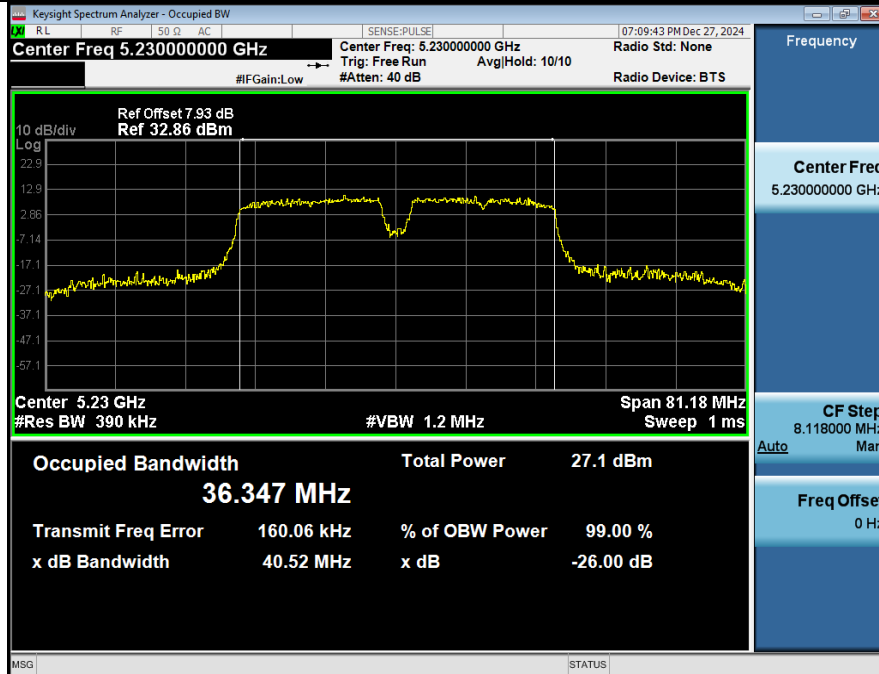


99%_OCB_NVNT_ANT1_802_11ax(HE40)_5190

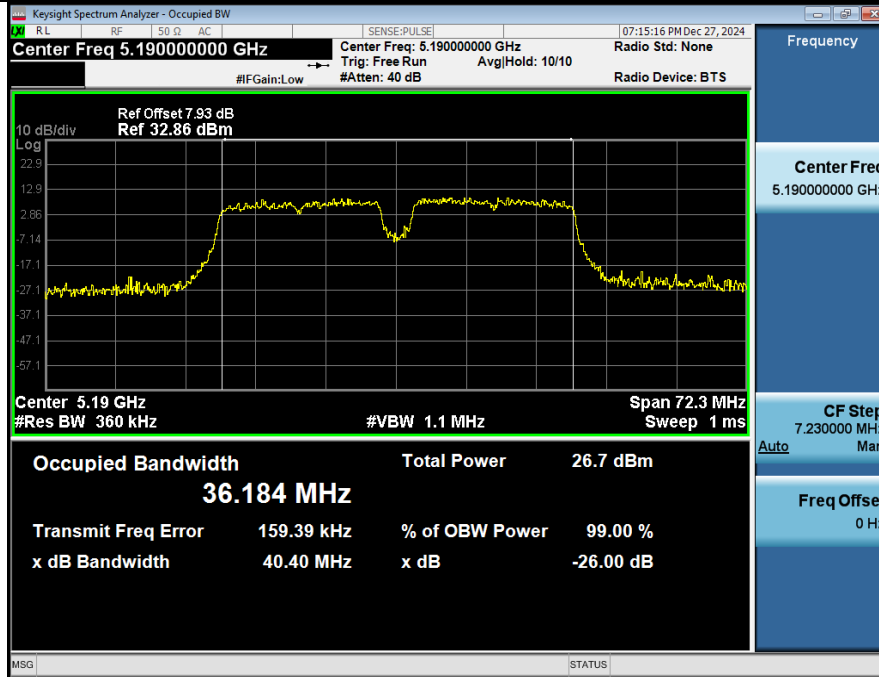


-26BW_NVNT_ANT1_802_11ax(HE40)_5190

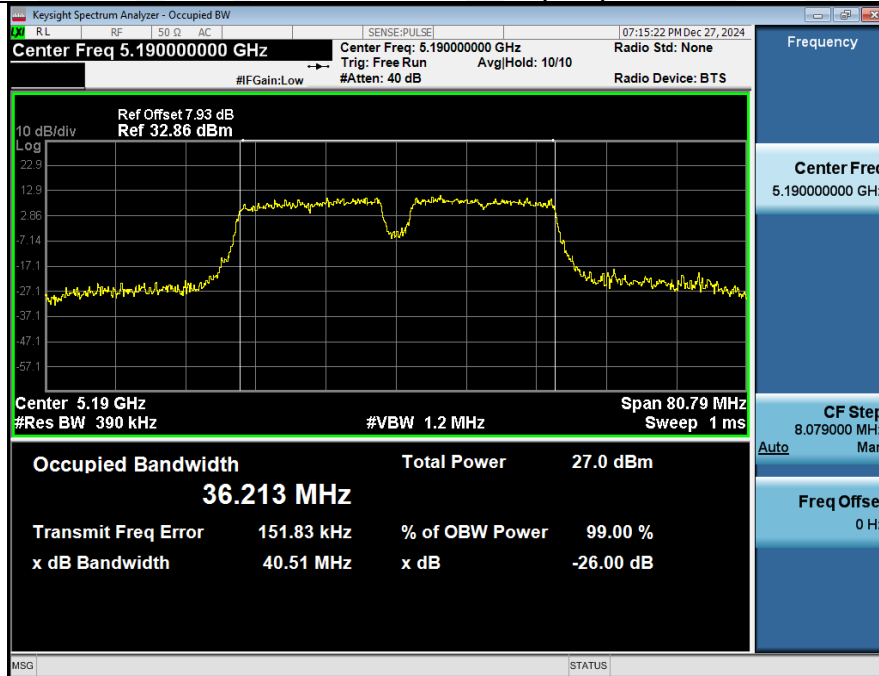


99%_OCB_NVNT_ANT2_802_11ax(HE40)_5190

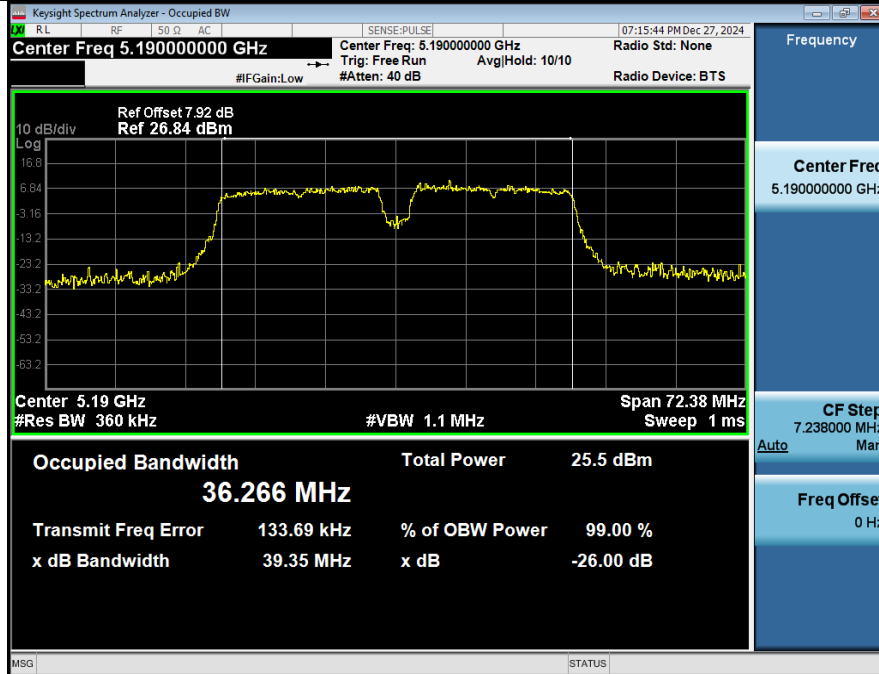


-26BW_NVNT_ANT2_802_11ax(HE40)_5190

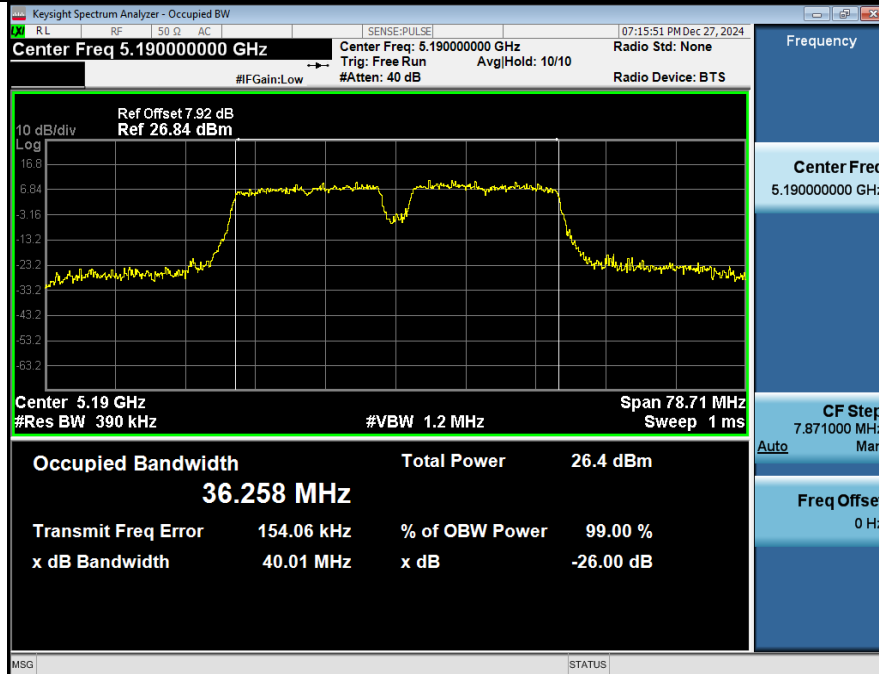


99%_OCB_NVNT_ANT1_802_11ax(HE40)_5230

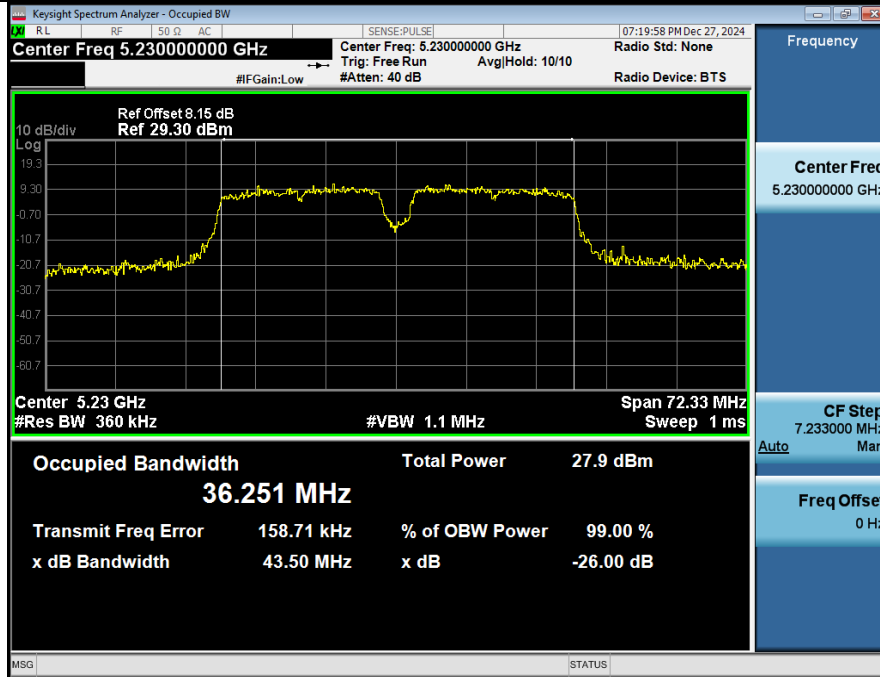


-26BW_NVNT_ANT1_802_11ax(HE40)_5230

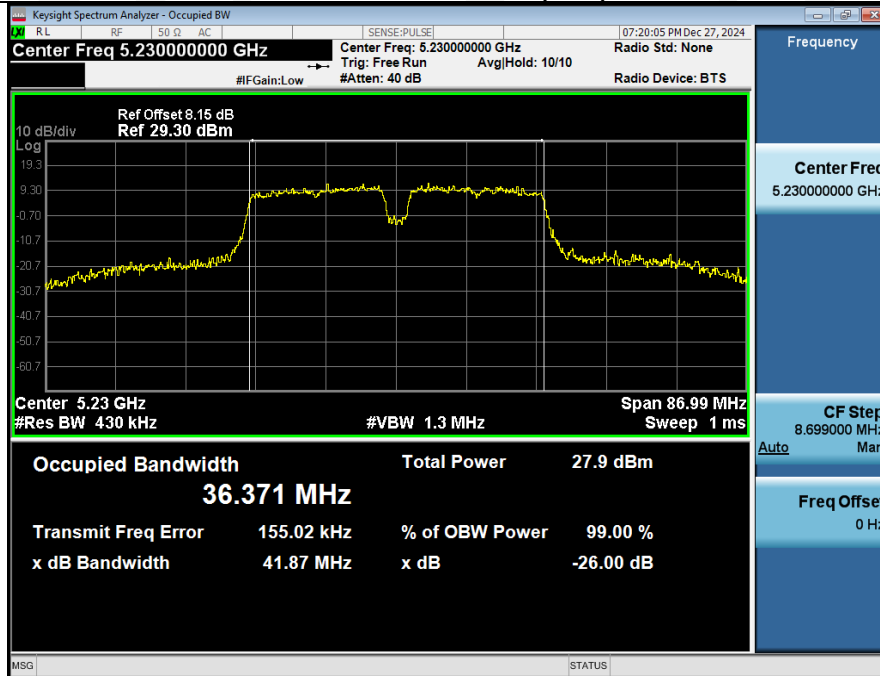


99%_OCB_NVNT_ANT2_802_11ax(HE40)_5230

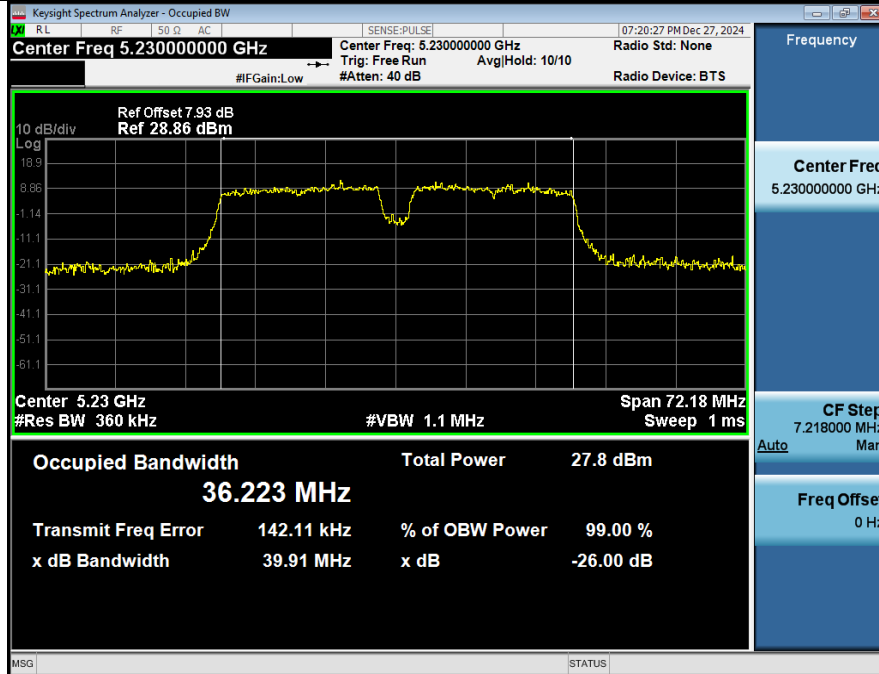


-26BW_NVNT_ANT2_802_11ax(HE40)_5230

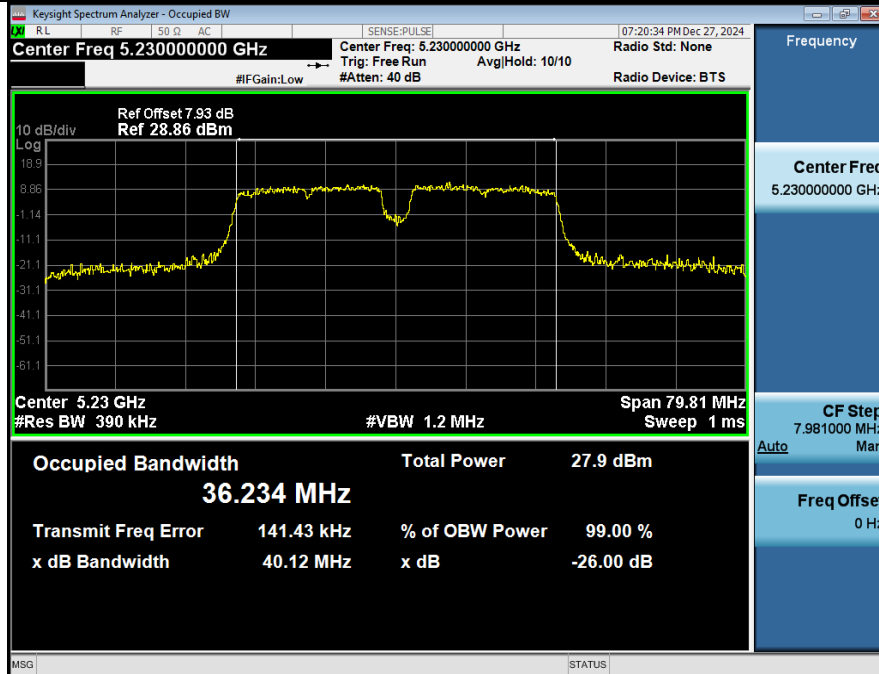


99%_OCB_NVNT_ANT1_802_11ac(VHT80)_5210

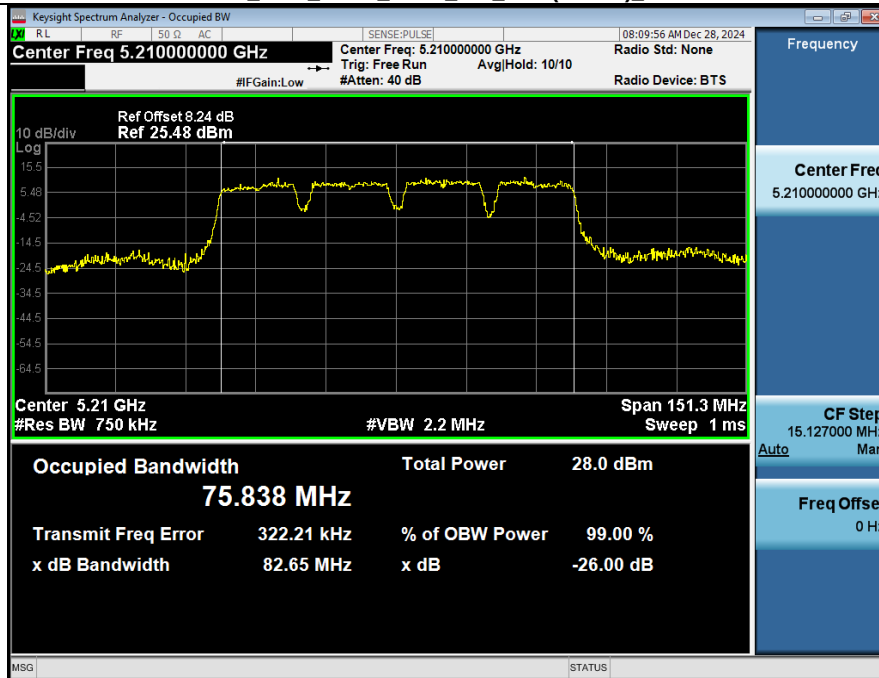


-26BW_NVNT_ANT1_802_11ac(VHT80)_5210

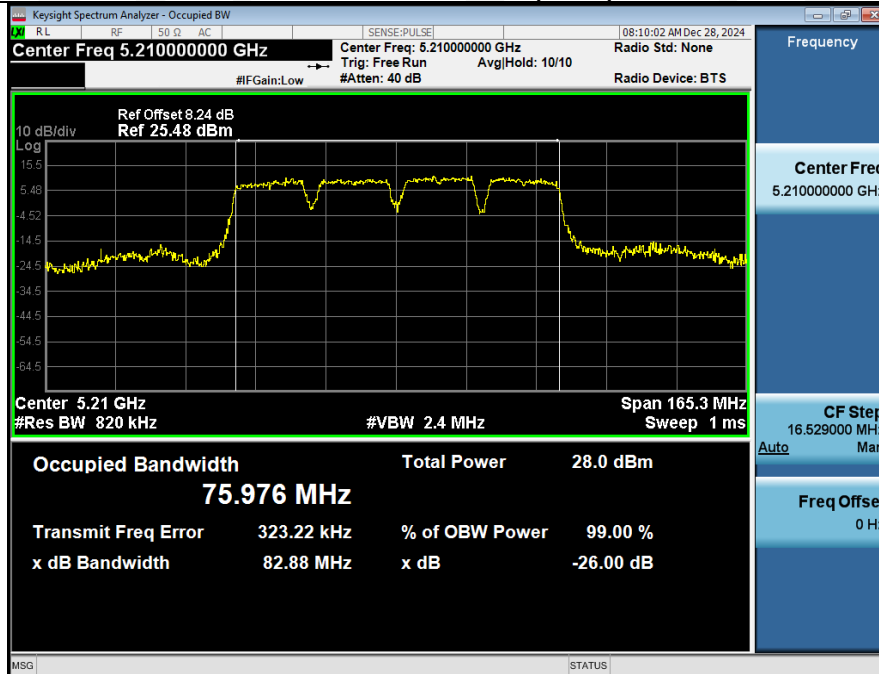


99%_OCB_NVNT_ANT2_802_11ac(VHT80)_5210

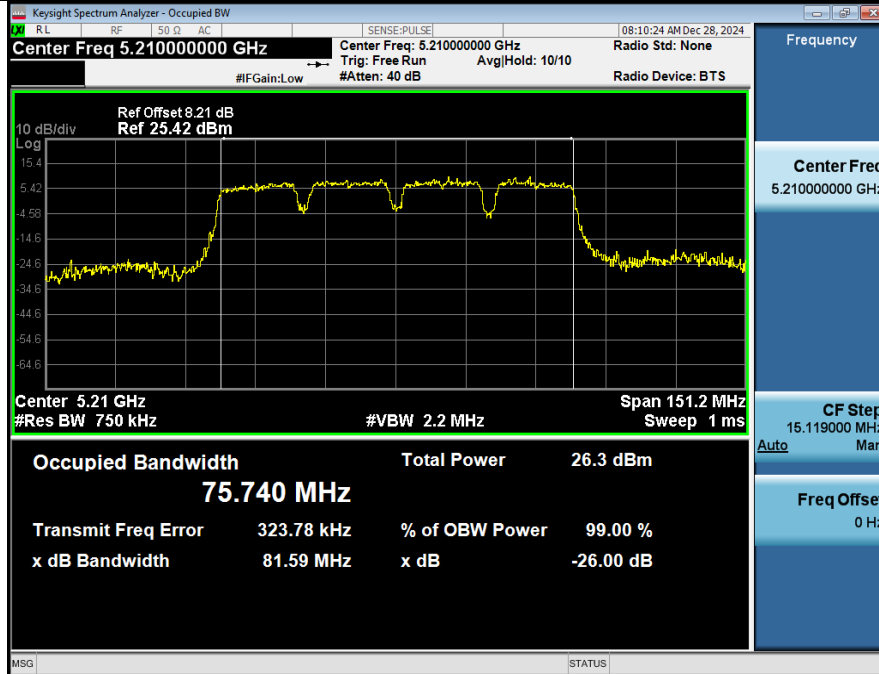


-26BW_NVNT_ANT2_802_11ac(VHT80)_5210

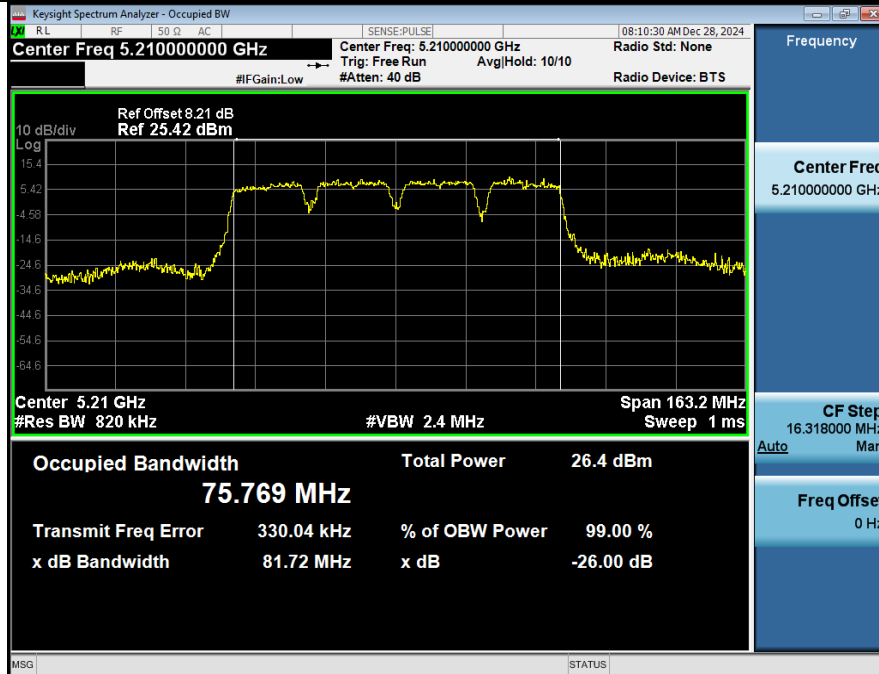


99%_OCB_NVNT_ANT1_802_11ax(HE80)_5210

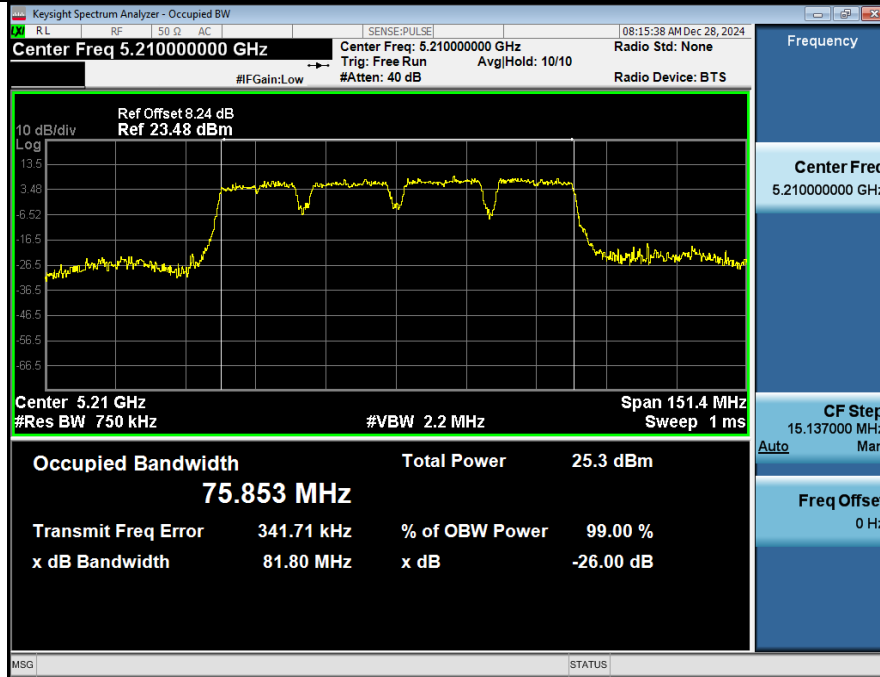


-26BW_NVNT_ANT1_802_11ax(HE80)_5210

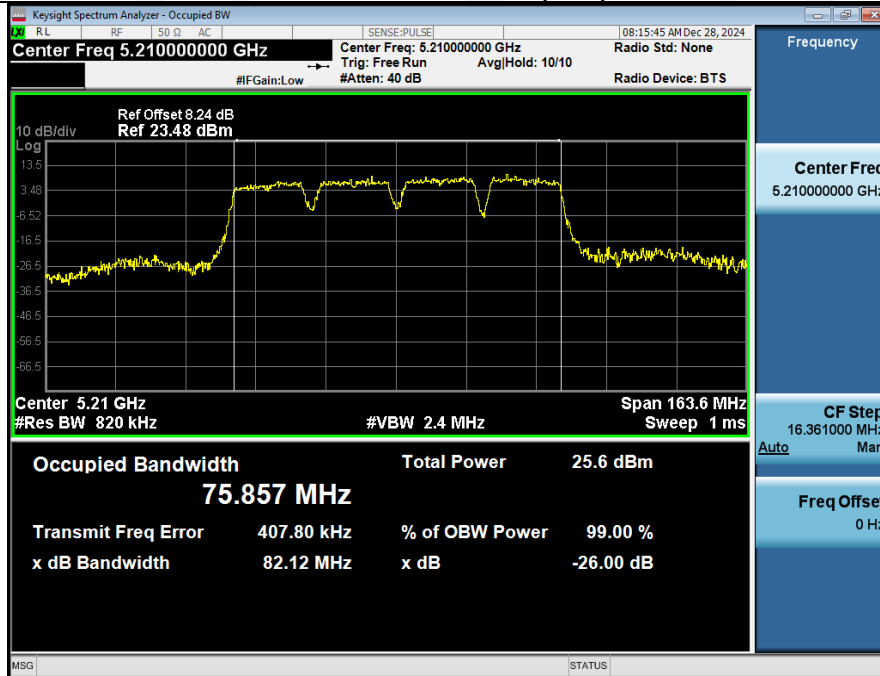

99%_OCB_NVNT_ANT2_802_11ax(HE80)_5210

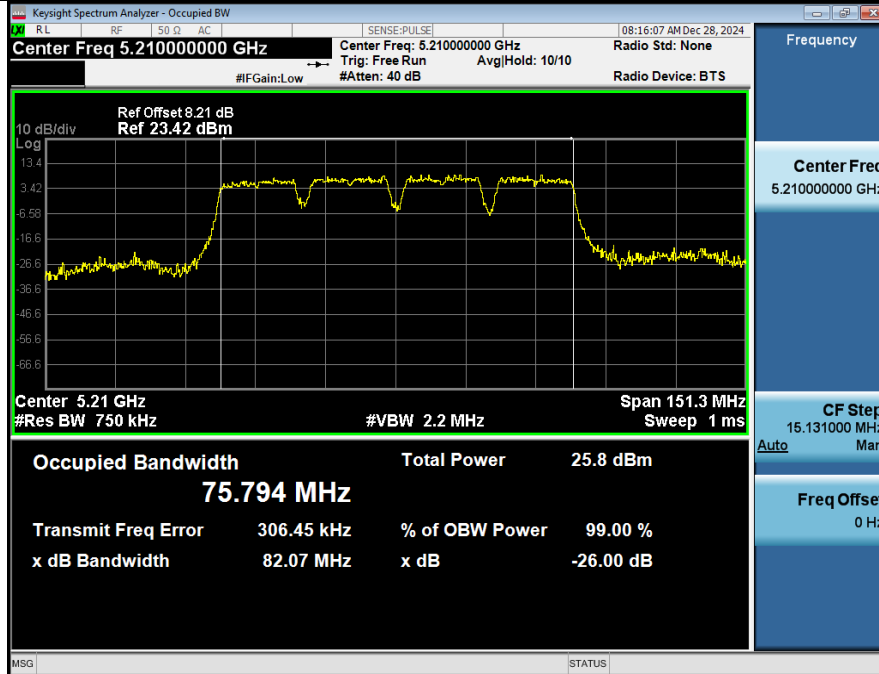


-26BW_NVNT_ANT2_802_11ax(HE80)_5210

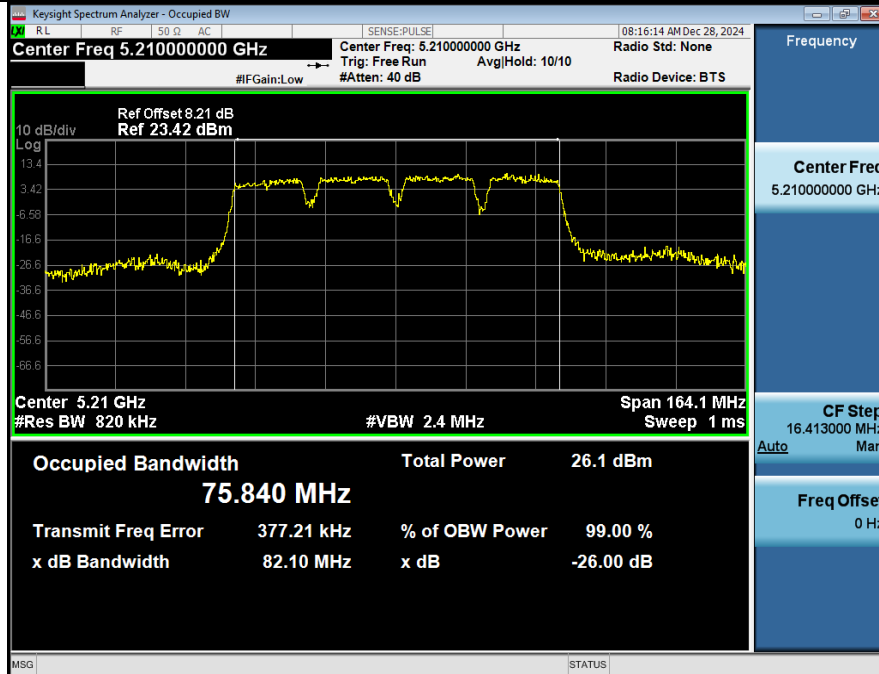


Band 2 (5260-5320 MHz):

Condition	Antenna	Modulation	Frequency(MHz)	26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5260.00	20.20	16.46
NVNT	ANT2	802.11a	5260.00	19.83	16.48
NVNT	ANT1	802.11a	5300.00	20.34	16.46
NVNT	ANT2	802.11a	5300.00	19.97	16.46
NVNT	ANT1	802.11a	5320.00	19.77	16.45
NVNT	ANT2	802.11a	5320.00	19.73	16.47
NVNT	ANT1	802.11n(HT20)	5260.00	19.62	16.44
NVNT	ANT2	802.11n(HT20)	5260.00	19.94	16.46
NVNT	ANT1	802.11n(HT20)	5300.00	19.70	16.45
NVNT	ANT2	802.11n(HT20)	5300.00	19.56	16.46
NVNT	ANT1	802.11n(HT20)	5320.00	19.54	16.48
NVNT	ANT2	802.11n(HT20)	5320.00	19.85	16.46
NVNT	ANT1	802.11ac(VHT20)	5260.00	19.90	16.47
NVNT	ANT2	802.11ac(VHT20)	5260.00	19.57	16.46
NVNT	ANT1	802.11ac(VHT20)	5300.00	19.54	16.46
NVNT	ANT2	802.11ac(VHT20)	5300.00	19.79	16.44
NVNT	ANT1	802.11ac(VHT20)	5320.00	19.73	16.45
NVNT	ANT2	802.11ac(VHT20)	5320.00	19.67	16.46
NVNT	ANT1	802.11n(HT40)	5270.00	40.83	36.18
NVNT	ANT2	802.11n(HT40)	5270.00	40.20	36.22
NVNT	ANT1	802.11n(HT40)	5310.00	39.89	36.18
NVNT	ANT2	802.11n(HT40)	5310.00	40.16	36.20
NVNT	ANT1	802.11ac(VHT40)	5270.00	40.30	36.17
NVNT	ANT2	802.11ac(VHT40)	5270.00	40.10	36.20
NVNT	ANT1	802.11ac(VHT40)	5310.00	39.80	36.19
NVNT	ANT2	802.11ac(VHT40)	5310.00	40.11	36.22
NVNT	ANT1	802.11ac(VHT80)	5290.00	81.61	75.70
NVNT	ANT2	802.11ac(VHT80)	5290.00	82.50	75.68
NVNT	ANT1	802.11ax(HE20)	5260.00	19.83	16.45
NVNT	ANT2	802.11ax(HE20)	5260.00	19.73	16.47
NVNT	ANT1	802.11ax(HE20)	5300.00	19.75	16.46
NVNT	ANT2	802.11ax(HE20)	5300.00	19.52	16.47
NVNT	ANT1	802.11ax(HE20)	5320.00	20.07	16.45
NVNT	ANT2	802.11ax(HE20)	5320.00	19.84	16.46
NVNT	ANT1	802.11ax(HE40)	5270.00	39.76	36.19
NVNT	ANT2	802.11ax(HE40)	5270.00	39.90	36.19
NVNT	ANT1	802.11ax(HE40)	5310.00	40.04	36.17
NVNT	ANT2	802.11ax(HE40)	5310.00	39.72	36.16
NVNT	ANT1	802.11ax(HE80)	5290.00	82.43	75.71
NVNT	ANT2	802.11ax(HE80)	5290.00	81.01	75.74
NVNT	ANT1	802.11ac(VHT160)	5250.00	289.09	155.05
NVNT	ANT2	802.11ac(VHT160)	5250.00	394.40	156.73
NVNT	ANT1	802.11ax(HE160)	5250.00	446.51	155.10
NVNT	ANT2	802.11ax(HE160)	5250.00	335.47	156.43


99%_OCB_NVNT_ANT1_802_11a_5260

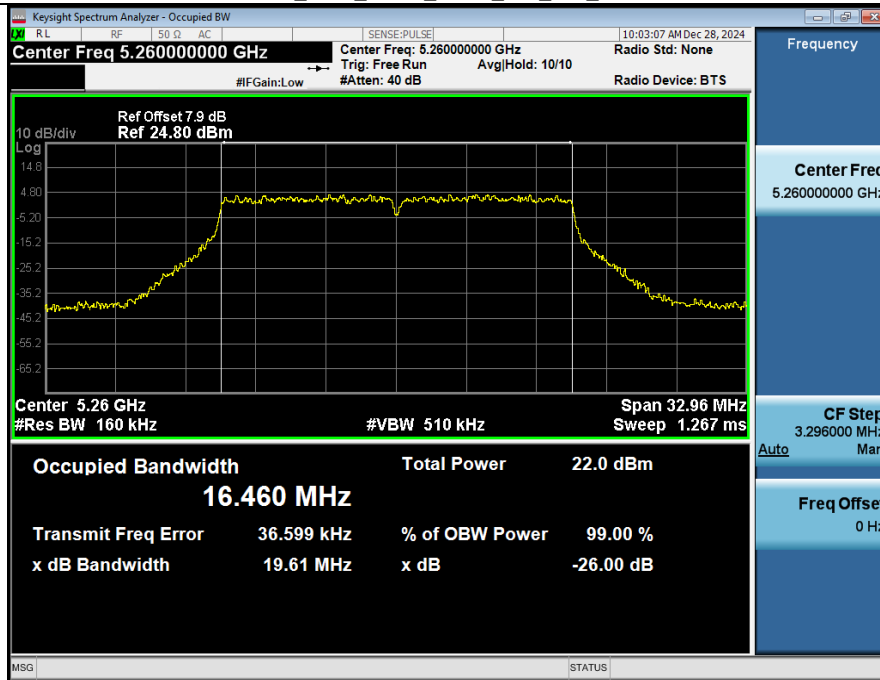


-26BW_NVNT_ANT1_802_11a_5260

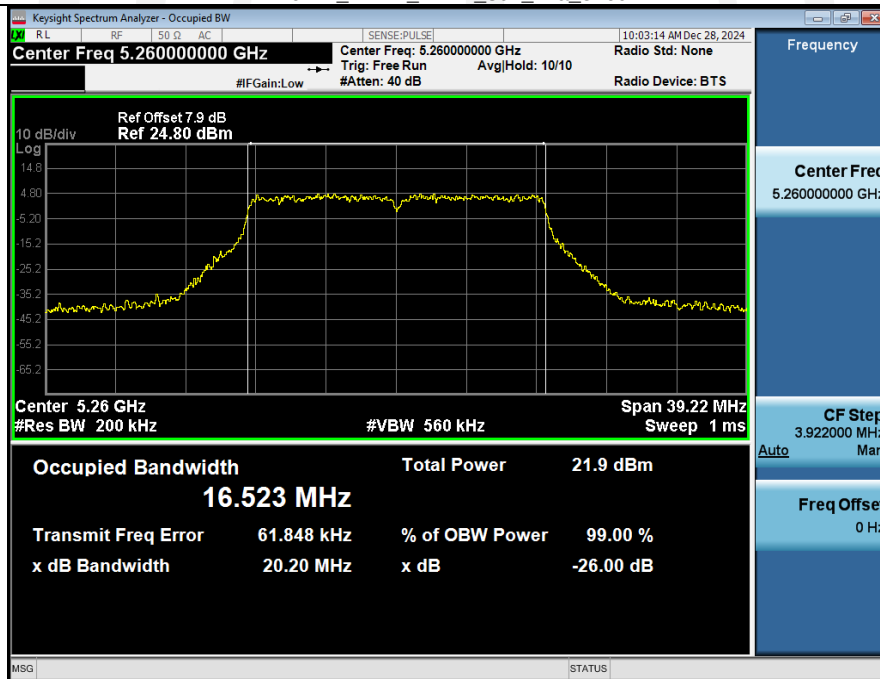


99%_OCB_NVNT_ANT2_802_11a_5260

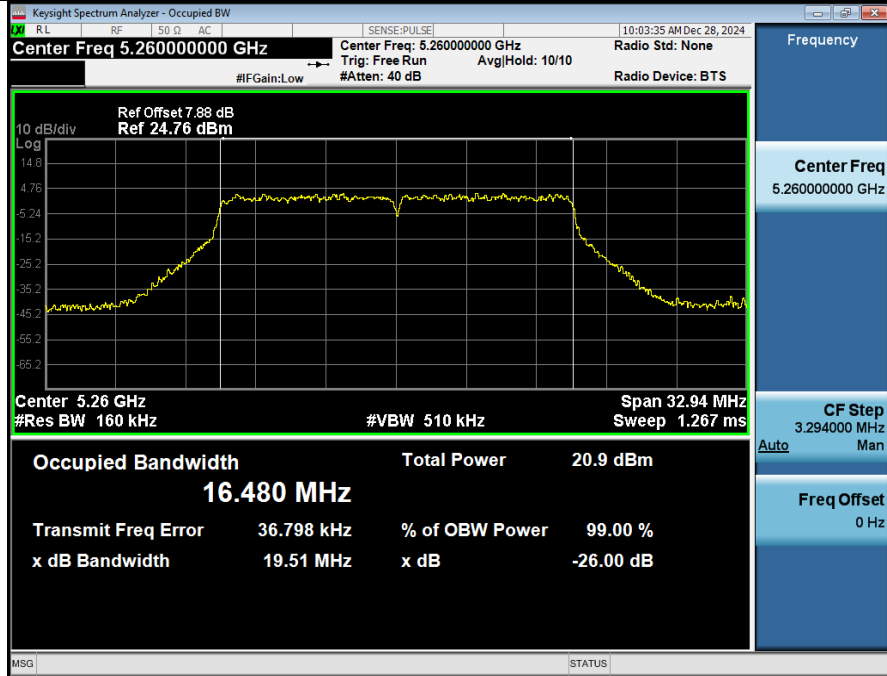


-26BW_NVNT_ANT2_802_11a_5260

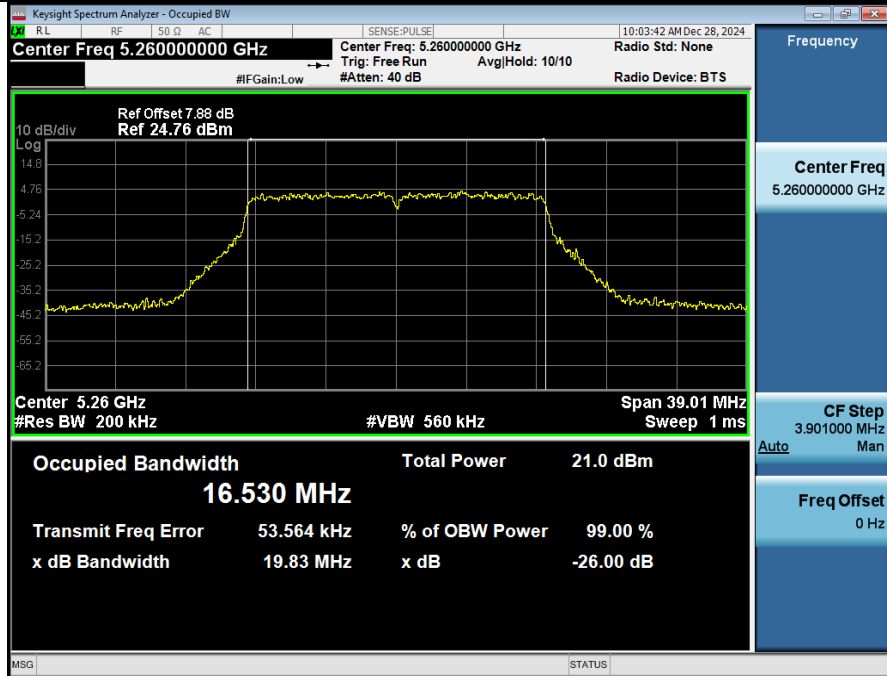


99%_OCB_NVNT_ANT1_802_11a_5300

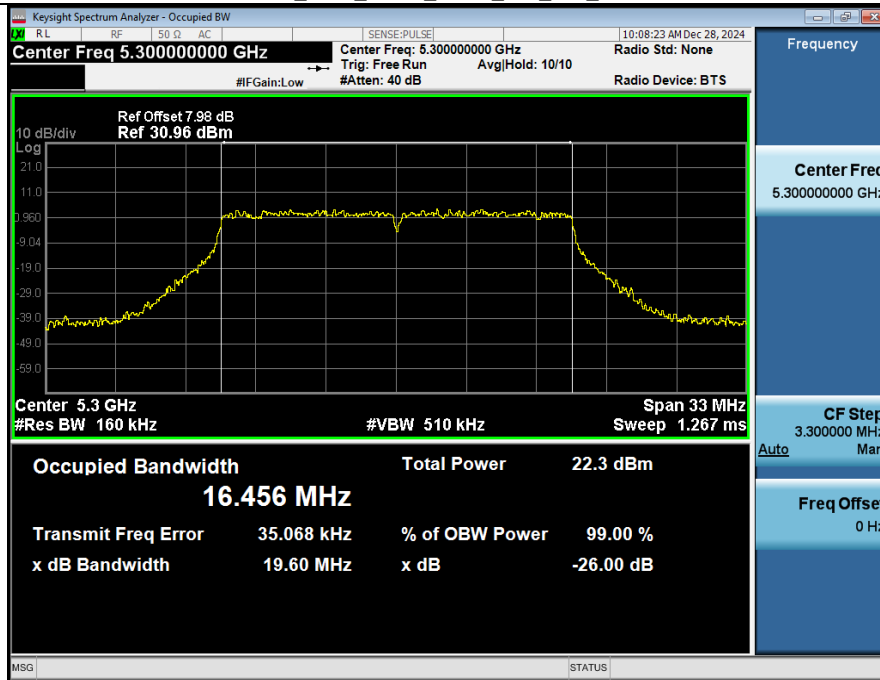


-26BW_NVNT_ANT1_802_11a_5300

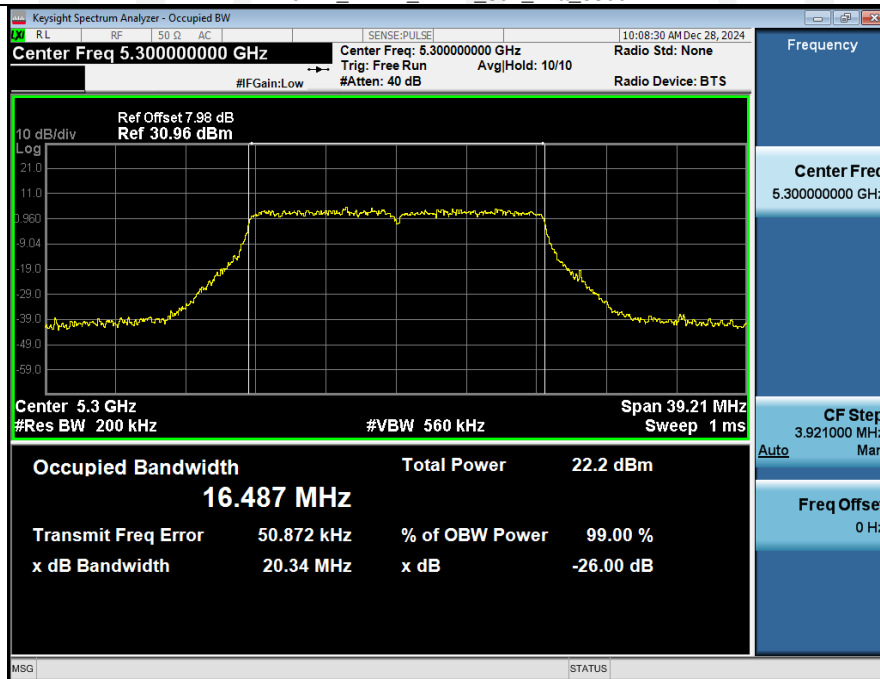


99%_OCB_NVNT_ANT2_802_11a_5300

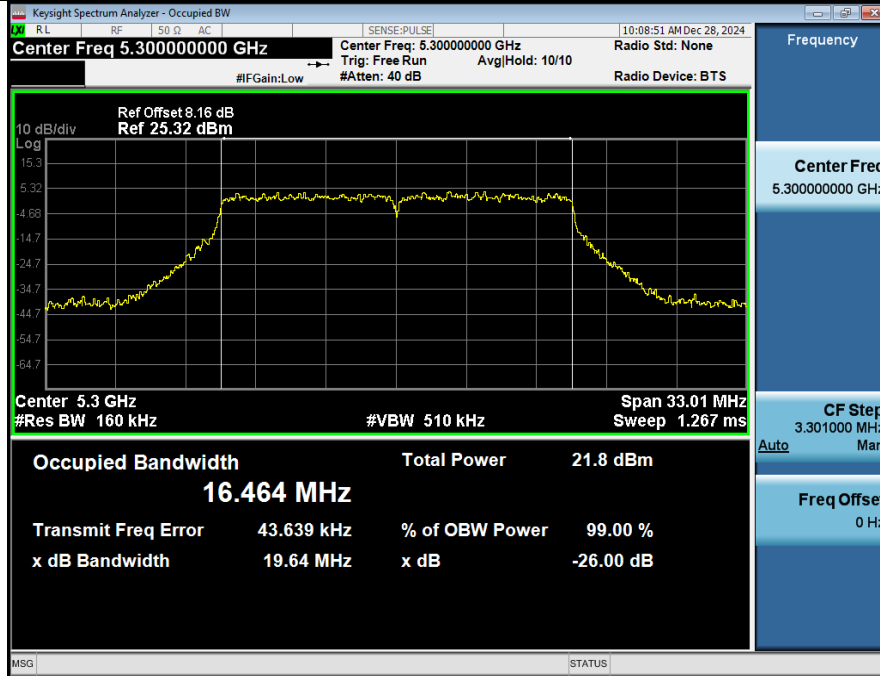


-26BW_NVNT_ANT2_802_11a_5300

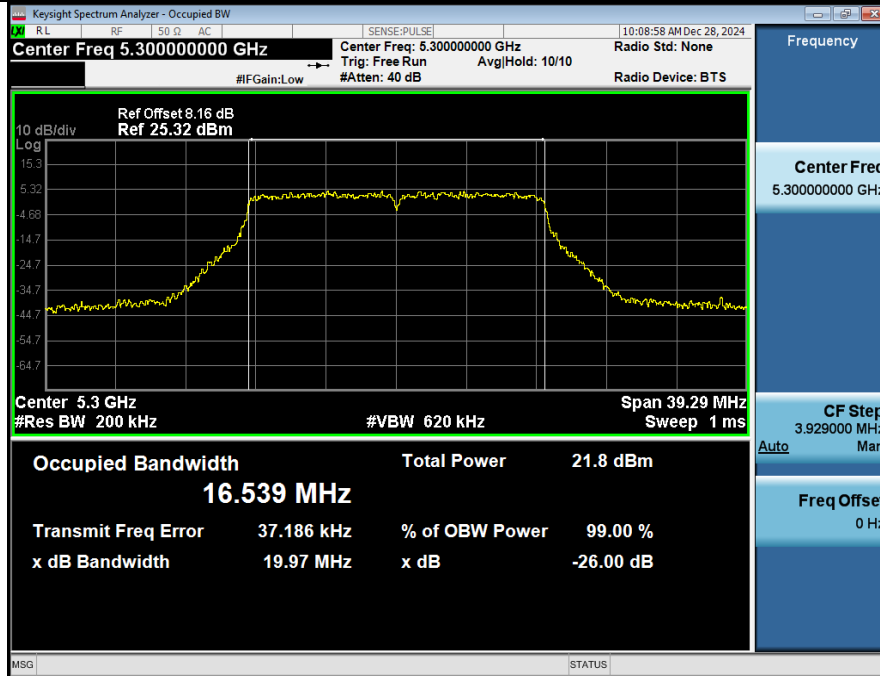


99%_OCB_NVNT_ANT1_802_11a_5320

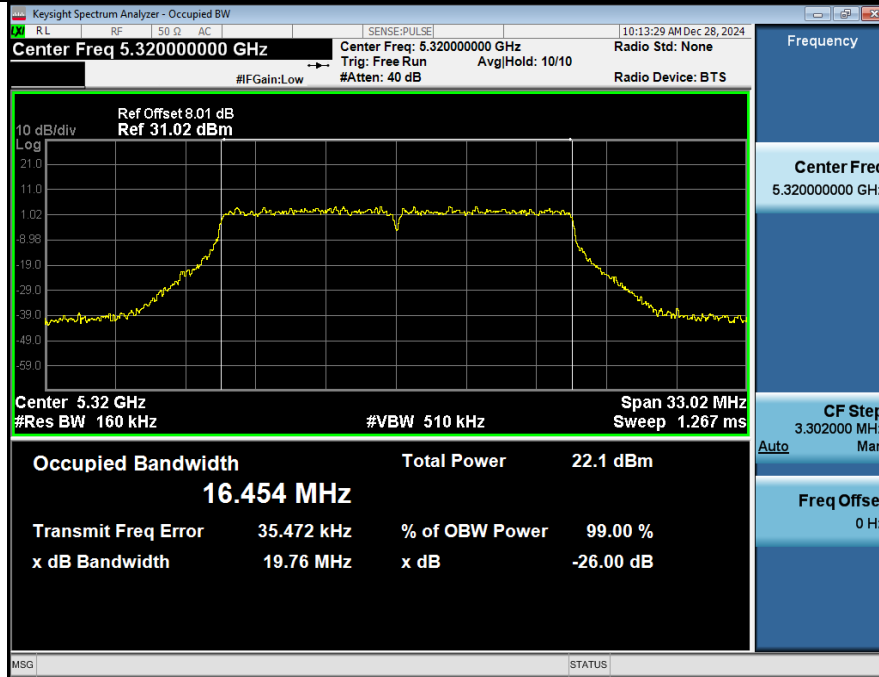


-26BW_NVNT_ANT1_802_11a_5320

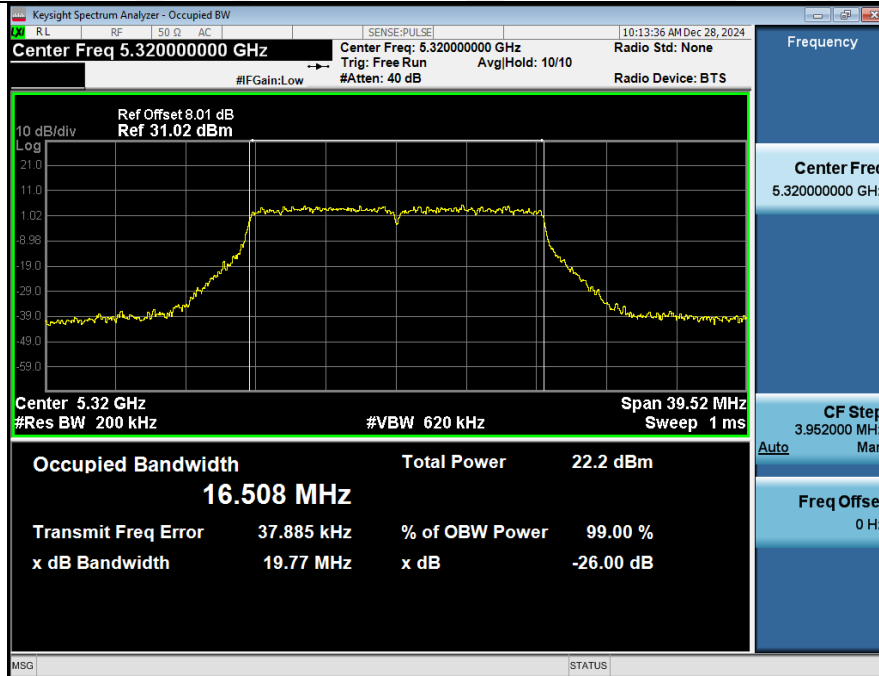


99%_OCB_NVNT_ANT2_802_11a_5320

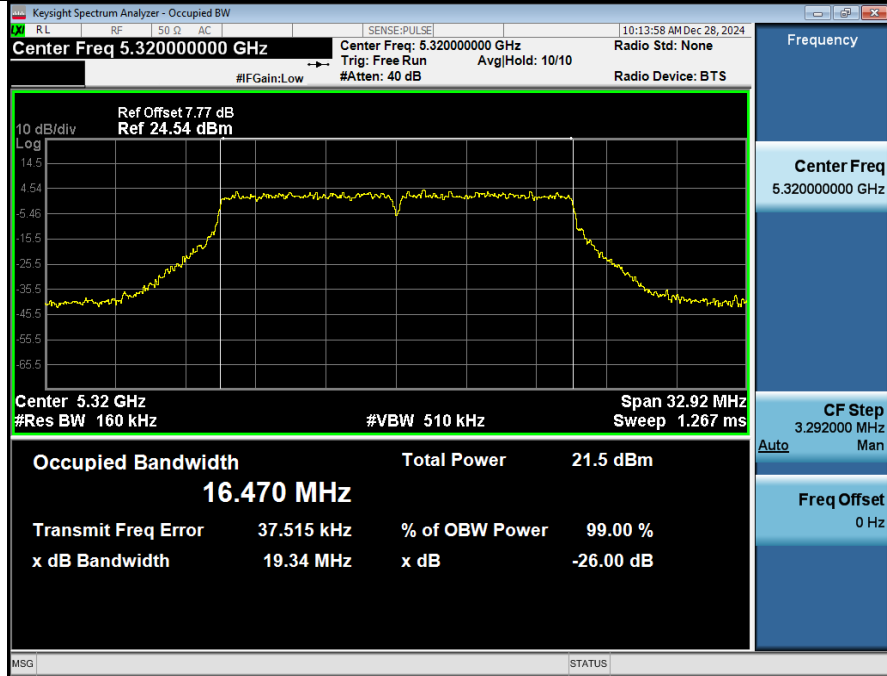


-26BW_NVNT_ANT2_802_11a_5320

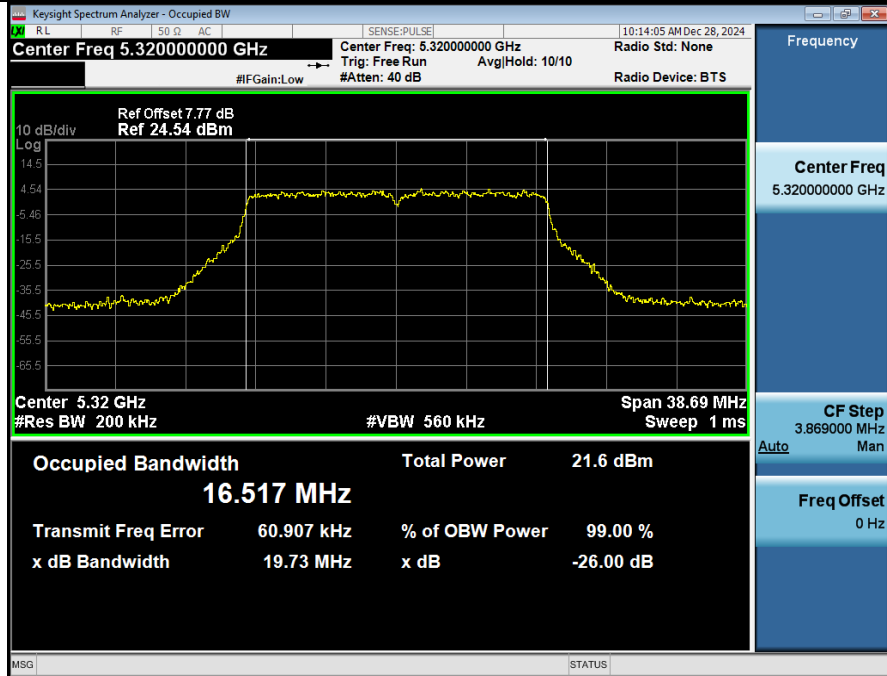


99%_OCB_NVNT_ANT1_802_11n(HT20)_5260

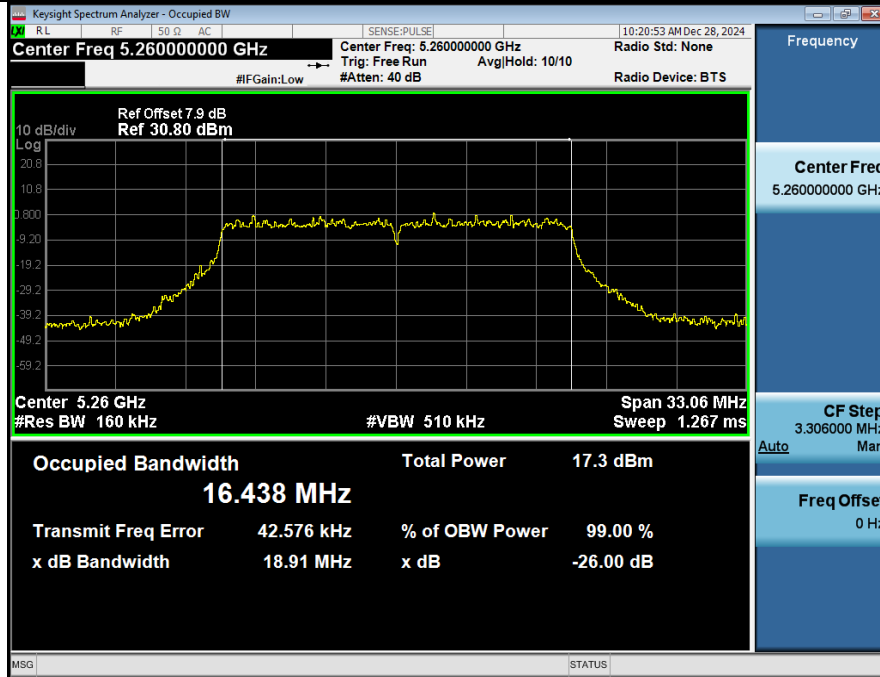


-26BW_NVNT_ANT1_802_11n(HT20)_5260

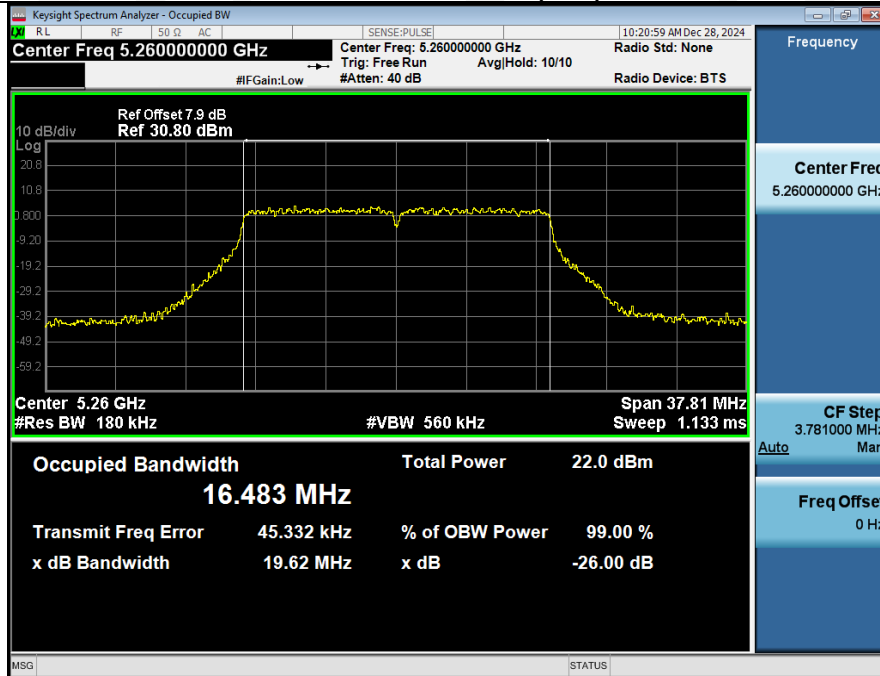


99%_OCB_NVNT_ANT2_802_11n(HT20)_5260

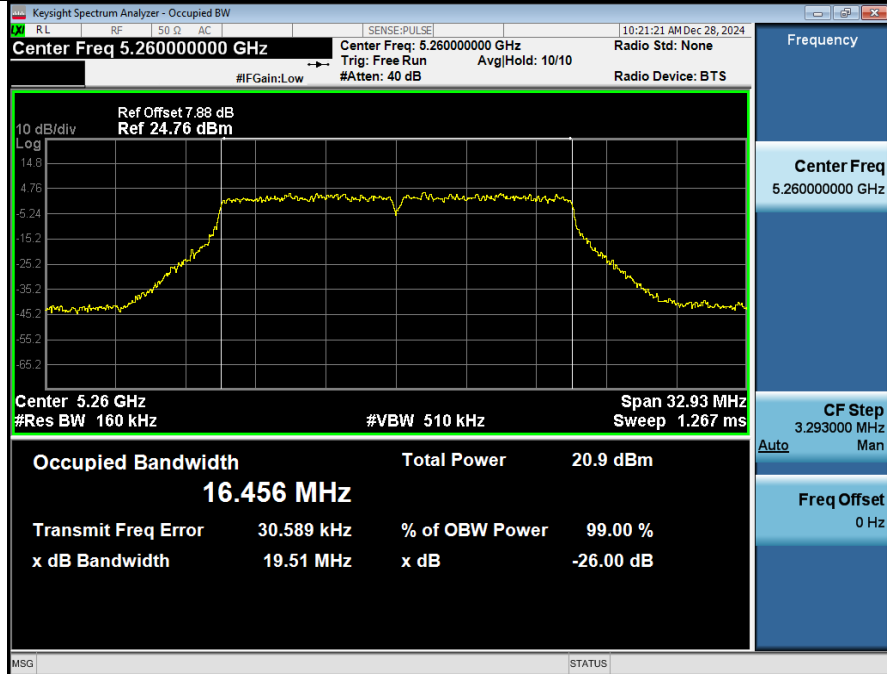


-26BW_NVNT_ANT2_802_11n(HT20)_5260

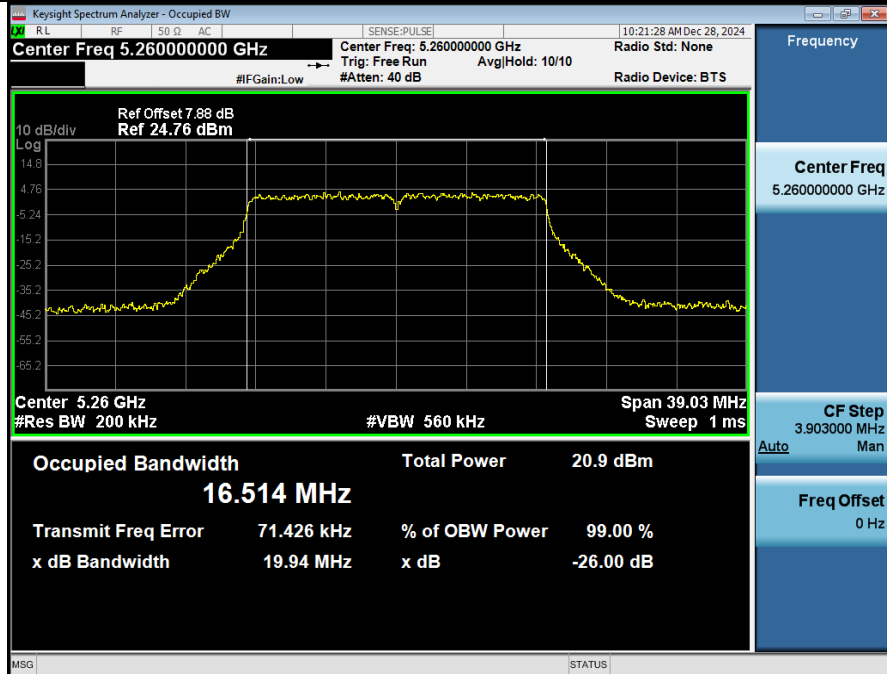


99%_OCB_NVNT_ANT1_802_11n(HT20)_5300

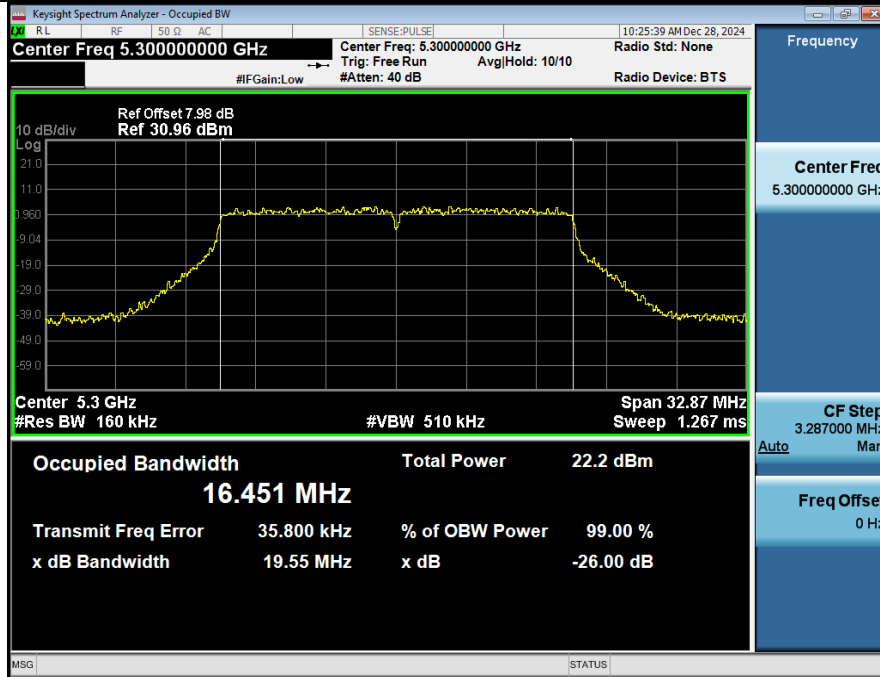


-26BW_NVNT_ANT1_802_11n(HT20)_5300

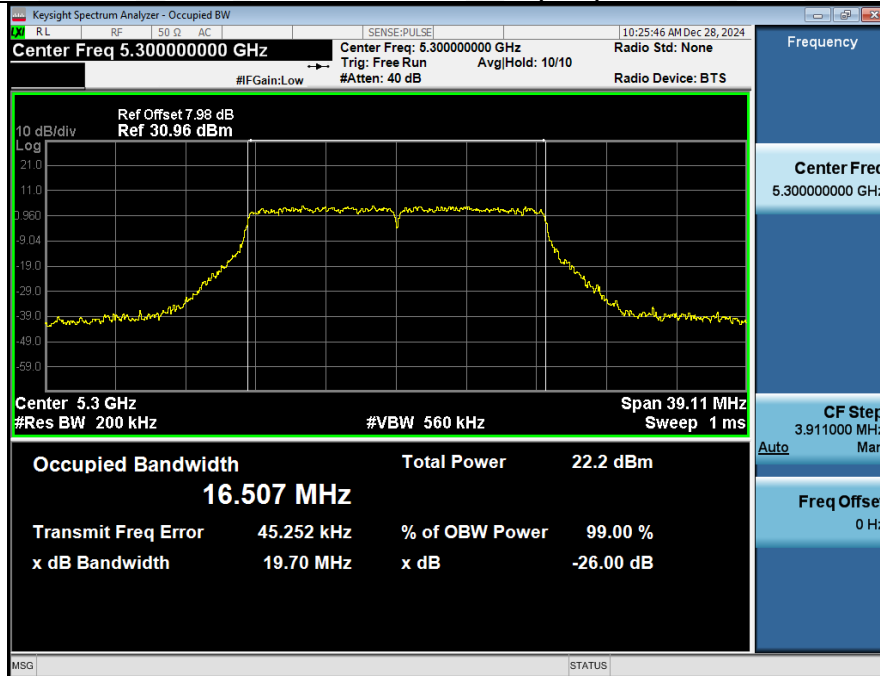


99%_OCB_NVNT_ANT2_802_11n(HT20)_5300

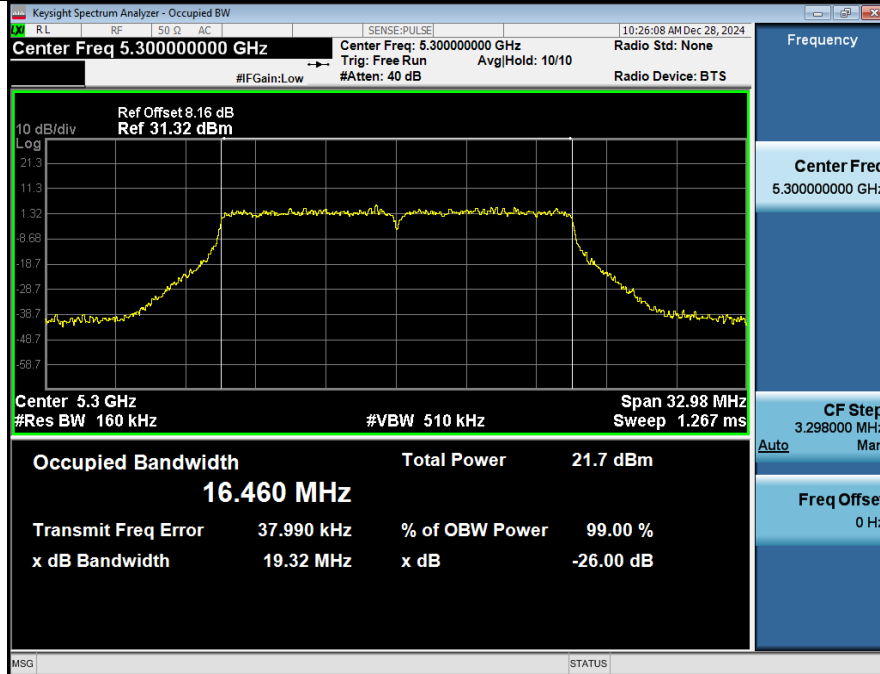


-26BW_NVNT_ANT2_802_11n(HT20)_5300

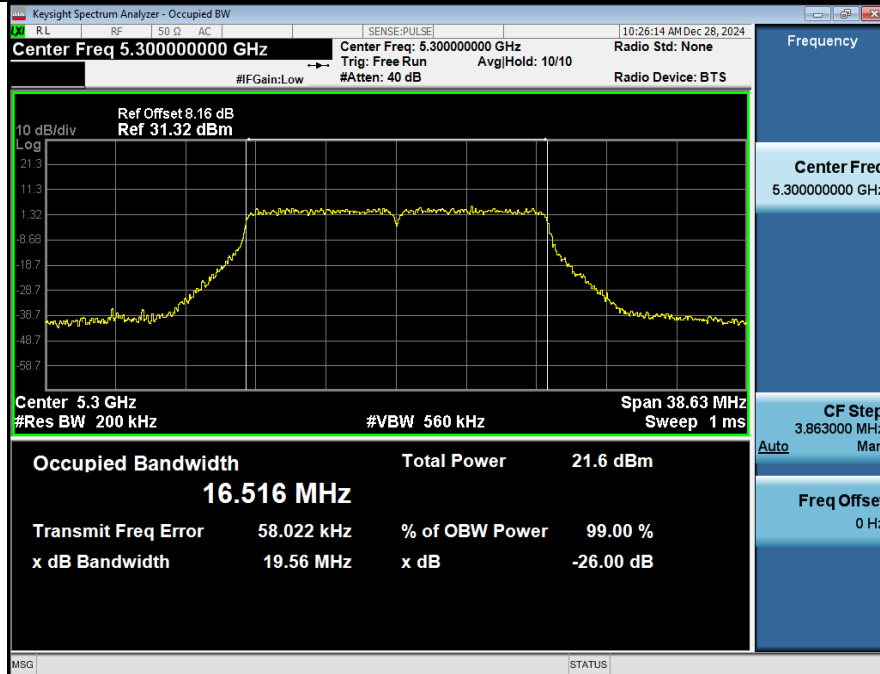


99%_OCB_NVNT_ANT1_802_11n(HT20)_5320

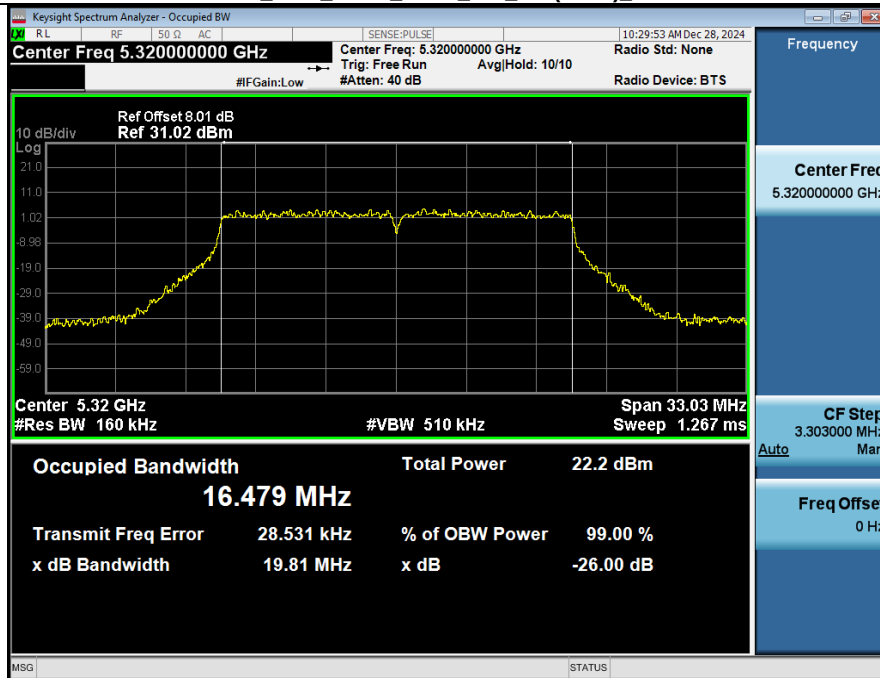

-26BW_NVNT_ANT1_802_11n(HT20)_5320

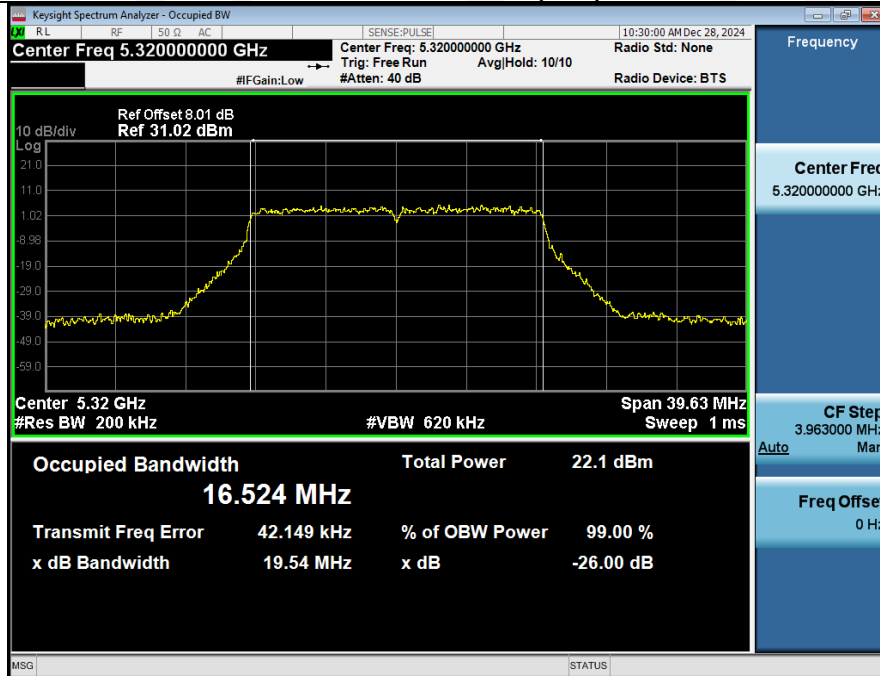

99%_OCB_NVNT_ANT2_802_11n(HT20)_5320

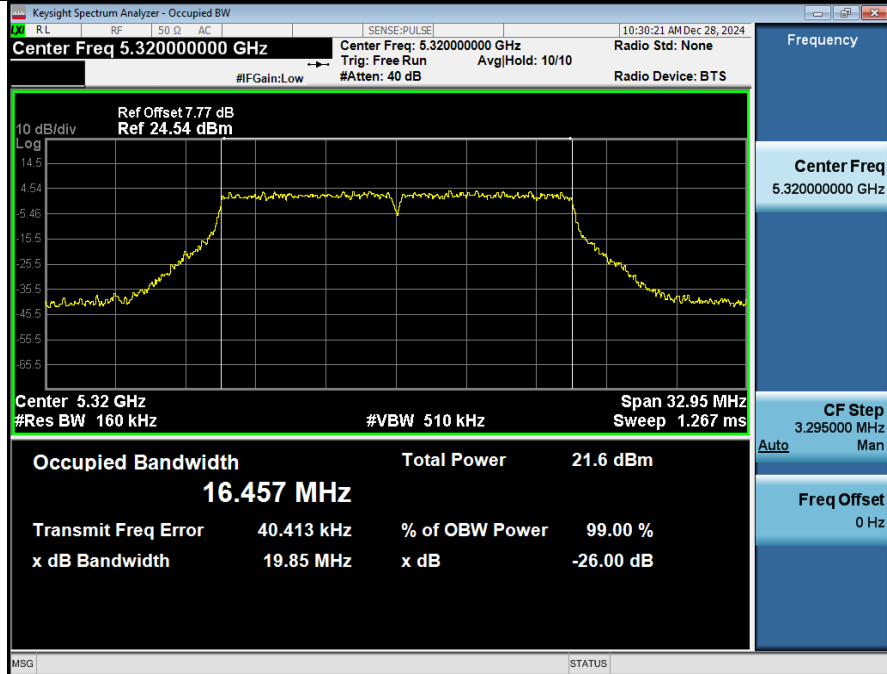

-26BW_NVNT_ANT2_802_11n(HT20)_5320

