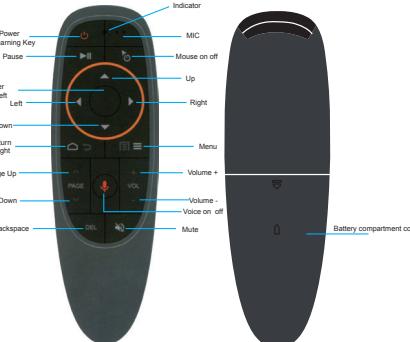


<p>2.4G Air Mouse & Fidelity voice Input</p> <p>Product icon</p>  <p>Thank you for using the product of our company!</p> <p>This is a wireless air mouse with built-in axis gyroscope and gravity acceleration sensor and fidelity voice input; it can perform the functions of a traditional remote control, computer mouse, and gaming motion controller on android platform. Plug and play micro receiver is compatible with personal computer, projector, TV box, Home Theater Personal Computer etc.</p> <p>Holding air mouse and rotating your wrist is converted into a movement of a cursor across the screen and it allows you to control your computer, projector and other entertainment equipment from a distance.</p> <p>Ergonomics of air mouse will replace stationary computer mouse and infrared button remote control giving you convenience to manage your computer and television set from a position which is most comfortable for you.</p>	<p>IR Learning (take the example of learning "power" button)</p> <ol style="list-style-type: none">1. Keep pressing "Power" button. The air mouse enters IR learning mode when the LED flashes slowly.2. Press the "power" button when you aim the IR transmitter with air mouse. Air mouse receives the code successfully if LED light.3. LED flashes slowly means that Air mouse has finished learning.4. Data will be saved automatically and the product will exit learning mode.5. Press "OK"+ "DEL" to clean the code up. <p>Air Mouse has 3 levels of cursor speed.</p> <p>From slow to fast: Press and hold "ok" and "Volume+" buttons. The speed adjusts one level when LED light on.</p> <p>From fast to slow: Press and hold "ok" and "Volume-" buttons. The speed adjusts one level when LED light on.</p> <p>Function Keys :</p> <ul style="list-style-type: none">▫ Home: Go back to the home;▫ Return: Go back to previous screen;▫ OK: Confirm action or insert cursor;▫ Cursor Locking: Press to lock the air mouse, press again to unlock;▫ Play/Pause: Multimedia play/pause. <p>Voice Switch: Press and hold "Voice Switch" to turn on voice channel. Release the key to turn off voice channel.</p> <p>Low battery reminder: The red light flashes slowly when the AAA battery power of the product is lower than 2V. It means that the battery need to be replaced at this time.</p> <p>Sensor Calibration Automatic calibration: The changes of voltage and temperature may make the cursor drifts. In this case, put the mouse flat on the desk and remain still. You can complete calibration by pressing any key to wake it up when it is in hibernation mode.</p>	<p>How to Use</p> <p>For initial use, plug a USB receiver into the USB port of device and wait for 20-60 seconds to install driver of USB receiver. Move the mouse, the mouse cursor can move on the screen means that pairing is successful. If it is unsuccessful, press and hold "OK" and "Home" buttons, LED light begin to flash. Pairing is successful when LED light stop flashing.</p> <p>Product specifications</p> <p>Transmission method: 2.4G RF wireless Sensors: 6 axis Gyroscope Number of keys: 17 Range: >10m Battery Type: AAA*2 Material: ABS Plastic and silicone Size: 143*45*29MM Weight: 50g</p> <p>Note:</p> <ol style="list-style-type: none">1. Non-professional are prohibited to use the test mode of the product. Under normal use, re-install the battery to restore it if red light always lighting.2. IR Learning only for "power" key.3. This product is divided into gyroscope version and no gyroscope version. <p>Gyroscope version: Swing your wrist to control the direction and movement of the mouse pointer!</p> <p>Gyroscope-free version: Move the mouse pointer by pressing "up", "down", "left" and "right" buttons on a virtual mouse.</p>
---	--	--

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment