



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 17159  
 Tel: +82-31-323-6008 Fax: +82-31-323-6010  
<http://www.ltalab.com>

Dates of Tests: April 06, 2022 ~ April 19, 2022

Test Report S/N: LR500112204B

Test Site : LTA CO., LTD.

## CERTIFICATION OF COMPLIANCE

FCC ID

**2A6GOKVL-C3-K01**

APPLICANT

**KevinLAB Inc.**

|                                  |   |   |
|----------------------------------|---|---|
| <b>Equipment Class</b>           | : | <b>Part 15 Spread Spectrum Transmitter</b>              |
| <b>Manufacturing Description</b> | : | <b>LPWA System</b>                                      |
| <b>Manufacturer</b>              | : | <b>KevinLAB Inc.</b>                                    |
| <b>Model name</b>                | : | <b>KVL-C3-K01</b>                                       |
| <b>Variant Model name</b>        | : | <b>KVL-R3-K01</b>                                       |
| <b>Test Device Serial No.:</b>   | : | <b>Identical prototype</b>                              |
| <b>Rule Part(s)</b>              | : | <b>FCC Part 15.247</b>                                  |
|                                  |   | <b>Subpart C ; ANSI C-63.4-2014 / ANSI C-63.10-2013</b> |
| <b>Frequency Range</b>           | : | <b>902.0 ~ 928.0 MHz</b>                                |
| <b>RF power</b>                  | : | <b>Max 0.15 dBm – Conducted</b>                         |
| <b>Data of issue</b>             | : | <b>April 20, 2022</b>                                   |

This test report is issued under the authority of:

*JaBeom.Koo*

Ja-Beom Koo, Manager

The test was supervised by:

*Eun-Hwan Jung*

Eun-Hwan Jung, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**NVLAP**<sup>®</sup>

NVLAP LAB Code.: 200723-0

## **TABLE OF CONTENTS**

|  |    |
|--|----|
| 1. GENERAL INFORMATION -----                   | 3  |
| 2. INFORMATION ABOUT TEST ITEM -----           | 4  |
| 3. TEST REPORT -----                           | 5  |
| 3.1 SUMMARY OF TESTS -----                     | 5  |
| 3.2 FREQUENCY HOPPING SYSTEM REQUIREMENTS----- | 6  |
| 3.3 TECHNICAL CHARACTERISTICS TEST -----       | 7  |
| 3.3.1 CARRIER FREQUENCY SEPARATION -----       | 7  |
| 3.3.2 NUMBER OF HOPPING FREQUENCIES -----      | 9  |
| 3.3.3 20 dB BANDWIDTH -----                    | 11 |
| 3.3.4 TIME OF OCCUPANCY (Dwell Time) -----     | 15 |
| 3.3.5 TRANSMITTER OUTPUT POWER -----           | 17 |
| 3.3.6 BAND EDGE -----                          | 20 |
| 3.3.7 CONDUCTED SPURIOUS EMISSIONS -----       | 22 |
| 3.3.8 RADIATED SPURIOUS EMISSIONS -----        | 25 |
| <br>   |    |
| <b>APPENDIX</b>                                |    |
| APPENDIX TEST EQUIPMENT USED FOR TESTS -----   | 33 |

## 1. General information

### 1-1 Test Performed

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 17159  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### 1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

| Agency | Country | Accreditation No. | Validity   | Reference           |
|--------|---------|-------------------|------------|---------------------|
| NVLAP  | U.S.A   | 200723-0          | 2022-09-28 | ECT accredited Lab. |
| RRA    | KOREA   | KR0049            | -          | EMC accredited Lab. |
| FCC    | U.S.A   | 649054            | 2023-01-25 | FCC CAB             |
| VCCI   | JAPAN   | C-4948,           | 2023-09-10 | VCCI registration   |
| VCCI   | JAPAN   | T-2416,           | 2023-09-10 | VCCI registration   |
| VCCI   | JAPAN   | R-4483(10 m),     | 2023-08-15 | VCCI registration   |
| VCCI   | JAPAN   | G-847             | 2022-12-13 | VCCI registration   |
| IC     | CANADA  | 5799A-1           | 2022-10-18 | IC filing           |

## 2. Information about test item

## **2-1 Client & Manufacturer**

Client Company name : KevinLAB Inc.

Address : 55 Hanyangdaehakro Sangnokgu 531 Hanyang Business Incubator,  
Ansan si Gyeonggi do South Korea

Tel / Fax : +82- 31-400-3794 / +82 - 31-400-3795

Manufacturer KevinLAB Inc.

Address 55 Hanyangdaehakro Sangnokgu 531 Hanyang Business Incubator,  
Ansan si Gyeonggi do, South Korea

Tel / Fax +82- 31-400-3794 / +82 - 31-400-3795

## **2-2 Equipment Under Test (EUT)**

Model name : KVL-C3-K01

Variant Model name : KVL-R3-K01

Serial number : Identical prototype

Date of receipt : April 06, 2022

EUT condition : Pre-production, not damaged

Antenna type : Dipole Antenna (Ma

Frequency Range : 902.0 ~ 928.0 MHz

RF output power : Max 0.15 dBm – Conducted

Type of Modulation : FSK

Power Source : 12 Vdc

### 2-3 Tested frequency

| Bluetooth                                       | LOW   | MID   | HIGH  |
|---|-------|-------|-------|
| <b>Frequency (MHz) –</b><br><b>900 MHz RFID</b> | 902.0 | 915.0 | 928.0 |

## **2-4 Ancillary Equipment**

| Equipment | Model No. | Serial No. | Manufacturer |
|-----------|-----------|------------|--------------|
| Notebook  | -         | MS-1736    | MSI          |

### 3. Test Report

#### 3.1 Summary of tests

| FCC Part<br>Section(s) | Parameter                        | Limit   | Test<br>Condition | Status<br>(note 1) |
|------------------------|----------------------------------|---|-------------------|--------------------|
| 15.247(a)              | Carrier Frequency Separation     | $\geq 2/3$ of 20dB BW                           | Conducted         | C                  |
| 15.247(a)              | Number of Hopping Frequencies    | $\geq 15$ channels                              |                   | C                  |
| 15.247(a)              | 20 dB Bandwidth<br>99% Bandwidth | —   |                   | C                  |
| 15.247(a)              | Dwell Time                       | $\leq 0.4$ seconds                              |                   | C                  |
| 15.247(b)              | Transmitter Output Power         | $\leq 1W$ for 1Mbps<br>$\leq 125mW$ for 2,3Mbps |                   | C                  |
| 15.247(d)              | Conducted Spurious emission      | $> 20$ dBc                                      |                   | C                  |
| 15.247(d)              | Band Edge                        | $> 20$ dBc                                      |                   | C                  |
| 15.249 / 15.209        | Field Strength of Harmonics      | $< 54$ dBuV (at 3m)                             | Radiated          | C                  |
| 15.109                 | Field Strength                   | —   |                   | C                  |
| 15.207 /15.107         | AC Conducted Emissions           | EN 55022  | Line<br>Conducted | N/A                |
| 15.203                 | Antenna requirement              | —   | —                 | C                  |

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: This product does not apply because it operates on DC.

#### Note 1: Antenna Requirement

→ The KevinLAB Inc.. FCC ID: 2AVEQKVL-C3-K01 unit complies with the requirement of §15.203.

The antenna type is PCB Pattern antenna.

The sample was tested according to the following specification:

\*FCC Parts 15.247; ANSI C-63.4-2014;ANSI C-63.10-2013

\*FCC KDB Publication No. 558074 D01 v03r05

\*FCC TCB Workshop 2012, April

## 3.2 Frequency Hopping System Requirements

### 3.2.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### 3.3 TECHNICAL CHARACTERISTIC TEST

#### 3.3.1 Carrier Frequency Separation

##### Procedure:

The test follows ANSI C-63.10. The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

##### The spectrum analyzer is set to:

Span = 2~3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 100 kHz (1% of the span or more)      Sweep = auto

VBW = 100 kHz      Detector function = peak

Trace = max hold

##### Measurement Data:

| Test Results                       |          |
|------------------------------------|----------|
| Carrier Frequency Separation (MHz) | Result   |
| 1.013                              | Complies |

- See next pages for actual measured spectrum plots.

##### Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of 20 dB bandwidth of the hopping channel, whichever is greater.

##### Measurement Setup

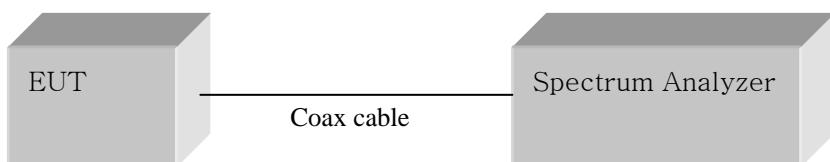
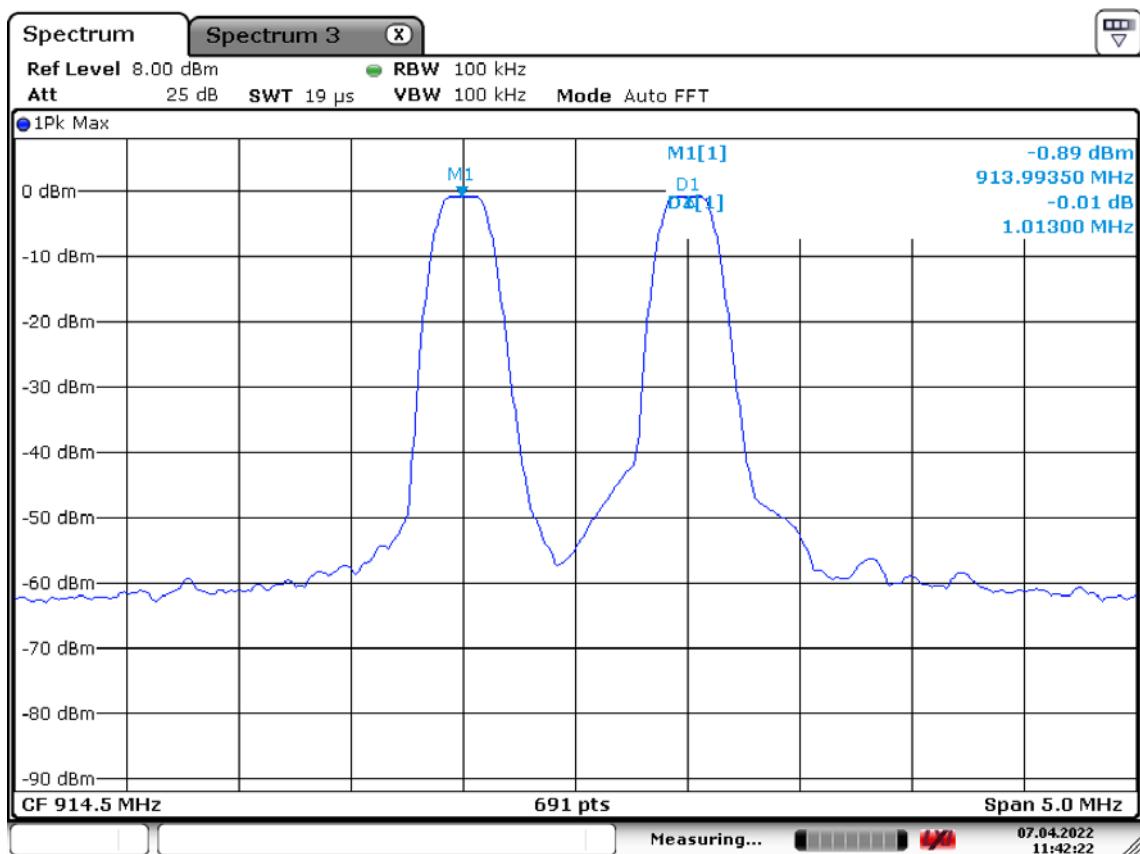


Figure 1: Measurement setup for the carrier frequency separation

### Carrier Frequency Separation



### 3.3.2 Number of Hopping Frequencies

#### Procedure:

For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies

The spectrum analyzer is set to (Bluetooth):

Frequency range      Start = 802 MHz,   Stop = 928 MHz

RBW = 100 kHz (1% of the span or more)      Sweep = auto

VBW = 100 kHz (VBW  $\geq$  RBW)      Detector function = peak

Trace = max hold      Span > 40 MHz

#### Measurement Data : **Complies**

|   |    |
|---|----|
| <b>Total number of Hopping Channels</b> | 27 |
|---|----|

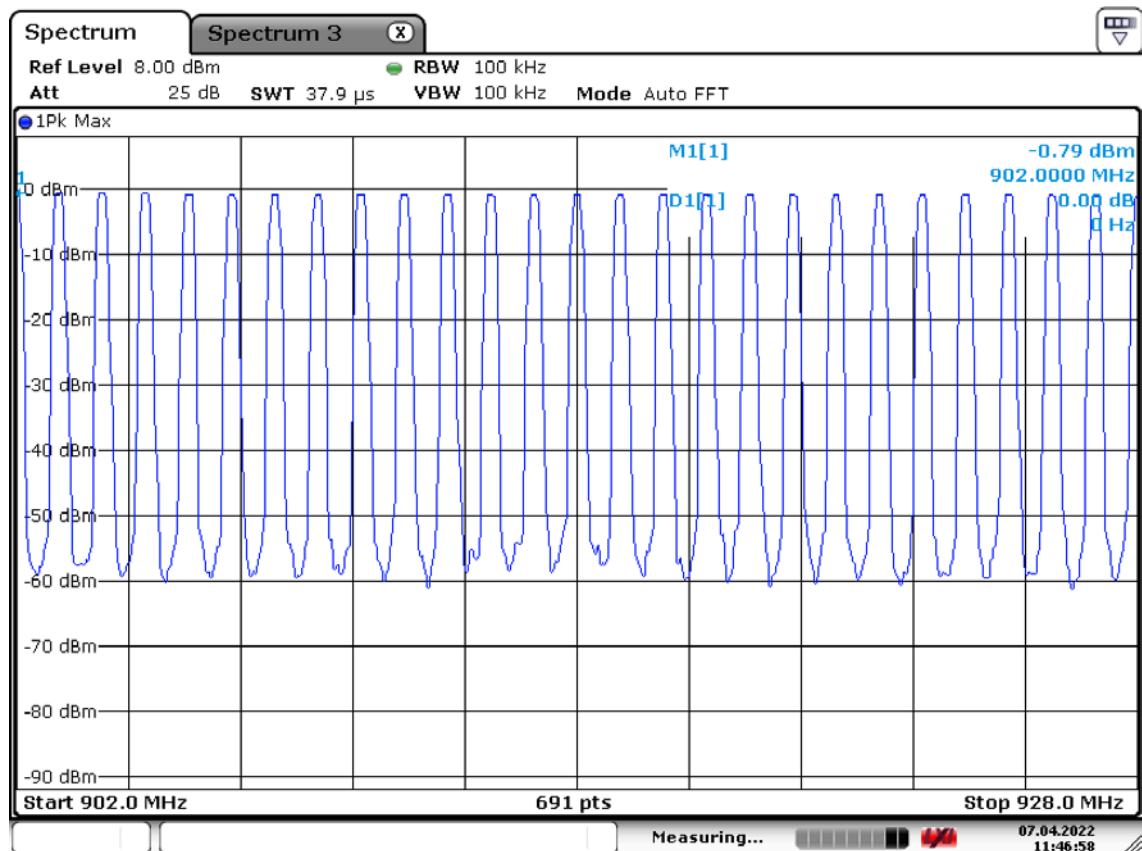
- See next pages for actual measured spectrum plots.

#### Minimum Standard:

Have at least 25 channels more than 250 kHz bandwidth

#### Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

Number of Hopping Frequencies (RFID)

Date: 7.APR.2022 11:46:58

### 3.3.3 20 dB Bandwidth

#### Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is ( as close as possible to ) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

#### The spectrum analyzer is set to RFID :

Center frequency = the highest, middle and the lowest channels

Span = 1 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 100 kHz

Sweep = auto

VBW = 300 kHz (VBW  $\geq$  RBW)

Detector function = peak

Trace = max hold

#### Measurement Data: 900 MHz RFID Mode

| Frequency<br>(MHz) | Channel No. | Test Results(MHz) |               |
|--------------------|-------------|-------------------|---------------|
|                    |             | 20dB Bandwidth    | 99% Bandwidth |
| 902.0              | 1           | 0.380             | 0.310         |
| 915.0              | 14          | 0.372             | 0.313         |
| 928.0              | 27          | 0.376             | 0.315         |

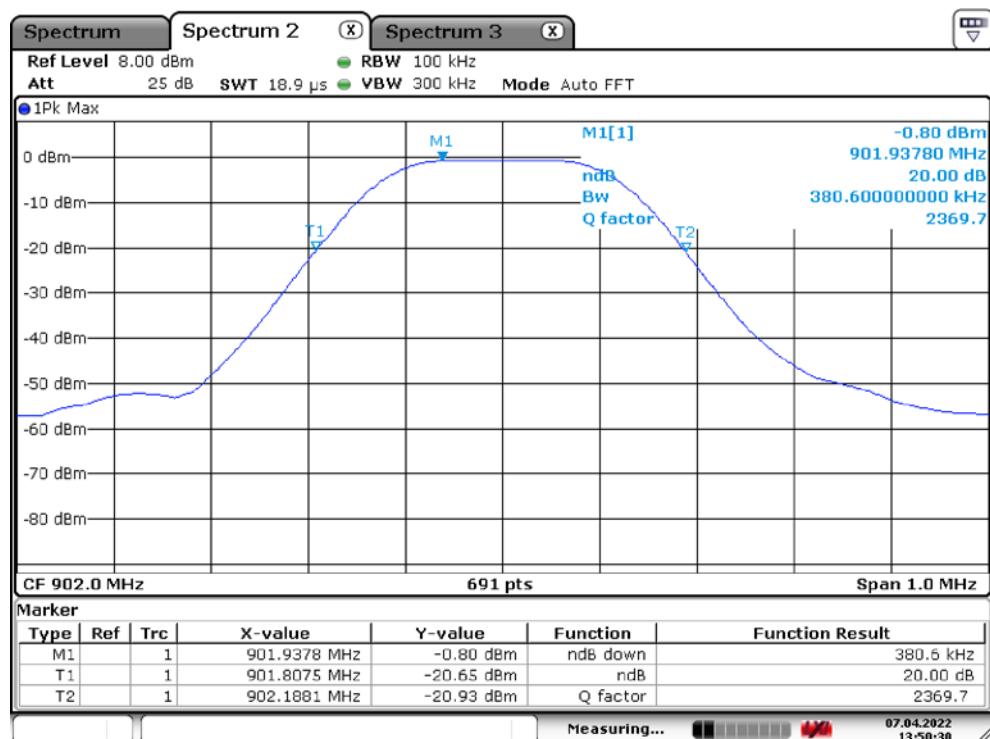
- See next pages for actual measured spectrum plots.

#### Minimum Standard:

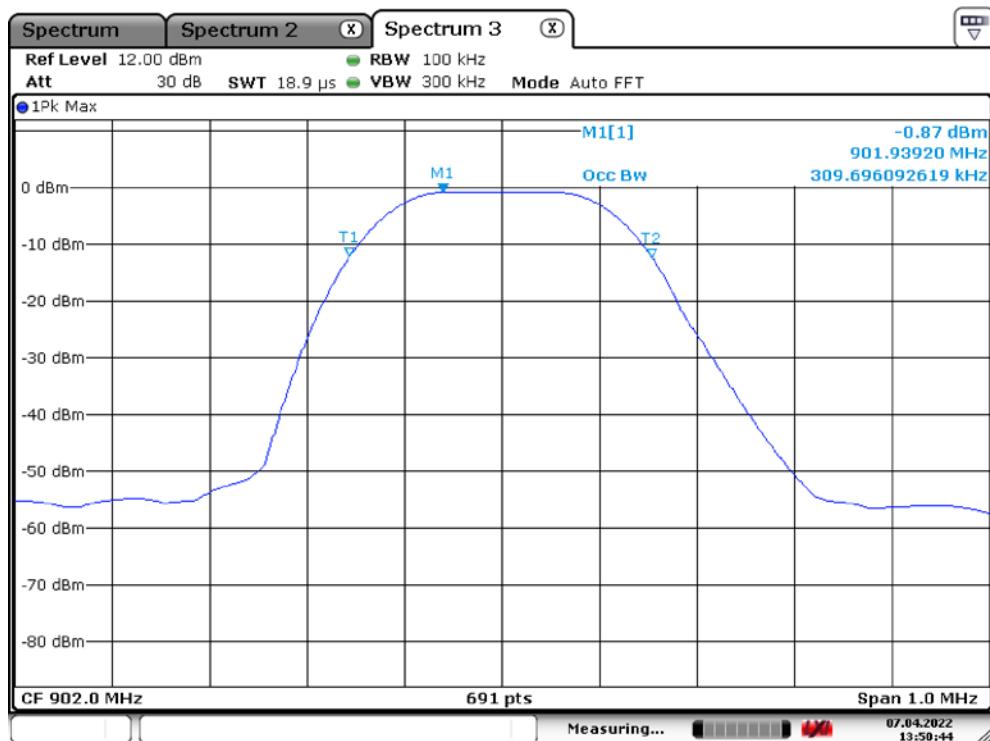
Less than 500 kHz

#### Measurement Setup

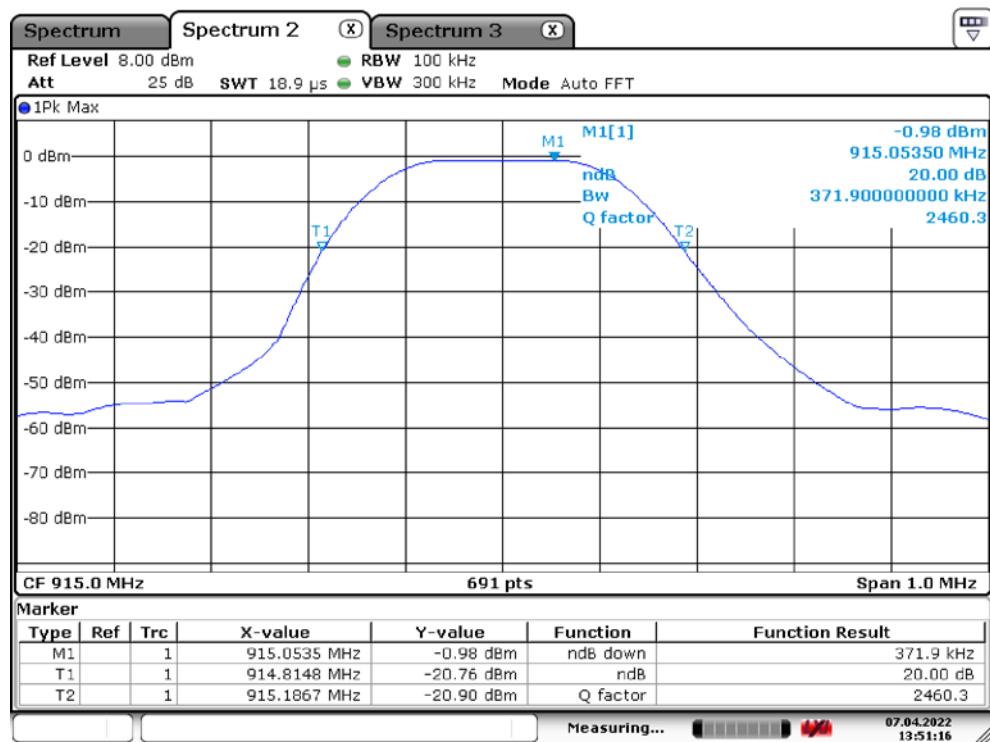
Same as the Chapter 3.3.1 (Figure 1)

Channel 1 of RFID mode20 dB Bandwidth

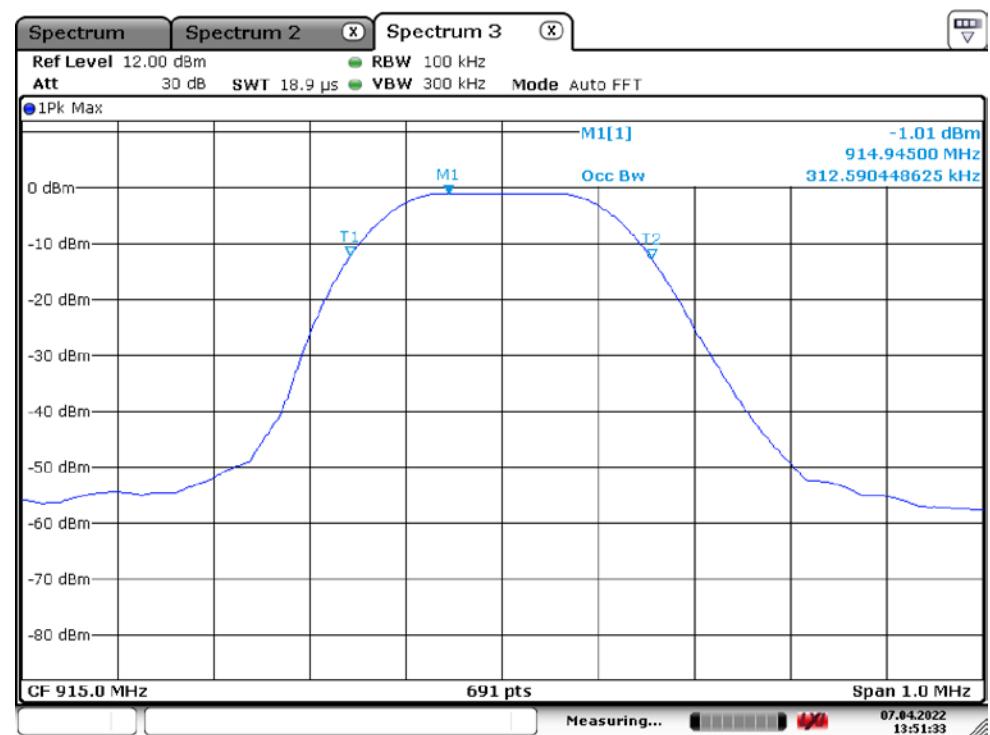
Date: 7.APR.2022 13:50:30

99% Bandwidth

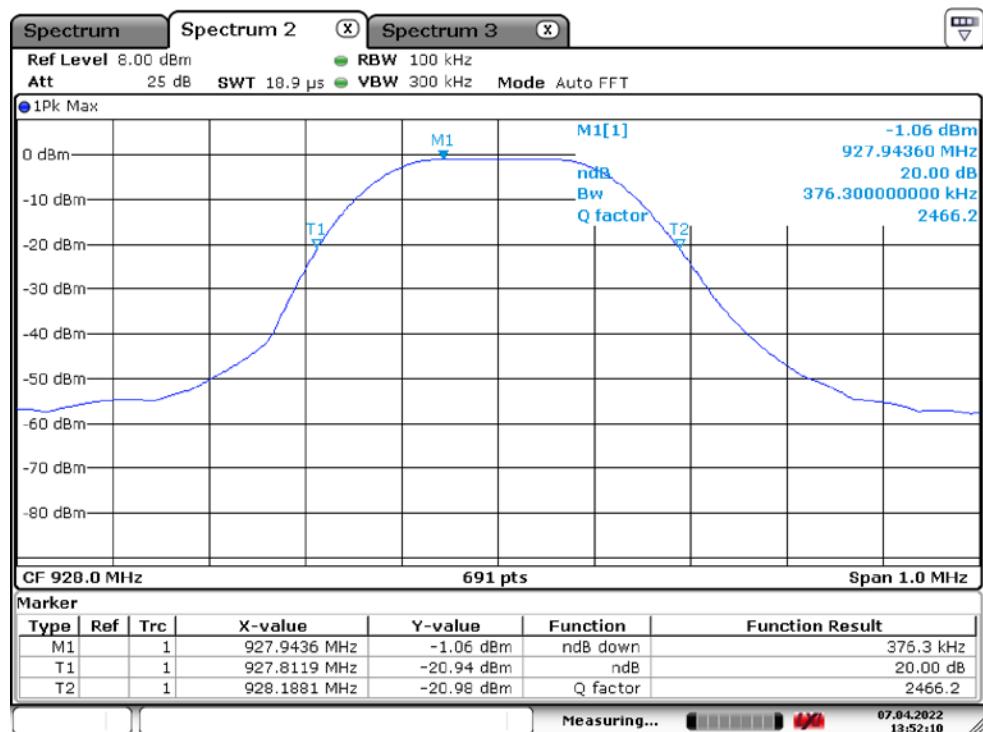
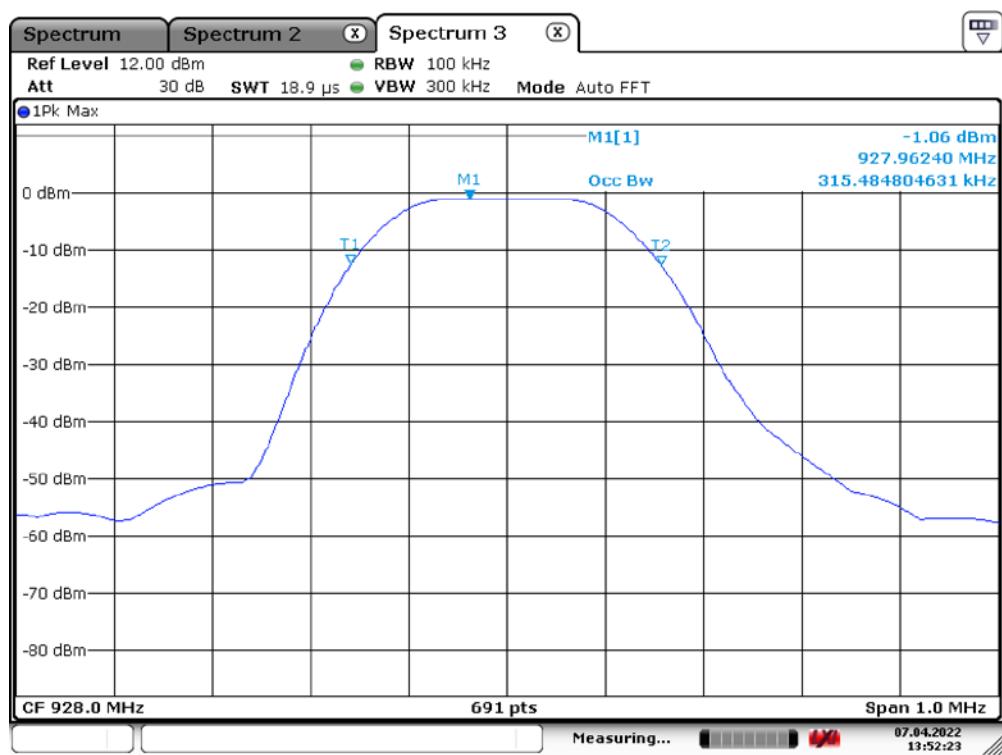
Date: 7.APR.2022 13:50:44

Channel 14 of RFID mode20 dB Bandwidth

Date: 7.APR.2022 13:51:16

99% Bandwidth

Date: 7.APR.2022 13:51:33

Channel 27 of RFID mode20 dB Bandwidth99% Bandwidth

### 3.3.4 Time of Occupancy (Dwell Time)

#### Procedure:

The test follows ANSI C-63.10. The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to :

Center frequency = 915 MHz

Span = zero

RBW = 100 kHz

VBW = 100 kHz (VBW  $\geq$  RBW)

Trace = max hold

Detector function = peak

#### Measurement Data:

| Mode | Length (ms) | Number | Dwell Time (ms) | Limit (msec) |
|------|-------------|--------|-----------------|--------------|
| USN  | 144.9       | 1      | 144.9           | 400          |

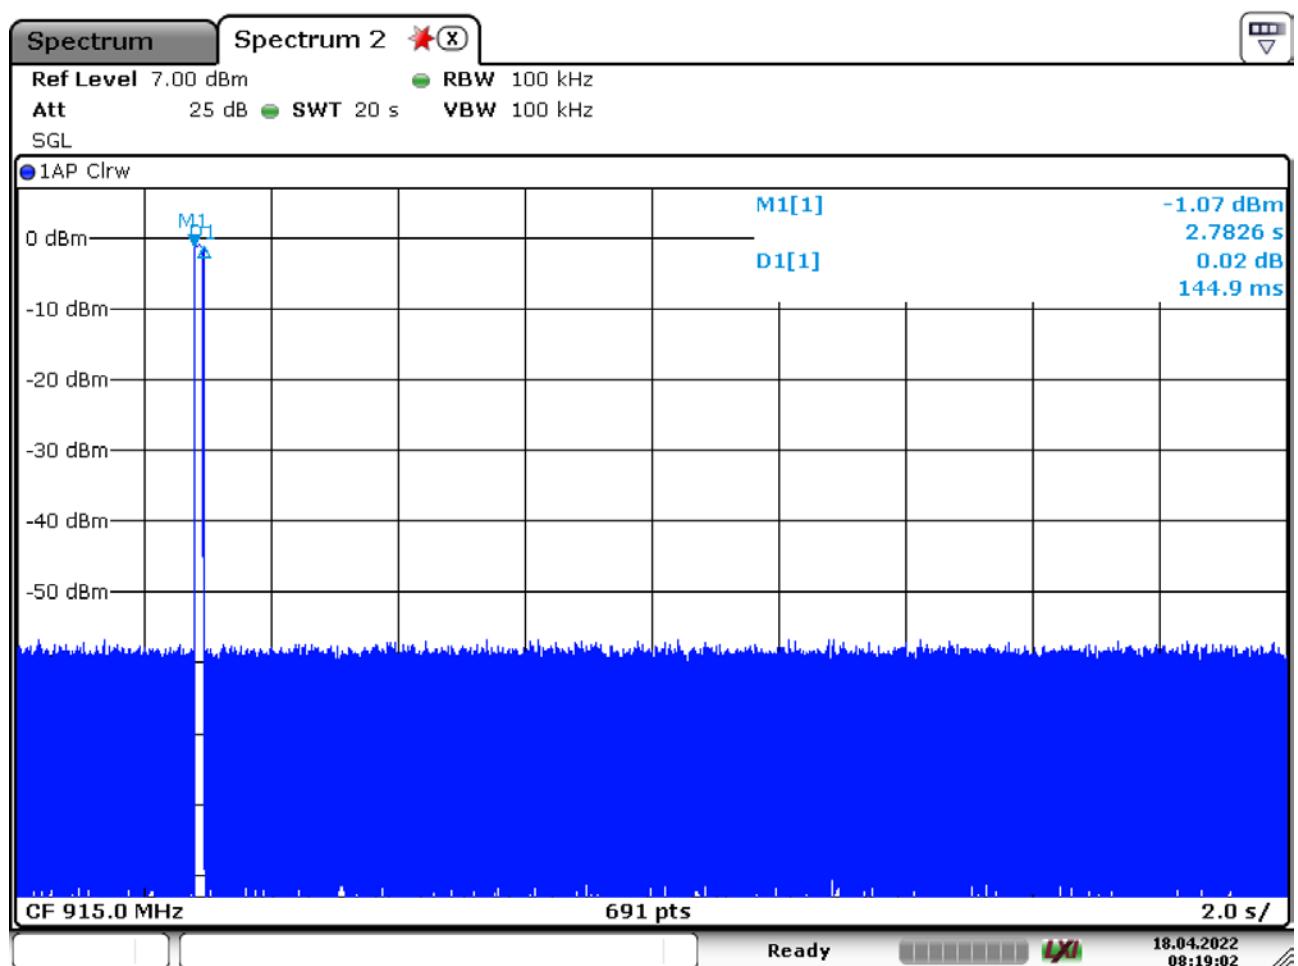
- See next pages for actual measured spectrum plots.

#### Minimum Standard:

the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period

#### Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)



### 3.3.5 Transmitter Output Power

### Procedure:

The test follows ANSI C-63.10. The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to :

Center frequency = the highest, middle and the lowest channels

Span = 10 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 3 MHz (greater than the 20 dB bandwidth of the emission being measured)

VBW = 3 MHz (VBW  $\geq$  RBW)

Detector function = peak

Trace = max hold

Sweep = auto

## Measurement Data : RFID Mode

| Frequency<br>(MHz) | Ch. | Test Results |             |          |
|--------------------|-----|--------------|-------------|----------|
|                    |     | dBm          | mW          | Result   |
| 902.0              | 1   | <b>0.15</b>  | <b>1.04</b> | Complies |
| 915.0              | 14  | <b>-0.02</b> | <b>1.00</b> | Complies |
| 928.0              | 27  | <b>-0.04</b> | <b>0.99</b> | Complies |

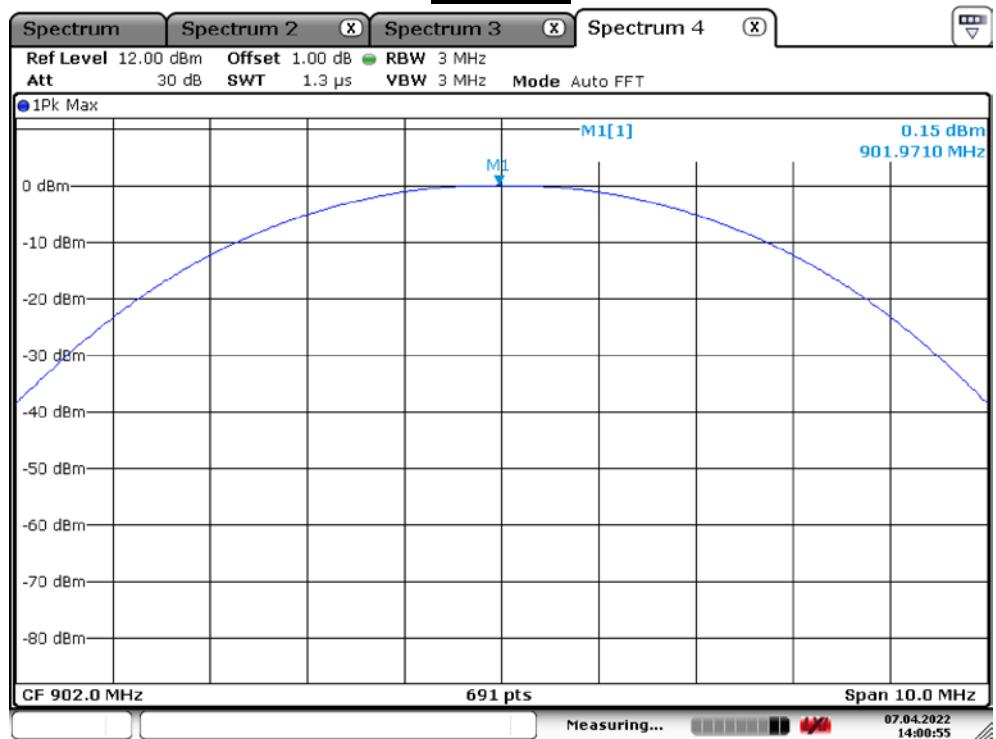
- See next pages for actual measured spectrum plots.

---

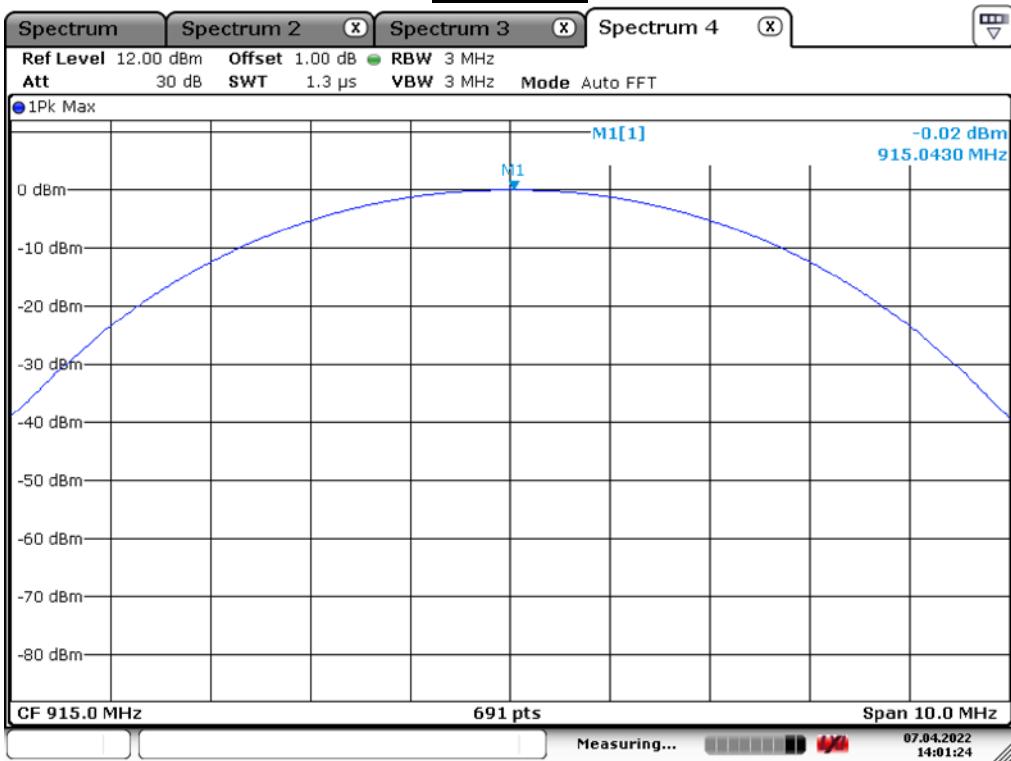
|                          |                      |
|--------------------------|----------------------|
| <b>Minimum Standard:</b> | At less than 0.25 W. |
|--------------------------|----------------------|

## Measurement Setup

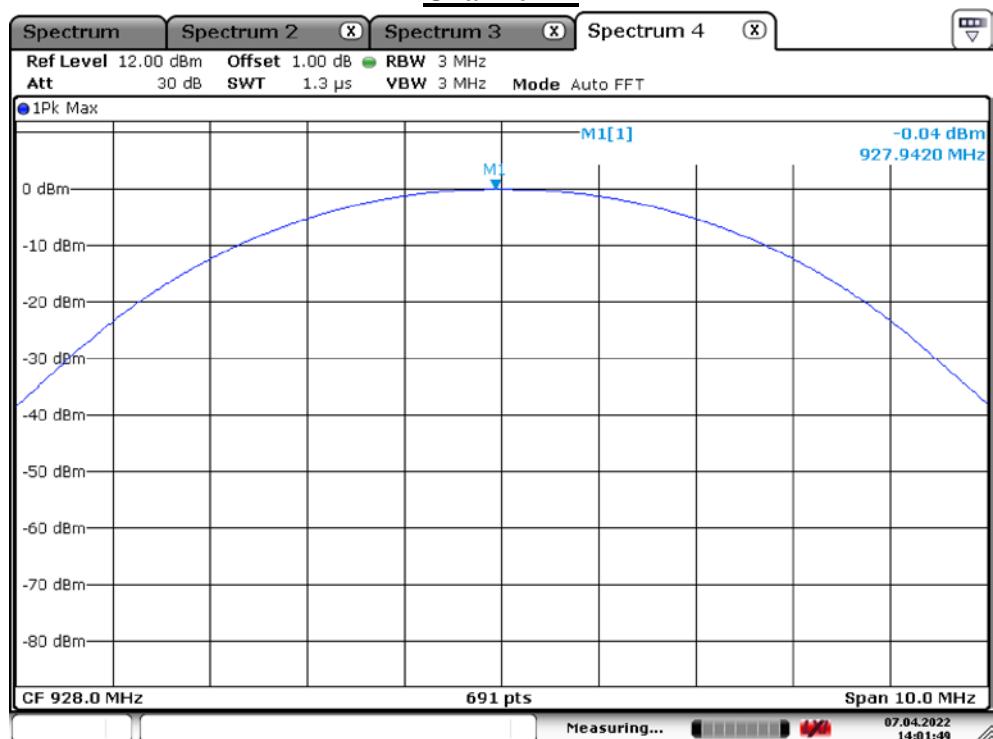
Same as the Chapter 3.3.1 (Figure 1)

Channel 1

Date: 7.APR.2022 14:00:55

Channel 14

Date: 7.APR.2022 14:01:24

Channel 27

Date: 7.APR.2022 14:01:49

### 3.3.6 Band Edge

### Procedure:

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz VBW = 300 kHz

Span = 10~30 MHz      Detector function = peak

Trace = max hold      Sweep = auto

### Measurement Data: Complies

| Frequency<br>(MHz) | Test Results |          |
|--------------------|--------------|----------|
|                    | dBc          | Result   |
| Low edge           | <b>56.92</b> | Complies |
| High edge          | <b>56.75</b> | Complies |

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

---

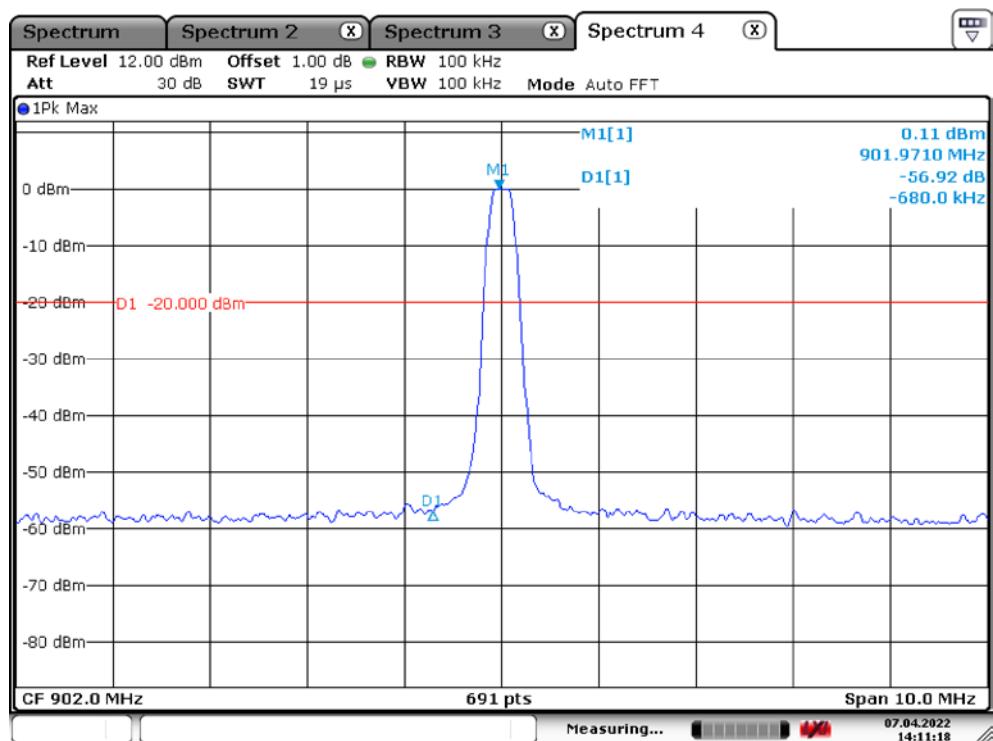
|                          |                       |
|--------------------------|-----------------------|
| <b>Minimum Standard:</b> | $\leq 20 \text{ dBc}$ |
|--------------------------|-----------------------|

---

## Measurement Setup

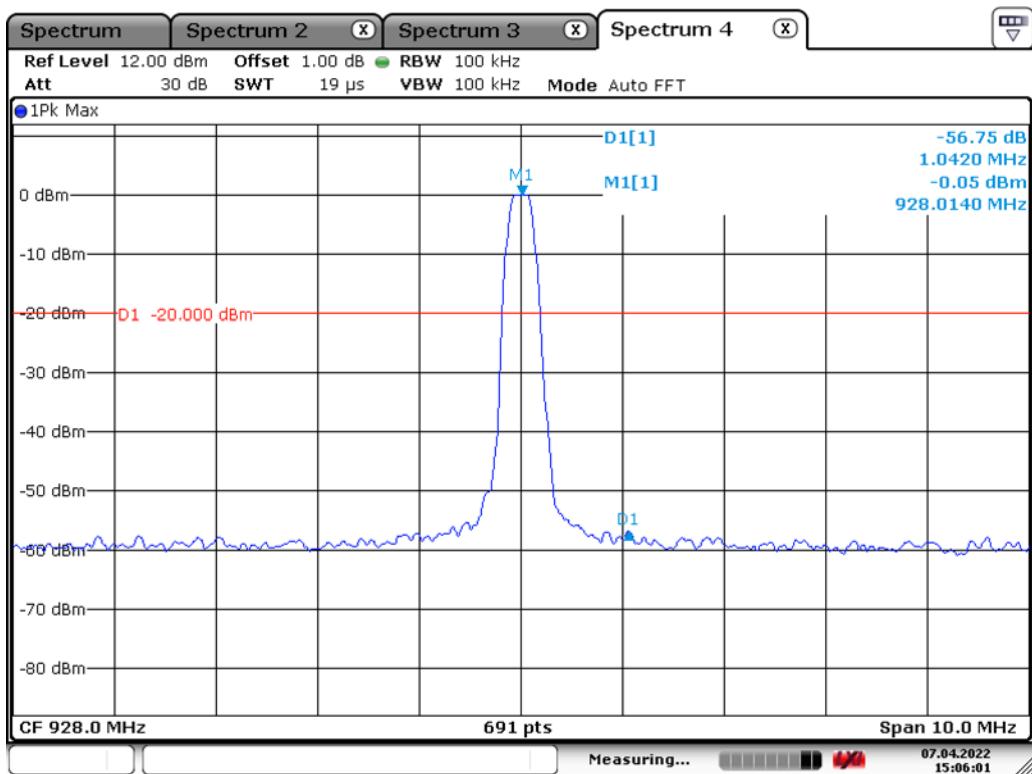
Same as the Chapter 3.3.1 (Figure 1)

Band Edge  
Lower edge



Date: 7.APR.2022 14:11:18

Upper edge



Date: 7.APR.2022 15:06:01

### 3.3.7 Conducted Spurious Emissions

### Procedure:

The test follows ANSI C-63.10. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz Sweep = auto

VBW = 100 kHz      Detector function = peak

Trace = max hold

**Measurement Data: Complies**

| Frequency<br>(MHz) | Test Results |          |
|--------------------|--------------|----------|
|                    | dBc          | Result   |
| Low Frequency      | 49.07        | Complies |
| Middle Frequency   | 52.04        | Complies |
| High Frequency     | 49.86        | Complies |

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

---

|                          |               |
|--------------------------|---------------|
| <b>Minimum Standard:</b> | $\leq$ 20 dBc |
|--------------------------|---------------|

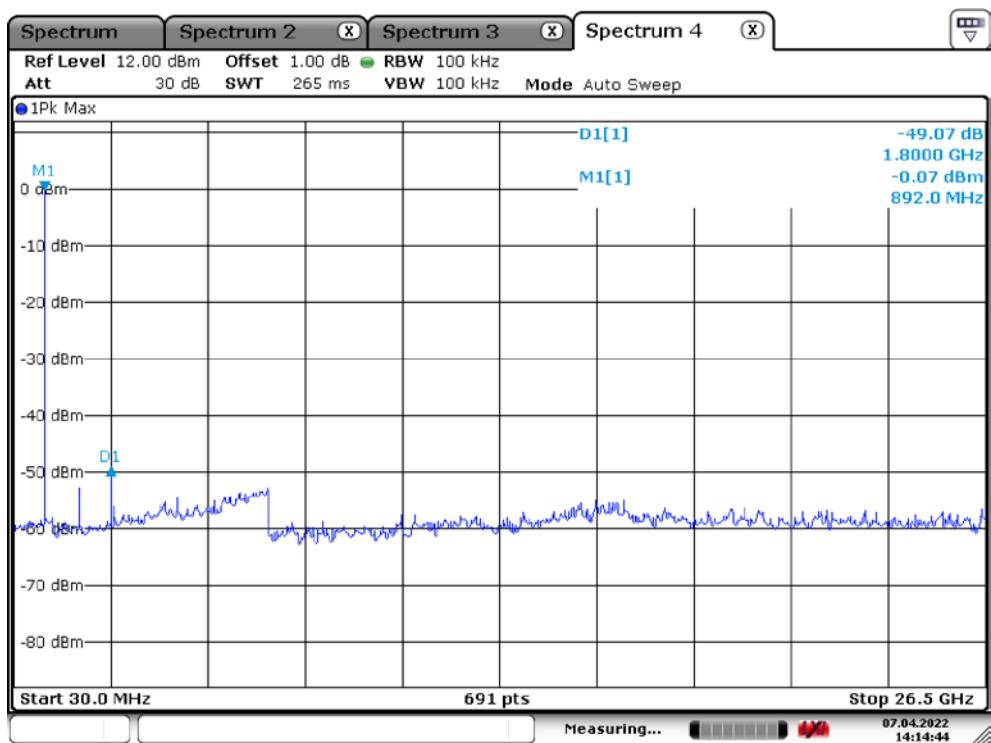
---

## Measurement Setup

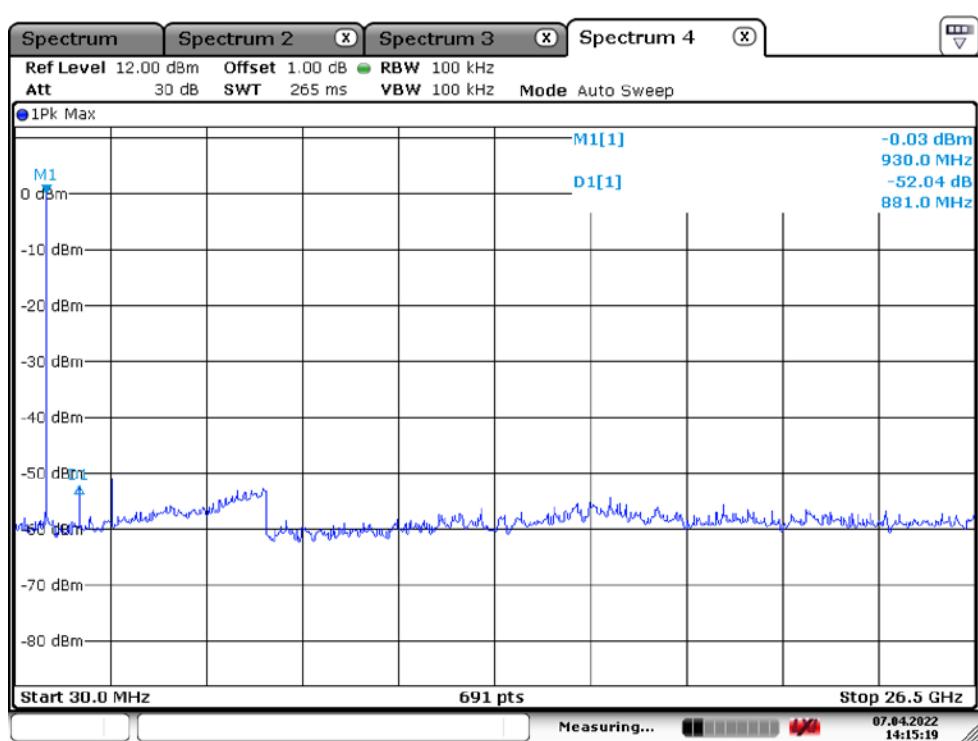
Same as the Chapter 3.3.1 (Figure 1)

Unwanted Emission – Low channel

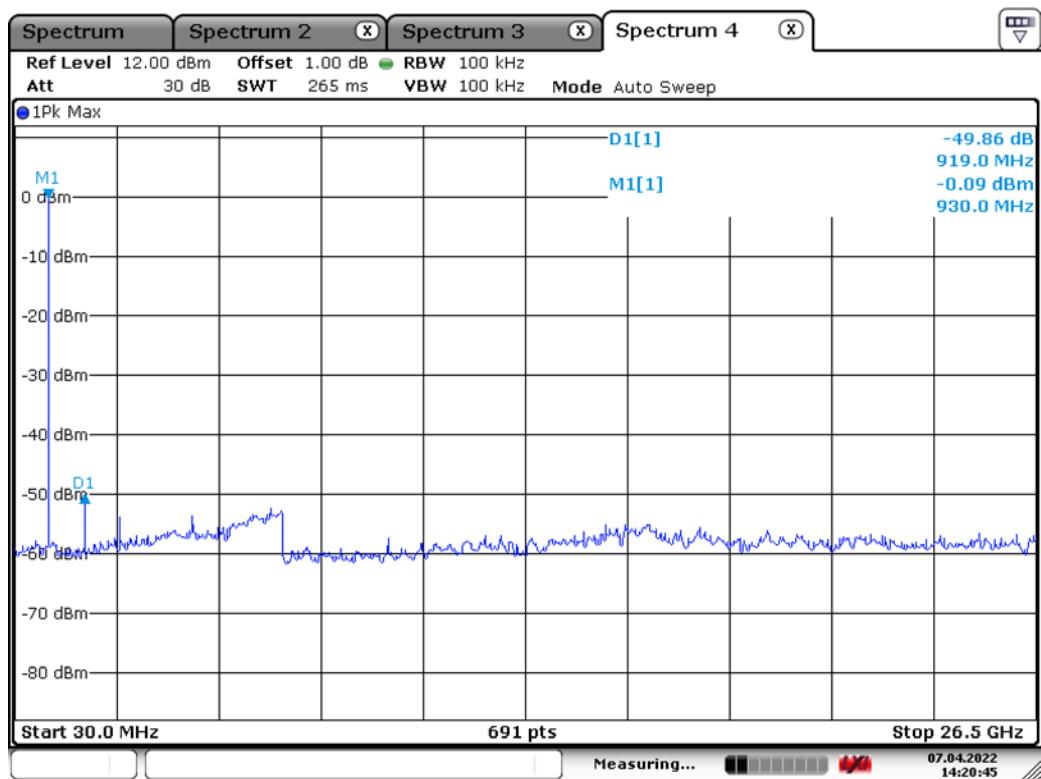
Frequency Range = 30 MHz ~ 26.5 GHz

Unwanted Emission – Middle channel

Frequency Range = 30 MHz ~ 26.5 GHz



**Unwanted Emission – High channel**  
**Frequency Range = 30 MHz ~ 26.5 GHz**



Date: 7.APR.2022 14:20:45

### 3.3.8 Radiated Spurious Emissions

#### Procedure:

Radiated emissions from the EUT were measured according to the dictates of ANSI C-63.10. The EUT was placed on a 0.8 m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

- (a) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 3 m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30 MHz, Bi-Log Test Antenna (30 MHz to 1 GHz) and Horn Test Antenna (above 1 GHz) are used. Test Antenna is 3 m away from the EUT. Test Antenna height is carried from 1 m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10<sup>th</sup> harmonic.

RBW = 120 kHz ( 30 MHz ~ 1 GHz)

VBW  $\geq$  RBW

= 1 MHz ( 1 GHz ~ 10<sup>th</sup> harmonic )

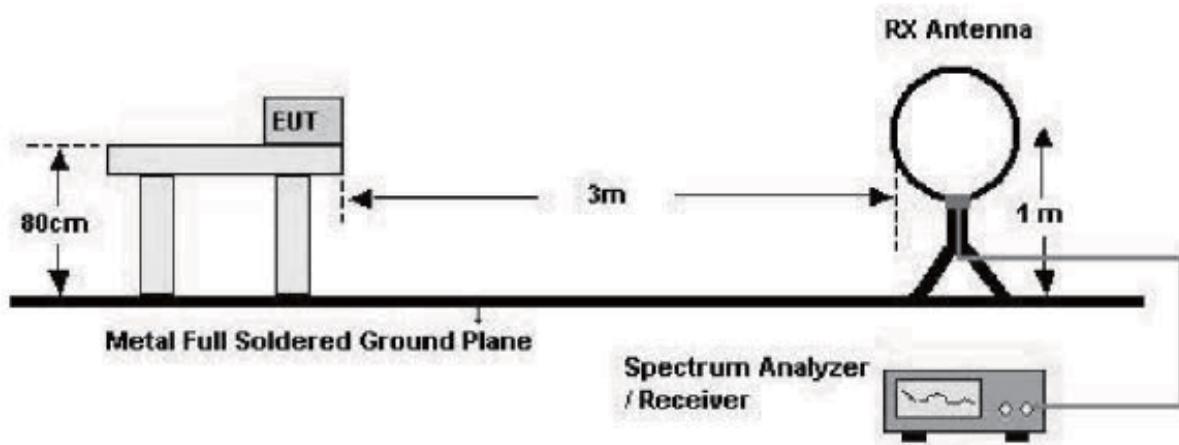
Span = 100 MHz

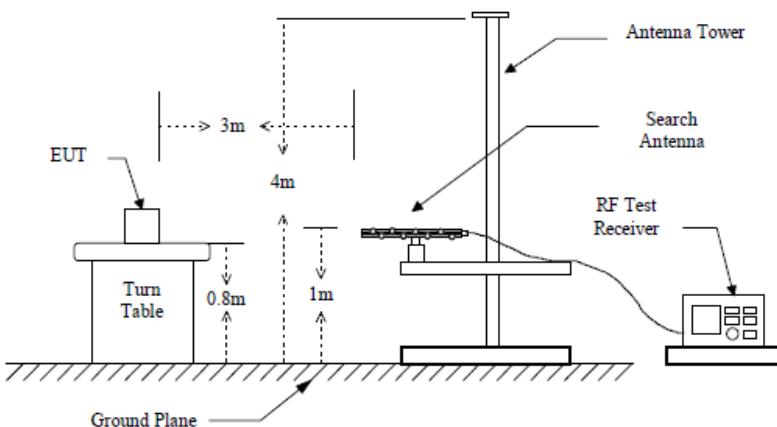
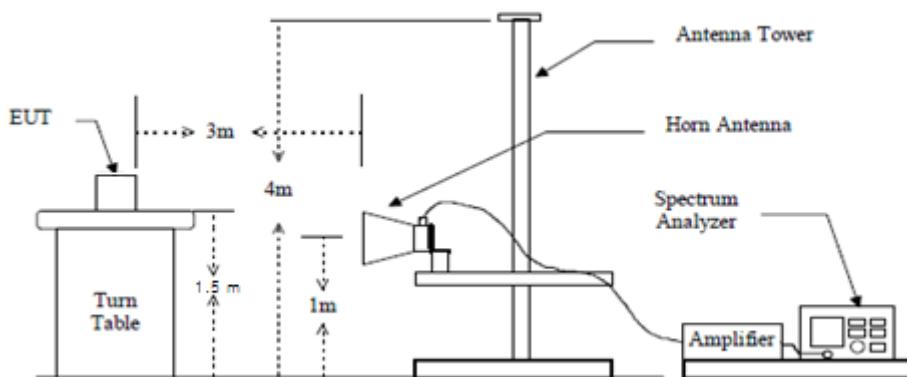
Detector function = peak

Trace = max hold

Sweep = auto

**below 30 MHz**



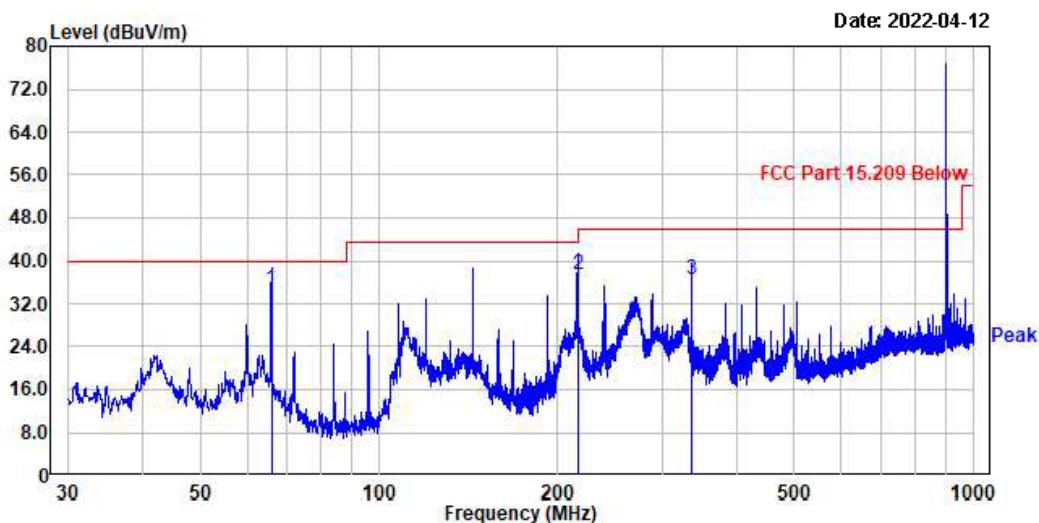
**below 1 GHz (30 MHz to 1 GHz)****above 1 GHz****Measurement Data: Complies**

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30 MHz.

**Minimum Standard: FCC Part 15.209(a)**

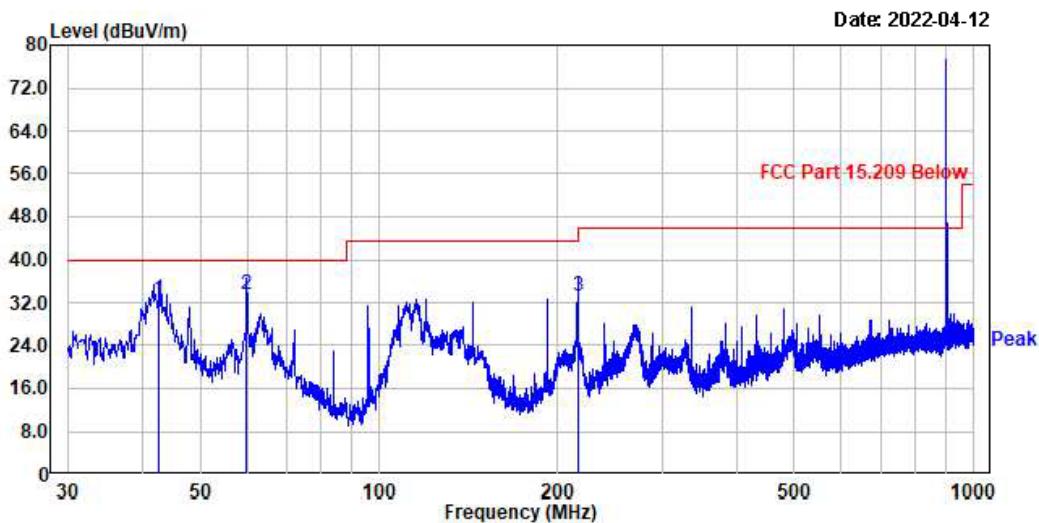
| Frequency (MHz) | Limit (uV/m) @ 3m    |
|-----------------|----------------------|
| 0.009 ~ 0.490   | 2400/F(kHz) (@ 300m) |
| 0.490 ~ 1.705   | 24000/F(kHz) (@ 30m) |
| 1.705 ~ 30      | 30(@ 30m)            |
| 30 ~ 88         | 100 **               |
| 88 ~ 216        | 150 **               |
| 216 ~ 960       | 200 **               |
| Above 960       | 500                  |

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Radiated EmissionsLow Frequency

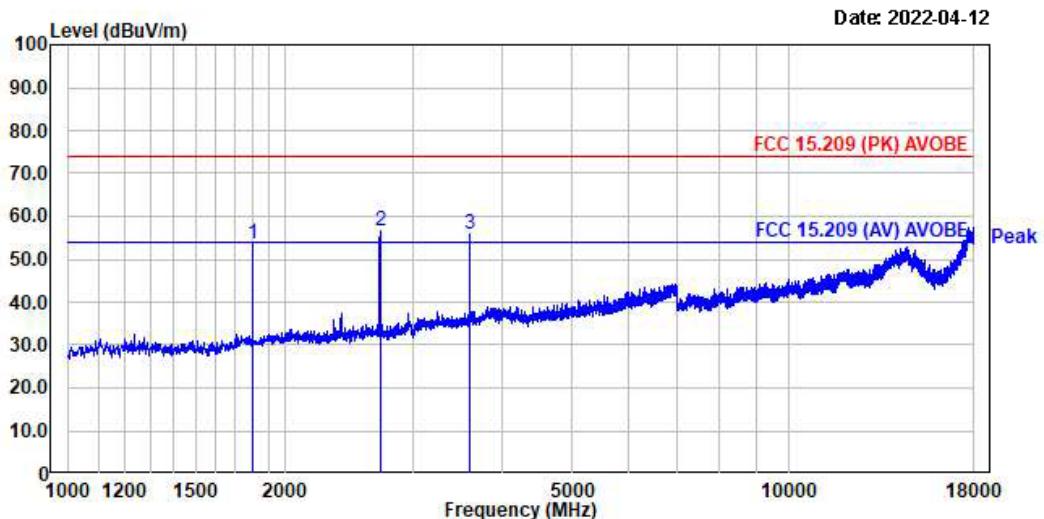
| No. | Freq<br>MHz | Reading<br>dB $\mu$ V | C.F<br>dB | Result<br>QP<br>dB $\mu$ V/m | Limit<br>dB $\mu$ V/m | Margin<br>dB | Height<br>cm | Angle<br>deg | Polarity   |
|-----|-------------|-----------------------|-----------|------------------------------|-----------------------|--------------|--------------|--------------|------------|
| 1.  | 65.89       | 50.22                 | -15.64    | 34.58                        | 40.00                 | 5.42         | 100          | 289          | horizontal |
| 2.  | 216.00      | 53.75                 | -16.24    | 37.51                        | 43.52                 | 6.01         | 100          | 0            | horizontal |
| 3.  | 335.91      | 47.11                 | -10.57    | 36.54                        | 46.02                 | 9.48         | 100          | 274          | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



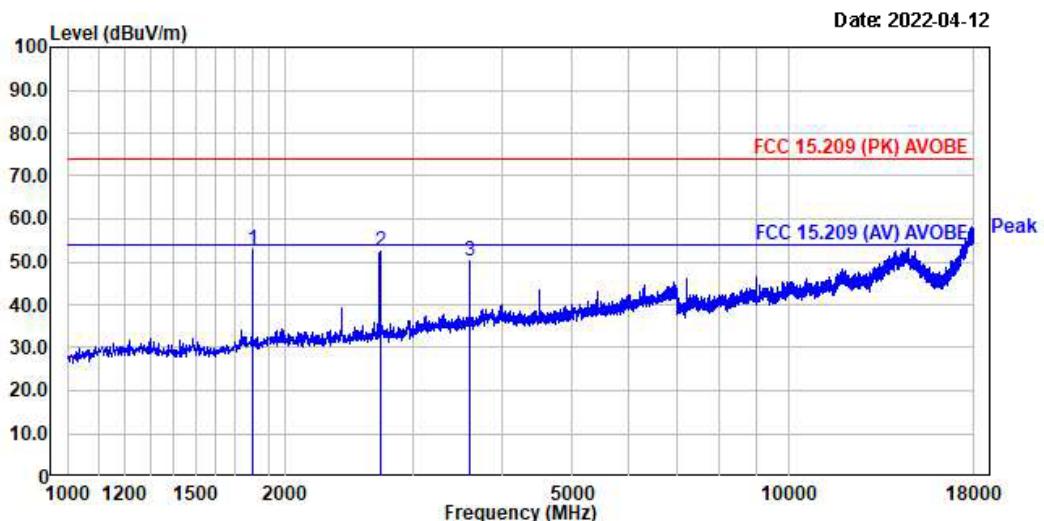
| No. | Freq<br>MHz | Reading<br>dB $\mu$ V | C.F<br>dB | Result<br>QP<br>dB $\mu$ V/m | Limit<br>dB $\mu$ V/m | Margin<br>dB | Height<br>cm | Angle<br>deg | Polarity |
|-----|-------------|-----------------------|-----------|------------------------------|-----------------------|--------------|--------------|--------------|----------|
| 1.  | 42.61       | 47.66                 | -14.98    | 32.68                        | 40.00                 | 7.32         | 100          | 123          | vertical |
| 2.  | 59.95       | 48.40                 | -14.80    | 33.60                        | 40.00                 | 6.40         | 100          | 209          | vertical |
| 3.  | 216.00      | 49.31                 | -16.24    | 33.07                        | 43.52                 | 10.45        | 100          | 86           | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



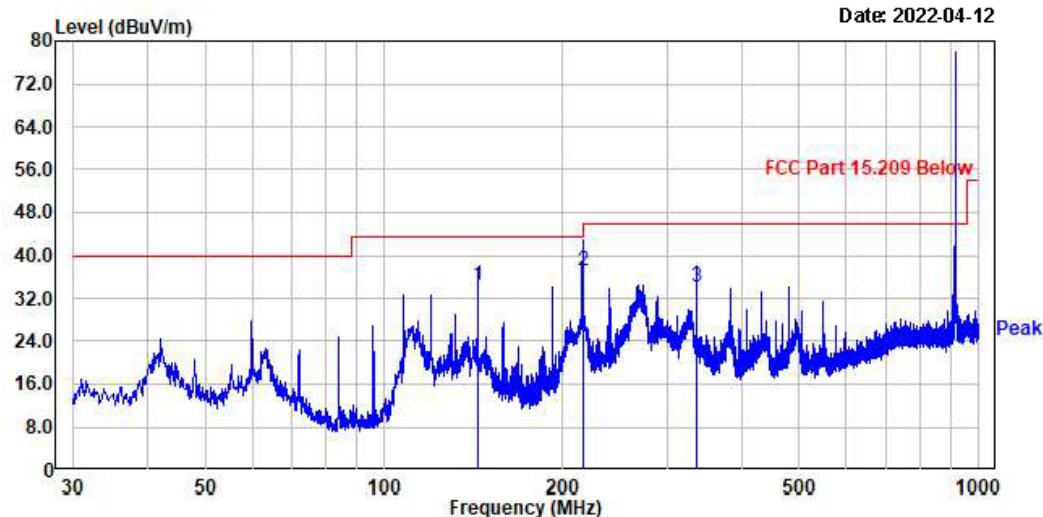
| No. | Freq    | RD    | RD    | C.F   | Result | Result | Limit | Limit | Margin | Margin | Height | Angle | Polarity   |
|-----|---------|-------|-------|-------|--------|--------|-------|-------|--------|--------|--------|-------|------------|
|     |         | PK    | AV    | PK    | AV     | PK     | AV    | PK    | AV     | PK     | AV     | cm    | deg        |
| 1.  | 1803.25 | 60.22 | ----- | -6.69 | 53.53  | -----  | 74.00 | ----- | 20.47  | -----  | 100    | 316   | horizontal |
| 2.  | 2706.38 | 58.99 | ----- | -2.56 | 56.43  | -----  | 74.00 | ----- | 17.57  | -----  | 100    | 95    | horizontal |
| 3.  | 3607.38 | 54.36 | ----- | 1.37  | 55.73  | -----  | 74.00 | ----- | 18.27  | -----  | 100    | 285   | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



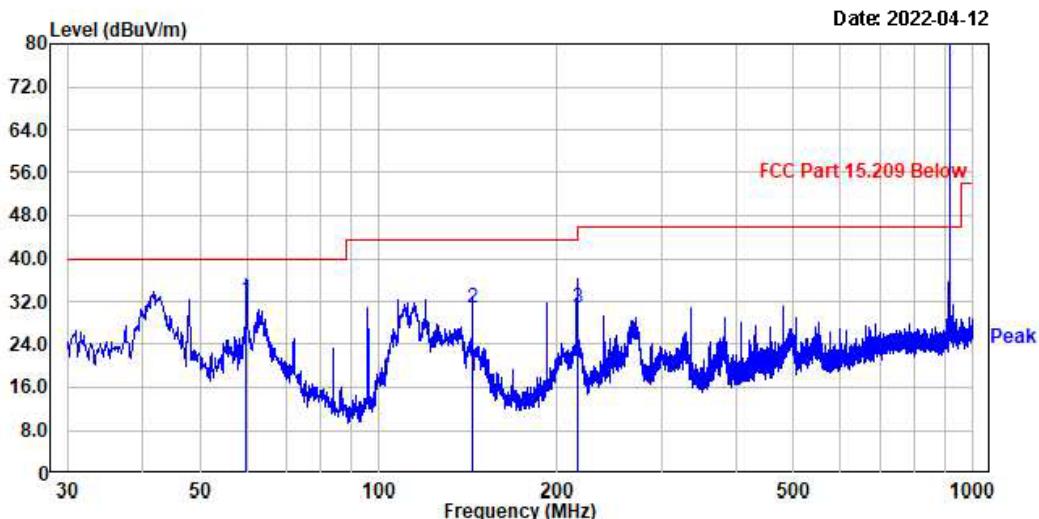
| No. | Freq    | RD    | RD    | C.F   | Result | Result | Limit | Limit | Margin | Margin | Height | Angle | Polarity |
|-----|---------|-------|-------|-------|--------|--------|-------|-------|--------|--------|--------|-------|----------|
|     |         | PK    | AV    | PK    | AV     | PK     | AV    | PK    | AV     | PK     | AV     | cm    | deg      |
| 1.  | 1803.25 | 59.65 | ----- | -6.69 | 52.96  | -----  | 74.00 | ----- | 21.84  | -----  | 100    | 159   | vertical |
| 2.  | 2706.38 | 55.13 | ----- | -2.56 | 52.57  | -----  | 74.00 | ----- | 21.43  | -----  | 100    | 78    | vertical |
| 3.  | 3607.38 | 48.98 | ----- | 1.37  | 50.35  | -----  | 74.00 | ----- | 23.65  | -----  | 100    | 208   | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Middle Frequency

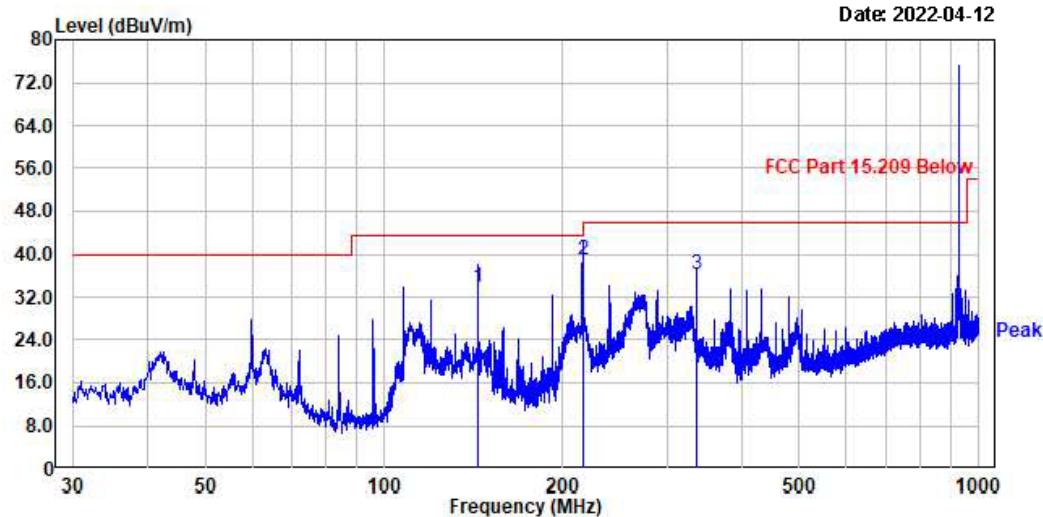
| No. | Freq   | Reading    | C.F    | Result       | Limit        | Margin | Height | Angle | Polarity   |
|-----|--------|------------|--------|--------------|--------------|--------|--------|-------|------------|
|     | MHz    | dB $\mu$ V | dB     | dB $\mu$ V/m | dB $\mu$ V/m | dB     | cm     | deg   |            |
| 1.  | 143.98 | 48.37      | -13.89 | 34.48        | 43.52        | 9.04   | 400    | 33    | horizontal |
| 2.  | 216.00 | 53.28      | -16.24 | 37.04        | 43.52        | 6.48   | 181    | 360   | horizontal |
| 3.  | 335.91 | 44.79      | -10.57 | 34.22        | 46.02        | 11.80  | 100    | 288   | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



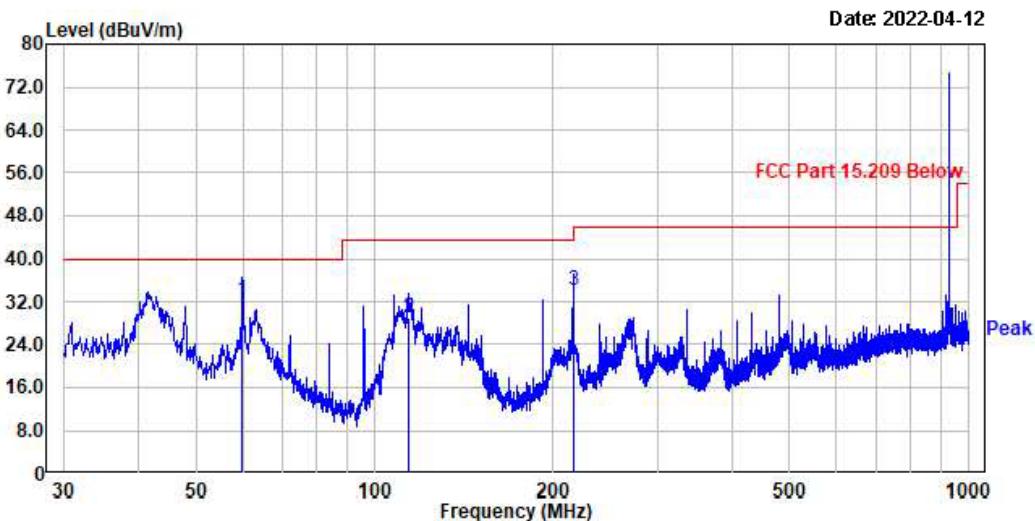
| No. | Freq   | Reading    | C.F    | Result       | Limit        | Margin | Height | Angle | Polarity |
|-----|--------|------------|--------|--------------|--------------|--------|--------|-------|----------|
|     | MHz    | dB $\mu$ V | dB     | dB $\mu$ V/m | dB $\mu$ V/m | dB     | cm     | deg   |          |
| 1.  | 59.95  | 47.03      | -14.80 | 32.23        | 40.00        | 7.77   | 100    | 276   | vertical |
| 2.  | 143.98 | 44.67      | -13.89 | 30.78        | 43.52        | 12.74  | 100    | 292   | vertical |
| 3.  | 216.00 | 47.10      | -16.24 | 30.86        | 43.52        | 12.66  | 100    | 119   | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

High Frequency

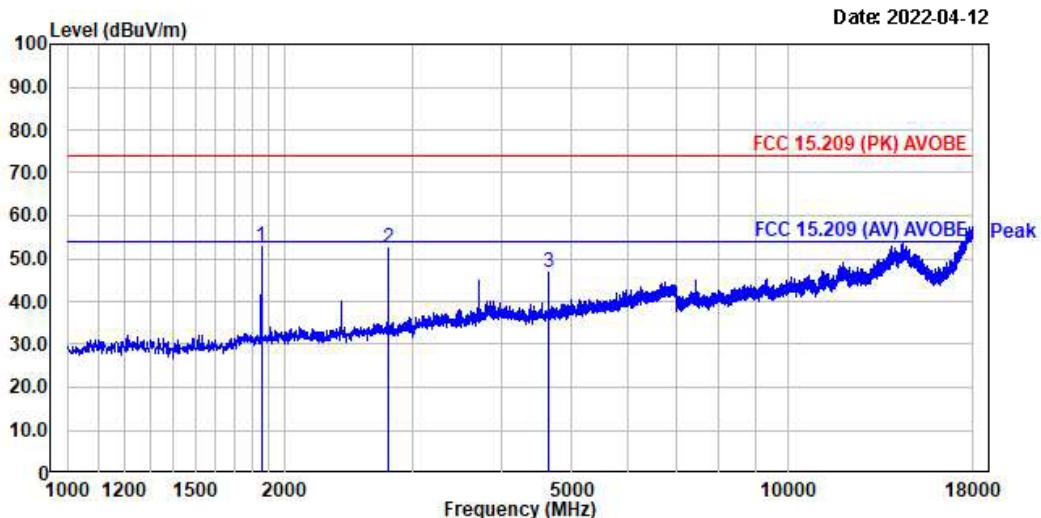
| No. | Freq   | Reading    | C.F    | Result       | Limit        | Margin | Height | Angle | Polarity   |
|-----|--------|------------|--------|--------------|--------------|--------|--------|-------|------------|
|     | MHz    | dB $\mu$ V | dB     | dB $\mu$ V/m | dB $\mu$ V/m | dB     | cm     | deg   |            |
| 1.  | 143.98 | 47.82      | -13.89 | 33.93        | 43.52        | 9.59   | 400    | 20    | horizontal |
| 2.  | 216.00 | 55.30      | -16.24 | 39.06        | 43.52        | 4.46   | 100    | 360   | horizontal |
| 3.  | 335.91 | 46.80      | -10.57 | 36.23        | 46.02        | 9.79   | 100    | 255   | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



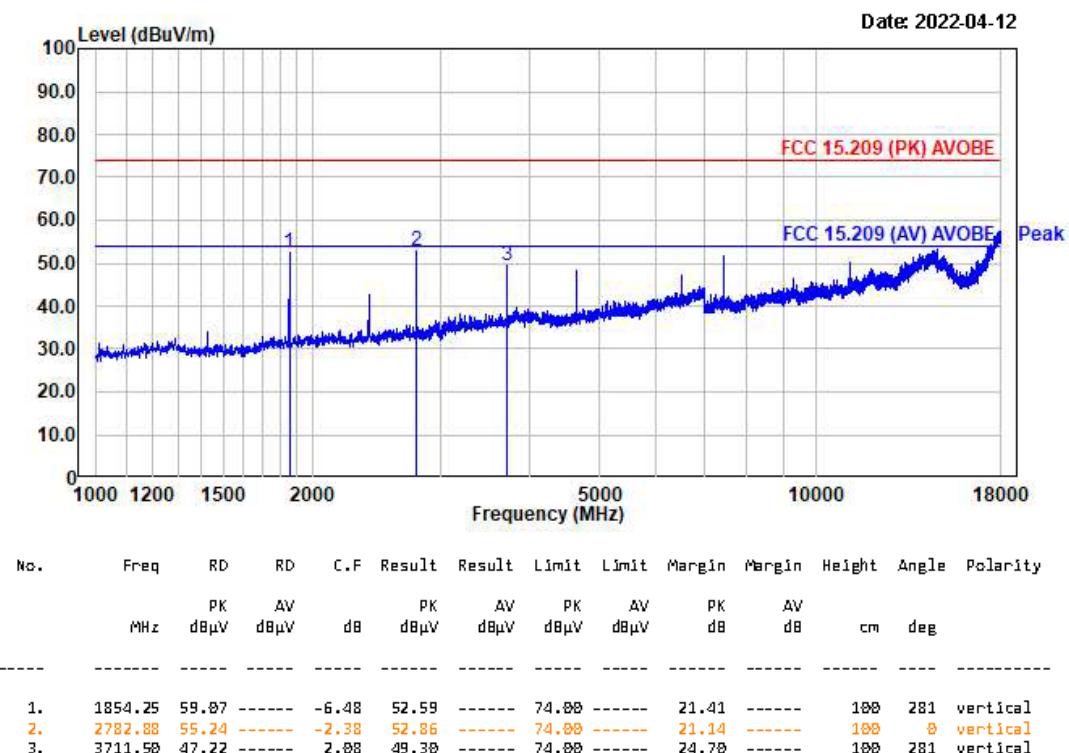
| No. | Freq   | Reading    | C.F    | Result       | Limit        | Margin | Height | Angle | Polarity |
|-----|--------|------------|--------|--------------|--------------|--------|--------|-------|----------|
|     | MHz    | dB $\mu$ V | dB     | dB $\mu$ V/m | dB $\mu$ V/m | dB     | cm     | deg   |          |
| 1.  | 59.95  | 47.22      | -14.80 | 32.42        | 40.00        | 7.58   | 100    | 210   | vertical |
| 2.  | 113.91 | 46.24      | -17.28 | 28.96        | 43.52        | 14.56  | 100    | 105   | vertical |
| 3.  | 216.00 | 50.23      | -16.24 | 33.99        | 43.52        | 9.53   | 100    | 123   | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



| No. | Freq    | RD    | RD    | C.F.  | Result | Result | Limit | Limit | Margin | Margin | Height | Angle | Polarity   |
|-----|---------|-------|-------|-------|--------|--------|-------|-------|--------|--------|--------|-------|------------|
|     |         | PK    | AV    | PK    | AV     | PK     | AV    | PK    | AV     | PK     | AV     | cm    | deg        |
| 1.  | 1854.25 | 59.28 | ----- | -6.48 | 52.80  | -----  | 74.00 | ----- | 21.20  | -----  | 100    | 298   | horizontal |
| 2.  | 2782.88 | 54.73 | ----- | -2.38 | 52.35  | -----  | 74.00 | ----- | 21.65  | -----  | 100    | 31    | horizontal |
| 3.  | 4640.13 | 43.53 | ----- | 3.22  | 46.75  | -----  | 74.00 | ----- | 27.25  | -----  | 100    | 0     | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



| No. | Freq    | RD    | RD    | C.F.  | Result | Result | Limit | Limit | Margin | Margin | Height | Angle | Polarity |
|-----|---------|-------|-------|-------|--------|--------|-------|-------|--------|--------|--------|-------|----------|
|     |         | PK    | AV    | PK    | AV     | PK     | AV    | PK    | AV     | PK     | AV     | cm    | deg      |
| 1.  | 1854.25 | 59.07 | ----- | -6.48 | 52.59  | -----  | 74.00 | ----- | 21.41  | -----  | 100    | 281   | vertical |
| 2.  | 2782.88 | 55.24 | ----- | -2.38 | 52.86  | -----  | 74.00 | ----- | 21.14  | -----  | 100    | 0     | vertical |
| 3.  | 3711.50 | 47.22 | ----- | 2.08  | 49.30  | -----  | 74.00 | ----- | 24.70  | -----  | 100    | 281   | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

### 3.3.9 AC Conducted Emissions

#### Procedure:

AC power line conducted emissions from the EUT were measured according to the dictates of ANSI C63.4:2003.

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

#### Measurement Data: N/A

#### Minimum Standard: FCC Part 15.207(a)/EN 55022

| Frequency Range | Quasi-Peak | Average    |
|-----------------|------------|------------|
| 0.15 ~ 0.5      | 66 to 56 * | 56 to 46 * |
| 0.5 ~ 5         | 56         | 46         |
| 5 ~ 30          | 60         | 50         |

\* Note: This product operates only with battery and does not operate during charging.

## APPENDIX

## TEST EQUIPMENT USED FOR TESTS

|    | Use | Description                             | Model No.        | Serial No.  | Manufacturer           | Interval | Next Cal. Date |
|----|-----|---|------------------|-------------|------------------------|----------|----------------|
| 1  | ■   | Signal Analyzer (9 kHz ~ 30 GHz)        | FSV30            | 100757      | R&S                    | 1 year   | 2022-09-06     |
| 2  | ■   | Signal Generator (~3.2 GHz)             | 8648C            | 3623A02597  | HP                     | 1 year   | 2023-03-17     |
| 3  |     | SYNTHESIZED CW GENERATOR                | 83711B           | US34490456  | HP                     | 1 year   | 2023-03-17     |
| 4  |     | Attenuator (3 dB)                       | 8491A            | 37822       | HP                     | 1 year   | 2022-09-06     |
| 5  |     | Attenuator (10 dB)                      | 8491A            | 63196       | HP                     | 1 year   | 2022-09-06     |
| 6  | ■   | EMI Test Receiver (~7 GHz)              | ESCI7            | 100722      | R&S                    | 1 year   | 2022-09-06     |
| 7  |     | RF Amplifier (~1.3 GHz)                 | 8447D OPT 010    | 2944A07684  | HP                     | 1 year   | 2022-09-06     |
| 8  |     | RF Amplifier (1~26.5 GHz)               | 8449B            | 3008A02126  | HP                     | 1 year   | 2023-03-17     |
| 9  | ■   | Horn Antenna (1~18 GHz)                 | 3115             | 00114105    | ETS                    | 2 year   | 2022-08-04     |
| 10 |     | DRG Horn (Small)                        | 3116B            | 81109       | ETS-Lindgren           | 2 year   | 2024-03-18     |
| 11 |     | DRG Horn (Small)                        | 3116B            | 133350      | ETS-Lindgren           | 2 year   | 2024-03-18     |
| 12 | ■   | TRILOG Antenna                          | VULB 9160        | 9160-3237   | SCHWARZBECK            | 2 year   | 2024-03-20     |
| 13 |     | Temp.Humidity Data Logger               | SK-L200TH II A   | 00801       | SATO                   | 1 year   | 2023-03-17     |
| 14 |     | Splitter (SMA)                          | ZFSC-2-2500      | SF617800326 | Mini-Circuits          | -        | -              |
| 15 | ■   | DC Power Supply                         | 6674A            | 3637A01657  | Agilent                | -        | -              |
| 17 | ■   | Power Meter                             | EPM-441A         | GB32481702  | HP                     | 1 year   | 2023-03-17     |
| 18 | ■   | Power Sensor                            | 8481A            | 3318A94972  | HP                     | 1 year   | 2022-09-06     |
| 19 |     | Audio Analyzer                          | 8903B            | 3729A18901  | HP                     | 1 year   | 2022-09-06     |
| 20 |     | Moduleation Analyzer                    | 8901B            | 3749A05878  | HP                     | 1 year   | 2022-09-06     |
| 21 |     | TEMP & HUMIDITY Chamber                 | YJ-500           | LTAS06041   | JinYoung Tech          | 1 year   | 2022-09-06     |
| 22 |     | Stop Watch                              | HS-3             | 812Q08R     | CASIO                  | 2 year   | 2020-03-18     |
| 23 |     | LISN                                    | KNW-407          | 8-1430-1    | Kyoritsu               | 1 year   | 2022-09-06     |
| 24 |     | Two-Lime V-Network                      | ESH3-Z5          | 893045/017  | R&S                    | 1 year   | 2023-03-18     |
| 25 |     | UNIVERSAL RADIO<br>COMMUNICATION TESTER | CMU200           | 106243      | R&S                    | 1 year   | 2023-03-18     |
| 26 |     | Highpass Filter                         | WHKX1.5/15G-10SS | 74          | Wainwright Instruments | 1 year   | 2023-03-18     |
| 27 |     | Highpass Filter                         | WHKX3.0/18G-10SS | 118         | Wainwright Instruments | 1 year   | 2023-03-18     |
| 28 |     | OSP120 BASE UNIT                        | OSP120           | 101230      | R&S                    | 1 year   | 2023-03-18     |
| 29 |     | Signal Generator(100 kHz ~ 40 GHz)      | SMB100A03        | 177621      | R&S                    | 1 year   | 2023-03-18     |
| 30 |     | Signal Analyzer (10 Hz ~ 40 GHz)        | FSV40            | 101367      | R&S                    | 1 year   | 2023-03-18     |
| 31 |     | Active Loop Antenna                     | FMZB 1519        | 1519-031    | SCHWARZBECK            | 2 year   | 2024-02-26     |